Where the message is embedded

Token-level embedding (typical)

Prefix: previously generated tokens

After | the | game | we | went

Top candidates in the next-token distribution

home $P = 0.12$ | **eating** $P = 0.08$ | **hiking** $P = 0.023$

payload bits guide selection

append the selected token, then repeat

After the game we went **home**

Updated prefix / visible text

Embedding unit: token choice

The prefix sets the next-token distribution.
Payload bits guide successive token choices.
Some methods use this distribution to encode bits.

Our two-layer selection channel

Layer 1: bits select the reply target

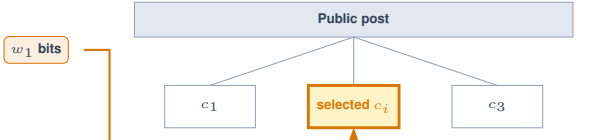

Layer 2: bits select a comment topic

Generation prompt

Public thread + selected target + selected topic

LLM API
ordinary generation

Visible reply on the selected target

Payload is carried by conversational choices, not token probabilities