

Bangladesh University of Professionals



Faculty of Science and Technology Department of Information & Communication Technology (ICT)

Course Title: Industrial Training

Course Code: ICE-3211

Submitted by

Section – A, Batch: BICE – 2022

Name: Nasrat Jahan

ID:2254901061

Walton ID: IA-539

Submission Date: 10.05.2026

▼ CUSTOMER-INFO-PROJECT

▼ k8s

! mysql.yaml

! php-app.yaml

! phpmyadmin.yaml

! redis.yaml

1M-customers.csv

create.php

db.php

delete.php

docker-compose.yml

Dockerfile

edit.php

generator.php

import.php

index.php

processor.php

styles.css

```
C:\Users\USER>cd customer-info-project
```

```
C:\Users\USER\Customer-info-project>docker build -t nasratjahan61/php-app:v1 .
```

```
[+] Building 7.1s (10/10) FINISHED                                docker:desktop-linux
=> [internal] load build definition from Dockerfile                0.1s
=> => transferring dockerfile: 211B                                0.0s
=> [internal] load metadata for docker.io/library/php:8.2-apache  6.2s
=> [auth] library/php:pull token for registry-1.docker.io         0.0s
=> [internal] load .dockerignore                                   0.0s
=> => transferring context: 2B                                       0.0s
=> [1/5] FROM docker.io/library/php:8.2-apache@sha256:f1a860a1c7e7e0008643a028ef8e1c43f4b293212aff559cc1dfaf75b0  0.1s
=> => resolve docker.io/library/php:8.2-apache@sha256:f1a860a1c7e7e0008643a028ef8e1c43f4b293212aff559cc1dfaf75b0  0.1s
=> CACHED [2/5] RUN docker-php-ext-install pdo pdo_mysql pcntl    0.0s
=> CACHED [3/5] RUN pecl install redis && docker-php-ext-enable redis 0.0s
=> CACHED [4/5] RUN a2enmod rewrite                                0.0s
=> CACHED [5/5] WORKDIR /var/www/html                             0.0s
=> exporting to image                                              0.4s
=> => exporting layers                                              0.0s
=> => exporting manifest sha256:69af787ad4171c9a1a971c9551eaff43f066039ea830f9401d58779c54837166  0.0s
=> => exporting config sha256:ec0075296c5e7484b0a7b72d1e579fbb992fc8c4ba557be0324258834e09b309  0.0s
=> => exporting attestation manifest sha256:91dc0de7fe80c6fa55692e9355e6ed61755269b7388d08a681072e62d35405f1  0.1s
=> => exporting manifest list sha256:fd0f16d9197adc977d84656e2a259fedf151e59a808d1531c2de2223e745f3ec  0.0s
=> => naming to docker.io/nasratjahan61/php-app:v1                0.0s
=> => unpacking to docker.io/nasratjahan61/php-app:v1              0.0s
```

```
View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/nmgd8l1cxai42lyomp95lemez
```

```
C:\Users\USER\Customer-info-project>docker login
```

```
Authenticating with existing credentials... [Username: nasratjahan61]
```

Info → To login with a different account, run 'docker logout' followed by 'docker login'

```
Login Succeeded
```

```
C:\Users\USER\Customer-info-project>docker push nasratjahan61/php-app:v1
The push refers to repository [docker.io/nasratjahan61/php-app]
66a2eaa40168: Pushed
ff2335fa2f3b: Mounted from library/php
4b4c979a20eb: Mounted from library/php
f091f5667dfe: Mounted from library/php
b7461d8347fd: Pushed
458e870d099d: Mounted from library/php
2d585d9ee000: Pushed
4f4fb700ef54: Mounted from phpmyadmin/phpmyadmin
da72641817f6: Mounted from library/php
3c5dc5059db7: Mounted from library/php
498f16823e3d: Mounted from library/php
57fb71246055: Mounted from library/php
026378697a1f: Mounted from library/php
e6c4048086a9: Mounted from library/php
9f42239b2778: Mounted from library/php
d6c24858623a: Mounted from library/php
7339e9519322: Mounted from library/php
0282102d7e2b: Mounted from library/php
f210d4191151: Pushed
v1: digest: sha256:fd0f16d9197adc977d84656e2a259fedf151e59a808d1531c2de2223e745f3ec size: 856
```

```
C:\Users\USER\Customer-info-project>kubectl apply -f k8s/redis.yaml
service/redis-service created
deployment.apps/redis created

C:\Users\USER\Customer-info-project>kubectl apply -f k8s/php-app.yaml
deployment.apps/php-app created
The Service "php-service" is invalid: spec.ports[0].nodePort: Invalid value: 30001: provided port is already allocated

C:\Users\USER\Customer-info-project>kubectl apply -f k8s/php-app.yaml
service/php-service created
deployment.apps/php-app unchanged


C:\Users\USER\Customer-info-project>kubectl apply -f k8s/phpmyadmin.yaml
service/pma-service created
deployment.apps/phpmyadmin created
```

```
C:\Users\USER\Customer-info-project>kubectl apply -f k8s/mysql.yaml
service/db unchanged
deployment.apps/mysql unchanged
```

```
C:\Users\USER\Customer-info-project>kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
mysql-59645cbb6-9mtcg              1/1     Running   0           3m19s
php-app-556cbdb4d8-xcv6g           1/1     Running   0           2m37s
phpmyadmin-575457b96-b94cs         1/1     Running   0           27m
redis-85b9d4ffb8-45kvr             1/1     Running   0           28m
```

```
C:\Users\USER\Customer-info-project>kubectl rollout restart deployment php-app
deployment.apps/php-app restarted
```

```
C:\Users\USER\Customer-info-project>kubectl port-forward svc/php-service 8080:80
Forwarding from 127.0.0.1:8080 -> 80
Forwarding from [::1]:8080 -> 80
Handling connection for 8080
Handling connection for 8080
```

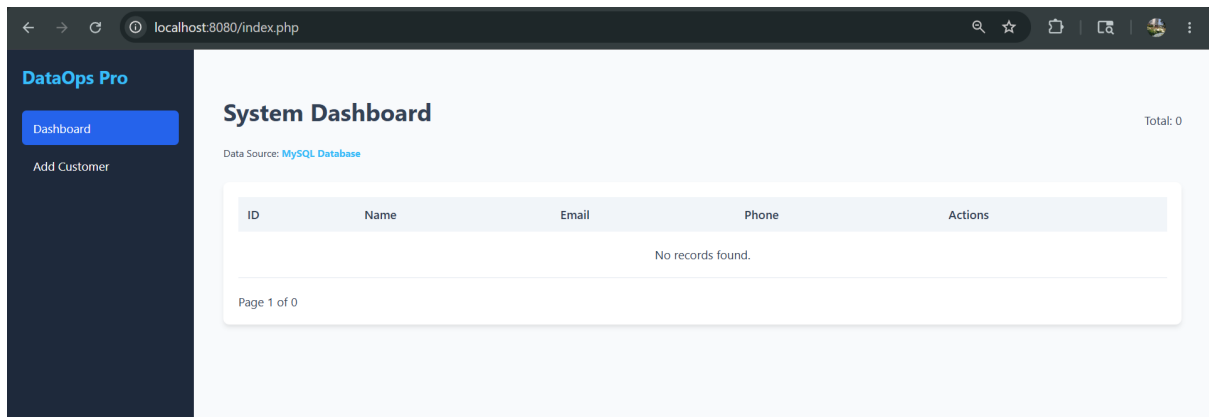

Database is empty cause after deployment database starts fresh.

