

Dynamic LION*

*LION: Empowering Multimodal Large Language Model with Dual-Level Visual Knowledge

Nassim Tiraoui

dept. name of organization (of Aff.)

Ottawa University

ntira053@uottawa.ca

WooSeok Kim

Department of Computer Science

Carleton University

wooseokkim@gmail.carleton.ca

Abstract—In the past few years, Multimodal Large Language Models (MLLMs) have shown strong potential in expanding the modalities that the LLMs can process. The performance of LLMs with multimodal data continues to improve by leveraging the knowledge between modalities. One recent work, the dual-Level vIsual knOWledge eNhanced Multimodal Large Language Model (LION), demonstrates improvements over existing MLLMs in visual knowledge. LION incorporates visual knowledge through the progressive integration of fine-grained spatial-aware features and the use of soft prompting with high-level semantic visual evidence. Despite these advancements, the soft prompting technique remains underexplored. As mentioned from the LION paper, soft prompting method still has the danger from hallucination to some degree. In this report, we propose a dynamic soft prompting to mitigate the object hallucination problem, and explore its effectiveness.

Index Terms—Multimodal Large Language Model (MLLM), LLM, Vision Encoder

I. INTRODUCTION

Recent research shows an increasing use of Multimodal Large Language Models (MLLMs) with its ability to incorporate different types of knowledge across various modalities (*i.e.*, image and text) [1]. This is especially useful for vision language (VL) tasks, such as reasoning of the input image using natural language style knowledge. Nevertheless, there still exists limitations of extracting and reasoning of visual knowledge. This is largely due to most of the existing MLLMs employ vision encoder that was pretrained on a coarsely aligned image-text pairs, which ultimately leads to insufficient extraction of visual information.

One recent work, dual-Level vIsual knOWledge eNhanced Multimodal Large Language Model (LION) [2], mitigates the issue by progressively incorporates fine-grained spatial-aware visual knowledge and applies soft prompting of high-level semantic visual evidence. Specifically, the authors propose a stage-wise instruction-tuning strategy to perform image-level and region-level VL tasks. It learns the visual knowledge separately by using two different adapters, and then a router module is used to aggregate the knowledge from image-level and region-level adapters into a single vision knowledge representation. In addition, LION employs a very well-known foundation model, Recognize Anything Model (RAM) [3], as a vision extractor to obtain image tags off-the-shelf. Tags extracted from RAM are used to generate a soft prompt,

which is the key component of the paper. A soft prompt is an instruction template with image tags and trainable parameters representing the prompt. The authors suggest the template as such, “According to <hint>, you are allowed to use the following tags:”, where the <hint> will be replaced with a trainable soft prompt, and the tags from RAM will be inserted at the end of the template. In this way, the model can avoid potential negative influence by the imperfect predictions from RAM.

II. LIMITATIONS OF THE PREVIOUS WORK

While LION achieves high performance in image captioning, visual question answering (VQA), and visual grounding tasks, object hallucination is one of the most concerned issue from the paper, as the authors mentioned. This challenge is due to an imperfect vision model such as RAM,

To be more specific on soft prompting, the model employs RAM to extract image tags in order to generate soft prompt. However, since vision models such as RAM are often imperfect, potential object hallucination problem is inevitable. Not only does the performance of off-the-shelf vision models contribute to the problem, but over-reliance on statistical bias [4] and unimodal priors [5], [6] can also lead to challenges such as visual hallucinations. Nevertheless, foundation models in MLLMs have shown impressive performance with ease of use [7].

soft prompting technique is still underexplored. In order to avoid object hallucinations while maintaining foundation models,

Not only that, the soft prompting technique from the paper uses a simple image tag information,

III. RELATED WORK

W. Fang *et al.* [8] Y. Zeng *et al.* [9] fine-grained contrastive learning

A. Soft Prompting

The IEEEtran class file is used to format your paper and style the text. All margins, column widths, line spaces, and text fonts are prescribed; please do not alter them. You may note peculiarities. For example, the head margin measures proportionately more than is customary. This measurement and others are deliberate, using specifications that anticipate your

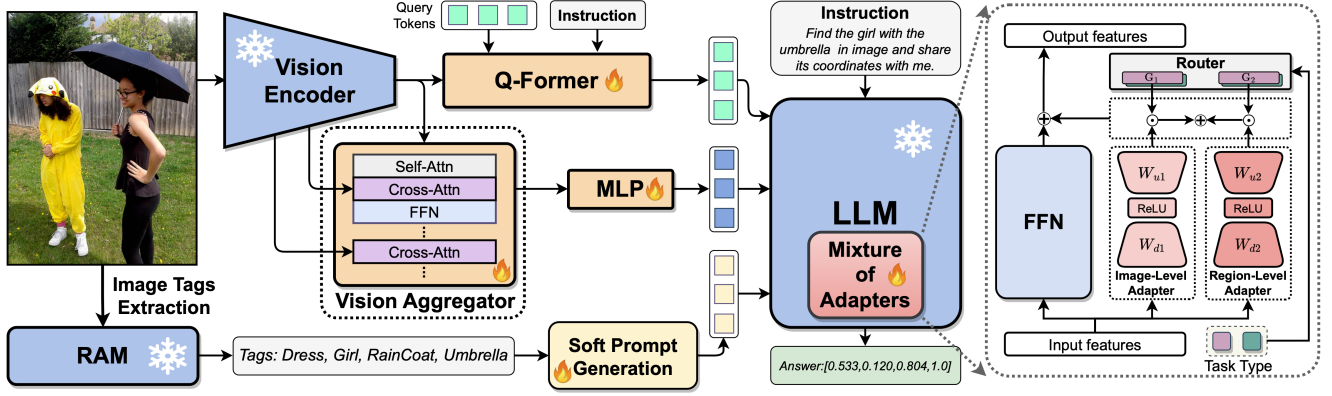


Fig. 1. Overview of the original LION [2]. The model extracts visual features from Q-Former, and combines them with fine-grained spatial-aware features from the vision aggregator. The Mixture-of-Adapters with a router in the frozen LLM dynamically fuses visual knowledge learned from different visual branches and LLM adapters based on the task types (image-level and region-level).

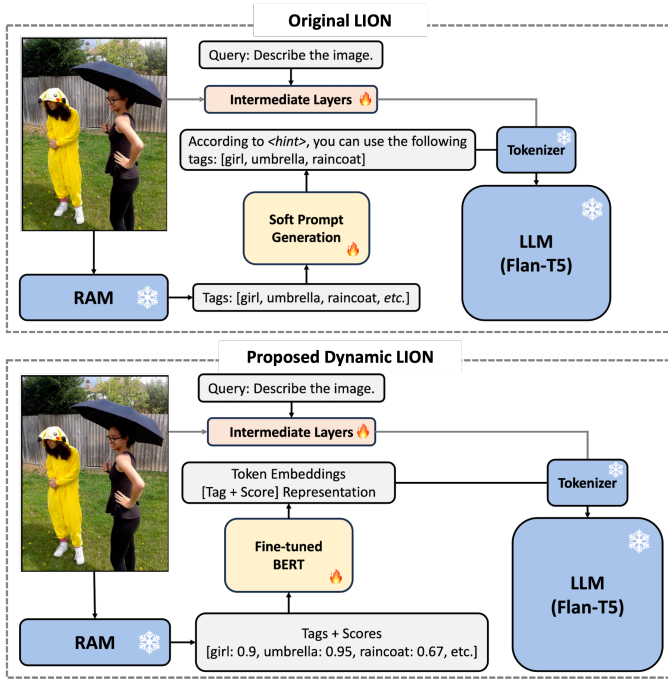


Fig. 2. Comparison between the original LION's soft prompting and the proposed dynamic soft prompting.

IV. PROPOSED METHOD

Before you begin to format your paper, first write and save the content as a separate text file. Complete all content and organizational editing before formatting. proofreading, spelling and grammar.

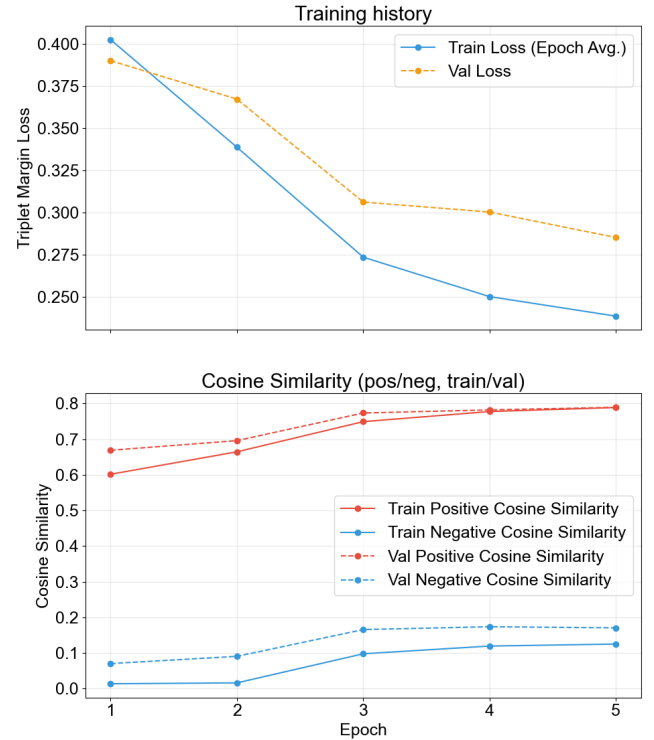


Fig. 3. Fine-tuning result of BERT model aligned to token embeddings.

A. Model Architecture

V. EXPERIMENTS

As discussed from the Section IV-A, we'll first look at the fine-tuning of the BERT model.

A. Fine-tuning BERT

B. Re-training the LION with Dynamic Soft Prompt

Keep your text and graphic files separate until after the text has been formatted and styled. Do not number text heads—

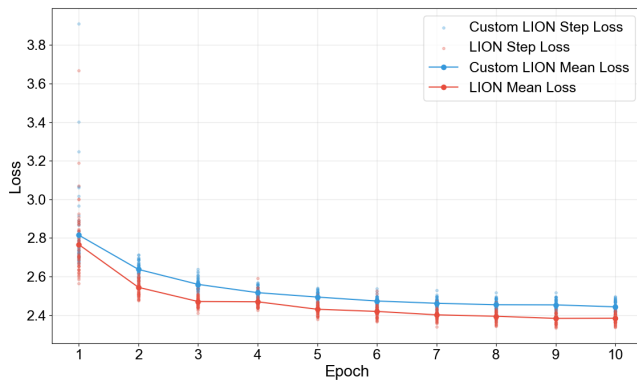


Fig. 4. Training results of original LION model and custom LION model (i.e., dynamic soft prompting).

Model	COCOCap	TextCaps	OKVQA	AOKVQA
LION-small	69.09	26.45	2.3%	1.8%
LION-small (ours)	21.40	4.68	16.3%	11.3%
LION-4B	138.20	104.87	51.08%	59.98%
LION-12B	139.25	108.76	57.33%	60.87%

TABLE I
COMPARISON ON IMAGE CAPTIONING AND VQA.

L^AT_EX will do that for you.

C. Evaluations on Image-Level VL Tasks

We evaluate the dynamic soft prompting method’s performance on two types of image-level VL tasks, which are image captioning and VQA. For image captioning, COCO caption [10] and TextCaps [11] datasets are used, and report CIDEr as the evaluation metric. Also for VQA task, OKVQA [12] and AOKVQA [13] datasets are used, and its performance is measured by Top-1 Accuracy metric.

The models used for the comparison are denoted as LION-4B, LION-12B, LION-small, and custom LION-small (ours). Each model is based off of a Flan-T5 model with different sizes of parameters. LION-4B and LION-12B are equipped with Flan-T5-XL (4B parameters) and Flan-T5-XXL (11B parameters), respectively. LION-small and custom LION-small use the same LLM, the Flan-T5-small model (80M parameters). Obviously, the higher the number of parameters the model has (i.e., LION-4B and LION-12B), the more likely the model is to perform better. Our goal is to while outperform LION-small model, also achieve a certain level of performance comparable to LION-4B or even LION-12B.

As shown in Table I, LION-4B and LION-12B achieves the best performance.

REFERENCES

- [1] G. Eason, B. Noble, and I. N. Sneddon, “On certain integrals of Lipschitz-Hankel type involving products of Bessel functions,” *Phil. Trans. Roy. Soc. London*, vol. A247, pp. 529–551, April 1955.
- [2] J. Clerk Maxwell, *A Treatise on Electricity and Magnetism*, 3rd ed., vol. 2. Oxford: Clarendon, 1892, pp.68–73.
- [3] I. S. Jacobs and C. P. Bean, “Fine particles, thin films and exchange anisotropy,” in *Magnetism*, vol. III, G. T. Rado and H. Suhl, Eds. New York: Academic, 1963, pp. 271–350.

- [4] K. Elissa, “Title of paper if known,” unpublished.
- [5] R. Nicole, “Title of paper with only first word capitalized,” *J. Name Stand. Abbrev.*, in press.
- [6] Y. Yorozu, M. Hirano, K. Oka, and Y. Tagawa, “Electron spectroscopy studies on magneto-optical media and plastic substrate interface,” *IEEE Transl. J. Magn. Japan*, vol. 2, pp. 740–741, August 1987 [Digests 9th Annual Conf. Magnetics Japan, p. 301, 1982].
- [7] M. Young, *The Technical Writer’s Handbook*. Mill Valley, CA: University Science, 1989.

REFERENCES

- [1] J. Kuang, Y. Shen, J. Xie, H. Luo, Z. Xu, R. Li, Y. Li, X. Cheng, X. Lin, and Y. Han, “Natural language understanding and inference with mllm in visual question answering: A survey,” *ACM Computing Surveys*, vol. 57, no. 8, pp. 1–36, 2025.
- [2] G. Chen, L. Shen, R. Shao, X. Deng, and L. Nie, “Lion: Empowering multimodal large language model with dual-level visual knowledge,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 26 540–26 550.
- [3] Y. Zhang, X. Huang, J. Ma, Z. Li, Z. Luo, Y. Xie, Y. Qin, T. Luo, Y. Li, S. Liu, Y. Guo, and L. Zhang, “Recognize anything: A strong image tagging model,” 2023. [Online]. Available: <https://arxiv.org/abs/2306.03514>
- [4] V. Agarwal, R. Shetty, and M. Fritz, “Towards causal vqa: Revealing and reducing spurious correlations by invariant and covariant semantic editing,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2020, pp. 9690–9698.
- [5] V. Gupta, Z. Li, A. Kortylewski, C. Zhang, Y. Li, and A. Yuille, “Swapmix: Diagnosing and regularizing the over-reliance on visual context in visual question answering,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 5078–5088.
- [6] Y. Han, L. Nie, J. Yin, J. Wu, and Y. Yan, “Visual perturbation-aware collaborative learning for overcoming the language prior problem,” *arXiv preprint arXiv:2207.11850*, 2022.
- [7] S. Yin, C. Fu, S. Zhao, K. Li, X. Sun, T. Xu, and E. Chen, “A survey on multimodal large language models,” *National Science Review*, vol. 11, no. 12, p. nwae403, 2024.
- [8] W. Fang, Q. Wu, J. Chen, and Y. Xue, “guided mllm reasoning: Enhancing mllm with knowledge and visual notes for visual question answering,” in *Proceedings of the Computer Vision and Pattern Recognition Conference*, 2025, pp. 19 597–19 607.
- [9] Y. Zeng, X. Zhang, and H. Li, “Multi-grained vision language pre-training: Aligning texts with visual concepts,” 2022. [Online]. Available: <https://arxiv.org/abs/2111.08276>
- [10] X. Chen, H. Fang, T.-Y. Lin, R. Vedantam, S. Gupta, P. Dollár, and C. L. Zitnick, “Microsoft coco captions: Data collection and evaluation server,” *arXiv preprint arXiv:1504.00325*, 2015.
- [11] O. Sidorov, R. Hu, M. Rohrbach, and A. Singh, “Textcaps: a dataset for image captioning with reading comprehension,” in *European conference on computer vision*. Springer, 2020, pp. 742–758.
- [12] K. Marino, M. Rastegari, A. Farhadi, and R. Mottaghi, “Ok-vqa: A visual question answering benchmark requiring external knowledge,” in *Proceedings of the IEEE/cvf conference on computer vision and pattern recognition*, 2019, pp. 3195–3204.
- [13] D. Schwenk, A. Khandelwal, C. Clark, K. Marino, and R. Mottaghi, “A-okvqa: A benchmark for visual question answering using world knowledge,” in *European conference on computer vision*. Springer, 2022, pp. 146–162.