

How Laxu uses Privy

Laxu runs on Monad testnet (chain 10143). It turns an open Perpl trade into a token that can be borrowed against. Privy is the identity and wallet layer. It also powers one feature that goes past login: **Protect this loan**. Here Laxu's server can repay part of a user's loan *from the user's own embedded wallet*. It can do this only because Privy lets the user add Laxu's authorization key as a signer, and Privy enforces a policy on everything that signer asks for.

This document lists each Privy feature Laxu uses, where it is in the code, and what evidence exists. Each item is in one of four states:

- **Proven:** a script or an on-chain transaction shows it.
- **Working:** built, and in use in the app.
- **Not exercised:** built, but not yet run end to end.
- **Not shipped:** prototyped as a spike only.

Contents

1. [Overview](#)
2. [Identifiers](#)
3. [Architecture of the integration](#)
4. [Feature by feature](#)
5. [Considered and not shipped](#)
6. [Evidence](#)
7. [Screenshots](#)
8. [How to reproduce](#)
9. [Status and limits](#)

1. Overview

The Privy app is named **Laxu** (read from Privy's `apps.get` API on 2026-10-09). Laxu uses Privy for four things:

1. **Login and embedded wallets.** Users sign in with email, Google or an external wallet. A user who arrives without a wallet gets a Privy embedded wallet at first login.
2. **User-signed transactions.** The user's wallet, embedded or external, signs the user's own transactions through Privy's provider: the AUSD payment that opens a trade, approvals, and every lending call.
3. **Server-side token verification.** Every authenticated backend call carries a Privy access token, and the backend verifies it. The backend gets the user's wallet from Privy's record of that user, never from the request body.
4. **Signers and policies.** Laxu's server authorization key (a 1-of-1 key quorum) is added as a signer on the user's embedded wallet. The signer carries a policy that allows only `repay()` on one lending pool, up to a per-call cap, with no native value, on chain 10143. Privy checks the policy on every request. This is what **Protect this loan** runs on.

Feature	What it does in Laxu	Where in code	Status
Login	Email, Google, external wallet through Privy's modal	App/src/app/providers.tsx:18	Working
Embedded wallets	Created at login for users without a wallet	App/src/app/providers.tsx:19	Working

Feature	What it does in Laxu	Where in code	Status
User-signed transactions	viem wallet client over the Privy wallet's provider	App/src/lib/walletClient.ts:11	Working; one embedded-wallet payment on chain (section 6)
Access-token verification	<code>verifyAccessToken</code> on every authenticated route; 401 on failure	Backend/src/auth/privy.ts:49	Working
Wallet resolved from Privy	The backend reads the user's wallet from Privy, not from the client	Backend/src/auth/privy.ts:99	Working
Signer on a user wallet, with a policy	Server acts on the user's embedded wallet only within the policy	Backend/src/privy/policies.ts:54 , App/src/lib/privySigner.ts:19	Proven by script and transaction
Protection worker	Sends <code>repay()</code> through Privy's wallet RPC when health falls to the trigger	Backend/src/services/protection.ts:127	Not exercised end to end
Export wallet, link email or wallet	Account menu	App/src/components/auth/AccountMenu.tsx:344	Built; not exercised in a browser
Privy server wallets	Spike only (section 5)	Backend/scripts/privy/01-server-wallet.ts	Not shipped


2. Identifiers (public values only)

Item	Value	Notes
Privy app name	<code>Laxu</code>	Returned by Privy's <code>apps.get</code> for this app id on 2026-10-09
Privy app ID	<code>cmuvf98y202d10b18du40p495</code>	Public client id. Same value in <code>App/.env.local (NEXT_PUBLIC_PRIVY_APP_ID)</code> and <code>Backend/.env (PRIVY_APP_ID)</code> ; the env example files leave it blank
Signer (key quorum) ID	<code>pwgeso78bs5m8sqm5z24khor</code>	Value of <code>PRIVY_SIGNER_ID</code> . It is an identifier, not a key
Key quorum setup	Display name <code>laxu-server</code> , threshold 1, one P-256 authorization key, no user members	Read from Privy's <code>keyQuorums.get</code> on 2026-10-09; created by <code>00-create-signer.ts</code>
Policy ID (full)	<code>wudc3vujs3wri9uoeeerv5ws0</code>	The policy that was attached to the user signer in the proof run (section 4.4). Named <code>laxu-spike P1 allow-only</code> , owned by the quorum above. Read from <code>docs/privy-findings.md</code> , <code>Backend/.e2e/privy-spike.json</code> and Privy's <code>policies.get</code> on 2026-10-09
Loan-protection policy IDs	One per protection rule, created at setup	Built by <code>buildRepayPolicy</code> . No protection rule exists in the database today (0 rows), so no live repay policy id exists to print
Chain	Monad testnet, chain ID 10143 (<code>eip155:10143</code>)	
Allowed origins	⚠️ TODO	Privy's <code>apps.get</code> returns <code>allowed_domains: []</code> . The hosted origin goes here once deployed (docs/deploy.md , section 5)


The app secret and the authorization private key are never in this repository. They live only in the untracked `Backend/.env`. No script in `Backend/scripts/privy/` prints either one.

The policy id `wudc3vujs3wri9uoeerv5ws0` is a test policy: it allows `approve` up to 1,000 base units on the AUDS token. The proof run used it because it exercises the same machinery as the repay policy (a target address, a function name and a numeric argument limit) without a loan. The policy that protection attaches in production is shown in section 4.4.

3. Architecture of the integration

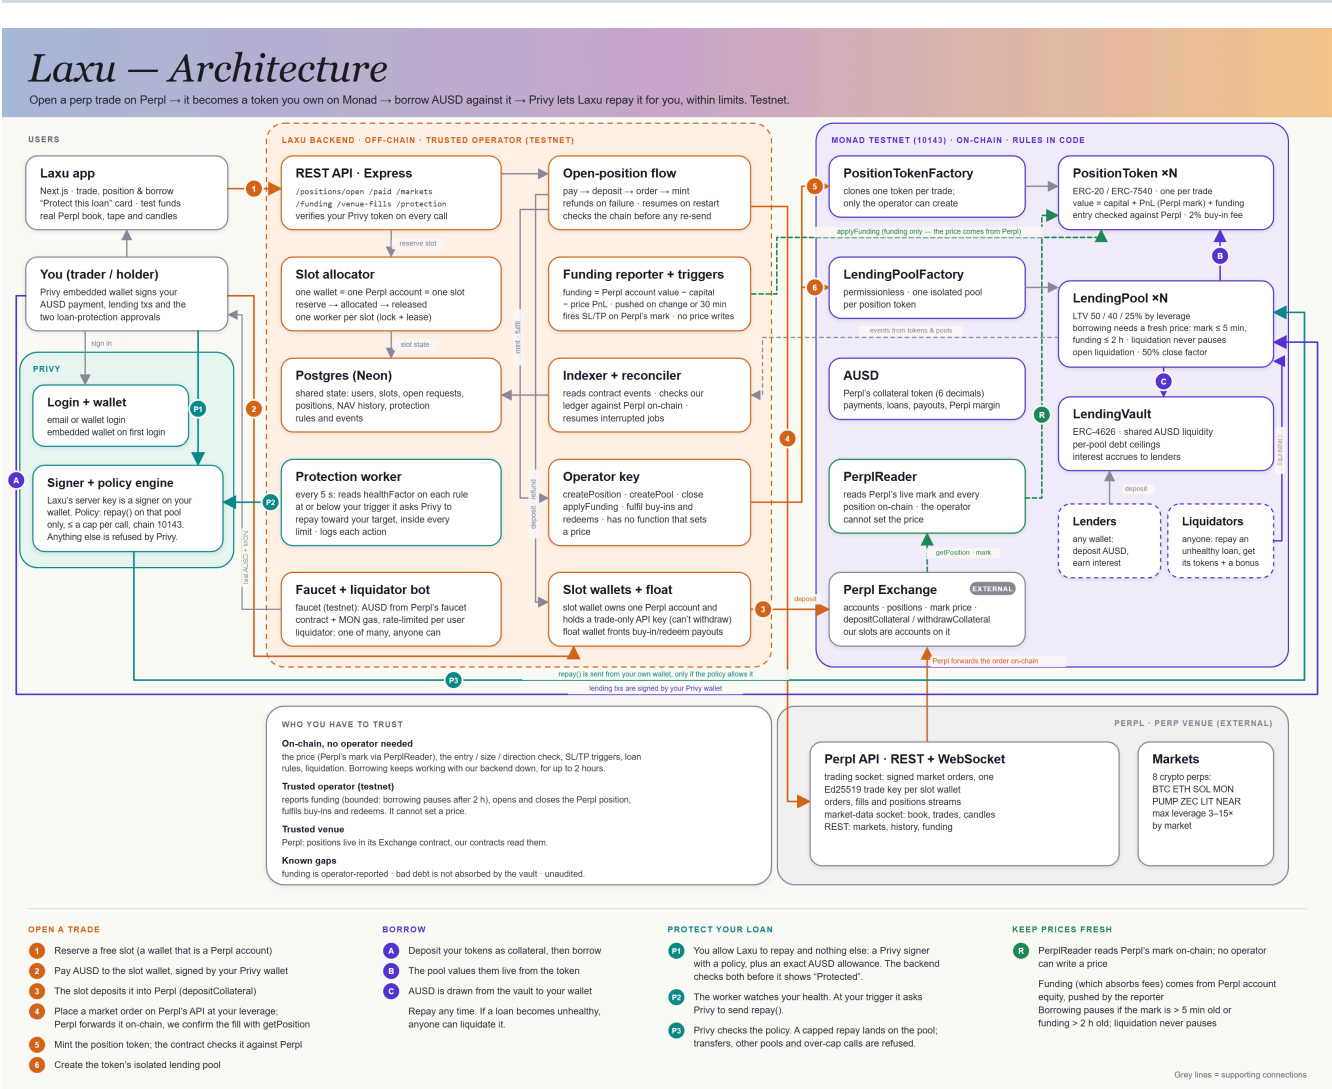

The signer flow for loan protection:

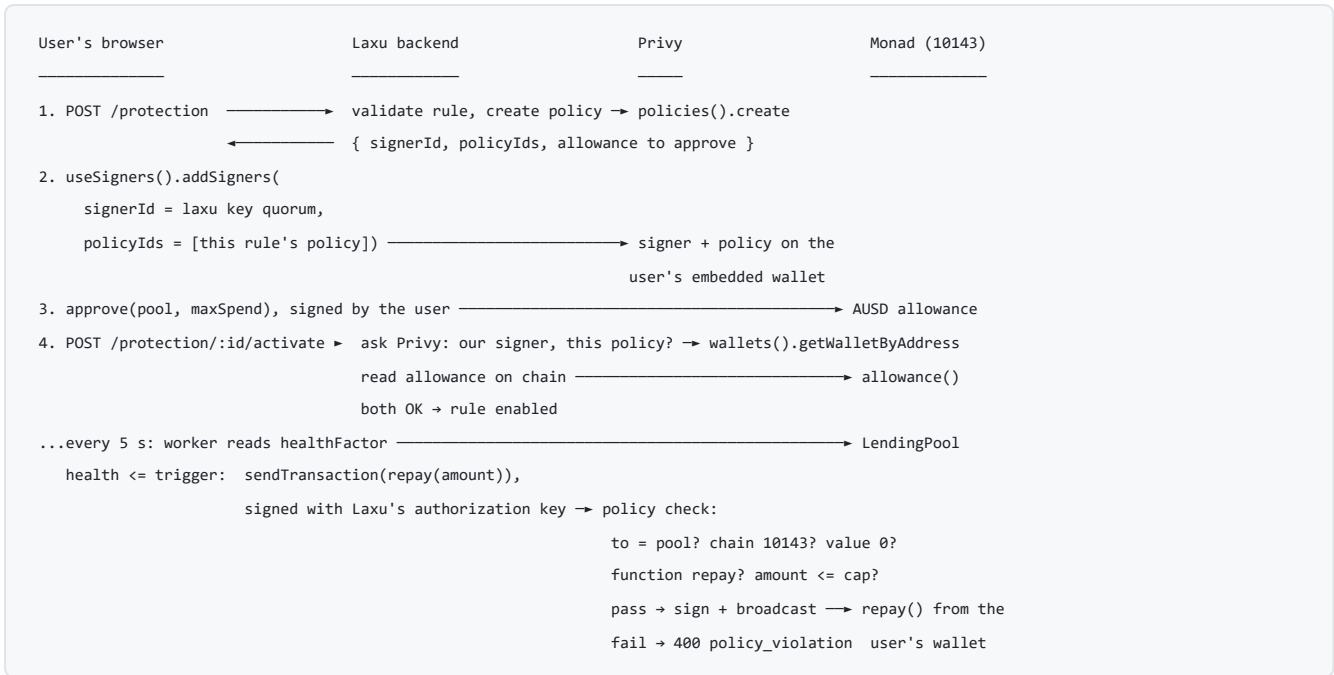

SDKs, at the versions installed (`package.json` and `node_modules`):

Side	Package	Version	Calls
Frontend	@privy-io/react-auth	3.45.0 (^3.45.0)	PrivyProvider, usePrivy, useWallets, useLogin, getAccessToken, useSigners (addSigners, removeSigners), useExportWallet, useLinkAccount
Backend	@privy-io/node	0.35.0 (^0.35.0)	utils().auth().verifyAccessToken, users().get, wallets().getWalletByAddress, wallets().ethereum().sendTransaction, policies().create, policies().delete

4. Feature by feature

4.1 Login and embedded wallets

What it is. `PrivyProvider` is configured with `loginMethods`: `["email", "wallet", "google"]` and `embeddedWallets`: `{ ethereum: { createOnLogin: "users-without-wallets" } }`. Monad testnet is the default and only chain ([App/src/app/providers.tsx:15-22](#)). In the Privy dashboard the app has email, wallet and Google login enabled (`email_auth`, `wallet_auth`, `google_oauth` are all `true` in `apps.get`).

Why Laxu needs it. A trader who signs in with email gets a wallet with no seed phrase to manage. Loan protection needs an embedded wallet, because a signer can only be added to a Privy wallet.

How it works. `SessionProvider` reads `usePrivy()` and `useWallets()` ([App/src/lib/session.tsx:52-53](#)). After each login it calls `POST /users/me` once ([session.tsx:94](#)). The backend resolves the wallet from Privy's record of the user ([Backend/src/auth/privy.ts:99](#)): the external wallet if the user connected one, otherwise the first embedded wallet. That address becomes the user's identity in Laxu. Privy creates the embedded wallet a moment after login, so the backend answers `409 WALLET_NOT_READY` until it exists ([Backend/src/services/users.ts:37-40](#)). The frontend retries up to six times, 1.5 s apart. The session's `wallet` is the connected wallet whose address matches the backend's record, never just `wallets[0]` ([session.tsx:125-128](#)).

Evidence and limits. Two email users have Privy embedded wallets: `0xfc7d5c97ec539215fab84a732b74f5dce6833d21` (Privy wallet id `ut2hhpkqfbf12q0637v89o8x`) and `0x8589211269ba098c7e579a116de8c7d12f0b8033`. A user holding both an external and an embedded wallet acts as the external one, and so cannot use loan protection.

4.2 User-signed transactions

What it is. Every on-chain action a user takes goes through a viem wallet client built on the Privy wallet's EIP-1193 provider ([App/src/lib/walletClient.ts:11-18](#)). For an embedded wallet, Privy signs. For an external wallet, the user's wallet app signs.

The transactions (all in [App/src/lib/actions.ts](#)):

Transaction	Call	Line
Open a trade: pay the slot wallet	AUSD <code>transfer(payTo, amount)</code>	actions.ts:226
Approve before a deposit or buy-in	AUSD or position-token <code>approve (approveIfNeeded)</code>	actions.ts:98
Post collateral	<code>LendingPool.depositCollateral</code>	actions.ts:652
Borrow	<code>LendingPool.borrow</code>	actions.ts:703
Repay	<code>LendingPool.repay</code>	actions.ts:710
Withdraw collateral	<code>LendingPool.withdrawCollateral</code>	actions.ts:697
Protection: exact allowance (set, top up, or 0)	AUSD <code>approve</code> to exactly the amount (<code>setExactAllowance</code>)	actions.ts:122

Evidence. The embedded wallet `0xfc7d...3d21` paid for a real trade on 2026-10-09 at 16:12:56 UTC: an AUSD `transfer` of 100 AUSD to slot wallet `0x27FAeC53E9fdAe9e4Fac0aF5CC4731e77aE8e503`, tx `0xb5a8e1dd...`. The open request `cmv15z36s0001ofh7pn38kw9u` reached `minted`. At that time no server signer was on the wallet: it was removed at 04:50 UTC that day, and Privy reports `additional_signers: []`. So the user's own session signed it.

Limits. The transactions in [docs/e2e-run.md](#) (deposit, borrow, repay, withdraw) were signed by plain script wallets, not Privy wallets. They show the contracts working, not Privy. No embedded wallet has yet signed a deposit, borrow, repay or withdraw on chain.

4.3 Backend access-token verification

What it is. `requireUser` ([Backend/src/auth/privy.ts:49-73](#)) reads `Authorization: Bearer <token>` and calls `privy().utils().auth().verifyAccessToken(...)` from `@privy-io/node` ([privy.ts:58](#)). The SDK checks the token's signature against the app's verification key. That key is `PRIVY_JWT_VERIFICATION_KEY` when set, and is otherwise fetched from Privy. The verified `user_id` (the Privy DID) is the caller's identity. The frontend attaches the token with `getAccessToken()` ([App/src/lib/api.ts:29-31](#)).

Failure. A missing header gives `401 MISSING_TOKEN`. A token that fails verification gives `401 INVALID_TOKEN` ([privy.ts:50-63](#); `unauthorized` is HTTP 401 in [Backend/src/lib/errors.ts:16](#)). A valid token for a user who never called `POST /users/me` gets `401 USER_NOT_REGISTERED` on routes that act on a wallet.

Routes behind `requireUser`:

Router	Routes
<code>/users</code>	<code>POST /me</code> , <code>GET /me</code> , <code>PATCH /me/tag</code>
<code>/positions</code>	<code>POST /open</code> , <code>POST /open/:id/paid</code> , <code>GET /open/:id</code> , <code>GET /mine</code> , <code>GET /:id</code>
<code>/faucet</code>	<code>GET /status</code> , <code>POST /claim</code>
<code>/protection</code>	<code>POST /</code> , <code>POST /:id/activate</code> , <code>GET /</code> , <code>DELETE /:id</code>

Why it matters. An address in a request body is never trusted. Protection routes act on the wallet the backend resolved from Privy for the verified user ([Backend/src/routes/protection.ts:26-30](#)).

4.4 Signers and policies

Why a signer is needed. `LendingPool.repay(amount)` repays the caller's own debt and pulls AUDS from the caller's wallet. Laxu cannot repay someone's loan from its own wallet. It has to act *as the user*, and only for that one call. A Privy signer with a policy gives exactly that.

The policy. Each protection rule gets its own policy, built by `buildRepayPolicy` ([Backend/src/privy/policies.ts:54-82](#)) and created in Privy at setup ([Backend/src/services/protection.ts:462](#)). Below is the exact body the code produces, printed by running `buildRepayPolicy` on 2026-10-09. The example inputs are the lending pool from the recorded run and a 50 AUDS per-call cap:

```
{
  "name": "laxu-repay-0x5566777B",
  "version": "1.0",
  "chain_type": "ethereum",
  "rules": [
    {
      "name": "repay up to the cap, on this pool only",
      "method": "eth_sendTransaction",
      "action": "ALLOW",
      "conditions": [
        { "field_source": "ethereum_transaction", "field": "to", "operator": "eq", "value": "0x5566777B0635E5185Ee5039634576fDB5c8962Dd" },
        { "field_source": "ethereum_transaction", "field": "chain_id", "operator": "eq", "value": "10143" },
        { "field_source": "ethereum_transaction", "field": "value", "operator": "lte", "value": "0x0" },
        { "field_source": "ethereum_calldata", "field": "function_name", "operator": "eq", "value": "repay",
          "abi": [{ "name": "repay", "type": "function", "stateMutability": "nonpayable",
            "inputs": [{ "name": "amount", "type": "uint256" }], "outputs": [{ "name": "repaid", "type": "uint256" }] } ] },
        { "field_source": "ethereum_calldata", "field": "repay.amount", "operator": "lte", "value": "0x2faf080",
          "abi": [{ "name": "repay", "type": "function", "stateMutability": "nonpayable",
            "inputs": [{ "name": "amount", "type": "uint256" }], "outputs": [{ "name": "repaid", "type": "uint256" }] } ] }
      ]
    }
  ],
  "owner_id": "pwgeso78bs5m8sqm5z24khor"
}
```

What each condition means:

Condition	Plain words
<code>method: eth_sendTransaction</code>	Only a request to send a transaction. Signing messages or typed data does not match
<code>to eq <pool></code>	Only to this one lending pool, never the AUDS token, another pool or any other address
<code>chain_id eq 10143</code>	Only on Monad testnet
<code>value lte 0x0</code>	No MON may move with the call
<code>function_name eq repay</code>	The calldata must decode as <code>repay(uint256)</code> . <code>approve</code> , <code>transfer</code> , <code>borrow</code> and <code>withdrawCollateral</code> do not match
<code>repay.amount lte 0x2faf080</code>	At most the per-call cap (50,000,000 base units = 50 AUDS here). The cap is half the user's maximum spend (Backend/src/services/protectionRules.ts:85)

There is **one ALLOW rule and no DENY rule**, on purpose. The spike measured two things. A request that matches no rule is denied. And a DENY-all rule overrides the ALLOW in either order, so it would block every repay ([docs/privy-findings.md](#), 1.2). A test pins the single-rule shape ([Backend/src/privy/policies.test.ts:51](#)). Privy also refuses a rule name of 50 characters or more. A real run caught that, and a test now pins the length ([policies.test.ts:45](#)).

The rule is narrow because the signer has no other reason to exist. Whatever it can do, someone holding Laxu's server key could do. With this policy the worst that key can do is repay the user's own debt on one pool, in steps no larger than the cap.

Who holds what. The server holds one P-256 authorization key, registered with Privy as the 1-of-1 key quorum `pwgeso78bs5m8sqm5z24khor`. Its private half is `PRIVY_AUTH_PRIVATE_KEY`, kept in `Backend/.env` and normalised to the base64 PKCS8 form the SDK expects ([Backend/src/privy/authKey.ts:11](#)). The user's embedded wallet stays owned by the user. Laxu never holds a user key. Adding the signer makes the quorum an *additional* signer on the wallet, restricted by the policy id passed with it. When the worker sends, the request is signed with the server key alone (`authorization_context`, [Backend/src/privy/signer.ts:43-57](#)). Privy accepts it only because the quorum is a signer on that wallet, and only if the policy passes.

Adding and removing the signer. The card calls `useSigners()` through a thin wrapper ([App/src/lib/privySigner.ts:19-43](#)):

- `addSigners({ address, signers: [{ signerId, policyIds: [policyId] }] })` ([privySigner.ts:27](#))
- `removeSigners({ address })` ([privySigner.ts:35](#)), which removes every signer from that wallet

No Privy popup appears for `addSigners` on this setup. This was observed in both proof runs, on 2026-10-08 and 2026-10-09. So the app supplies the consent step itself. Before anything is granted, the setup panel shows the consent text ([App/src/components/position/ProtectionParts.tsx:148-150](#)):

Laxu will be allowed to call `repay` on this loan's pool from your wallet, only when your health drops to `{trigger}`, for at most `{per call}` per call and `{total}` in total. It cannot send your funds anywhere else. You can turn this off at any time.

The button under it reads "**I understand, allow Laxu to repay**"

([App/src/components/position/ProtectionSetup.tsx:271](#)). Nothing is granted before that press. The card says "Powered by Privy" next to the Privy step, and never shows or implies a Privy dialog.

The card's states ([App/src/components/position/ProtectionCard.tsx](#)). The backend computes a `phase` for each rule (`setup`, `on` or `off`), and the card renders from it:

State	When	What the user sees	Line
Off	No rule, or a rule turned off with nothing left behind	"Set up protection" (disabled with "Borrow first" when there is no debt)	ProtectionCard.tsx:313
Setup	Form open	Trigger, target, max spend, repay preview, consent text, two steps	ProtectionCard.tsx:231
Finish setup	A rule in phase <code>setup</code> (for example after a reload mid-setup)	"Setup not finished. Pick up where you left off, or cancel it." Resumes from the live signer and allowance	ProtectionSetup.tsx:277
On	Phase <code>on</code> (the backend has verified both grants)	PROTECTED badge, health, limits, events, Turn off	ProtectionCard.tsx:247
Cleanup needed	Phase <code>off</code> , but the signer or an allowance is still on the wallet	"Protection is off and Laxu cannot act, but the permission is still on your wallet." with buttons to remove each one	ProtectionCard.tsx:289

Two grants, and why both. The setup steps are fixed: "Step 1 of 2: Allow Laxu to repay" (the signer), then "Step 2 of 2: Approve spending limit" (the allowance) ([ProtectionSetup.tsx:67-69](#)).

- The **signer** (Privy side) limits *what* Laxu can call: `repay` on that pool, up to the per-call cap.

- The **allowance** (chain side) limits *how much* Laxu can ever spend in total. The user approves exactly their maximum spend to the pool, in their own transaction (`setExactAllowance` , never `max-uint`).

The policy has no total limit. Privy's cumulative limits apply to `eth_signTransaction` , not to `eth_sendTransaction` , so the ERC-20 allowance is the total cap. Before a rule turns on, `activateRule` checks both ([Backend/src/services/protection.ts:504-545](#)). It asks Privy whether the wallet carries Laxu's signer with exactly this rule's policy and nothing else ([protection.ts:517-524](#)). It reads the allowance on chain ([protection.ts:526-531](#)). It refuses with `SIGNER_MISSING` , `SIGNER_POLICY_MISMATCH` or `ALLOWANCE_TOO_LOW` otherwise. The card shows "Protected" only after the backend says so.

Turn-off order ([ProtectionCard.tsx:194-205](#)):

1. **Backend disable** (`DELETE /protection/:id`). The worker stops at once, and this step needs nothing from Privy.
2. **Revoke the signer** (`removeSigners`).
3. **Allowance to 0** (`approve(pool, 0)`).

If step 2 or 3 is rejected, the rule lands in Cleanup needed, which offers only the steps that remain.

Evidence: the signer acting under the policy. Script [Backend/scripts/privy/03-user-signer.ts](#), run 2 on 2026-10-09, used the embedded wallet `0xfc7d...3d21` and policy `wudc3vujs3wri9uoeeerv5ws0` (`approve` on AUD up to 1,000). The user pressed Add signer on the dev page at 04:47:59 UTC. The script then ran with only the server's key, no user signature:

```
$ cd Backend
$ npx ts-node --transpile-only scripts/privy/03-user-signer.ts --wallet 0xfc7d5c97ec539215fab84a732b74f5dce6833d21
additional_signers: 1; ours present: true; its policy ids: ["wudc3vujs3wri9uoeeerv5ws0"]
```

Call from the user's wallet, signed only by the server key	Result
<code>approve(0x...dEaD, 1000)</code> (at the cap)	Allowed. Mined: <code>0x370e8a29...</code> , <code>from</code> = the user's wallet, status <code>success</code>
<code>approve(0x...dEaD, 1001)</code> (over the cap)	Refused: <code>policy_violation</code>
<code>transfer(0x...dEaD, 1)</code> on the same token (wrong function)	Refused: <code>policy_violation</code>
<code>approve</code> sent to another address (wrong target)	Refused: <code>policy_violation</code>

Privy's refusal body, the same every time: `HTTP 400 {"error":"RPC request denied due to policy violation","code":"policy_violation"}`.

The user then pressed Remove signer (04:50:19 UTC), and the script ran again with `--expect-removed` . It reported `additional_signers: 0` , and the same allowed call failed. Verbatim from `Backend/.e2e/privy-spike.json` :

```
NOT POLICY HTTP 401 {"error":"No valid authorization signatures were provided. Your payload may be malformed or your signing keys may be incorrect"}
```

These lines and results are as recorded in [docs/privy-findings.md](#) (1.3, run 2); the full terminal transcript was not saved.

4.5 Protection worker

Loop. With `ENABLE_PROTECTION=true`, the backend refuses to boot if the Privy credentials, signer id or authorization key are missing. It then starts `startProtectionJob` ([Backend/src/services/protection.ts:138](#)). Every `PROTECTION_INTERVAL_MS` (default 5,000 ms, [Backend/src/config/env.ts:161](#)), `runProtectionTick` ([protection.ts:127](#)) checks each enabled rule. For each one it reads `healthFactor` and `currentDebt` from the pool. At or below the trigger, and outside the 60 s cooldown, it plans a repay and sends it.

Repay amount ([Backend/src/services/protectionMath.ts:54-92](#)):

```
healthFactor = collateralValue × thresholdBps × 1e18 / (10,000 × debt)
D'           = collateralValue × thresholdBps × 1e18 / (10,000 × targetHealth)    debtAtHealth, rounded down
base         = debt - D'
needed       = min(base + ceil(base × 100 / 10,000), debt)                      REPAY_BUFFER_BPS = 100 (1%)
amount       = min(needed, maxPerCall, remainingSpend, balance, allowance)
send nothing if amount < DUST_FLOOR (10,000 base units = 0.01 AUDS)
```

The clamps are named `maxPerCall`, `remainingSpend`, `balance` and `allowance`, in that order. A plan records which clamp cut it, so the card can tell the user which limit stopped a full repay.

Sending. `executeRepay` ([protection.ts:285-342](#)) writes a `PENDING` event, estimates gas with Laxu's own RPC plus a buffer (Monad bills the gas *limit*), and calls `sendTransaction` with `caip2: "eip155:10143"`. It then records what the pool actually took, from the `Repaid` log, as a `REPAID` event with the tx hash and the health before and after. Privy errors are classified ([Backend/src/privy/signer.ts:85-92](#)): `policy_violation` maps to policy, 401 to signer removed, and `transaction_broadcast_failure` to broadcast.

Gas. The repay is sent from the user's wallet, so the user's wallet pays the MON gas. Before sending, `gasGate` ([protection.ts:271](#)) checks that the wallet can cover the gas limit at the fee cap. If not, the worker records `SKIPPED` with "Add MON for gas" and makes no Privy call.

Every action is logged in `protection_events`, with these kinds: `CREATED`, `ENABLED`, `SKIPPED`, `PENDING`, `REPAID`, `FAILED` and `DISABLED`. The card lists them ([App/src/components/position/ProtectionEvents.tsx](#)). A skip note is written at most once per cooldown window.

Tests. All 31 passed on 2026-10-09: `npx tsx --test src/privy/policies.test.ts src/services/protectionMath.test.ts src/services/protectionRules.test.ts`.

File	Tests	Covers
Backend/src/privy/policies.test.ts	5	Exact policy shape (:9); rule name under 50 characters (:45); one ALLOW, no DENY, repay-only ABI (:51); cap is the hex of the base-unit amount, pool changes only the target (:61); non-address refused (:72)
Backend/src/services/protectionMath.test.ts	9	Health parse and format (:32); <code>debtAtHealth</code> (:41); exact target (:47); 1% buffer (:57); never more than the debt (:68); each clamp binds on its own and is named (:82); zero results (:108); dust floor (:125); decimals (:141)
Backend/src/services/protectionRules.test.ts	17	Input validation; trigger at exactly the threshold acts (:129); cooldown (:147); skip notes; PENDING handling (:197); gas gate on the limit (:206); re-enable starts clean (:224)
App/scripts/checkProtectionMath.mjs	6 + 9	The App's repay preview matches the backend's <code>planRepay</code> on 6 vectors; 9 eligibility cases (external wallet gives <code>not-embedded</code>)

5. Considered and not shipped

Privy server wallets for the faucet and liquidator. Script [Backend/scripts/privy/01-server-wallet.ts](#) created a Privy server wallet owned by the key quorum (`0x8d6908cb420C27435d6a707206944d828258094`) and sent from it on Monad testnet on 2026-10-08.

What the spike proved:

- Privy signs **and broadcasts** on chain 10143: 5 of 5 sends, median 1,172 ms. Privy set the nonce and gas itself. First hash `0x937f4804...`, gas used 26,456.
- Sign-only plus a viem broadcast also works: `0x107adeb3...`.
- With a policy on that wallet ([Backend/scripts/privy/02-policy.ts](#)), Privy enforces `to`, `value`, the function name and a numeric argument limit, and denies by default. Allowed `approve`: `0xb19e166e...`. Five forbidden variants (over the limit, wrong function, wrong address, plain value send, `approve` with value) were refused with `policy_violation`.

The shipped protection signer relies on these results: it uses `sendTransaction` (Privy signs and broadcasts), and it keeps the allow-only policy shape.

The running product does not use server wallets: the faucet, liquidator, slot, float and operator wallets keep their own keys, by the project owner's choice. Privy sits only where the *user's* wallet acts and the user stays in control.

6. Evidence

Transactions

Each hash below was checked with `eth_getTransactionReceipt` and `eth_getTransaction` on 2026-10-09. All are success.

Step	Who signed	Tx hash	What it proves
Open-trade payment, 100 AUD transfer to slot wallet <code>0x27FA...e503</code>	User, in the browser, with the Privy embedded wallet <code>0xfc7d...3d21</code> (no server signer on the wallet then)	0xb5a8e1ddc51c88f0426030f33093360ab080c652d0892bc9403979e836e3e8ad	The embedded wallet signs the user's real transactions; the open request reached <code>minted</code>
<code>approve(dead, 1000)</code> from the user's wallet	Laxu's server key, as a signer on the user's embedded wallet, through Privy's wallet RPC under policy <code>wudc3vujs3wri9uoeerv5ws0</code>	0x370e8a29a2c5a29fbd9c9a99db1b2b5b7b745e195ab81a1f64af367cb2f7cc8f	The server can act on a user's wallet only through the signer, within the policy (<code>from = 0xfc7d...3d21</code>)
<code>approve(dead, 1000)</code> from a Privy server wallet (policy run 2)	Server key, Privy server wallet <code>0x8d69...8094</code> , under an allow-only policy	0xb19e166e065827925daf87e712a5ca181d1794c1c011441e05336680b761c8f9	The allowed side of the policy test (spike, section 5)
1 wei send, Path A	Privy (<code>sendTransaction</code>), server wallet <code>0x8d69...8094</code>	0x937f4804c3f4e2221cfde6920444a8a07a05806df9e18a87d7fb918e8e050ef9	Privy signs and broadcasts on Monad testnet (spike)

One more transaction is on chain but is **not** counted as proof. The embedded wallet's first transaction (nonce 0) is [0x117b2a57165edc247d533963f14a442d5e87d3ad0c5551e3395b0627bda31a1a](#), dated 2026-10-08 20:46:25 UTC. It is `approve(0x...dEaD, 1000)` with the script's fixed 200,000 gas limit, and it was mined while the signer from run 1 was

attached (20:44:54 to 20:50:23 UTC). That matches the script's allowed call. However, the run's log does not record it, and the findings call run 1 inconclusive. So who signed it is inferred, not shown.

No protection-triggered repay() has run on testnet. No embedded-wallet user has had a loan while protection was on, and the database holds no protection rules or events. This is the most important item still open (section 9).

Policy refusal log

Refusals are not mined, so they have no hash. Privy answered `HTTP 400 {"error":"RPC request denied due to policy violation","code":"policy_violation"}` for each:

Run	Call	Result
User signer, 2026-10-09 (03-user-signer.ts)	<code>approve(dead, 1001)</code>	<code>policy_violation</code>
User signer, 2026-10-09	<code>transfer(dead, 1)</code>	<code>policy_violation</code>
User signer, 2026-10-09	<code>approve</code> at another address	<code>policy_violation</code>
User signer, after removal	<code>approve(dead, 1000)</code>	HTTP 401, no valid authorization signature
Server wallet, 2026-10-08 (02-policy.ts, run 2)	Over the limit, wrong function, wrong address, plain value send, <code>approve</code> with value	<code>policy_violation</code> ×5

Tests

The unit tests are listed in section 4.5. Separately, `Backend/scripts/privy/qa-protection.ts` passed 22 of 22 checks on 2026-10-09 against the real database, chain and Privy, sending no transaction (`Backend/.e2e/privy-qa.json`). They cover validation refusals, the embedded-wallet check, `activate` refused with `SIGNER_MISSING`, other users locked out, and the worker's no-debt and wallet-mismatch paths.

7. Screenshots

The images go in `docs/img/privy/`. None has been captured yet.

File	What to capture
<code>01-login.png</code>	Login modal (email or wallet)
<code>02-embedded-wallet.png</code>	Embedded wallet address shown in the app
<code>03-privy-dashboard-app.png</code>	Privy dashboard showing the app named Laxu (hide the app secret)
<code>04-dashboard-policy.png</code>	Dashboard view of the policy (full policy id visible)
<code>05-dashboard-authorization-key.png</code>	Authorization key / quorum entry (public key and id only)
<code>06-protect-card-off.png</code>	"Protect this loan" card, state Off
<code>07-protect-setup.png</code>	Setup with trigger, target, max spend and preview
<code>08-protect-consent.png</code>	The consent step ("I understand, allow Laxu to repay")
<code>09-protect-on.png</code>	State On, "Protected"
<code>10-protect-events.png</code>	Events list showing a protection action or the check log
<code>11-script-allowed-refused.png</code>	Terminal output of <code>03-user-signer.ts</code> (allowed 1000, refused 1001/transfer/other address)

File	What to capture
12-signed-tx.png	Explorer page of a transaction signed by the embedded wallet

Screenshot to add: docs/img/privy/01-login.png

The Privy login modal, offering email, Google or a wallet

Screenshot to add: docs/img/privy/02-embedded-wallet.png

The user's Privy embedded wallet address shown in Laxu

Screenshot to add: docs/img/privy/03-privy-dashboard-app.png

The Privy dashboard showing the app named Laxu, app secret hidden

Screenshot to add: docs/img/privy/04-dashboard-policy.png

The policy in the Privy dashboard, full policy id visible

Screenshot to add: docs/img/privy/05-dashboard-authorization-key.png

The laxu-server authorization key quorum, public key and id only

Screenshot to add: docs/img/privy/06-protect-card-off.png

The Protect this loan card in the Off state

Screenshot to add: docs/img/privy/07-protect-setup.png

Setup: trigger, target, maximum spend and the repay preview

Screenshot to add: docs/img/privy/08-protect-consent.png

The consent step: "I understand, allow Laxu to repay"

Screenshot to add: docs/img/privy/09-protect-on.png

Protection on, with the PROTECTED badge

Screenshot to add: docs/img/privy/10-protect-events.png

The protection events list

Screenshot to add: docs/img/privy/11-script-allowed-refused.png

03-user-signer.ts output: approve 1000 allowed; 1001, transfer and another address refused

Screenshot to add: docs/img/privy/12-signed-tx.png

MonadVision page of a transaction signed by the embedded wallet

8. How to reproduce

Steps marked **(your credentials)** need your own Privy app.

1. **Create a Privy app (your credentials).** In the dashboard, enable email login (protection needs an embedded wallet), and optionally Google and wallet login. Add your app's origin to the allowed origins.

2. **Set the env var names.** Values come from your dashboard; never commit them. - Backend/.env :
`PRIVY_APP_ID` , `PRIVY_APP_SECRET` , optional `PRIVY_JWT_VERIFICATION_KEY` ; for protection, `PRIVY_SIGNER_ID`
and `PRIVY_AUTH_PRIVATE_KEY` ; for the spike scripts only, `PRIVY_TEST_CONTRACT` . - App/.env.local :
`NEXT_PUBLIC_PRIVY_APP_ID` ; for the dev signer page only, `NEXT_PUBLIC_PRIVY_SIGNER_ID` and
`NEXT_PUBLIC_DEV_TOOLS=1` .
3. **Create the authorization key (your credentials):** `cd Backend && npx ts-node --transpile-only scripts/privy/00-create-signer.ts` . It registers a new P-256 public key as a 1-of-1 quorum `laxu-server` and writes `PRIVY_SIGNER_ID` and `PRIVY_AUTH_PRIVATE_KEY` into `Backend/.env` , with a backup at `~/privy-signer-backup.txt` . It prints the quorum id, never the key, and never overwrites.
4. **Create a test policy (your credentials):** `npx ts-node --transpile-only scripts/privy/02-policy.ts` prints an allow-only `approve` policy id. Never attach one made with `--with-deny-all` .
5. **Add the signer.** Start the App with `NEXT_PUBLIC_DEV_TOOLS=1` , open `/dev/privy` , sign in **with email**, paste the policy id, click **Add signer**. Send the embedded wallet about 0.01 MON for gas.
6. **Run the proof at once:** `npx ts-node --transpile-only scripts/privy/03-user-signer.ts --wallet 0xYOUR_EMBEDDED_WALLET` . Expect ours present: `true` , `[ALLOWED BY POLICY]` for `approve(dead, 1000)` , and `[POLICY DENIED]` for `1001`, `transfer` and the other address. Without the signer it exits with code 3.
7. **Remove the signer** on the page, rerun with `--expect-removed` , and expect HTTP 401.
8. **Loan protection end to end.** Set `ENABLE_PROTECTION=true` and `NEXT_PUBLIC_ENABLE_PROTECTION=true` , run one backend with workers, borrow against a position, and open **Protect this loan** with a trigger *above* the current health so it acts at once. Then run `scripts/privy/demo-rejection.ts --full` against the live repay policy.

9. Status and limits

Item	Status	Evidence
Login: email, Google, wallet	Working	providers.tsx:18 ; app settings from <code>apps.get</code>
Embedded wallet created at login	Working	Two embedded-wallet users in the database
Embedded wallet signs the user's transactions	Proven for a payment	<code>0xb5a8e1dd...</code> (section 6). Deposit, borrow, repay and withdraw by an embedded wallet: not yet on chain
Access-token verification, 401 on failure	Working	auth/privy.ts:49-73
Server acts on a user's wallet through a signer, within the policy	Proven	<code>03-user-signer.ts</code> run 2; <code>0x370e8a29...</code> ; three <code>policy_violation</code> refusals
Removing the signer stops the server	Proven	HTTP 401 after <code>removeSigners</code>
Repay policy shape	Proven by test	<code>policies.test.ts</code> (5 tests); created in Privy by <code>qa-protection.ts</code>
Activation checks (signer and allowance)	Proven for the refusal path	<code>qa-protection.ts</code> : <code>SIGNER_MISSING</code> , rule stays disabled. The success path has not run
Browser QA of the card (Spec 05b 7.2)	Not exercised	Items 1 and 2 partial (logic and backend answers only); items 3 to 12 not run. See privy-findings.md , "Frontend QA"
Full trigger-and-repay cycle on testnet	Not exercised	No protected loan has existed; no <code>REPAID</code> event exists
<code>demo-rejection.ts --full</code> against a live repay policy	Not exercised	Needs an enabled rule

Item	Status	Evidence
Embedded wallets only	By design	Signers attach to Privy wallets. External-wallet users see "Loan protection needs a Laxu wallet created with email sign-in." The backend answer <code>NOT_EMBEDDED_WALLET</code> is unexercised, because no external-wallet user exists
One active rule per wallet	By design	A signer carries at most one policy, so the backend refuses a second active rule (<code>ANOTHER_RULE_ACTIVE</code>)
Policy scope	Per pool, per rule	Each rule's policy names one pool and one per-call cap. It could be tightened further (for example a total limit inside Privy) if Privy's cumulative limits come to support <code>eth_sendTransaction</code>
Gas	Paid by the user's wallet	The repay is sent from the user's wallet. Monad bills the gas limit. The worker skips with "Add MON for gas" when the wallet is short
Market speed	Limit	A fast move between 5 s checks can still liquidate. It is a safety net, not a guarantee
Hosted origin in Privy	Pending	<code>allowed_domains</code> is empty; it needs the deployed URL
Screenshots	Missing	All 12 in section 7