


Terminal instalando:

```
npm i express pg sequelize express-session connect-pg-simple
+ CategoryInfo          : SecurityError: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\Users\Natanihel\Desktop\ejercicio 1 y 2 clase> Set-ExecutionPolicy -Scope CurrentUser -ExecutionPolicy RemoteSigne
d
PS C:\Users\Natanihel\Desktop\ejercicio 1 y 2 clase> npm init -y
Wrote to C:\Users\Natanihel\Desktop\ejercicio 1 y 2 clase\package.json:

{
  "name": "ejercicio-1-y-2-clase",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC"
}

PS C:\Users\Natanihel\Desktop\ejercicio 1 y 2 clase> npm i express pg sequelize express-validator bcrypt jsonwebtoken ex
press-session connect-pg-simple
npm warn deprecated dottie@2.0.7: Package no longer supported. Contact Support at https://www.npmjs.com/support for more
info.
npm warn deprecated uuid@8.3.2: uuid@10 and below is no longer supported. For ESM codebases, update to uuid@latest. Fo
r CommonJS codebases, use uuid@11 (but be aware this version will likely be deprecated in 2028).
\
```

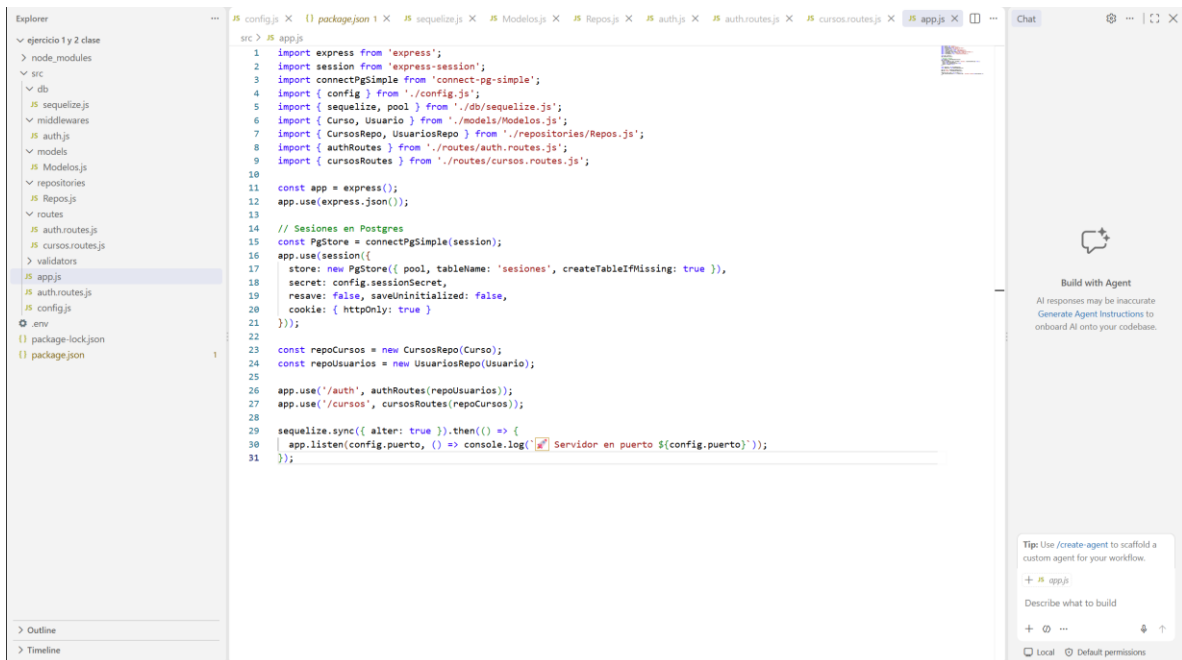

```
PS C:\Users\Natanihel\Desktop\ejercicio 1 y 2 clase> node --env-file=.env src/app.js
(node:30868) Warning: SECURITY WARNING: The SSL modes 'prefer', 'require', and 'verify-ca' are treated as aliases for 'verify-full'.
In the next major version (pg-connection-string v3.0.0 and pg v9.0.0), these modes will adopt standard libpq semantics,
which have weaker security guarantees.
```

To prepare for this change:

- If you want the current behavior, explicitly use 'sslmode=verify-full'
- If you want libpq compatibility now, use 'uselibpqcompat=true&sslmode=require'

See <https://www.postgresql.org/docs/current/libpq-ssl.html> for libpq SSL mode definitions.

(Use 'node --trace-warnings ...' to show where the warning was created)


🔥 Servidor en puerto 3000

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:3000/auth/registro`
- Method:** `POST`
- Body (raw):**

```
{
  "email": "natanihel@umg.edu.gt",
  "password": "123"
}
```
- Response (JSON):**

```
{
  "id": "6aa218b1-b5fd-46cf-9129-4ab17718ca5f",
  "email": "natanihel@umg.edu.gt"
}
```
- Status:** `201 Created`
- Time:** `1.66 s`
- Size:** `316 B`

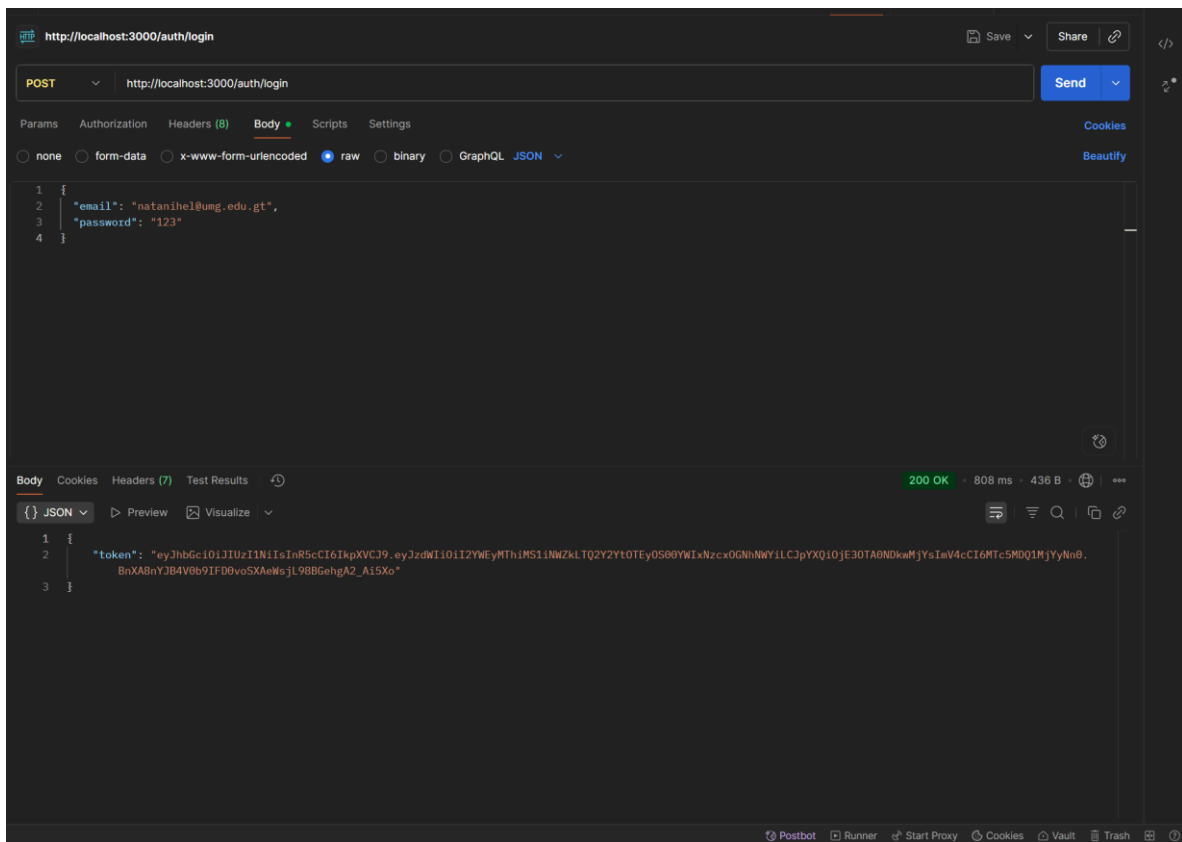

http://localhost:3000/cursos

POST http://localhost:3000/cursos

Params Authorization Headers (8) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "nombre": "Desarrollo Web",
3   "codigoUnico": "WEB-101",
4   "creditos": 5
5 }
```

Body Cookies Headers (7) Test Results

401 Unauthorized - 13 ms - 279 B

{ JSON Preview Debug with AI

```
1 {
2   "error": "Token no proporcionado"
3 }
```

Postbot Runner Start Proxy Cookies Vault Trash

http://localhost:3000/cursos

SaveShare

Send

POSThttp://localhost:3000/cursos

ParamsAuthorizationHeaders (9)BodyScriptsSettings

noneform-datax-www-form-urlencodedrawbinaryGraphQL JSON

```
1 {
2   "nombre": "Desarrollo Web",
3   "codigoUnico": "WEB-101",
4   "creditos": 5
5 }
```

201 Created735 ms427 B

BodyCookiesHeaders (7)Test Results

JSONPreviewVisualize

```
1 {
2   "id": "d87f8bf4-f634-467d-ba84-d646864d898d",
3   "nombre": "Desarrollo Web",
4   "codigoUnico": "WEB-101",
5   "creditos": 5,
6   "updatedAt": "2026-09-26T18:59:36.891Z",
7   "createdAt": "2026-09-26T18:59:36.891Z"
8 }
```

PostbotRunnerStart ProxyCookiesVaultTrash