1- Lancement des 4 machines

2- Modification du DNS : nano /etc/bind/named.conf.options

3-

```
options {
        directory "/var/cache/bind";

        // If there is a firewall between you and nameservers you want
        // to talk to, you may need to fix the firewall to allow multiple
        // ports to talk.  See http://www.kb.cert.org/vuls/id/800113

        // If your ISP provided one or more IP addresses for stable
        // nameservers, you probably want to use them as forwarders.
        // Uncomment the following block, and insert the addresses replacing
        // the all-0's placeholder.

        forwarders {
                172.16.10.20;
                172.16.20.21;
        };

        allow-query {192.168.0.0/16; 172.16.10.0/24; localnets;};
        //========================================================================
        // If BIND logs error messages about the root key being expired,
        // you will need to update your keys.  See https://www.isc.org/bind-keys
        //========================================================================
        dnssec-validation no;

        auth-nxdomain no;    # conform to RFC1035
        listen-on-v6 { any; };
};
```

restart service bind9

```
root@messagelab:~# service bind9 status
● named.service - BIND Domain Name Server
     Loaded: loaded (/lib/systemd/system/named.service; enabled; preset: enabled)
     Active: active (running) since Fri 2025-09-12 16:38:56 CEST; 31s ago
       Docs: man:named(8)
   Main PID: 1038 (named)
     Status: "running"
      Tasks: 4 (limit: 1097)
     Memory: 11.1M
        CPU: 21ms
     CGroup: /system.slice/named.service
             └─1038 /usr/sbin/named -f -u bind

sept. 12 16:38:56 messagelab named[1038]: zone 0.in-addr.arpa/IN: loaded serial 1
sept. 12 16:38:56 messagelab named[1038]: zone 255.in-addr.arpa/IN: loaded serial 1
sept. 12 16:38:56 messagelab named[1038]: zone mlif.local/IN: loaded serial 11
sept. 12 16:38:56 messagelab named[1038]: zone 100.168.192.in-addr.arpa/IN: loaded serial 9
sept. 12 16:38:56 messagelab named[1038]: zone 200.168.192.in-addr.arpa/IN: loaded serial 1
sept. 12 16:38:56 messagelab named[1038]: zone 127.in-addr.arpa/IN: loaded serial 1
sept. 12 16:38:56 messagelab named[1038]: zone localhost/IN: loaded serial 2
sept. 12 16:38:56 messagelab named[1038]: all zones loaded
sept. 12 16:38:56 messagelab systemd[1]: Started named.service - BIND Domain Name Server.
sept. 12 16:38:56 messagelab named[1038]: running
```

statut Bind9

4- Test mlif local :

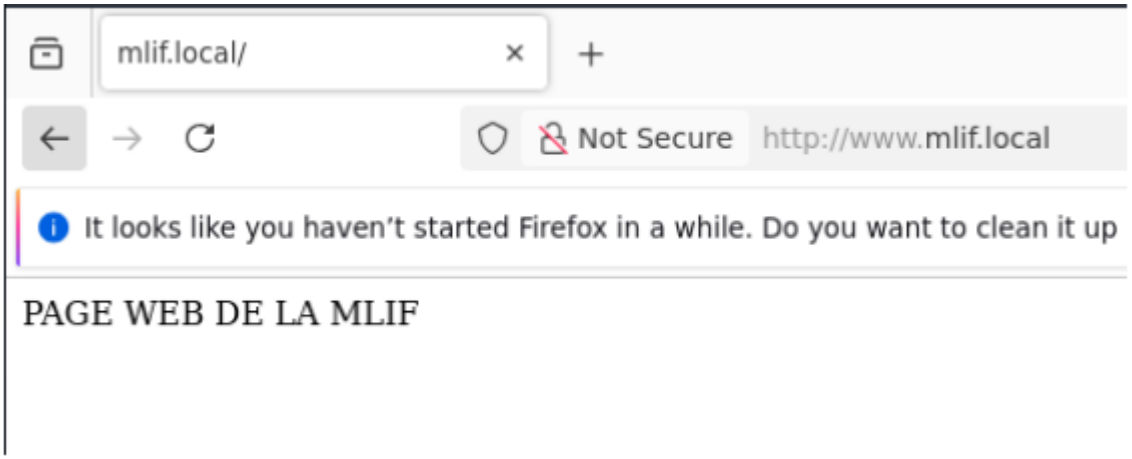

5- accès au pfsense :

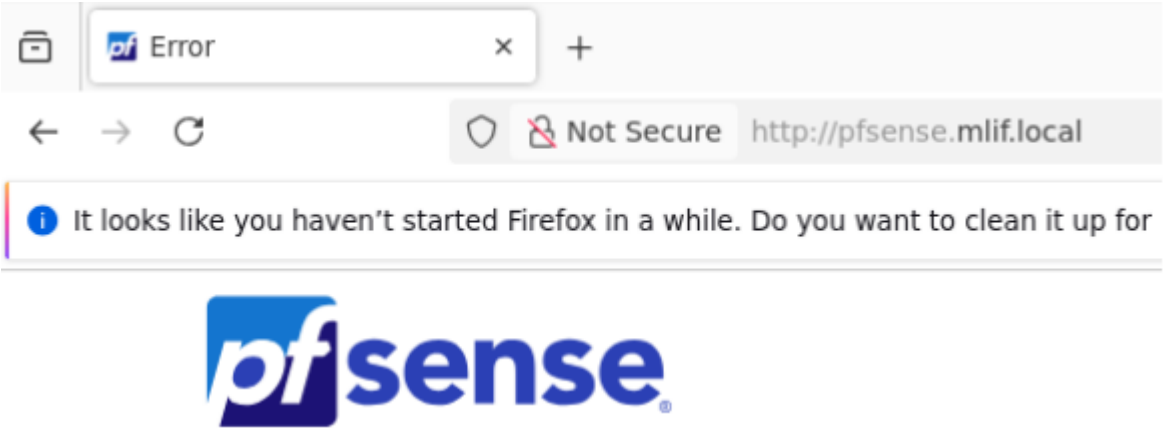

6- Ping www.mlif.local

```
root@www:~# ping messagelab.mlif.local
PING messagelab.mlif.local (192.168.100.10) 56(84) bytes of data.
64 bytes from messagelab.mlif.local (192.168.100.10): icmp_seq=1 ttl=63 time=0.277 ms
64 bytes from messagelab.mlif.local (192.168.100.10): icmp_seq=2 ttl=63 time=0.616 ms
64 bytes from messagelab.mlif.local (192.168.100.10): icmp_seq=3 ttl=63 time=0.496 ms
^C
--- messagelab.mlif.local ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2006ms
rtt min/avg/max/mdev = 0.277/0.463/0.616/0.140 ms
```

7- Nslookup www.mlif.local

```
root@www:~# nslookup www.mlif.local
Server:         192.168.100.10
Address:        192.168.100.10#53

Name:   www.mlif.local
Address: 192.168.200.5

root@www:~#
```

8- ping www.cisco.com :

```
root@www:~# ping www.cisco.com
PING e2867.dsca.akamaiedge.net (2.20.10.35) 56(84) bytes of data.
64 bytes from a2-20-10-35.deploy.static.akamaitechnologies.com (2.20.10.35):
```

9- accès au pfsense :

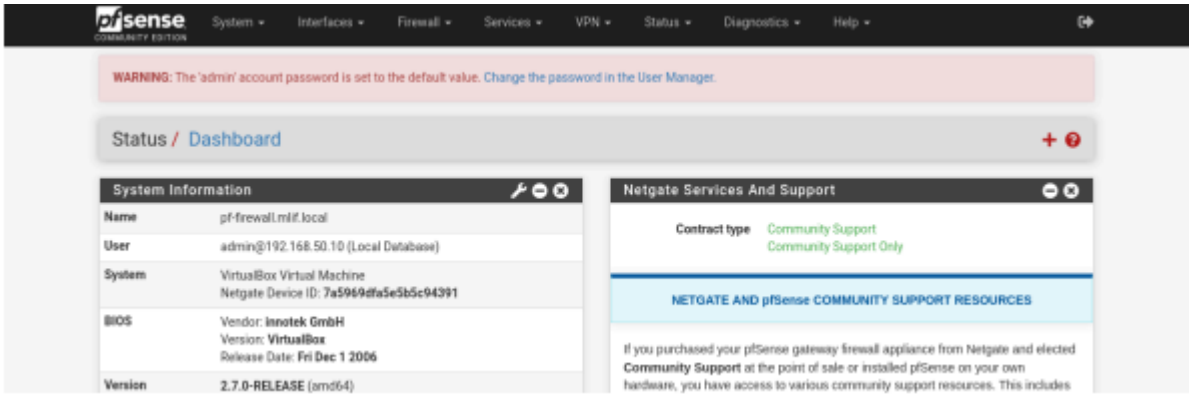

10- Menu Firewall :

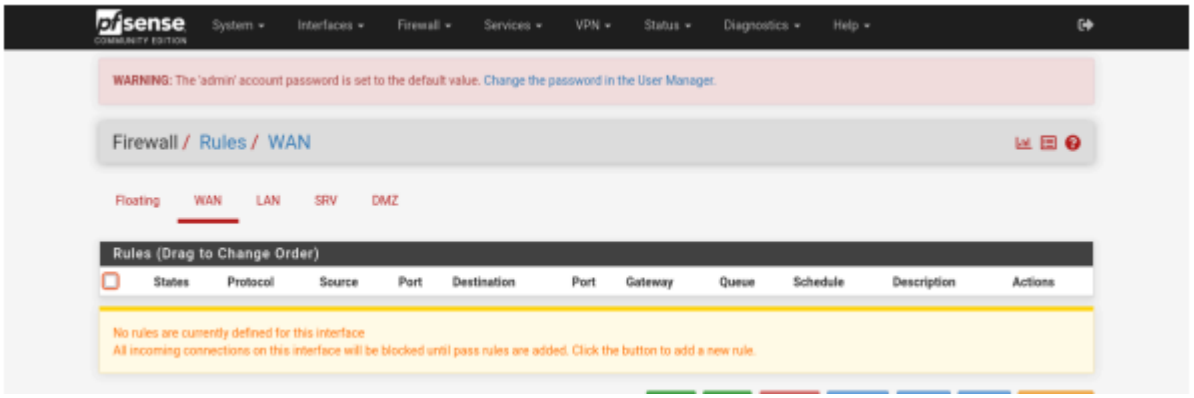

11- Interface DMZ :

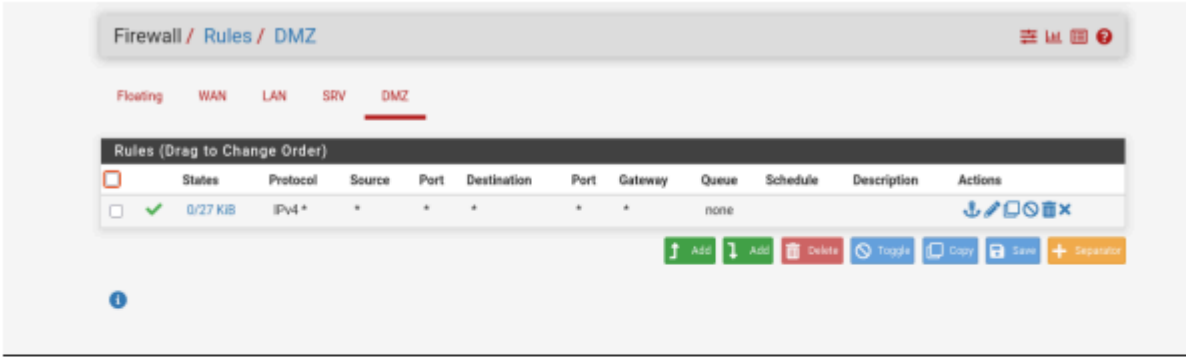

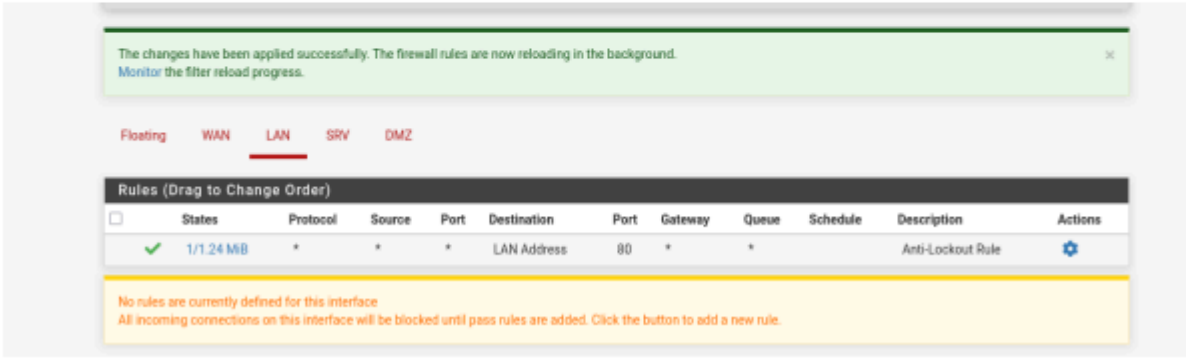
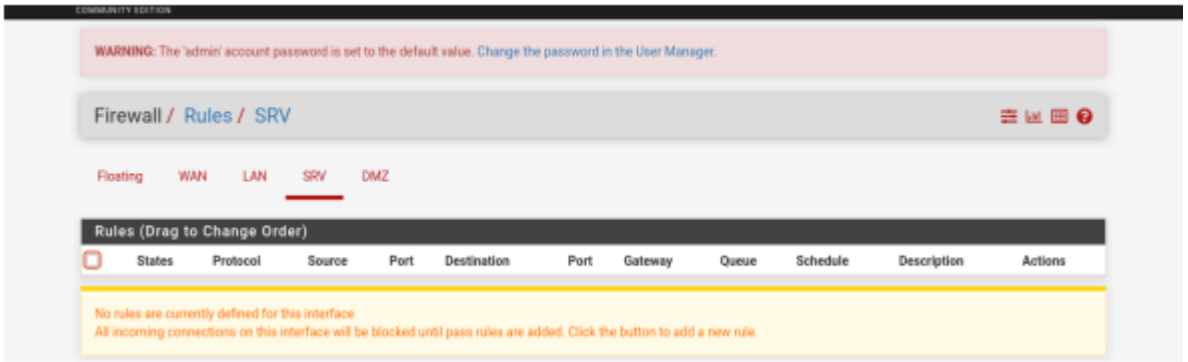
12- supprimer derniere ligne à la page serveur :