

# Every row carries its source.

Free, local, open source. CSV/PDF/HTML in → table out where every row includes the exact quote it came from.

Account research is one example. Bring any `TaskSpec` — SaaS notes, CVE triage, docs.

## TRY THE EXAMPLE IN 30S — NO KEYS


```
bash

$ free-fleet quickstart --demo --run-id demo
→ writes runs/demo/clean_packet.{json,csv} via demo/fake
```

Local SQLite at `./free-fleet.db` • MIT • No data leaves your machine

# Slice → Pack → Lease → Score → Check → Packet

Deterministic control plane — not an agent loop.

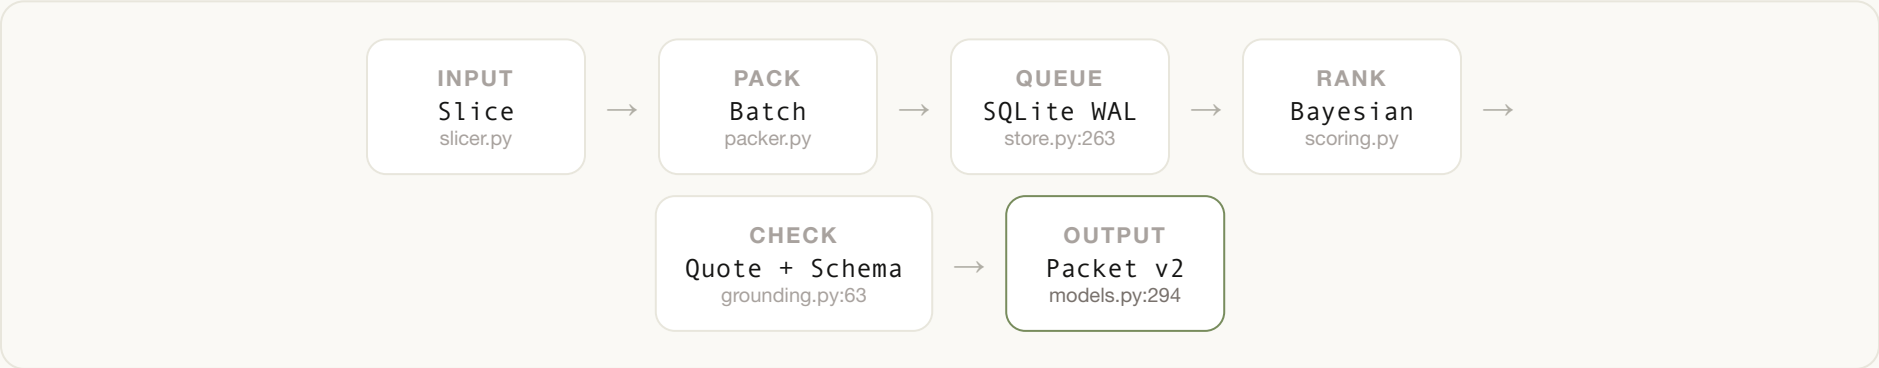

**Resumable • Auditable • Concurrent**

BEGIN IMMEDIATE leases • inference\_attempts ledger • stale leases recovered • free\_fleet\_v2 packet with digest

# Quote must match the source **exactly.**

You can check it yourself — no trust required.

## QUOTEREF — ALWAYS STORED WITH OFFSETS

```
{ slice_id: "full", start: 22, end: 75, text: "real-time latency monitoring for cloud microservices." }
```

```
slice_text[start:end] == text
// if not, grounding_failed → rotate lane, no commit to SQLite
// offsets optional if text occurs once, required if ambiguous
```

Closed schema `additionalProperties: false` — model can't add fields or markdown.

# CSV in → CSV out with quotes.

Real output from `examples/saas_intelligence` — account research example.

\$ free-fleet export demo --format csv

3 rows, each with quote

| ITEM_ID  | PRICING_TYPE | PRIMARY_QUOTE_TEXT                                 |
|----------|--------------|----------------------------------------------------|
| stripe   | usage_based  | "2.9% + 30¢ per successful card charge"            |
| resend   | free_tier    | "First 3,000 emails per month are completely free" |
| pinecone | free_tier    | "1 free index with 2GB storage"                    |

PACKET

free\_fleet\_v2 + digest

AUDIT

inference\_attempts ledger

● TRY IT — FREE, LOCAL

# One command in Claude.

For technical builders and the GTM folks they support — no sales funnel, just a suite.

```
bash — Claude & Cursor

$ pip install free-fleet
$ free-fleet mcp install --workspace-root "$PWD"
writes claude_desktop_config.json / mcp.json → restart app
$ free-fleet quickstart --demo # no keys, <1s
```

In Claude/Cursor — chat, don't configure

“Use free-fleet to triage `accounts.csv` for pricing — free-only”

→ calls free\_fleet\_run → SQLite leases → checks quote+schema → exports CSV