

ResinDB

A search-centric document database

A document database

- The core mechanism of a database is that of a **key/value** store.
- The principal difference between a key/value store and a document store is that in a document store terms (key/value pairs) are grouped into documents.
- A document is a serialized business entity or graph that can be seen as a **dictionary of key/value**, or a nested dictionary of dictionaries of string/object, much like a JSON document, or even a **dictionary of byte stream/byte stream**.
- A key/value store can respond to value lookups by key (i.e. what value did I store with this key?). The query is composed of a key.
- Key/value stores and databases alike can **index the values** of a certain key to be able to respond to lookups by its value.
- Document databases instead keep an inverted index where **values are mapped to documents** to be able to respond to document lookups (i.e. what documents did I store that contain this content?)

An inverted index

A document:

```
{  
  "label": "universe",      "description": "totality of planets, stars, galaxies, intergalactic space, or  
    all matter or all energy"  
}
```

The postings *:

label/**universe** (1)

description/**totality of planets, stars, galaxies, intergalactic space, or all matter or all energy** (1)

* posting = a term reference, (a count) + a reference to the original document

A full-text search inverted index

label/**universe** (1)

description/**totality** (1)

description/**of** (1)

description/**planets** (1)

description/**stars** (1)

description/**galaxies** (1)

description/**intergalactic** (1)

description/**space** (1)

description/**or** (2)

description/**all** (2)


description/**matter** (1)

description/**energy** (1)

Conceptual model


Write

Column-based indexing,
row-based compression

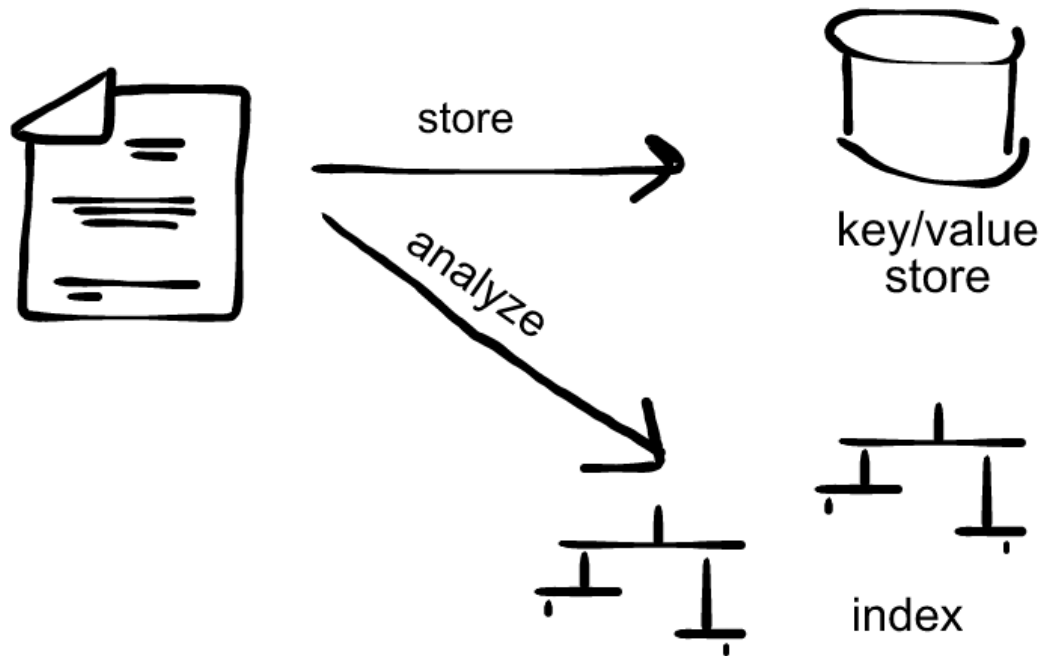


Read


Term-based reading

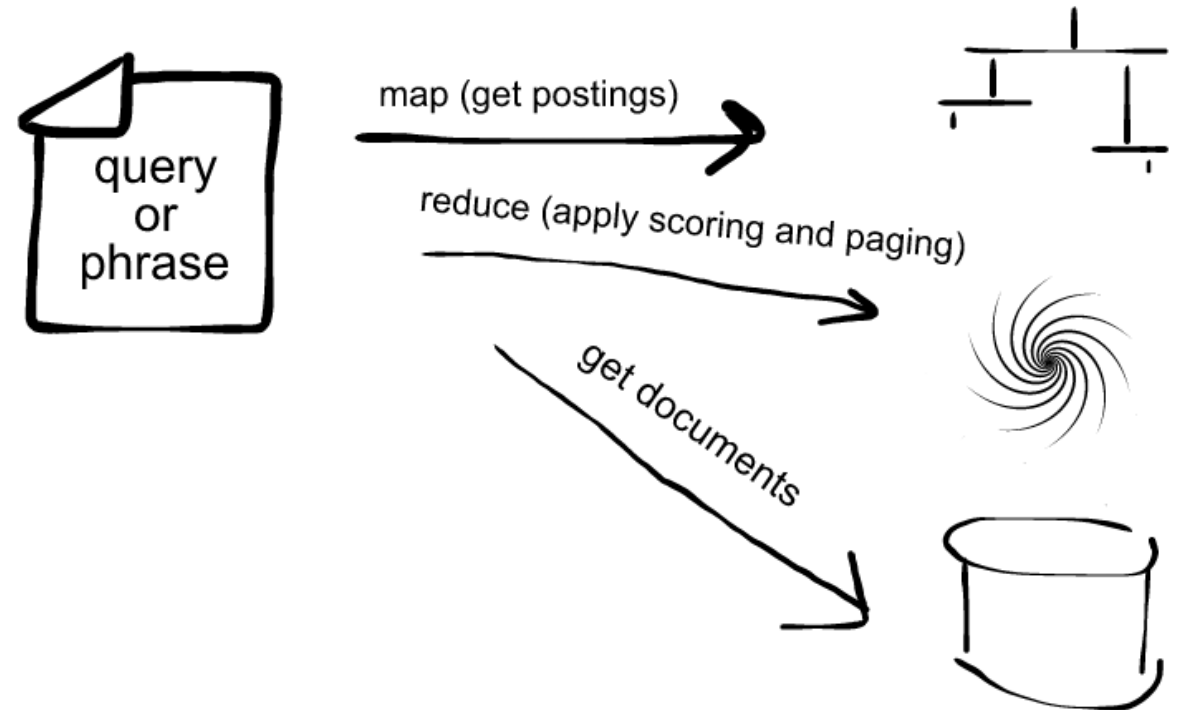

Write model

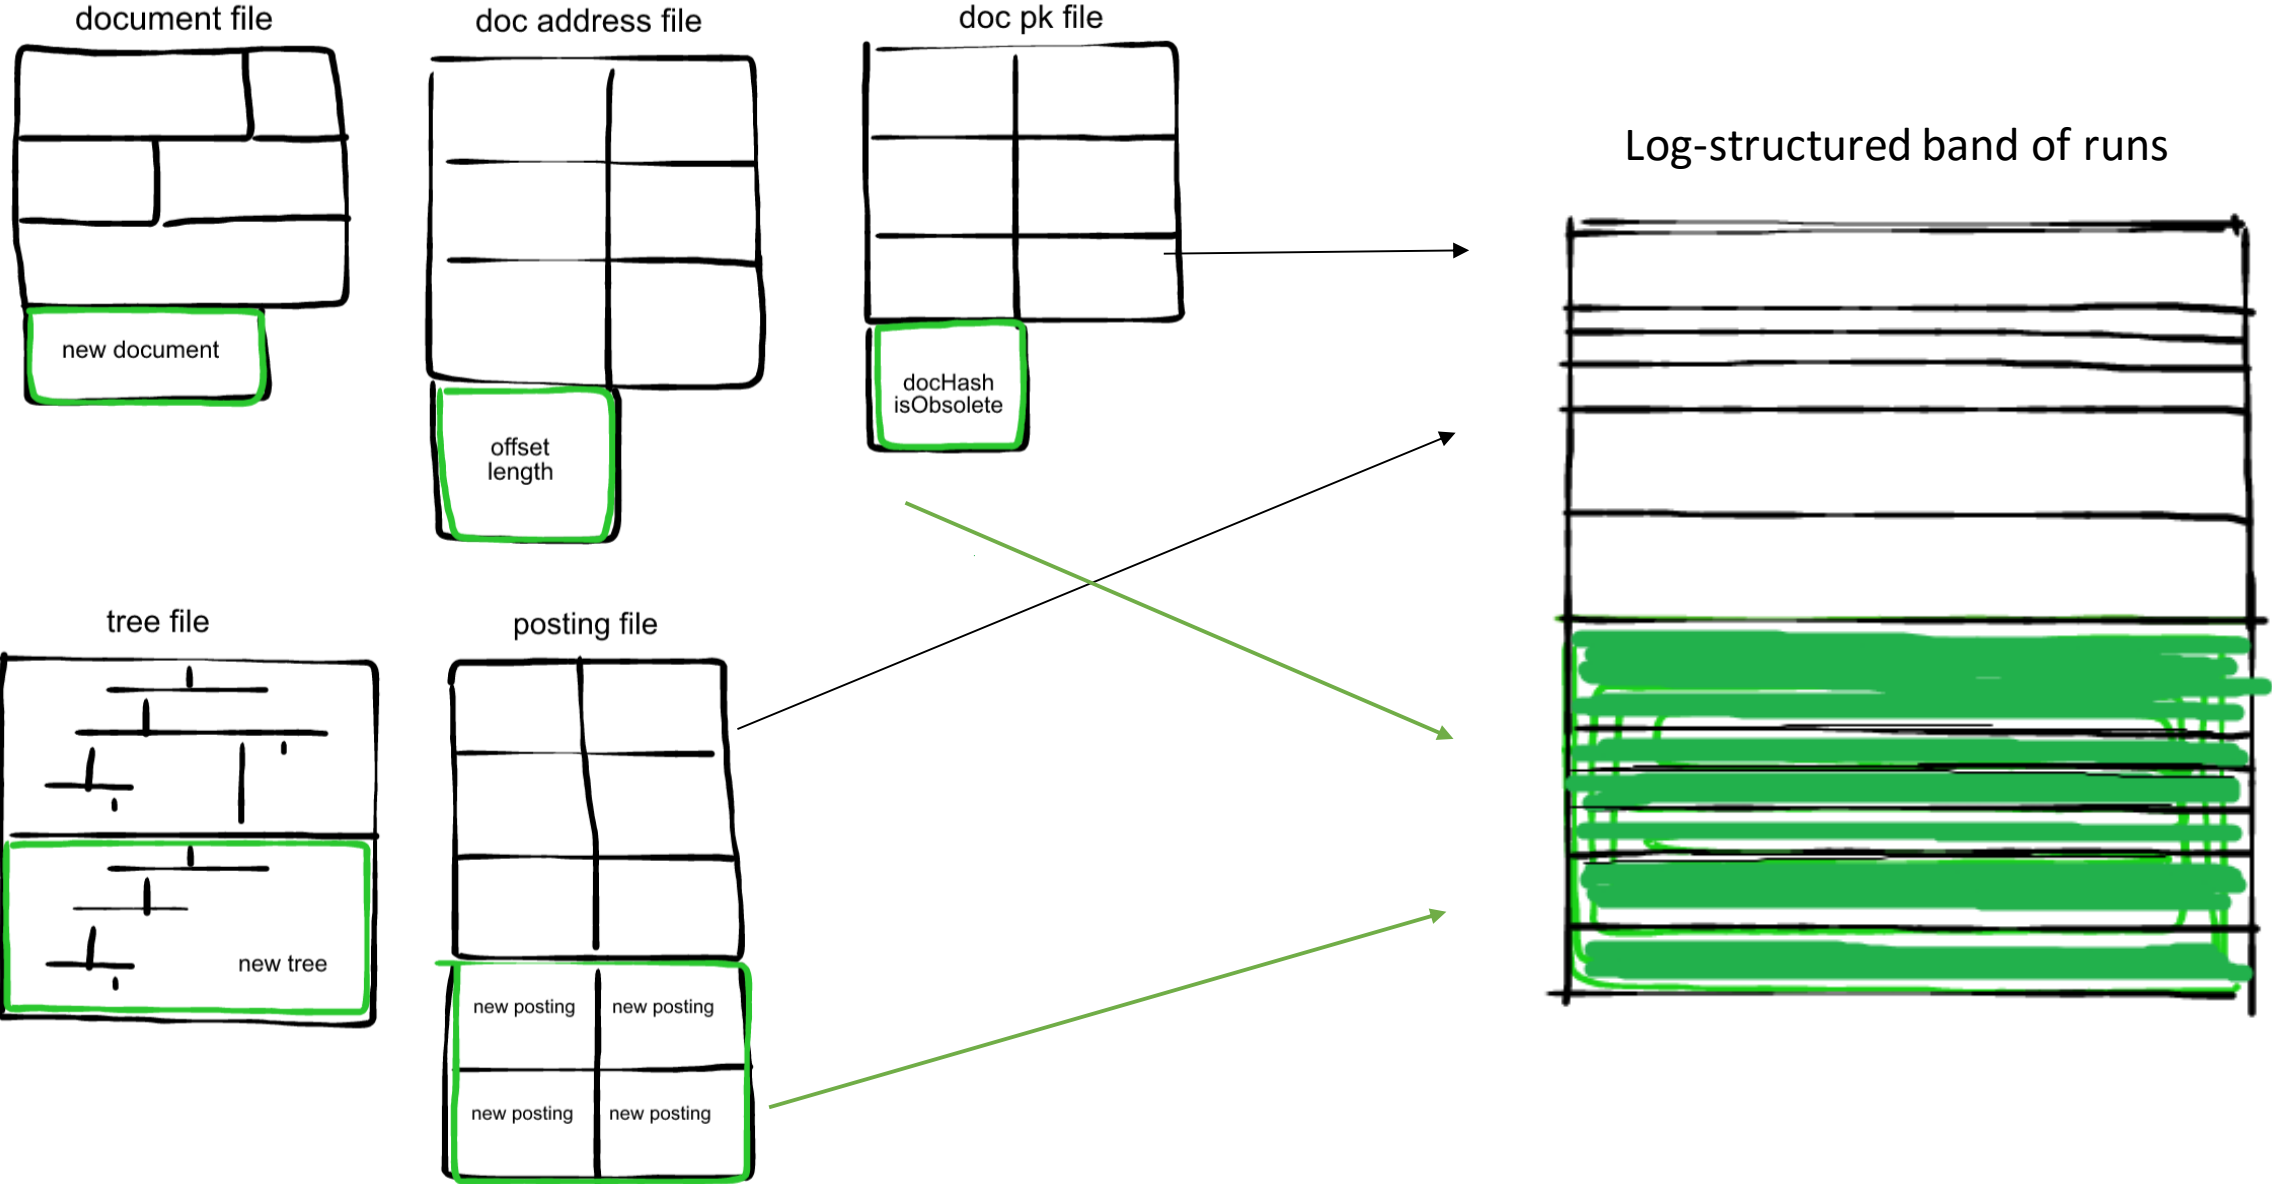

Read model

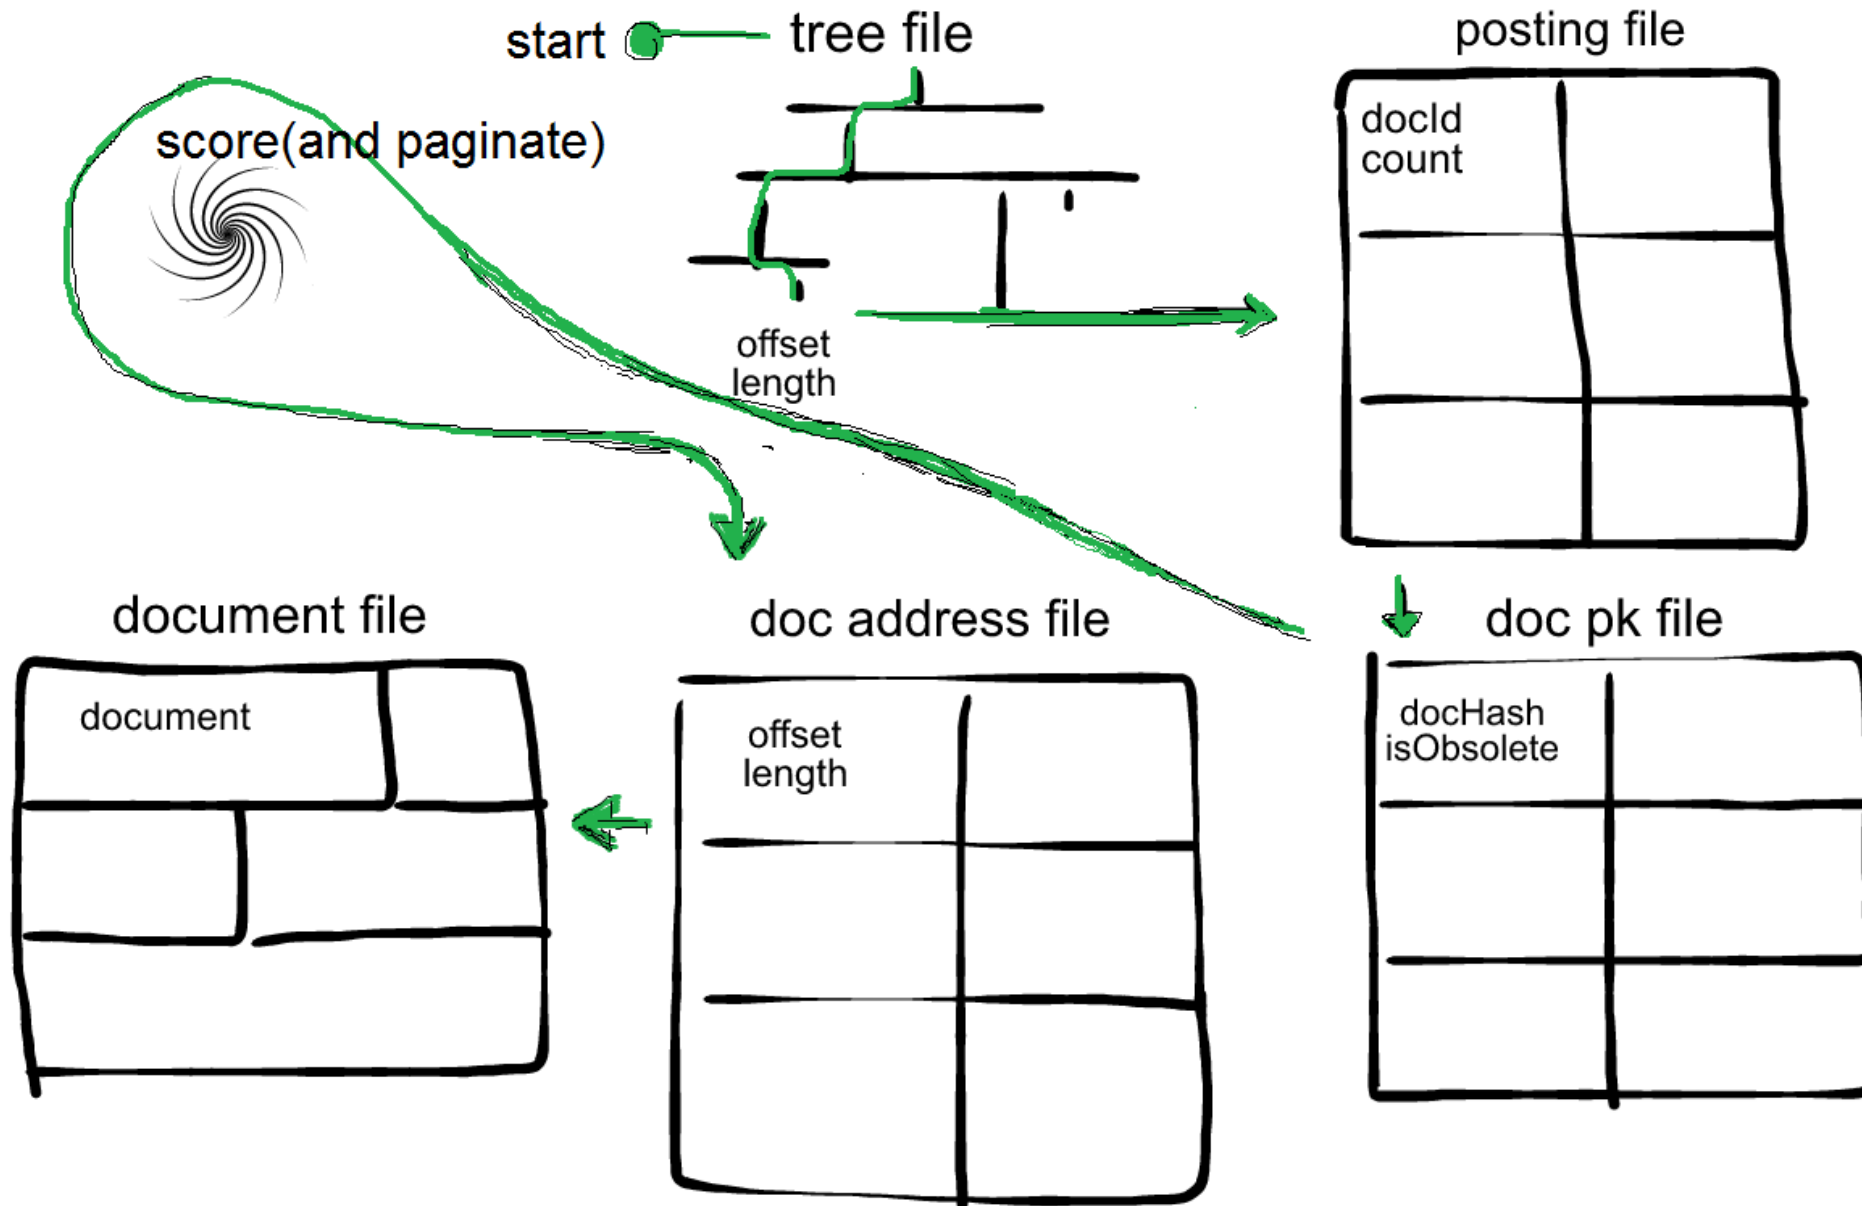

Vector space model

Query: "What is a cat?"

Create query document: [what,is,a,cat]

Scan index: what

Scan index: is

Scan index: a

Scan index: cat

Found documents:

[(i), (have), a, cat],

[what, (if), (i), (am), a, cat]

Normalize to fit into 4-dimensional space:

[null, null, a, cat],
[what, null, a, cat]

Score the documents:

[0, 0, 0.1, 3],
[0.2, 0, 0.1, 4]

Sort by the documents' distance from query document, paginate, and as a final step, **fetch documents from the filesystem.**

Distributed model

Resin over gRPC

