

ResinDB

A search-centric document database

Definition of a document database

- The core mechanism of any database is that of a **key/value** store.
- In a document store terms (i.e. key/value pairs) are grouped into documents.
- A document (a serialized business entity or graph) can be viewed upon as a **dictionary of key/value**, or a nested dictionary of dictionaries of string/object, much like a JSON document.
- A document database may be defined as a key/value store where the value is a document and the (primary) key is optional, a **key/document store**.
- A key/value store can respond to lookups by key. *I.e. what value did I store with this key?* The query is thus composed of a key.
- Stores and databases alike may **index the values** within a certain scope (where the scope might be a key, column, range or no scope i.e. there is a global scope) to be able to respond to lookups by value.
- Document databases instead keep an inverted index where **values are mapped not to keys but to documents** to be able to respond to document lookups. *I.e. what documents did I store that has this value in this column or field?* The query is thus composed of a document.

An inverted index

To fit inside an inverted index, this document...

```
{  
  "label": "universe",  
  "description": "totality of planets, stars, galaxies, intergalactic space, or all matter or all energy"  
}
```

...will be transformed into the following terms (and their count) *:

label/**universe** (1)

description/**totality of planets, stars, galaxies, intergalactic space, or all matter or all energy** (1)

The terms in a full-text search inverted index

label/**universe** (1)

description/**totality** (1)

description/**of** (1)

description/**planets** (1)

description/**stars** (1)

description/**galaxies** (1)

description/**intergalactic** (1)

description/**space** (1)

description/**or** (2)

description/**all** (2)


description/**matter** (1)

description/**energy** (1)

Conceptual model


Write

Column-based indexing,
row-based compression

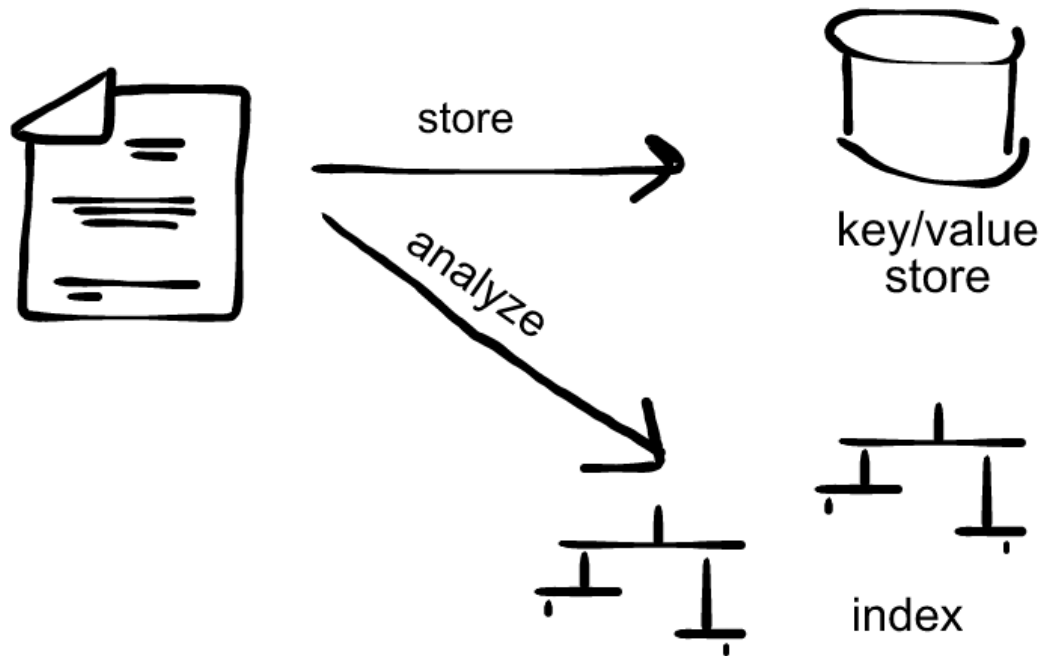

Read

Document-based querying,
snapshot and disk-based reading

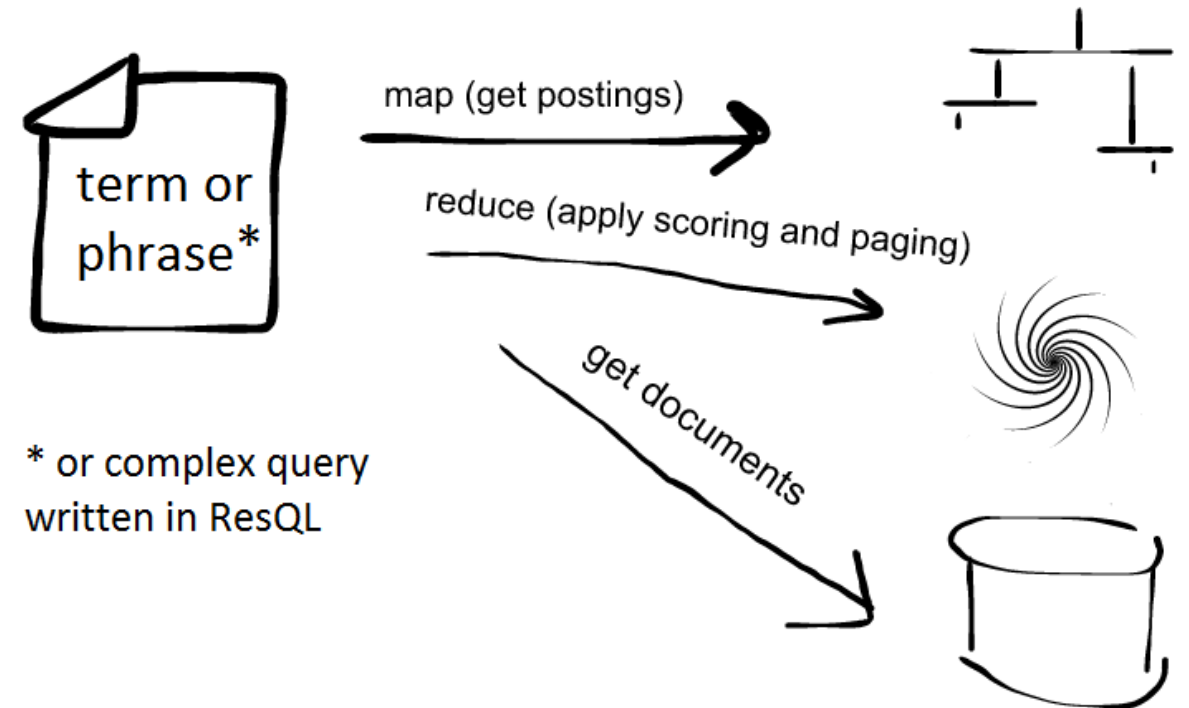


Writing/reading with LcrsTrie and LcrsNode

Resin's default index data structure is a binary character trie. It is **represented in memory** and during indexing by the LcrsTrie **and on disk** and at the time of query by the LcrsNode.


The LcrsNode offer the same binary search capabilities as a in-memory binary search tree but without having to load anything into memory except for the current tree node.

A index lookup is a sequential forward-only read of a bitmap.

Write model

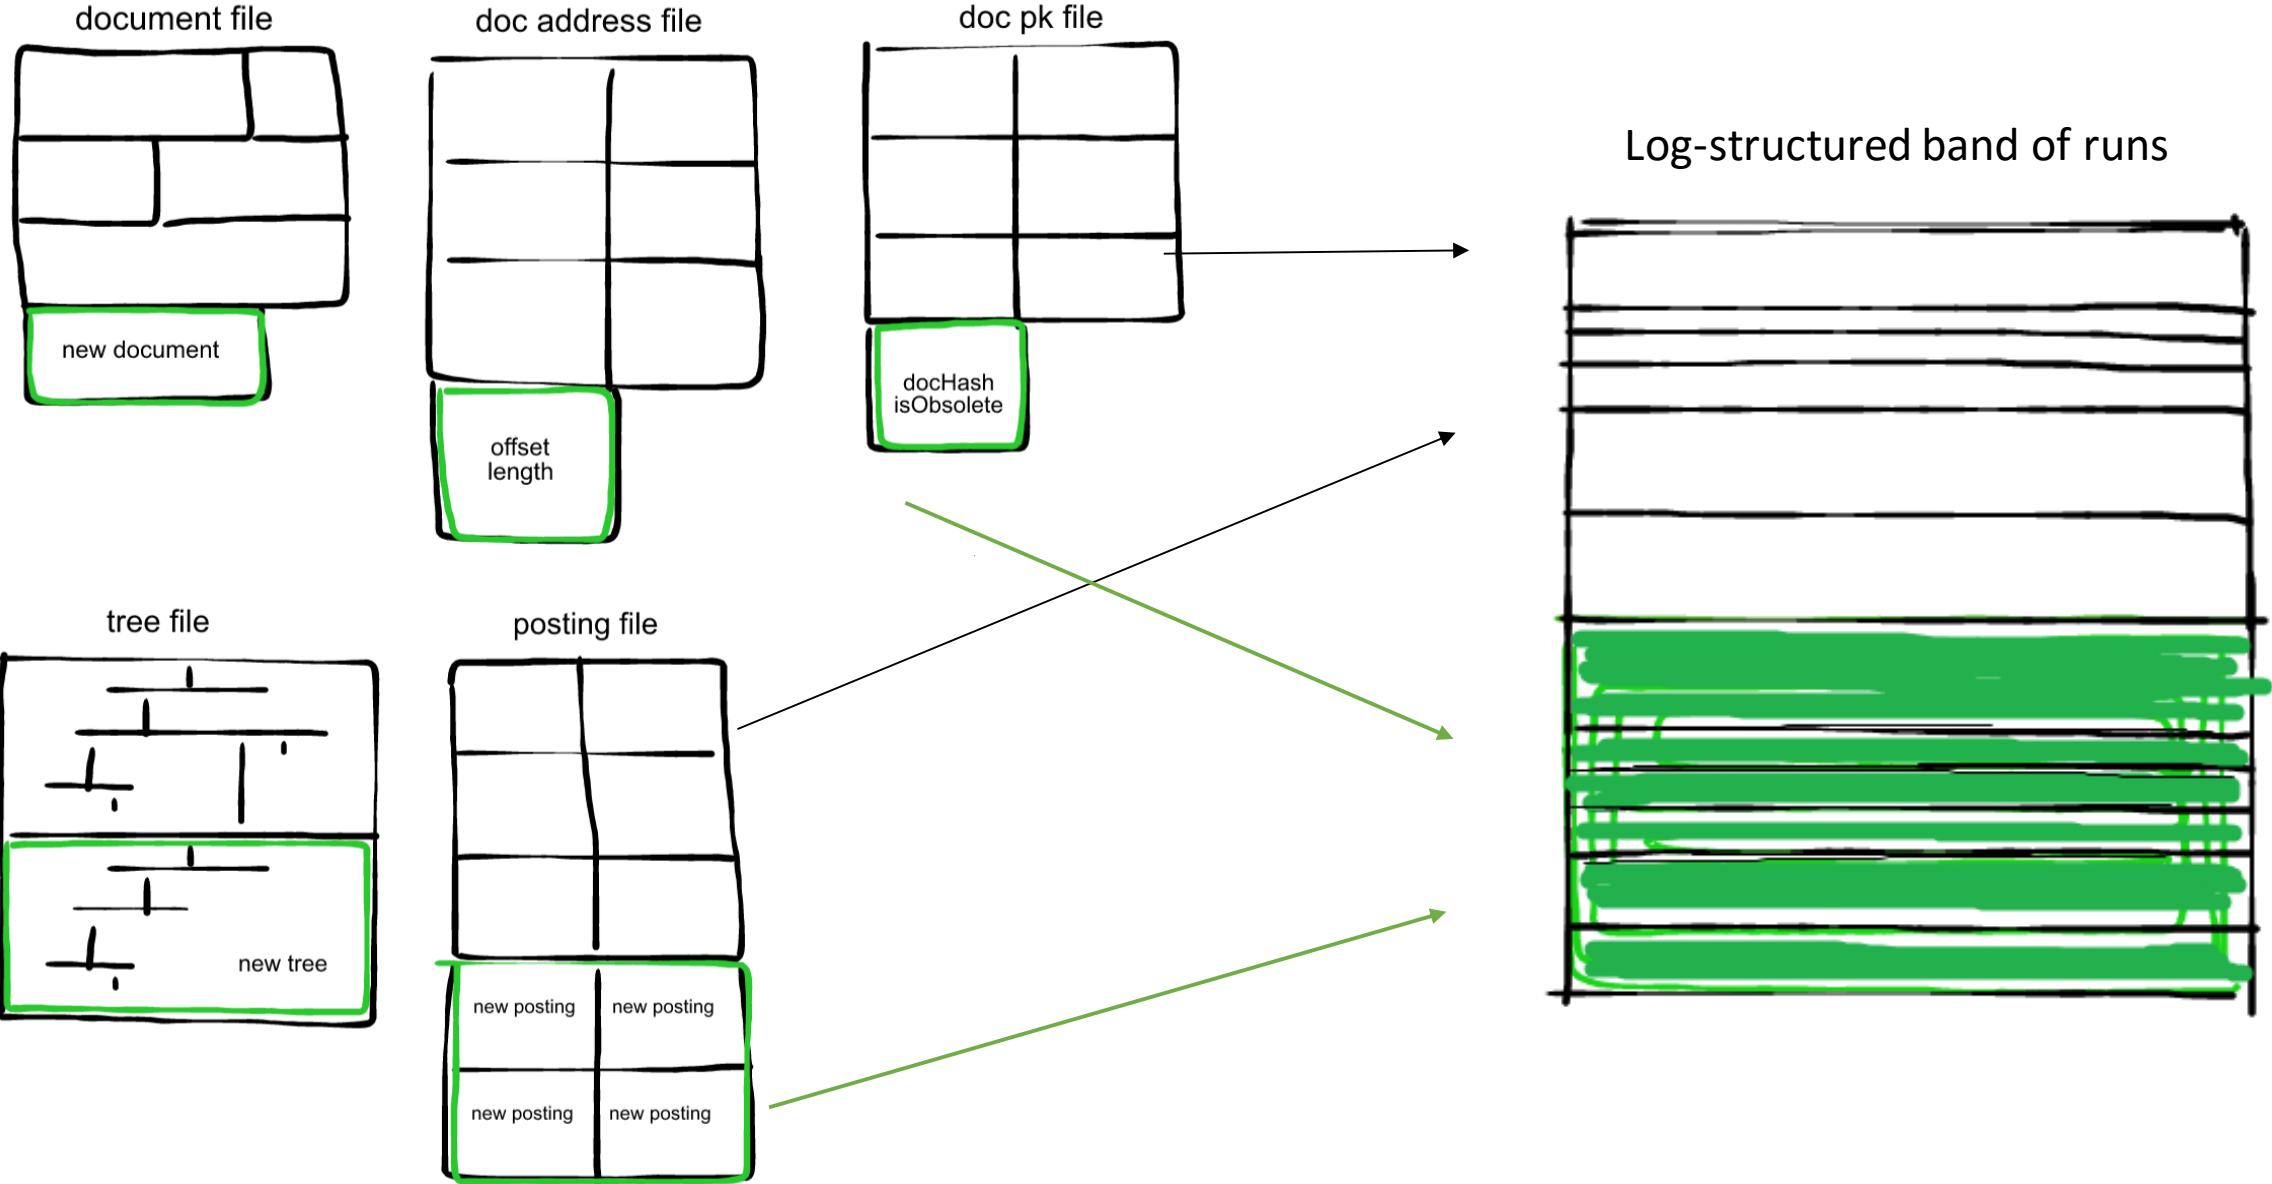

Read model

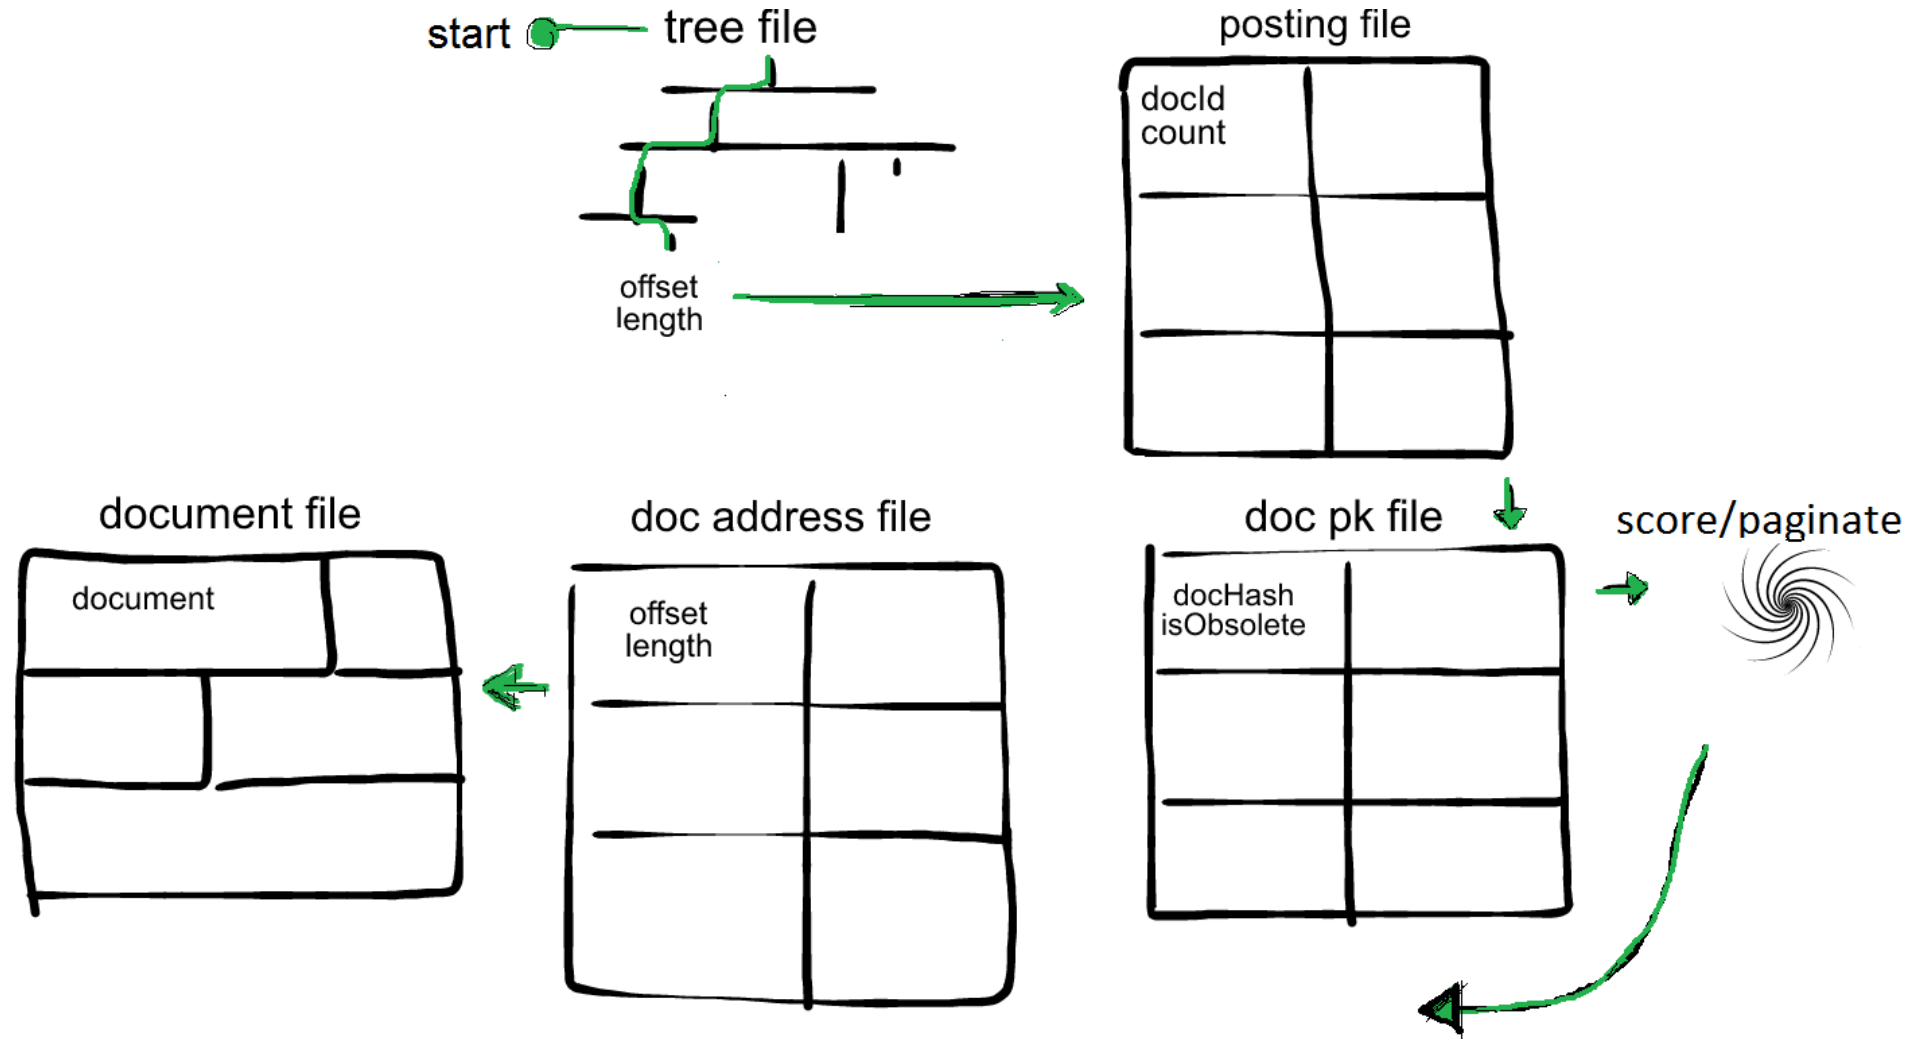

Vector space model

Query: "What is a cat?"

Parse into document: [what,is,a,cat]

Scan index: what

Scan index: is

Scan index: a

Scan index: cat

Found documents:

[(i), (have), a, cat],

[what, (if), (i), (am), a, cat]

Normalize to fit into 4-dimensional space:

[null, null, a, cat],
[what, null, a, cat]


Give each word a weight (tf-idf):

[0, 0, 0.1, 3],
[0.2, 0, 0.1, 4]

Sort by the documents' (Euclidean) distance from the query document, paginate and as a final step, **fetch documents from the filesystem.**

Distributed model

Resin over gRPC

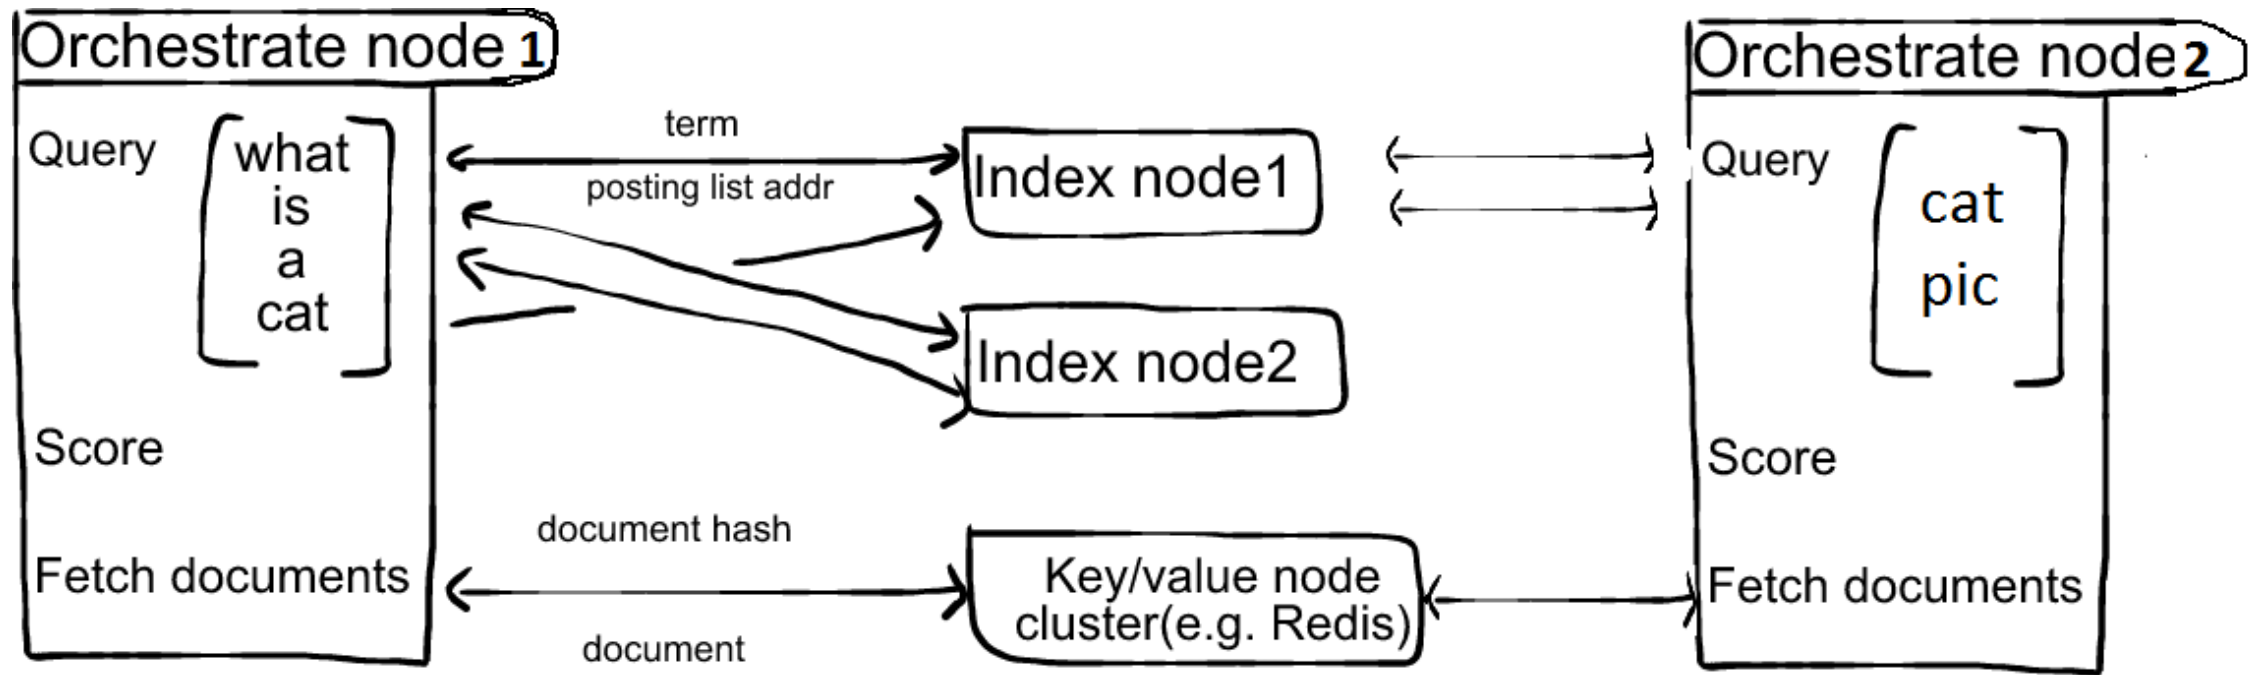

.Net Core/C#

How a indie developer keeps pace, feature- and performance-wise, with DocumentDb, RocksDB and Bigtable.

;)