INTRODUCTION SEQUENCE


```
1 $ delay 2000

$ show goal

$ git commit

2 $ git checkout -b bugfix
3
```

```
$ clear
                                            \square
$ objective
                                            \square
$ git branch bugFix
                                            \square
$ objective
                                            \square
$ git checkout bugFix
                                            \square
$ objective
                                            $ git commit
                                            \square
$ objective
                                            $ git checkout master
                                            \square
$ git commit
                                            $ objective
                                            \square
$ git merge bugFix
                                            \square
```

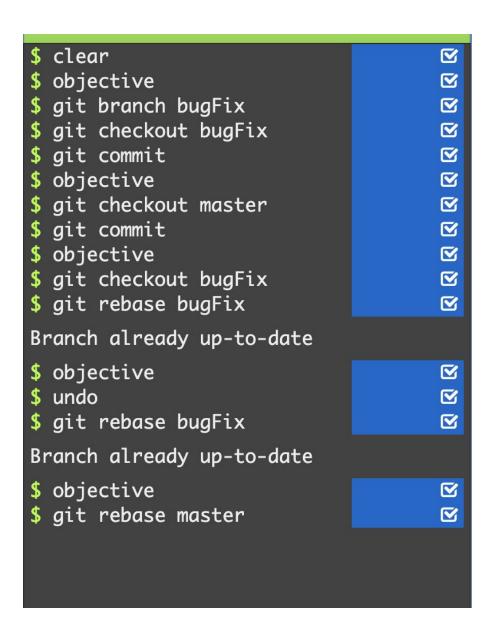

RAMPING UP

```
Use the label (hash) on the commit for help!

$ delay 2000
$ show goal
$ git checkout c4
```

2

```
Remember the Caret (^) operator!

$ delay 2000
$ show goal
$ git checkout bugFix^
```

3

```
$ clear
$ reset
$ git branch -f master C6
$ git branch -f bugFix C0
$ git checkout C1

Would

Can
```

```
different arguments.

$ delay 2000
$ show goal
$ git reset local~1
$ git checkout pushed
$ git revert pushed
```

MOVING WORK AROUND

Show Goal

\$ clear
\$ git cherry-pick C3 C4 C7

Show Goal

\$ clear
\$ git cherry-pick C3 C4 C7

2

