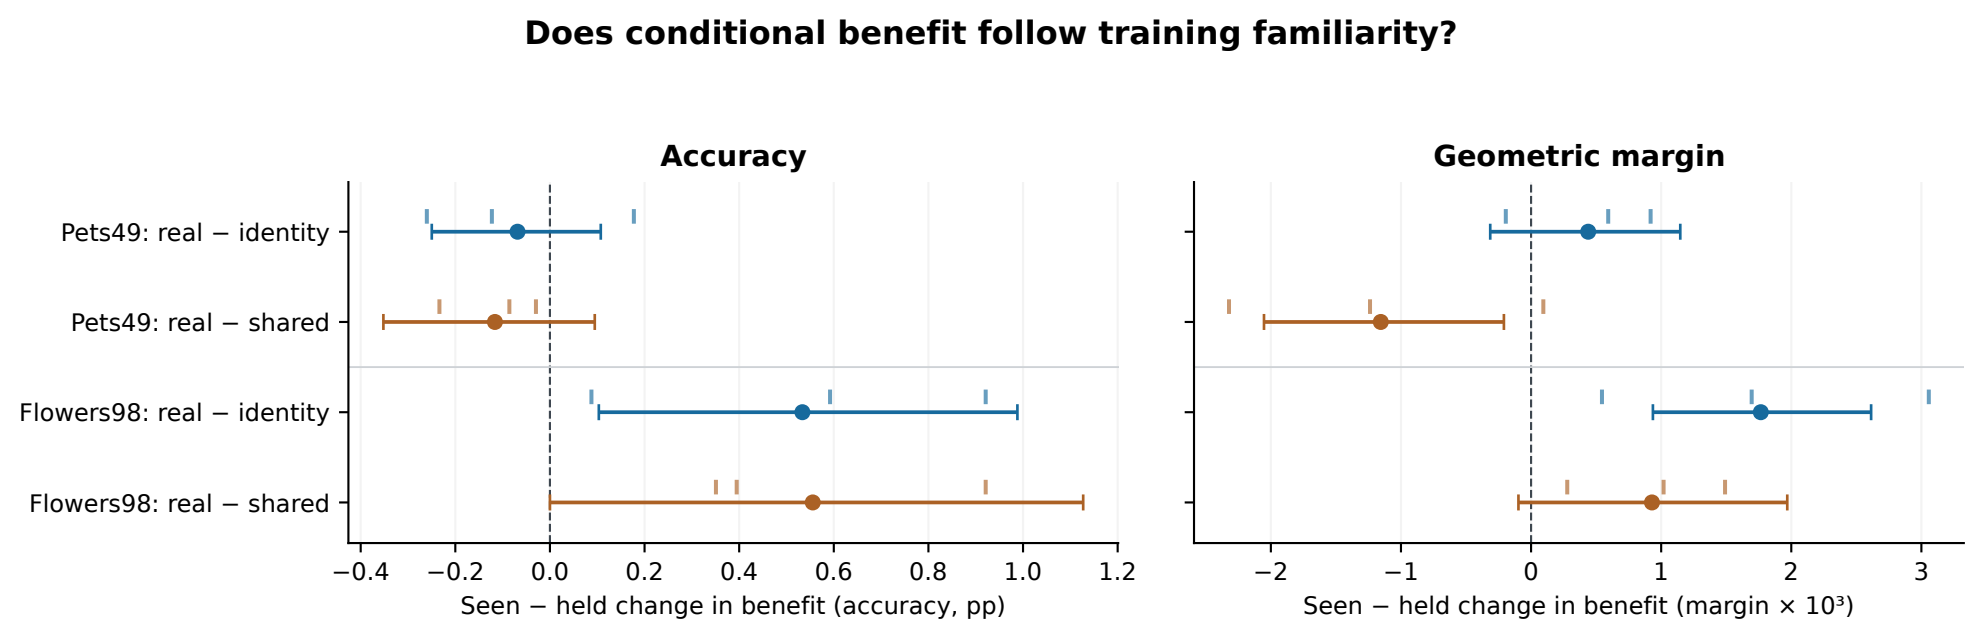
Does conditional benefit follow training familiarity?
Accuracy
Geometric margin
Pets49: real − identity
Pets49: real − shared
Flowers98: real − identity
Flowers98: real − shared
−0.4
−0.2
0.0
0.2
0.4
0.6
0.8
1.0
1.2
−2
−1
0
1
2
3
Seen − held change in benefit (accuracy, pp)
Seen − held change in benefit (margin × 10³)
Mean and image-bootstrap 95% interval
Individual paired seeds
Identical image/task rows and class codes across fits; both candidate familiarity roles exchange.