Predicting conditioning benefits within and across datasets

Development data · CLIP B/16 · positive raw gaps favor C over U

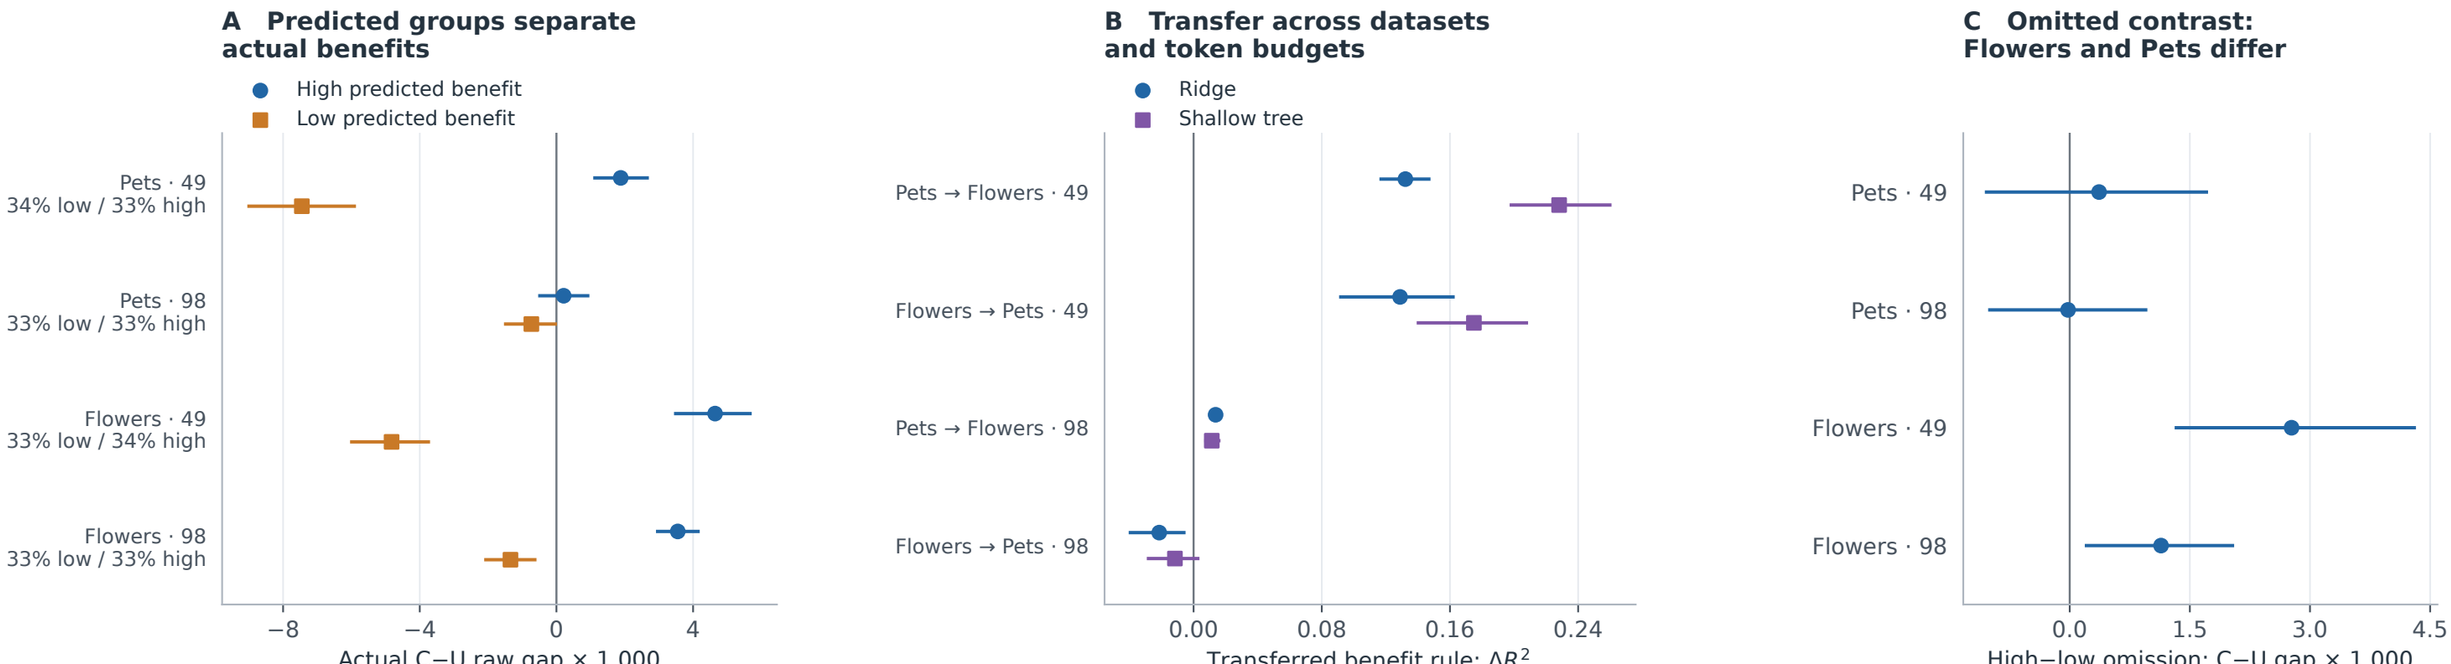

A Ridge-predicted lower/upper groups; cutoffs learned in training folds. Labels show weighted group sizes.

B Benefit rule fitted on source only; the common prefix readout uses training images from both datasets. ΔR² is relative to context, not absolute R².

C High/low groups use U's omitted task-contrast energy. Panels A and C measure score-gap differences.

All bars: four-setting-adjusted 95% image-bootstrap intervals; the readout, selectors and fitted benefit predictors are held fixed.