Content-based prediction of conditioning benefits

Development data · CLIP B/16 · block 6 · three fixed selector seeds

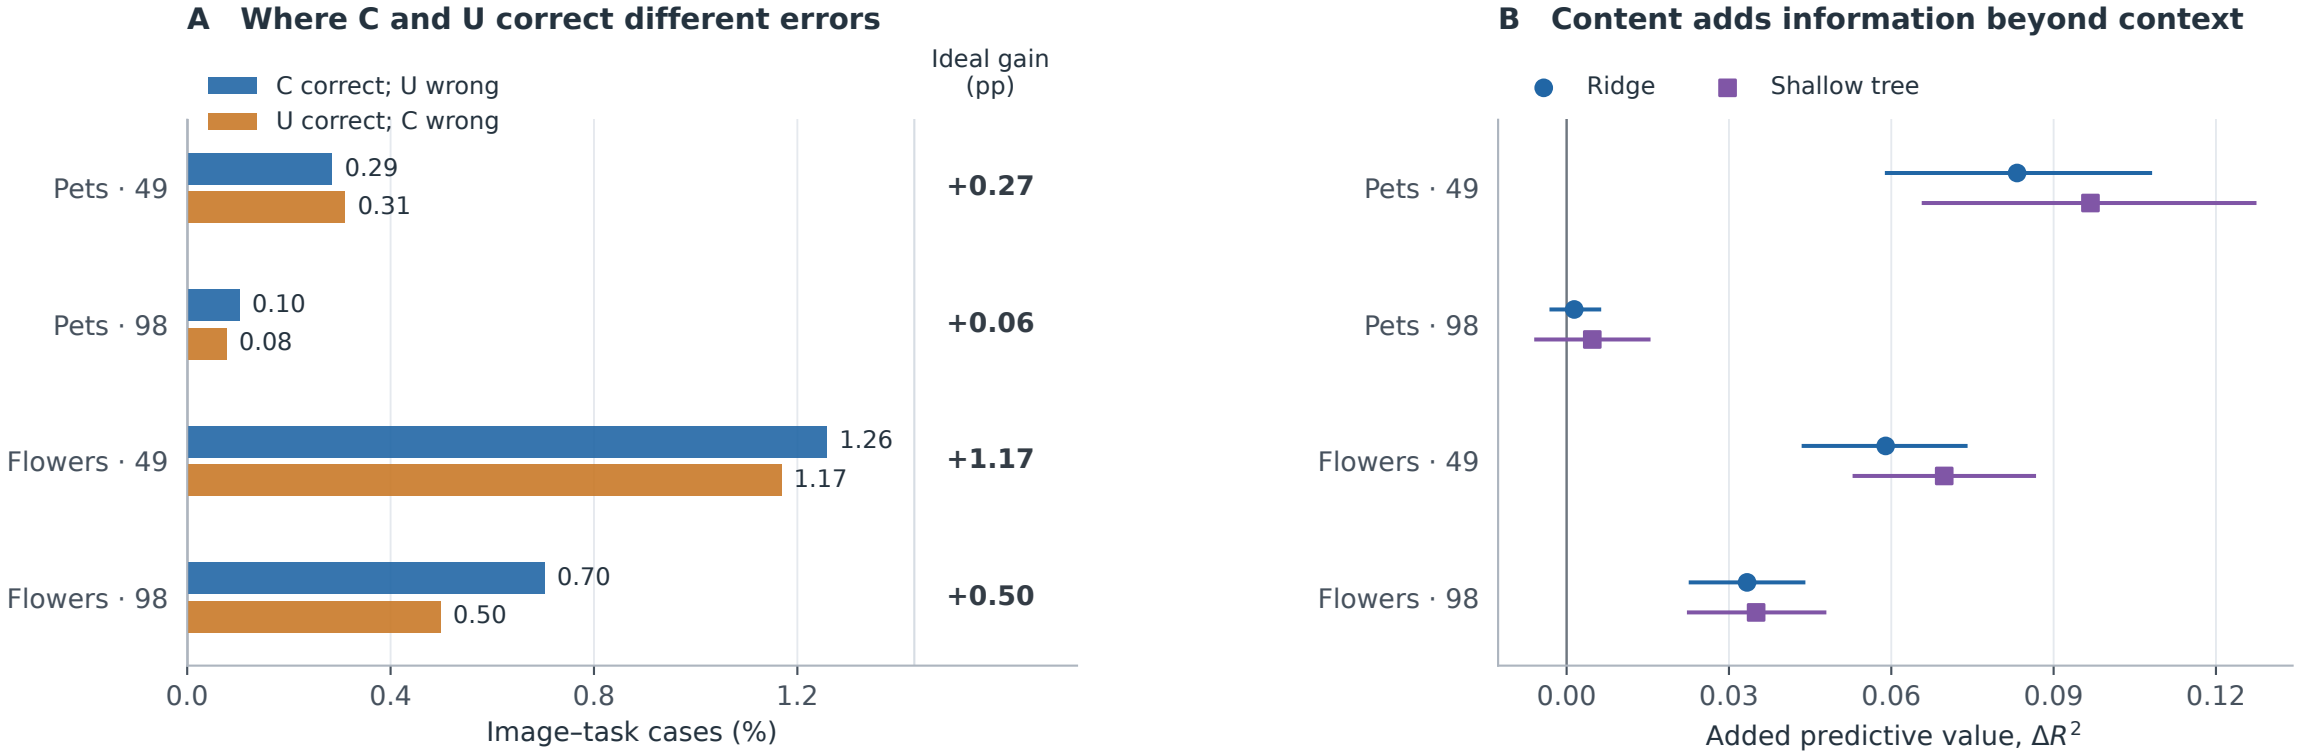

A Ideal gain: per-example oracle over the better fixed C/U selector, computed per seed and then averaged.

B Outcome: C−U raw classification gap; predictors hold out both images and class combinations.
Context = seven selection statistics + projected full-image gap. Bars: four-setting-adjusted 95% image-bootstrap intervals.