1 WEEK / JUNIOR FRONTEND

Create the React storefront skeleton.

Set up the project, create reusable components, and connect basic pages using React Router. Use the LUMINA screenshot as layout inspiration, not as a pixel-perfect target.

React | Vite | JavaScript | React Router | CSS | No API yet

USER STORY

As a shopper, I want to navigate a simple online store, so I can explore its main pages and see the structure of its products.

Expected result

Navigation
Navbar with working links to each page.


Homepage
Hero section plus three reusable product cards.

Other routes
Clean placeholder screens, ready for Sprint 2.

REQUIRED ROUTES

URL	SCREEN / MINIMUM CONTENT
`/`	Home: HeroBanner + FeaturedProducts (3 ProductCard items)
`/shop`	Shop: heading and “Products coming soon” placeholder
`/about`	About: heading and short placeholder paragraph
`/contact`	Contact: heading and short placeholder paragraph
`/cart`	Cart: “Your cart is empty” state
`*`	NotFound: simple “Page not found” screen

Scope guardrail: The carousel is a static HeroBanner placeholder; no sliding behavior is required. Do **not** build APIs, real product data, a working cart, authentication, or checkout during Sprint 1.

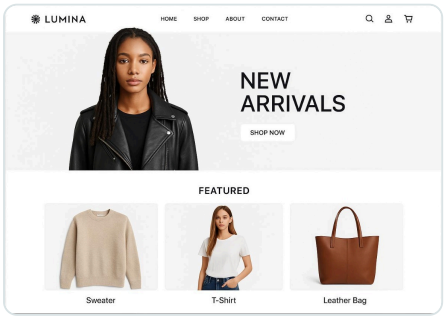

DESIGN REFERENCE

Use the screenshot to recognize **Navbar**, **HeroBanner**, **FeaturedProducts** and **ProductCard**. Recreate the structure with text and gray image placeholders.

IMPLEMENTATION CHECKLIST

What you need to build.

A / Project setup

- [ ] Create a React app with Vite.
- [ ] Install React Router.
- [ ] Run the app locally with npm.
- [ ] Commit the initial setup to Git.

```
npm create vite@latest junior-store -- --template react
cd junior-store
npm install
npm install react-router-dom
npm run dev
```

B / Reusable UI components

- [ ] **Navbar:** logo and working menu links.
- [ ] **HeroBanner:** title, text, and static CTA.
- [ ] **ProductCard:** title, price, image placeholder.
- [ ] **FeaturedProducts:** render 3 ProductCard items.
- [ ] **Footer:** simple shared footer.
- [ ] Keep components in separate .jsx files.

LOCAL PRODUCT DATA / EXAMPLE

```
const products = [
  { id: 1, name: "Sweater", price: 49 },
  { id: 2, name: "T-Shirt", price: 25 },
  { id: 3, name: "Leather Bag", price: 89 },
];
```

Use **map()** and a stable **key** to display the three cards. Pass name and price as props.

C / Routing and page structure

- [ ] Configure BrowserRouter, Routes and Route.
- [ ] Create Home, Shop, About, Contact, Cart.
- [ ] Use Link in Navbar (not full page reloads).
- [ ] Add a wildcard NotFound route.

D / Styling and delivery

- [ ] Use Flexbox or Grid for layout.
- [ ] Make the home layout readable on mobile.
- [ ] Add README with install/run steps.
- [ ] Open a Pull Request for review.

ACCEPTANCE CRITERIA

How we know it is finished.

- [ ] **App runs:** npm install and npm run dev work.
- [ ] **Navigation works:** links change the route.
- [ ] **Cards reused:** exactly one ProductCard definition.
- [ ] **map() used:** three products from local array.
- [ ] **No console errors:** app loads cleanly.
- [ ] **README:** clear run instructions.
- [ ] **All routes work:** no blank or broken screen.
- [ ] **Shared layout:** Navbar and Footer reused.
- [ ] **Props used:** card data passed from parent.
- [ ] **NotFound:** unknown URLs show a message.
- [ ] **Readable on mobile:** no horizontal overflow.
- [ ] **PR submitted:** changes ready for review.

Suggested five-day plan

Day 1	Environment, React + Vite setup, first Git commit.
Day 2	Navbar, HeroBanner, Footer and basic CSS.
Day 3	ProductCard, props, static array, map() and FeaturedProducts.
Day 4	React Router, empty pages, links and NotFound route.
Day 5	Mobile check, README, manual testing and Pull Request.

Suggested folder structure

```
src/
├── components/
│   ├── Navbar.jsx
│   ├── HeroBanner.jsx
│   ├── ProductCard.jsx
│   ├── FeaturedProducts.jsx
│   └── Footer.jsx
├── pages/
│   ├── Home.jsx
│   ├── Shop.jsx
│   ├── About.jsx
│   ├── Contact.jsx
│   ├── Cart.jsx
│   └── NotFound.jsx
├── App.jsx
└── main.jsx
```

Review questions

- What makes ProductCard a reusable component?
- What is the difference between props and local variables?
- Why use **map()** and a **key**?
- What does React Router do?
- Why use Link instead of an anchor for internal navigation?

Submission: GitHub repository + Pull Request + short README. In the PR description, include screenshots of the homepage (desktop and mobile) and list what was completed.