


Requirements -

- (i) What type of devices will use this
- (ii) Type of data to be displayed.
- ~~(iii) How should the search be performed - on~~

Component Architecture -

- ~~(i) UI - Searchbar, do Dropdown.~~
- (ii) State managed in ~~parent~~ ^{container} component which renders Searchbar + DD

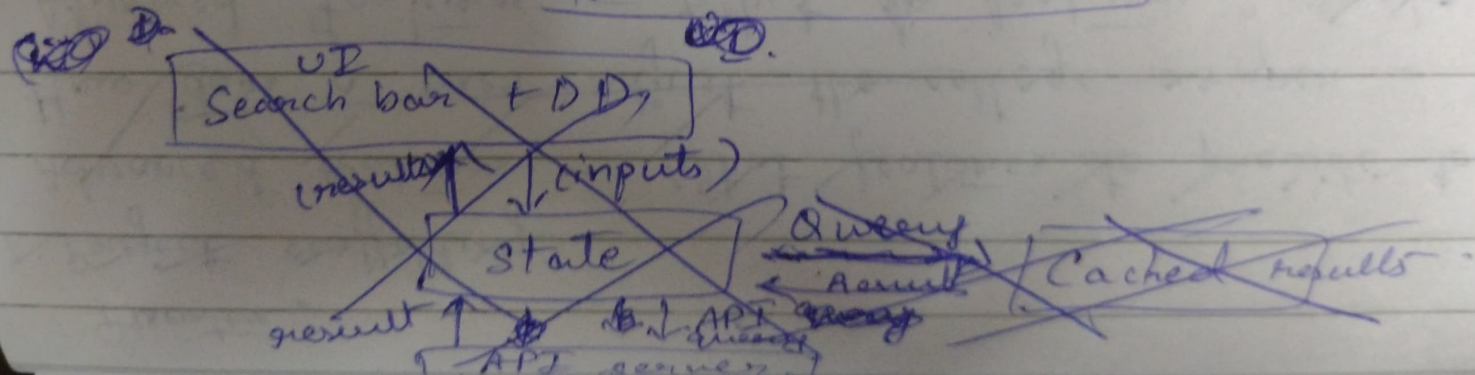


Searchbar — passes typed inputs to state.
 DD — renders received results from API server/cache.
 State — where data lives → the truth.

which makes API calls.

State — simple use State in container component.
 searchTerm, selected Option, dropdown Options, isApiLoading.
 Searchbar + DD — is Open (when dropdown Options is defined);
 selected Option, input Value.

Data Flow.

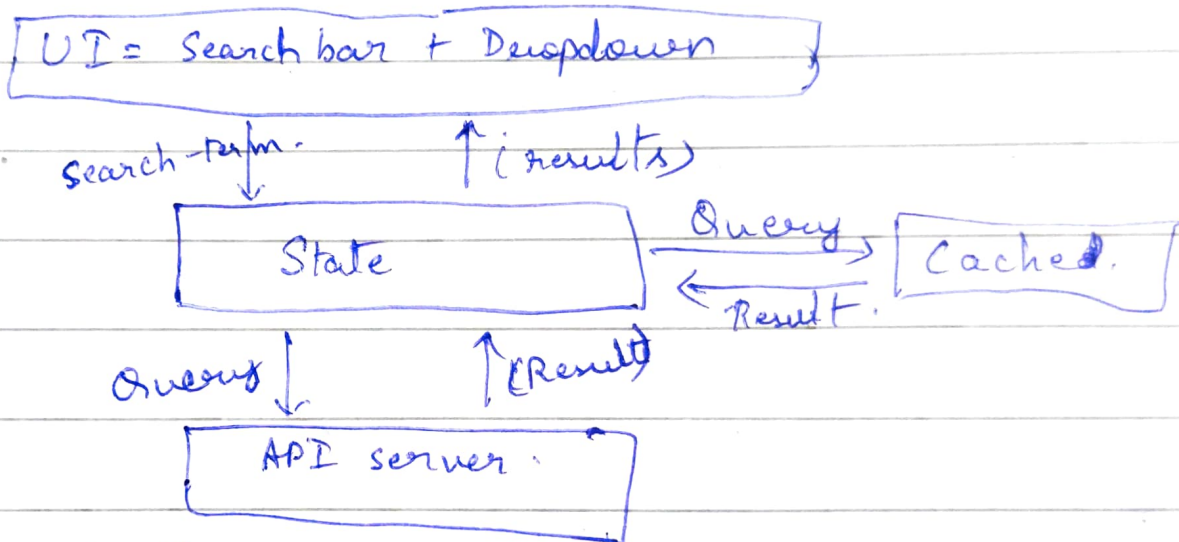

→ let's call this DropdownType.

Interfaces and API.

Searchbar + DD.

```

export interface SearchbarProps {
  onInputChange: (value: string) => void;
  dropdownOptions: {
    value: string/number;
    displayName: string;
  };
  isLoading: Boolean; // Displays spinner in dropdown during fetching api
  onSelect: (value: DropdownType) => void;
}
  
```

For advanced

Container component: Doesn't require any props. Stores the state responsible for data communication.

Performance — Can debounce on Input Change and pass `wait` as props to Searchbar + DD.

Accessibility — DD = listbox, appropriate `aria-roles` and `aria-labels` in `<input>`, `DD` container and option element.