


How to run **lunar-tear-masterdata-patcher** **in Google Colab**

Simple step-by-step visual guide • No installation required

STEP 1 Download your masterdata file and rename it to origin.bin.e

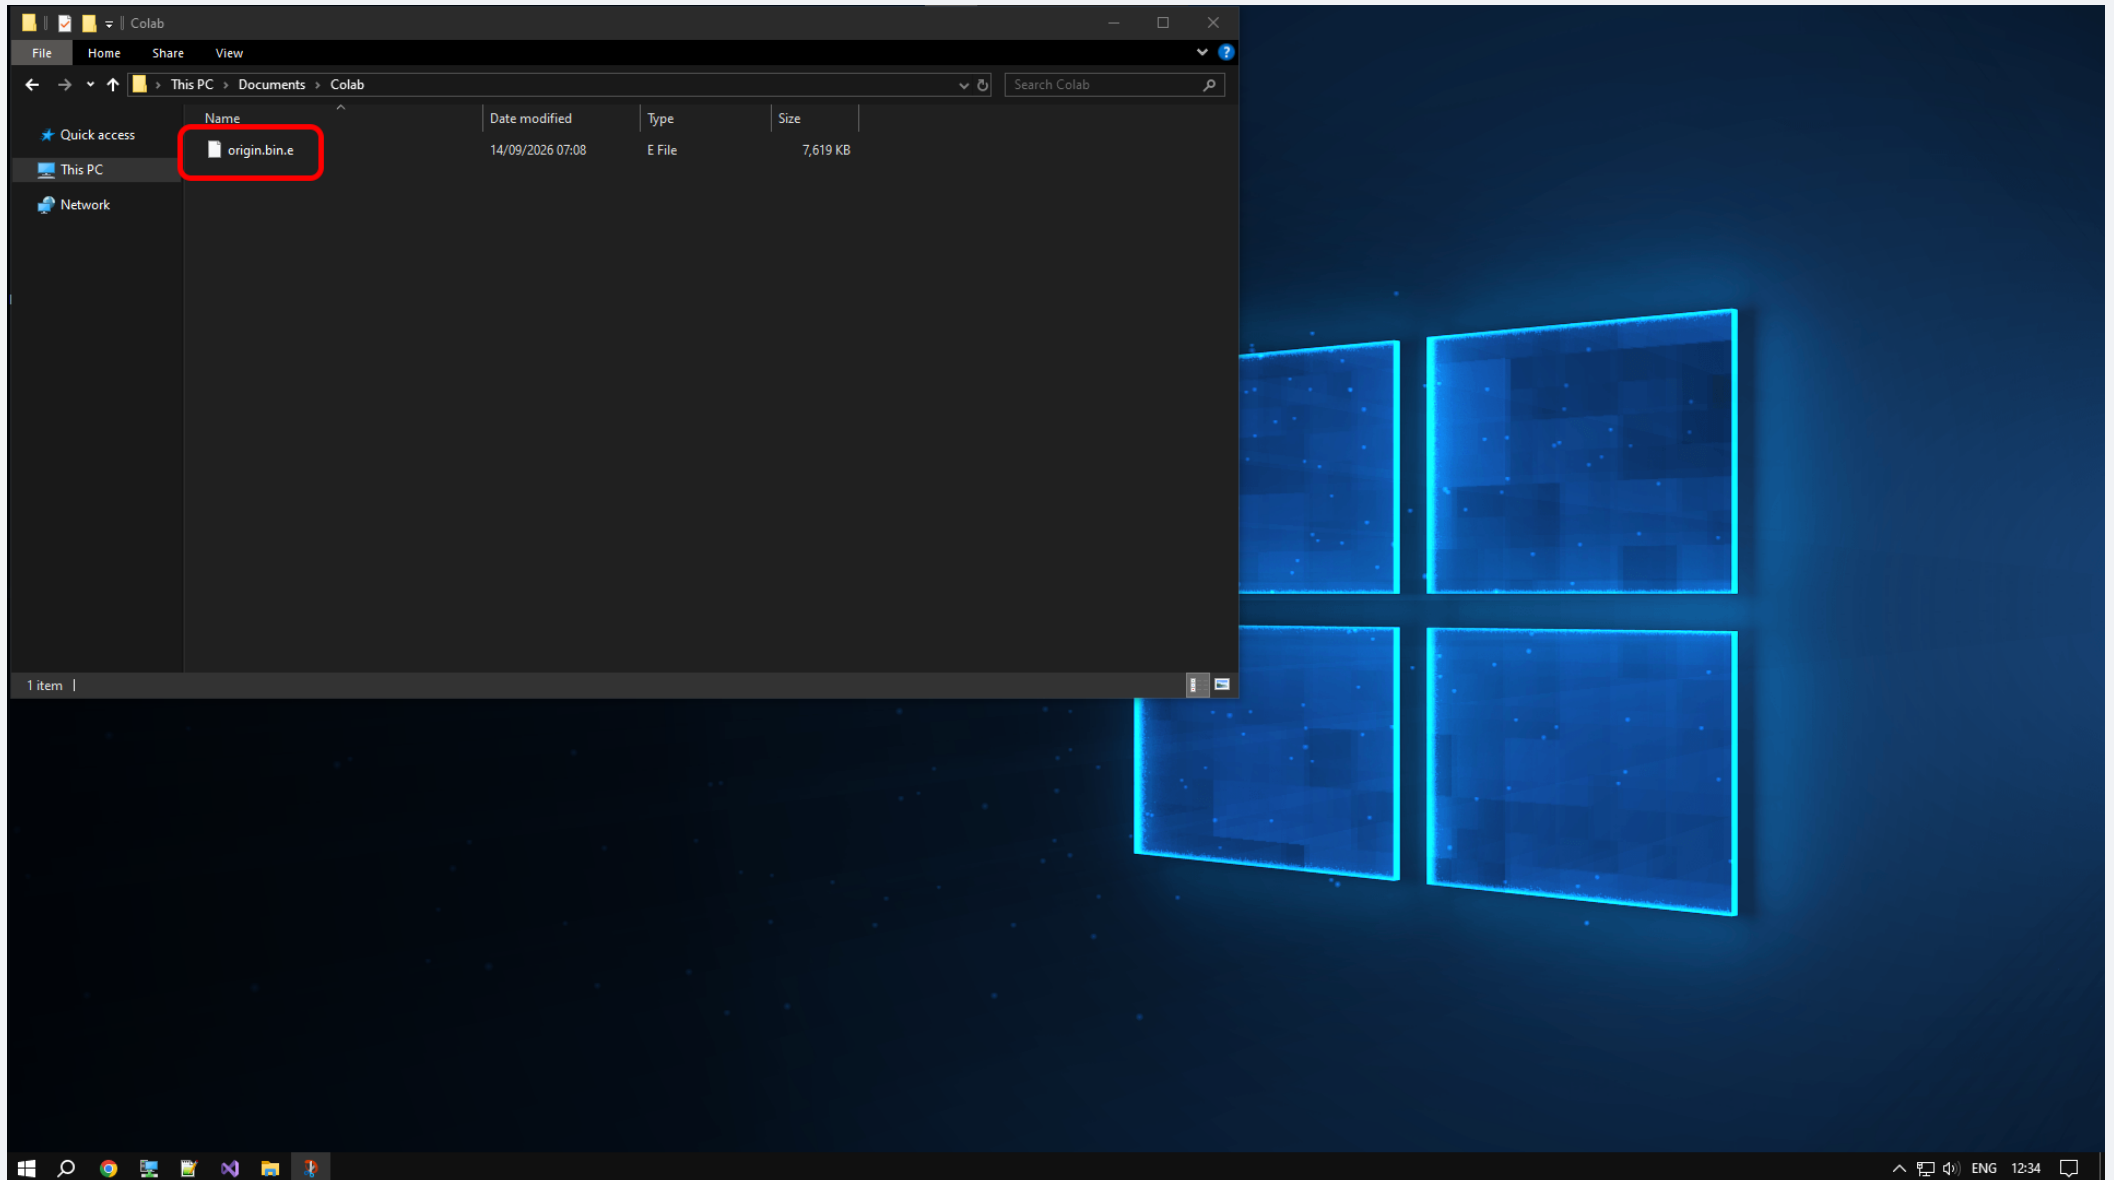

STEP 2

Copy the link: <https://github.com/NavHobbyDev/lunar-tear-masterdata-patcher>

The screenshot shows the GitHub repository page for `NavHobbyDev/lunar-tear-masterdata-patcher`. The browser address bar displays the URL `github.com/NavHobbyDev/lunar-tear-masterdata-patcher`, which is highlighted with a red box. A large red **or** is overlaid on the page. A red box highlights the **Code** button in the top right of the repository view. Another red box highlights the copy icon next to the repository URL in the 'Clone' dropdown menu.

Repository Details:

- Repository: `lunar-tear-masterdata-patcher` (Public)
- Owner: `NavHobbyDev`
- Branch: `main` (1 Branch)
- Tags: 0
- Watch: 0
- Fork: 0
- Star: 0

Files:

File Name	Action	Time
<code>IDs.md</code>	Add files via upload	
<code>LICENSE</code>	Add files via upload	
<code>README.md</code>	Add files via upload	
<code>config.json</code>	Update config.json	
<code>patch.bat</code>	Add files via upload	
<code>patch.sh</code>	Add files via upload	
<code>patch_masterdata.py</code>	Add files via upload	
<code>patcher.ipynb</code>	Add files via upload	23 minutes ago
<code>run_patches.py</code>	Add files via upload	2 days ago
<code>setup.bat</code>	Add files via upload	2 days ago
<code>setup.sh</code>	Add files via upload	2 days ago

About:

Extended masterdata patcher for Lunar Tear. Based on walter-sparrow lunar-scripts; adds shop content rewrites, consumable term-ref resolution, and related flags.

Releases: No releases published

Packages: No packages published

Contributors: 1

- `NavHobbyDev`

Languages:


- Python 99.2%
- Other 0.8%

README:

lunar-tear-masterdata-patcher

Utility scripts for patching encrypted masterdata binaries used with community private-server setups for a discontinued game.

STEP 3 Go to <https://colab.research.google.com/>

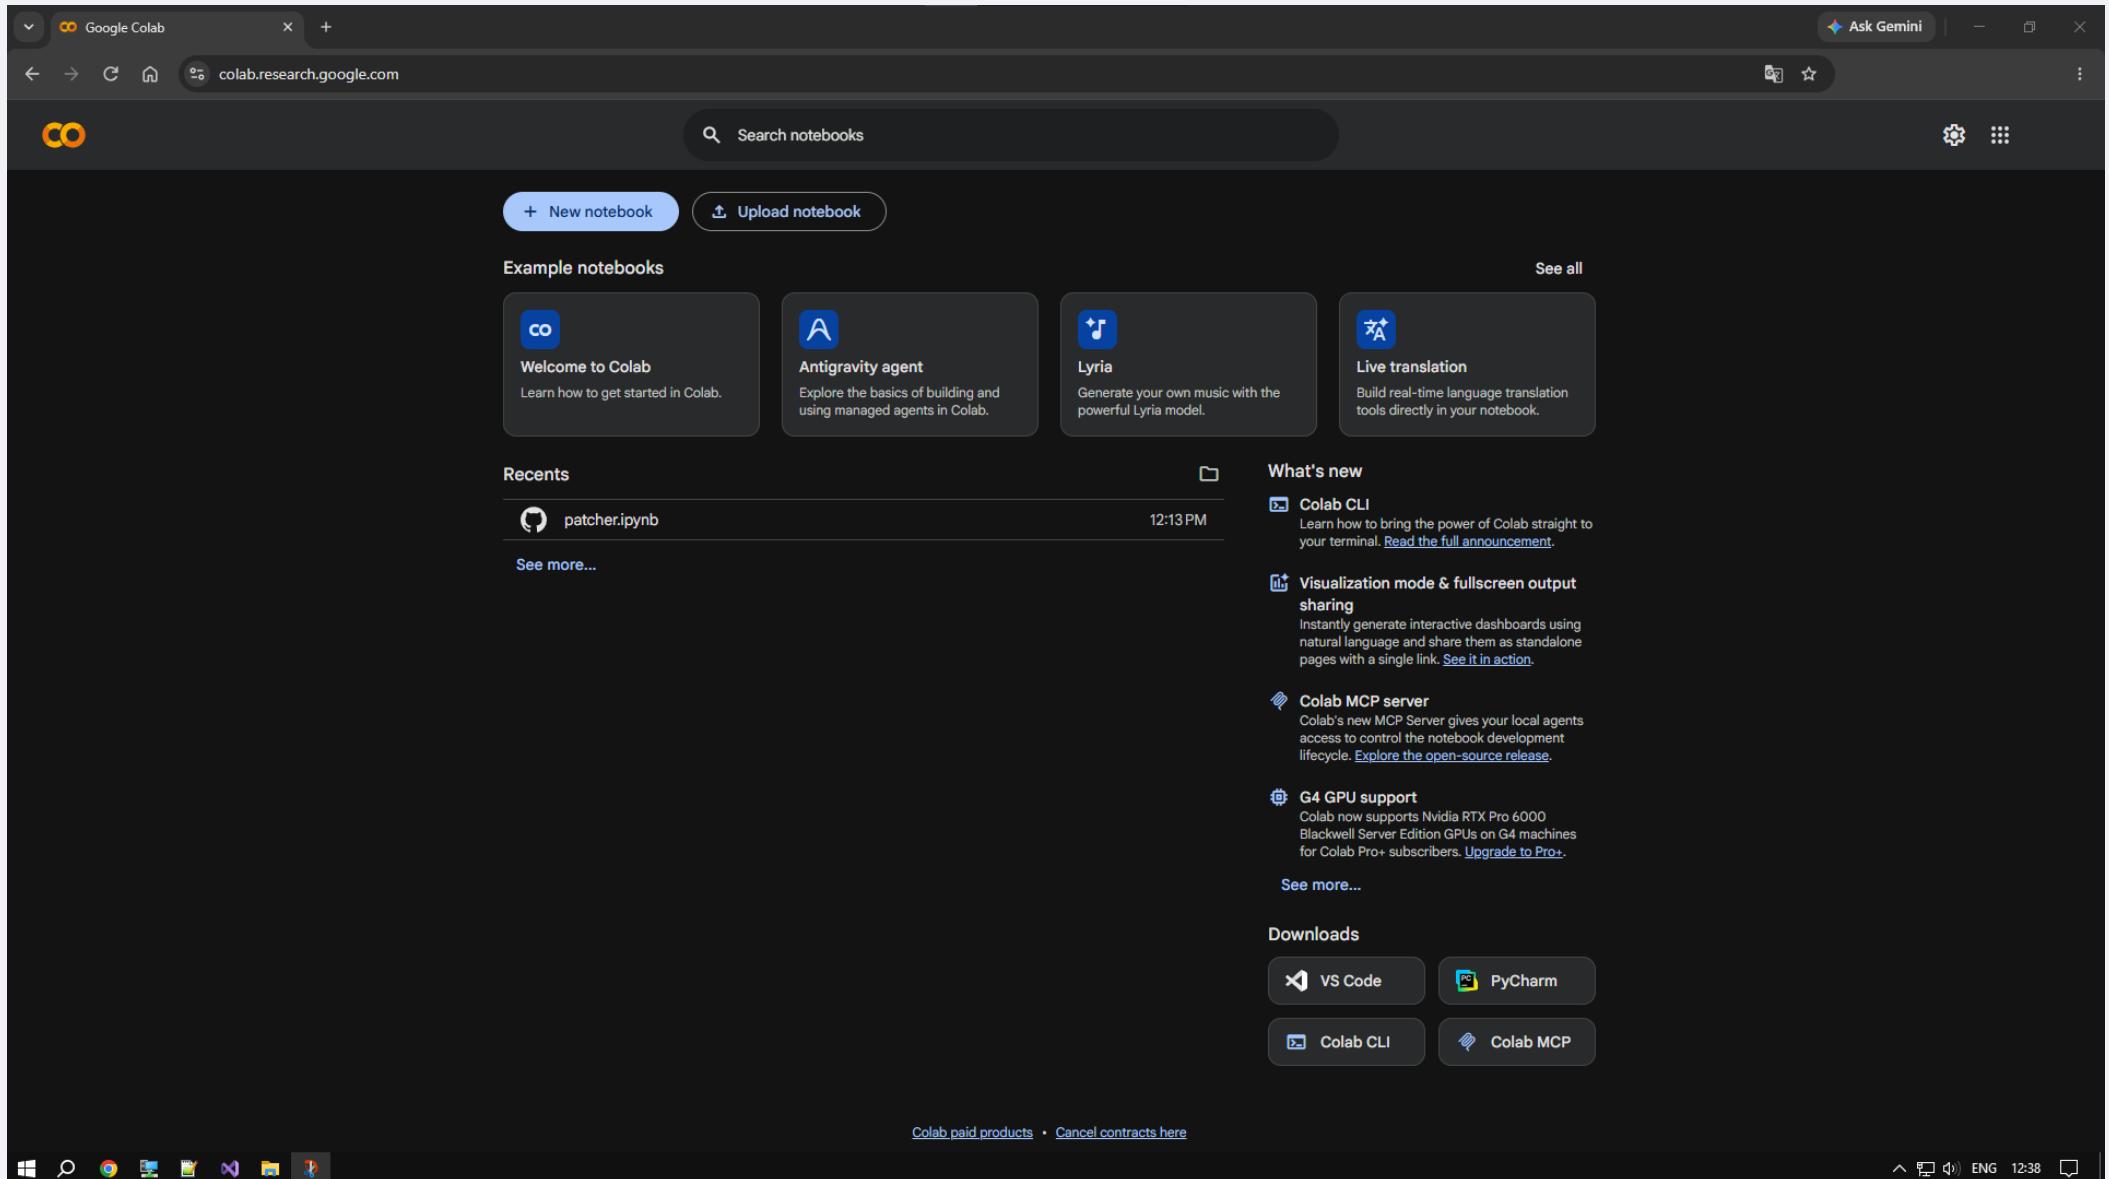


The screenshot shows the Google Colab homepage in a web browser. The browser's address bar displays `colab.research.google.com`. The page features a dark theme with the Google Colab logo at the top left. A search bar labeled "Search notebooks" is positioned at the top center. Below the search bar, there are two buttons: "+ New notebook" and "Upload notebook".

The main content area is divided into several sections:


- Example notebooks:** This section displays four featured notebooks: "Welcome to Colab" (Learn how to get started in Colab.), "Antigravity agent" (Explore the basics of building and using managed agents in Colab.), "Lyria" (Generate your own music with the powerful Lyria model.), and "Live translation" (Build real-time language translation tools directly in your notebook.). A "See all" link is located to the right of these cards.
- Recents:** This section shows a list of recently accessed notebooks. The first entry is "patcher.ipynb" with a timestamp of "12:13 PM". A "See more..." link is provided below the list.
- What's new:** This section highlights recent updates and features:
 - Colab CLI:** Learn how to bring the power of Colab straight to your terminal. [Read the full announcement.](#)
 - Visualization mode & fullscreen output sharing:** Instantly generate interactive dashboards using natural language and share them as standalone pages with a single link. [See it in action.](#)
 - Colab MCP server:** Colab's new MCP Server gives your local agents access to control the notebook development lifecycle. [Explore the open-source release.](#)
 - G4 GPU support:** Colab now supports Nvidia RTX Pro 6000 Blackwell Server Edition GPUs on G4 machines for Colab Pro+ subscribers. [Upgrade to Pro+.](#)A "See more..." link is located at the bottom of this section.
- Downloads:** This section provides quick links to download various tools:
 - VS Code
 - PyCharm
 - Colab CLI
 - Colab MCP

At the bottom of the page, there are links for [Colab paid products](#) and [Cancel contracts here](#). The Windows taskbar is visible at the very bottom of the screen.


STEP 4 Click «Upload notebook»

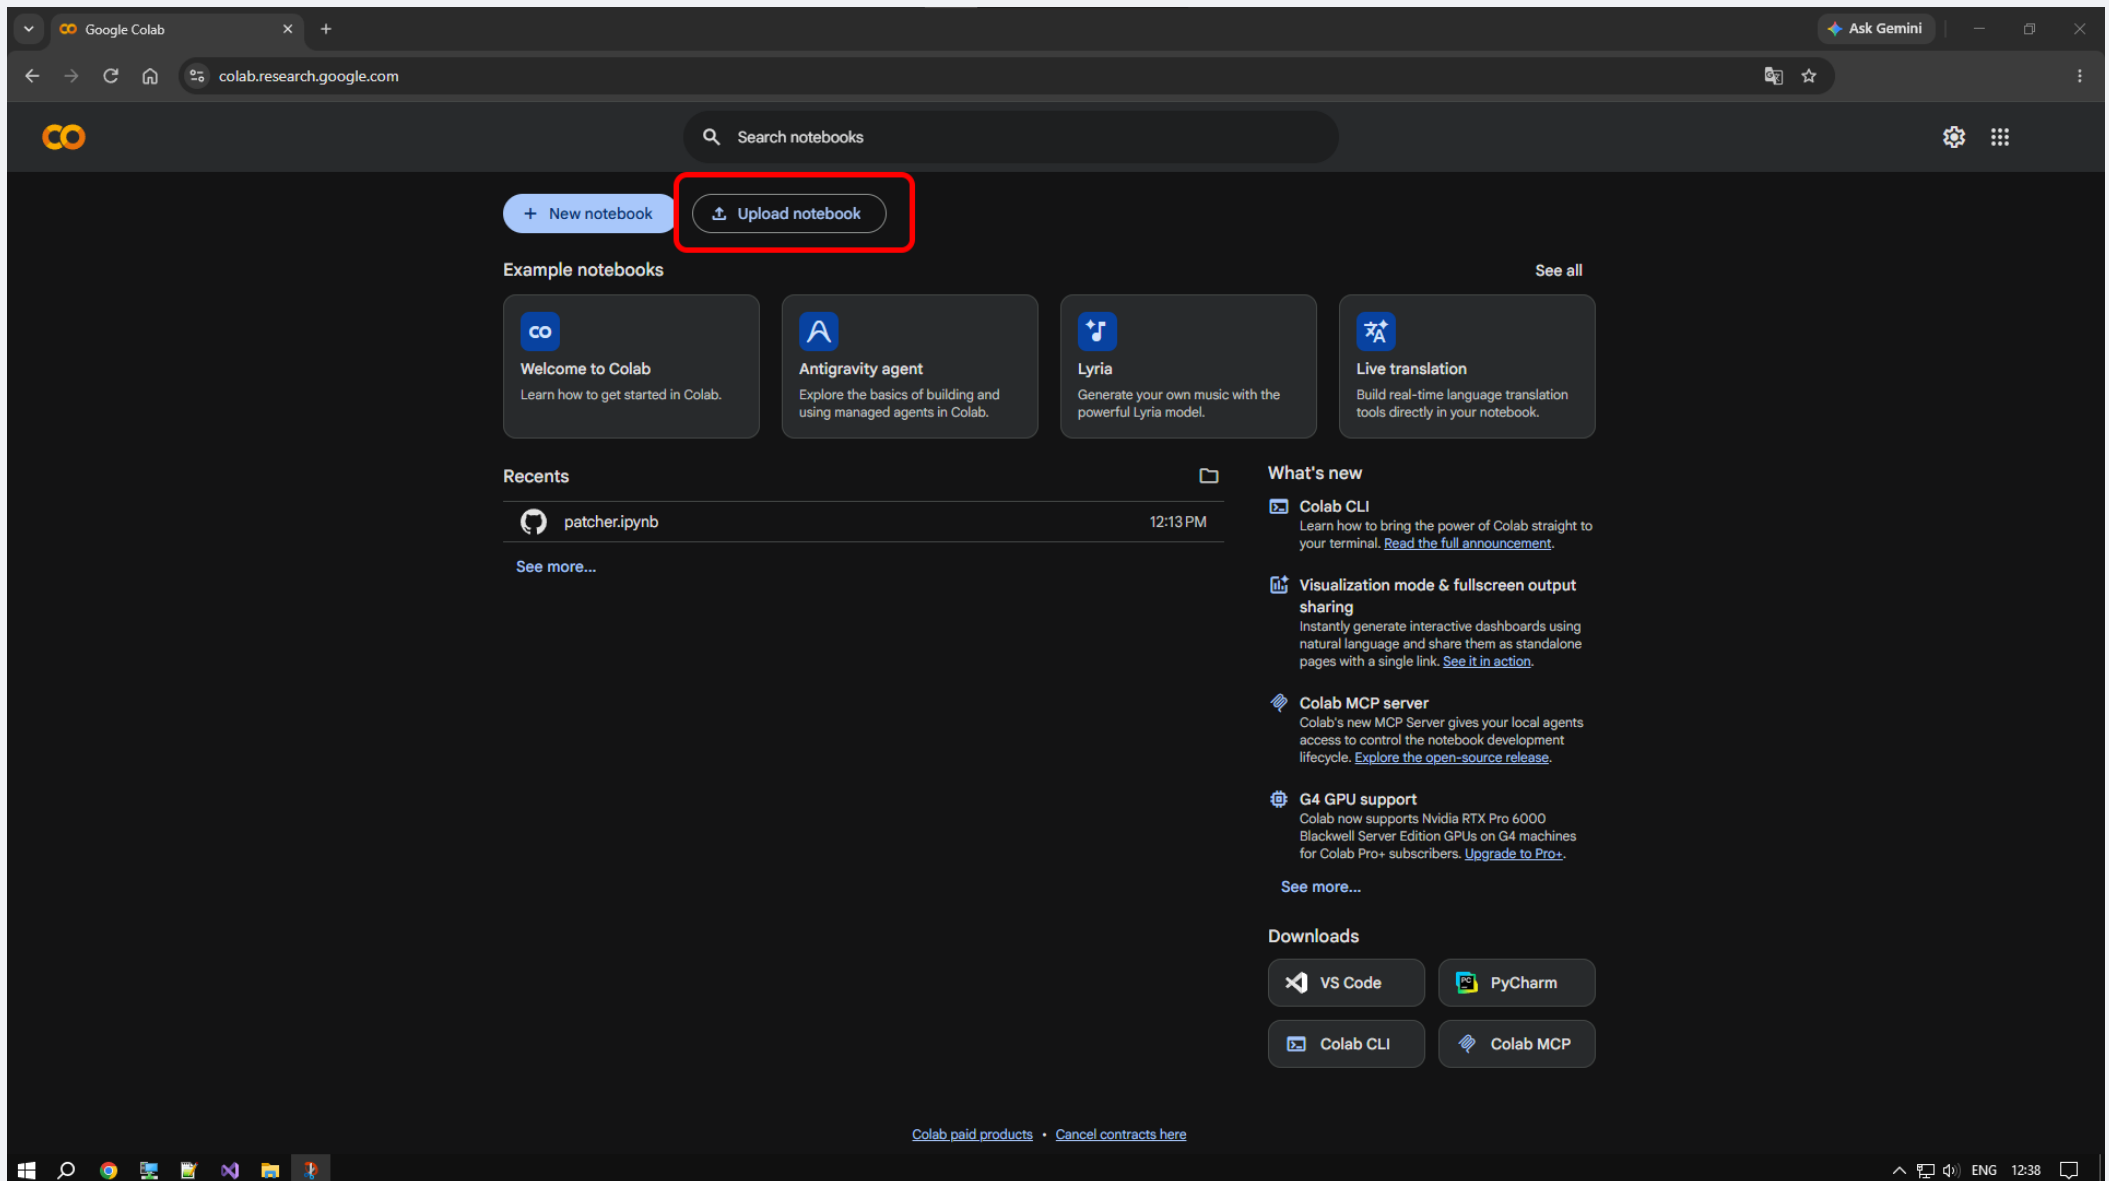


STEP 5 In the dialog choose the GitHub tab

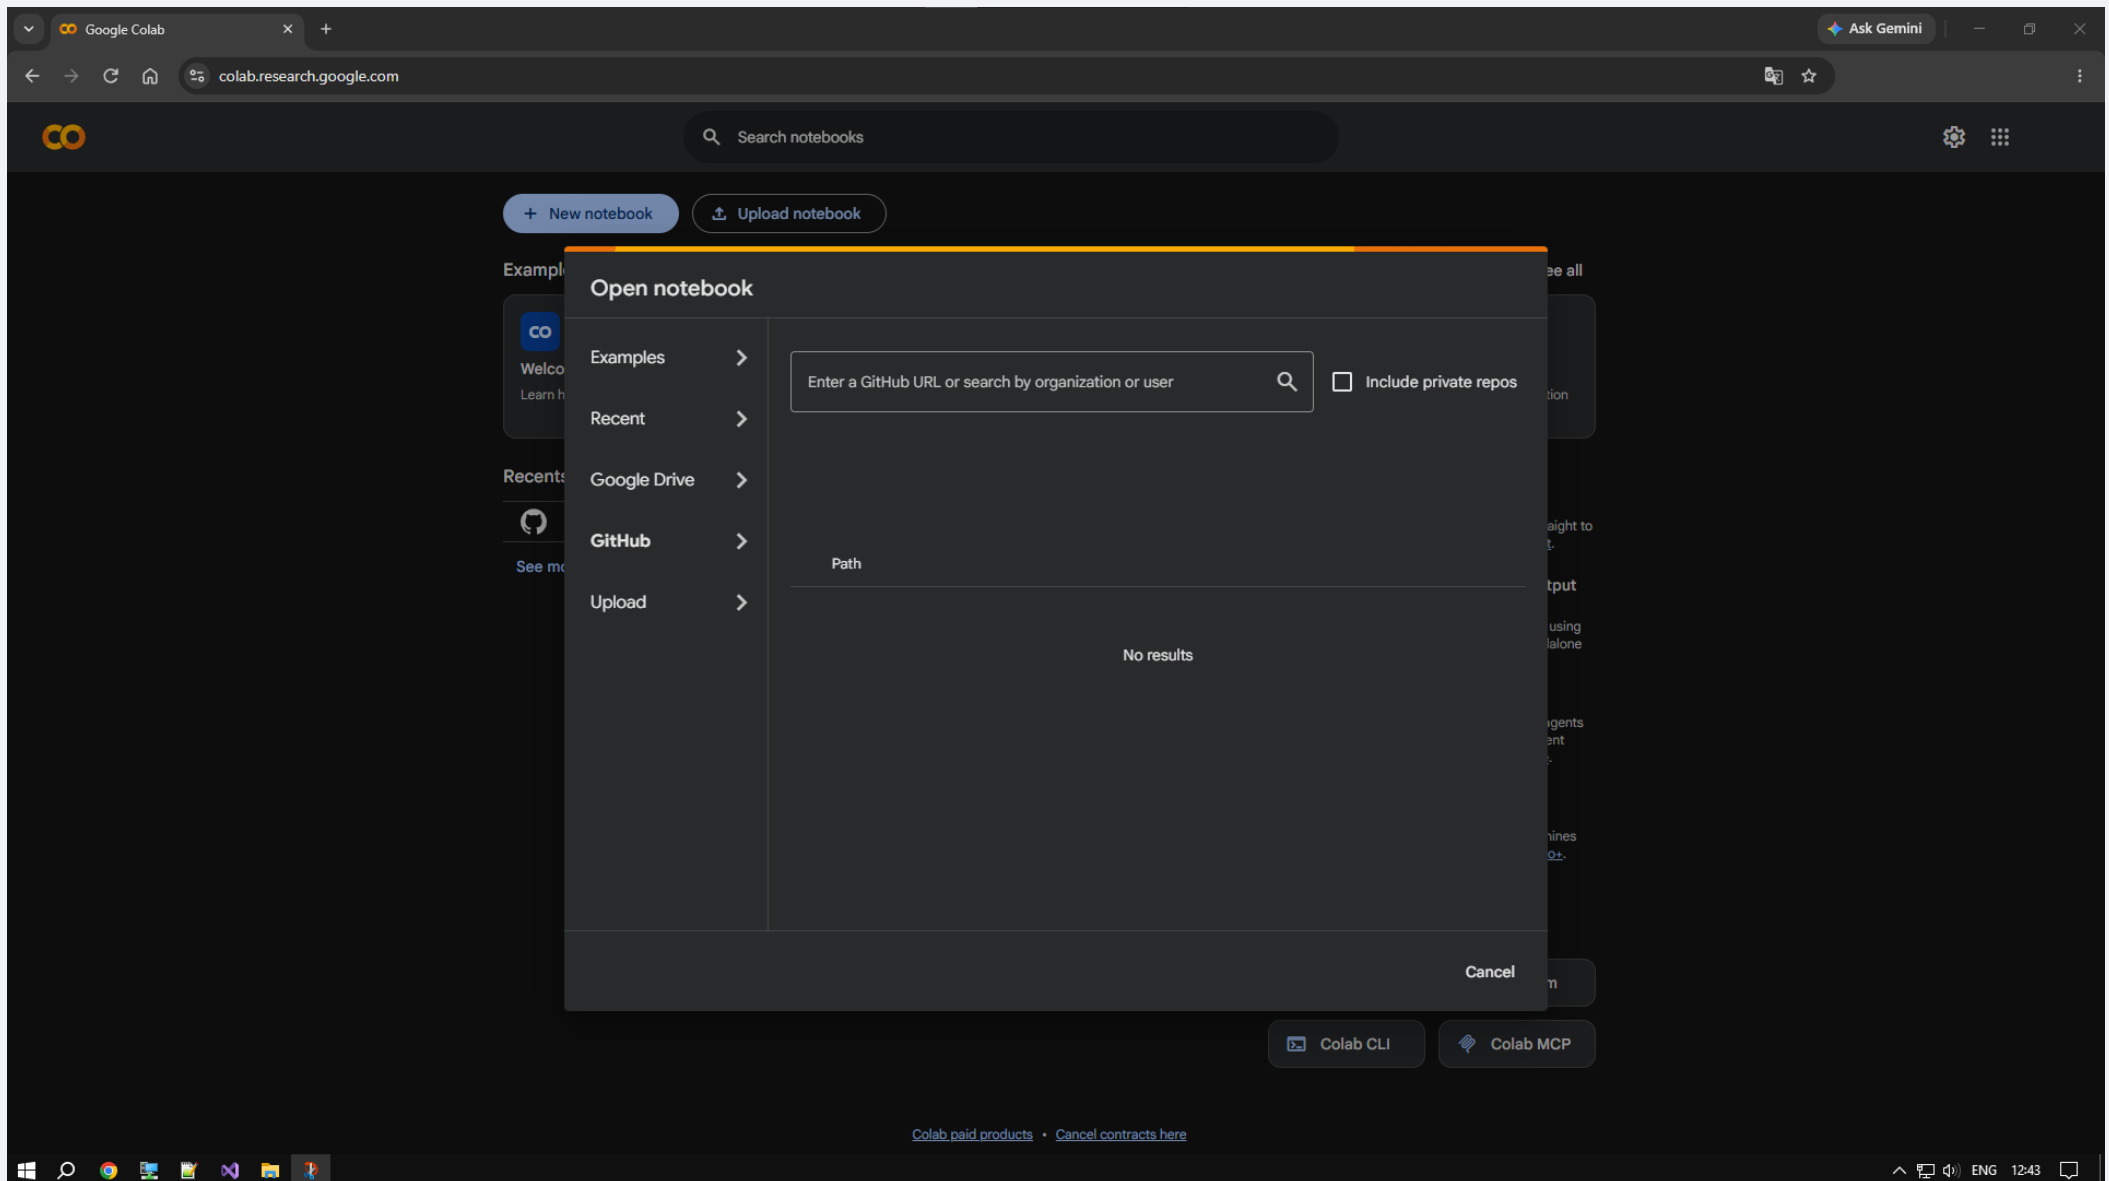


STEP 6 Paste the repository URL and press Enter (or click the search icon)

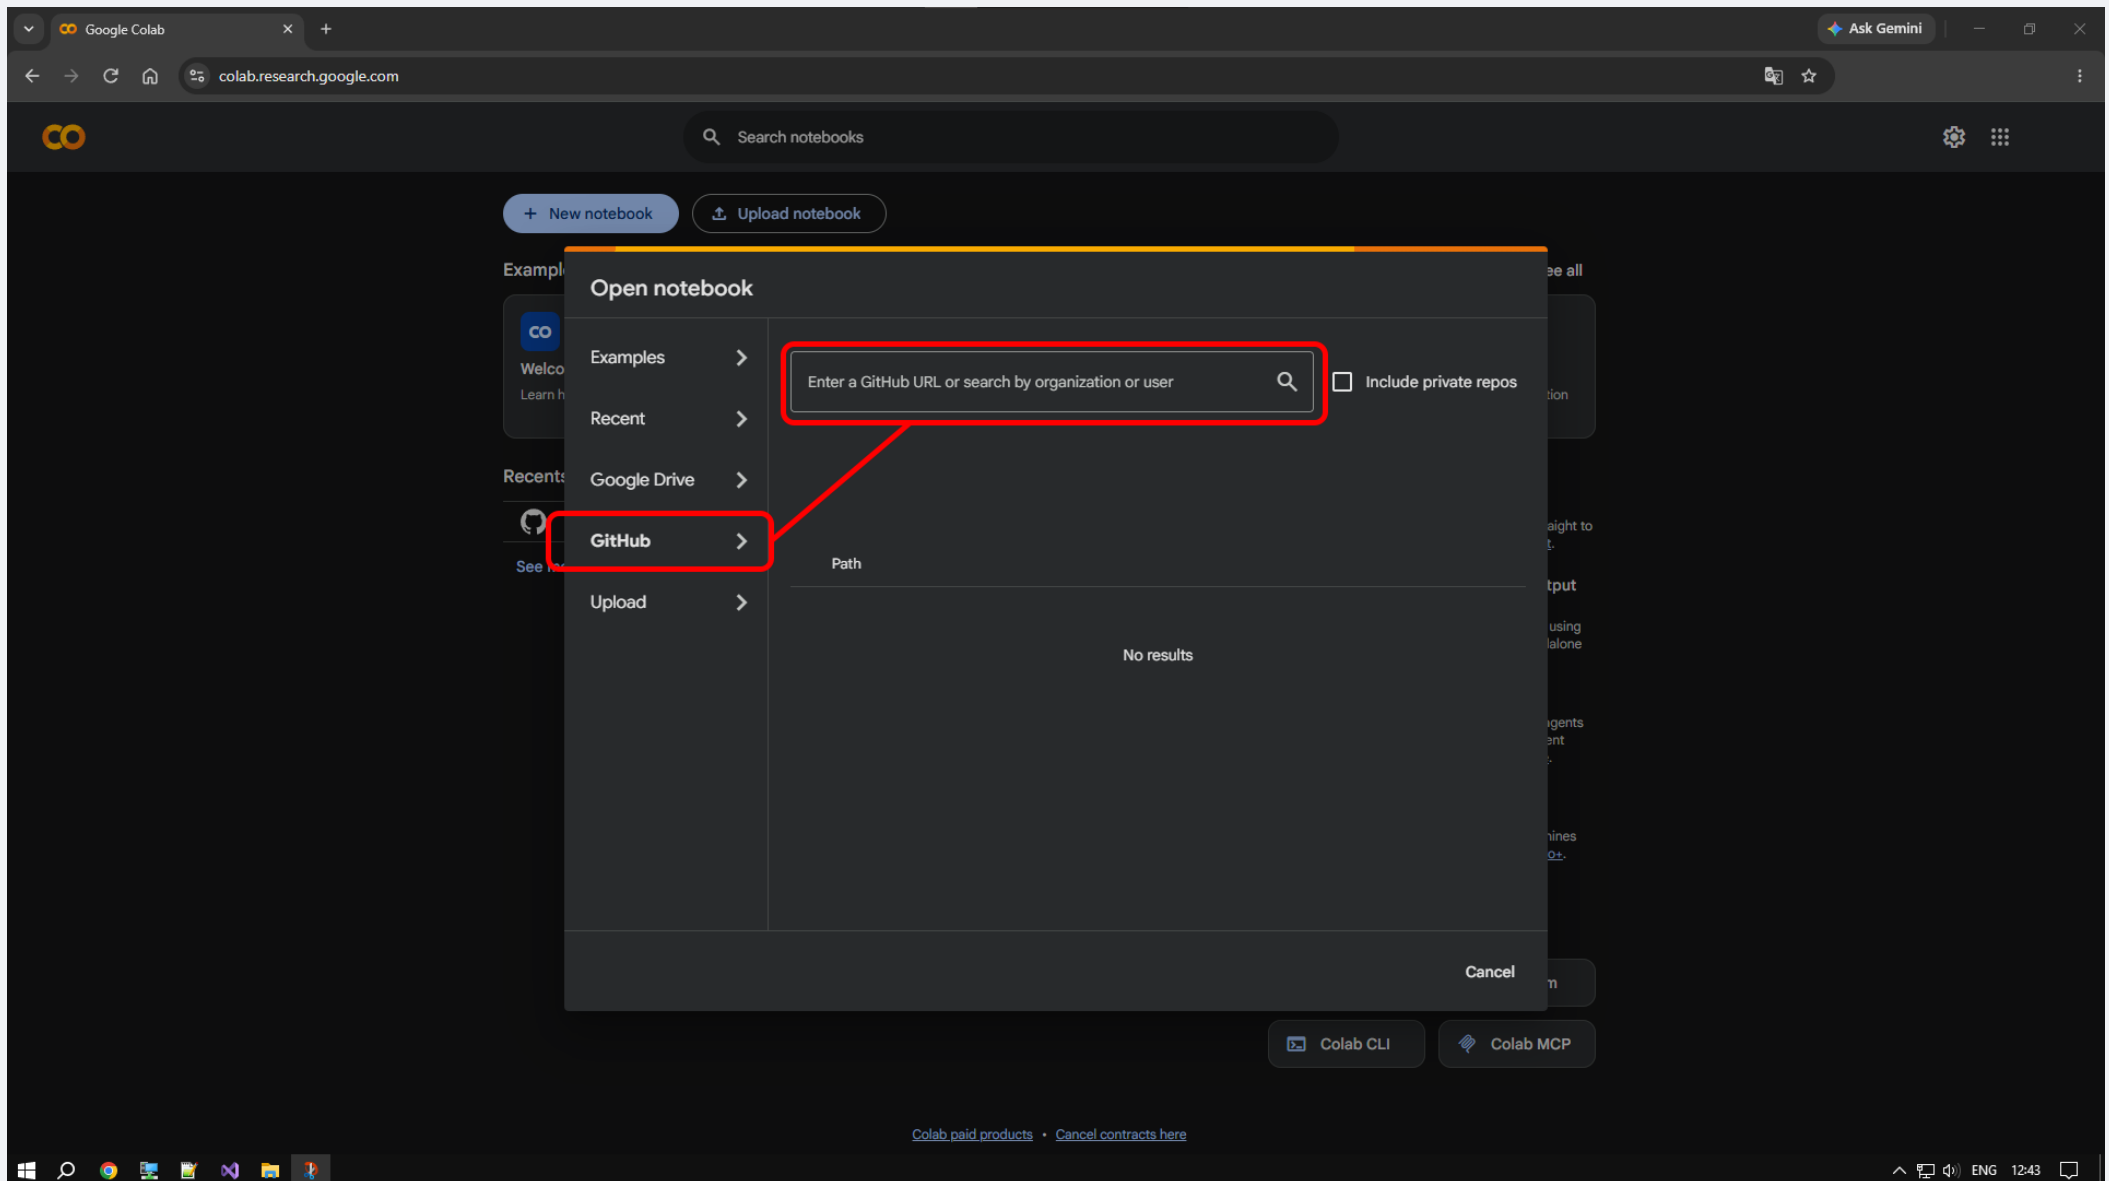

STEP 7 Select the file patcher.ipynb

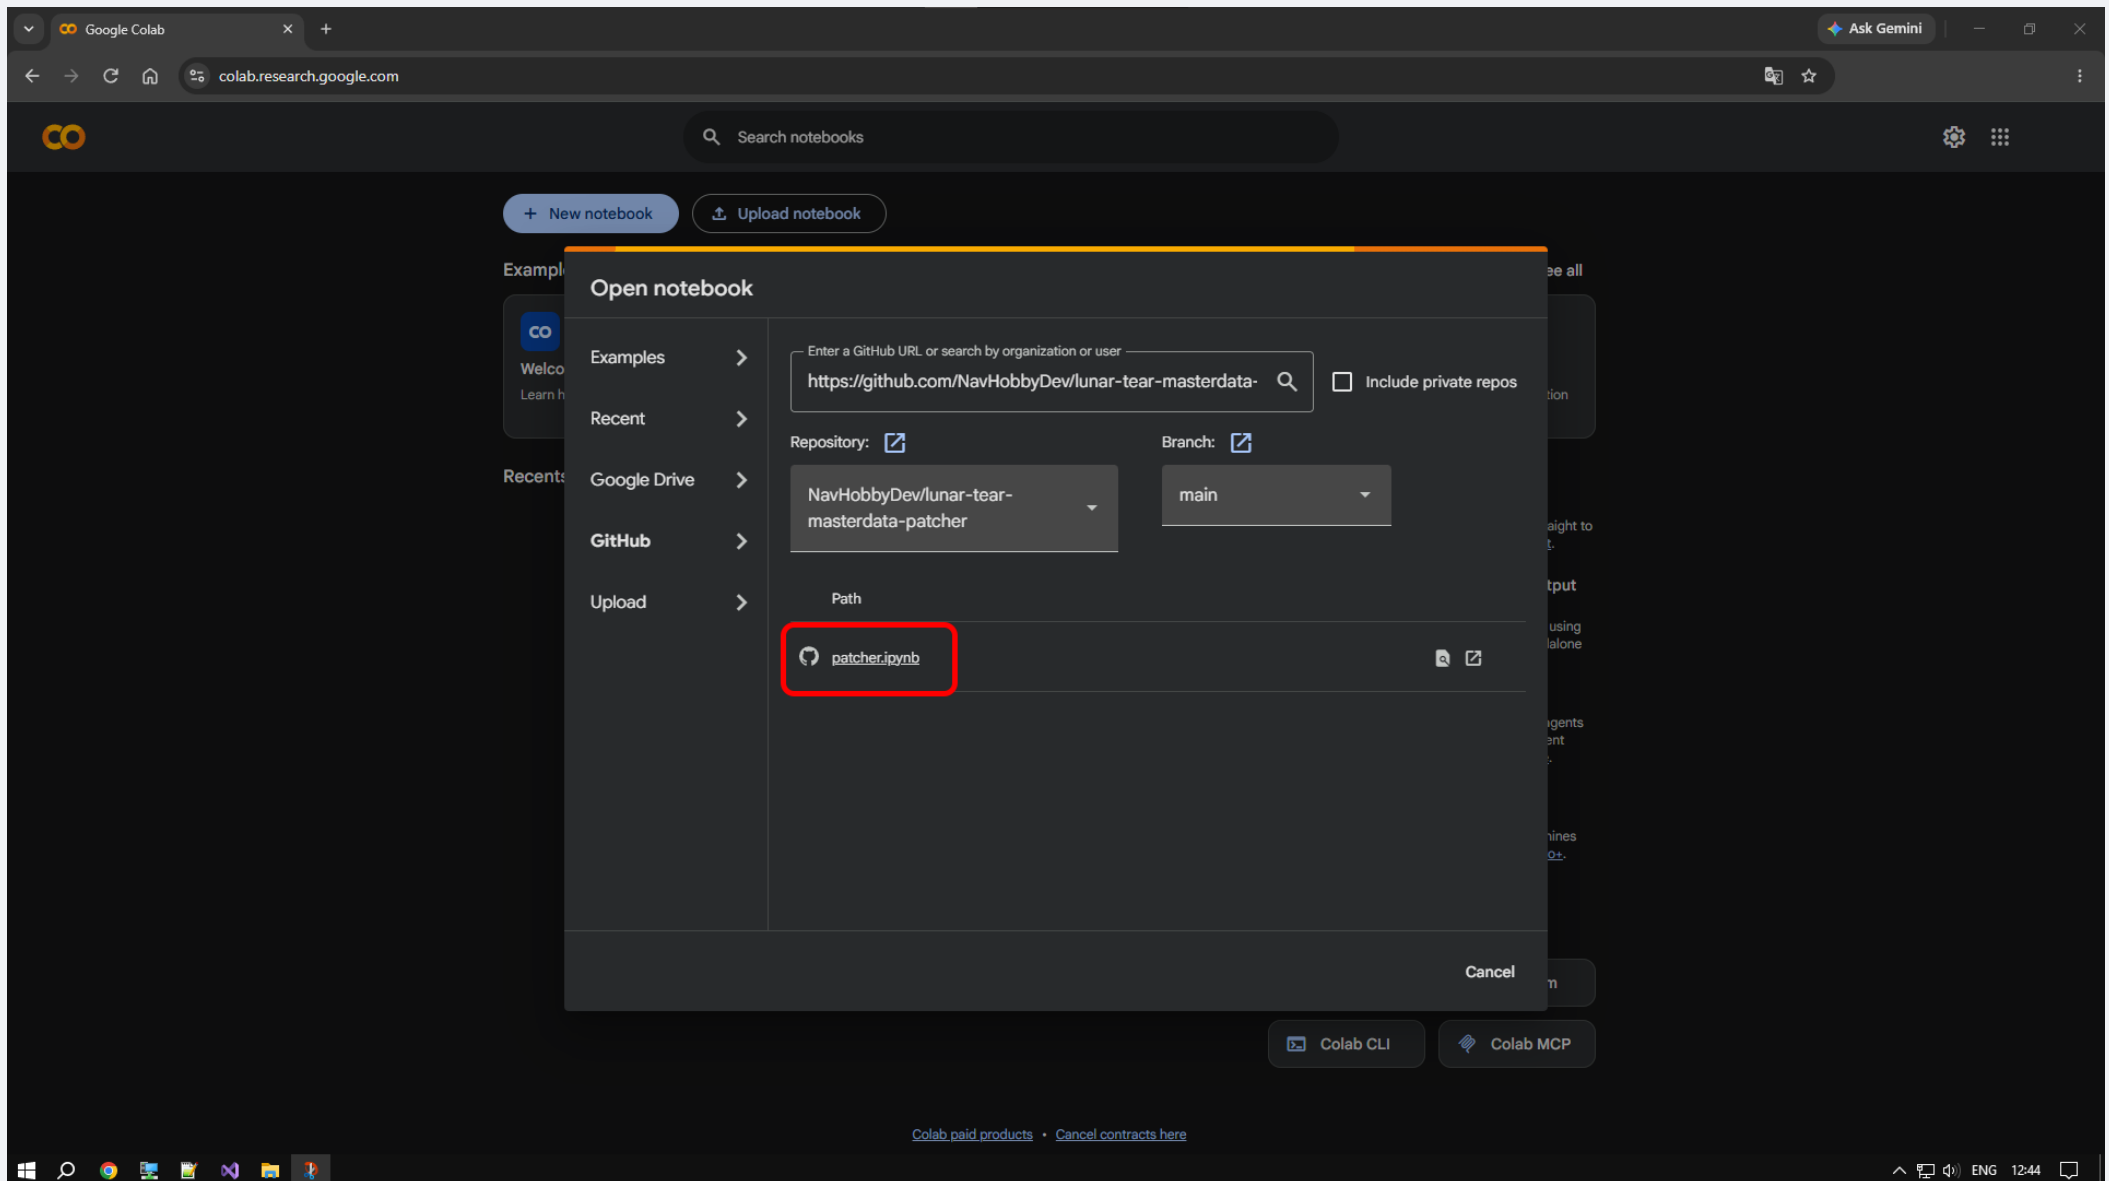

STEP 8 Click the Play button to run the notebook

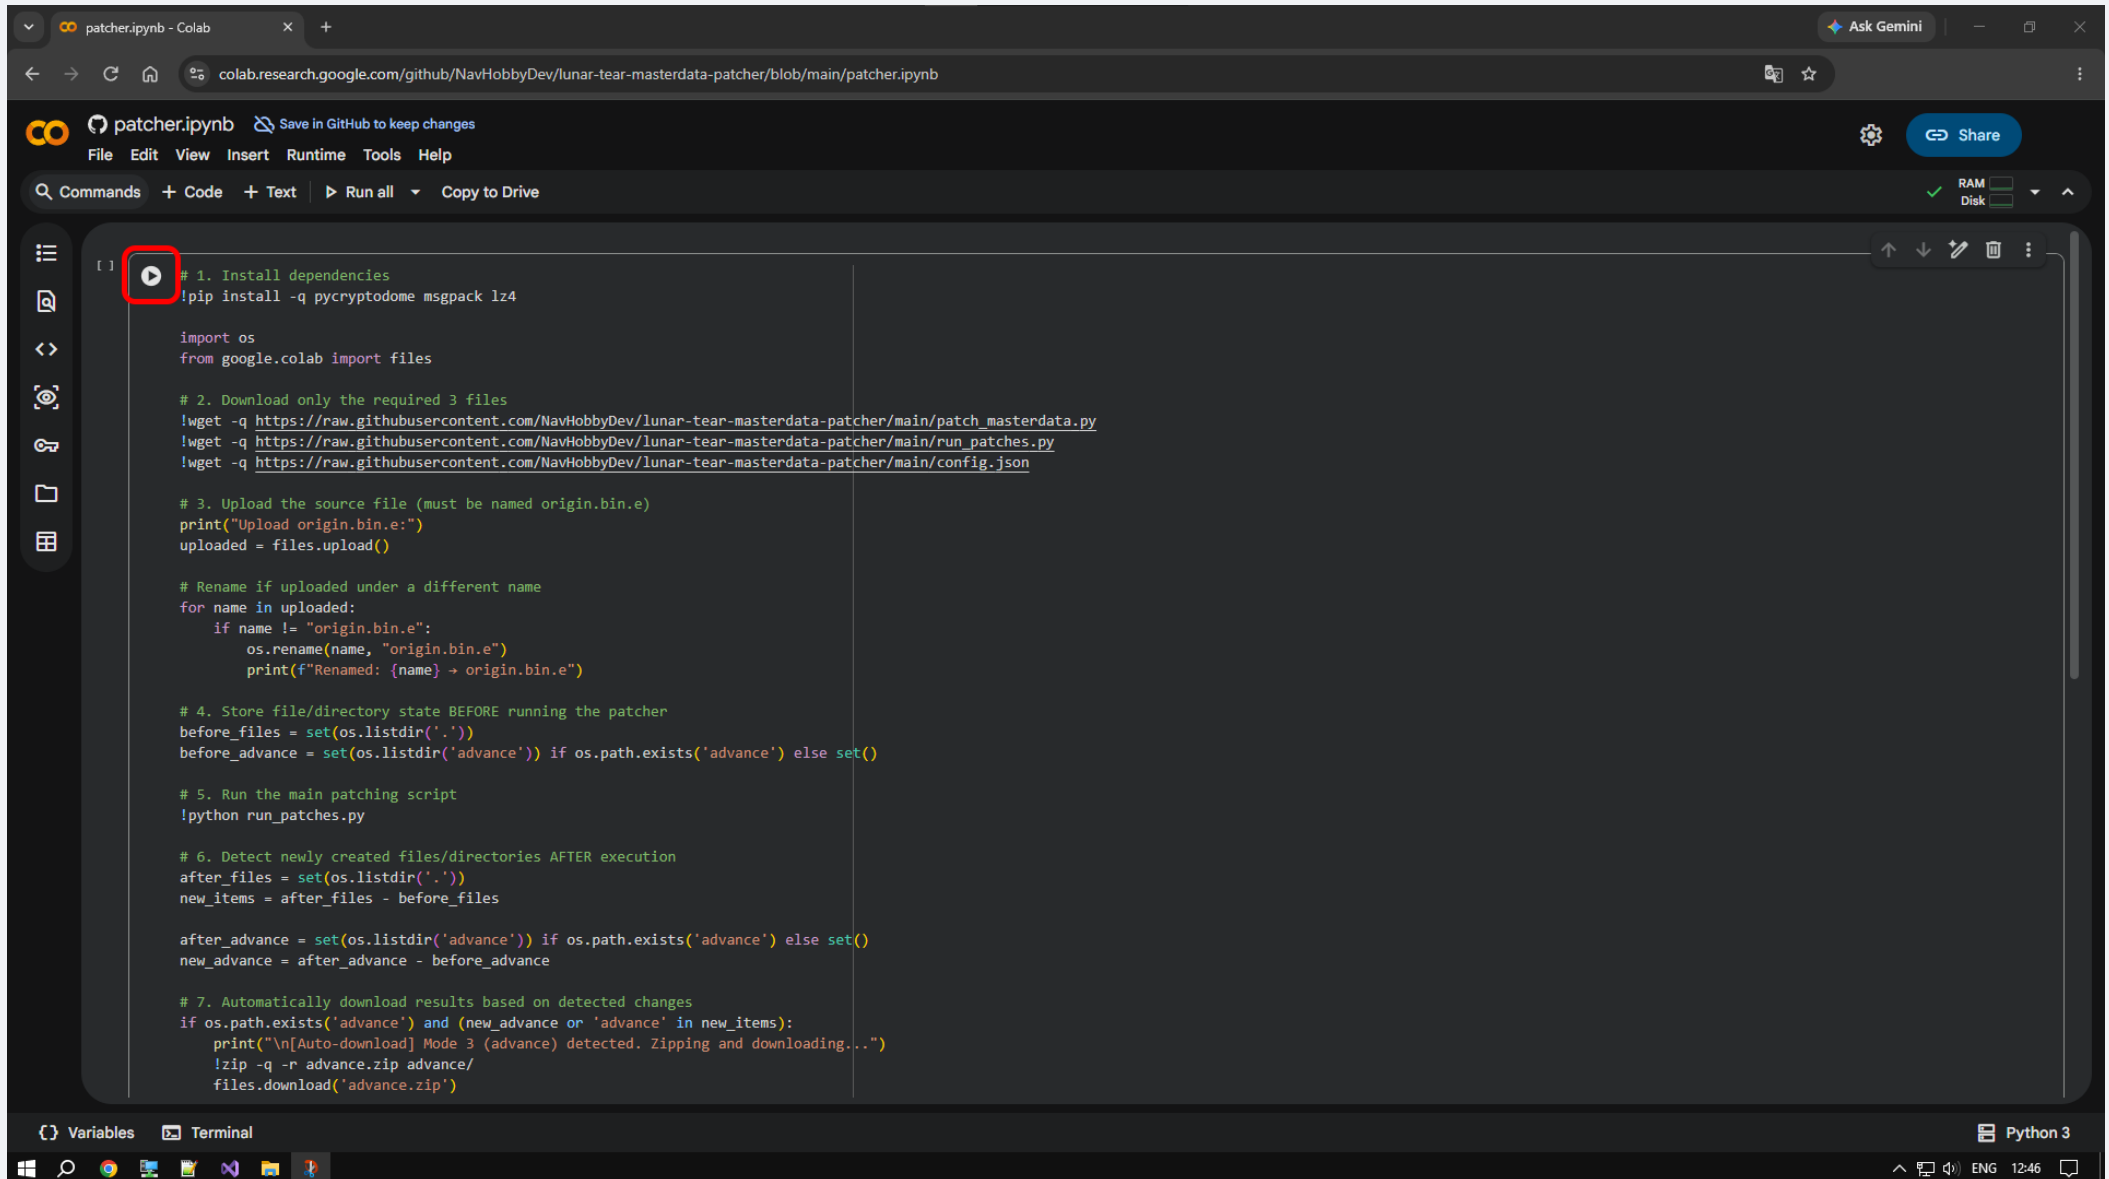

The screenshot shows a Google Colab notebook interface. The browser address bar displays the URL: `colab.research.google.com/github/NavHobbyDev/lunar-tear-masterdata-patcher/blob/main/patcher.ipynb`. The notebook title is `patcher.ipynb`, and it includes a "Save in GitHub to keep changes" button. The menu bar contains `File Edit View Insert Runtime Tools Help`. Below the menu is a toolbar with `Commands + Code + Text` and a `Run all` button. On the right, there are status indicators for `RAM` and `Disk`, and a `Share` button.

The notebook contains a single code cell with the following Python script:

```
[ ] # 1. Install dependencies
!pip install -q pycryptodome msgpack lz4

import os
from google.colab import files

# 2. Download only the required 3 files
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/patch_masterdata.py
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/run_patches.py
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/config.json

# 3. Upload the source file (must be named origin.bin.e)
print("Upload origin.bin.e:")
uploaded = files.upload()

# Rename if uploaded under a different name
for name in uploaded:
    if name != "origin.bin.e":
        os.rename(name, "origin.bin.e")
        print(f"Renamed: {name} → origin.bin.e")

# 4. Store file/directory state BEFORE running the patcher
before_files = set(os.listdir('.'))
before_advance = set(os.listdir('advance')) if os.path.exists('advance') else set()

# 5. Run the main patching script
!python run_patches.py


# 6. Detect newly created files/directories AFTER execution
after_files = set(os.listdir('.'))
new_items = after_files - before_files

after_advance = set(os.listdir('advance')) if os.path.exists('advance') else set()
new_advance = after_advance - before_advance

# 7. Automatically download results based on detected changes
if os.path.exists('advance') and (new_advance or 'advance' in new_items):
    print("\n[Auto-download] Mode 3 (advance) detected. Zipping and downloading...")
    !zip -q -r advance.zip advance/
    files.download('advance.zip')
```

The first cell's play button is highlighted with a red square. The bottom of the interface shows a `Variables` and `Terminal` tab, and a `Python 3` runtime indicator. The system tray at the bottom indicates the time is 12:46 and the language is ENG.

STEP 9 When the warning appears, click «Run anyway»

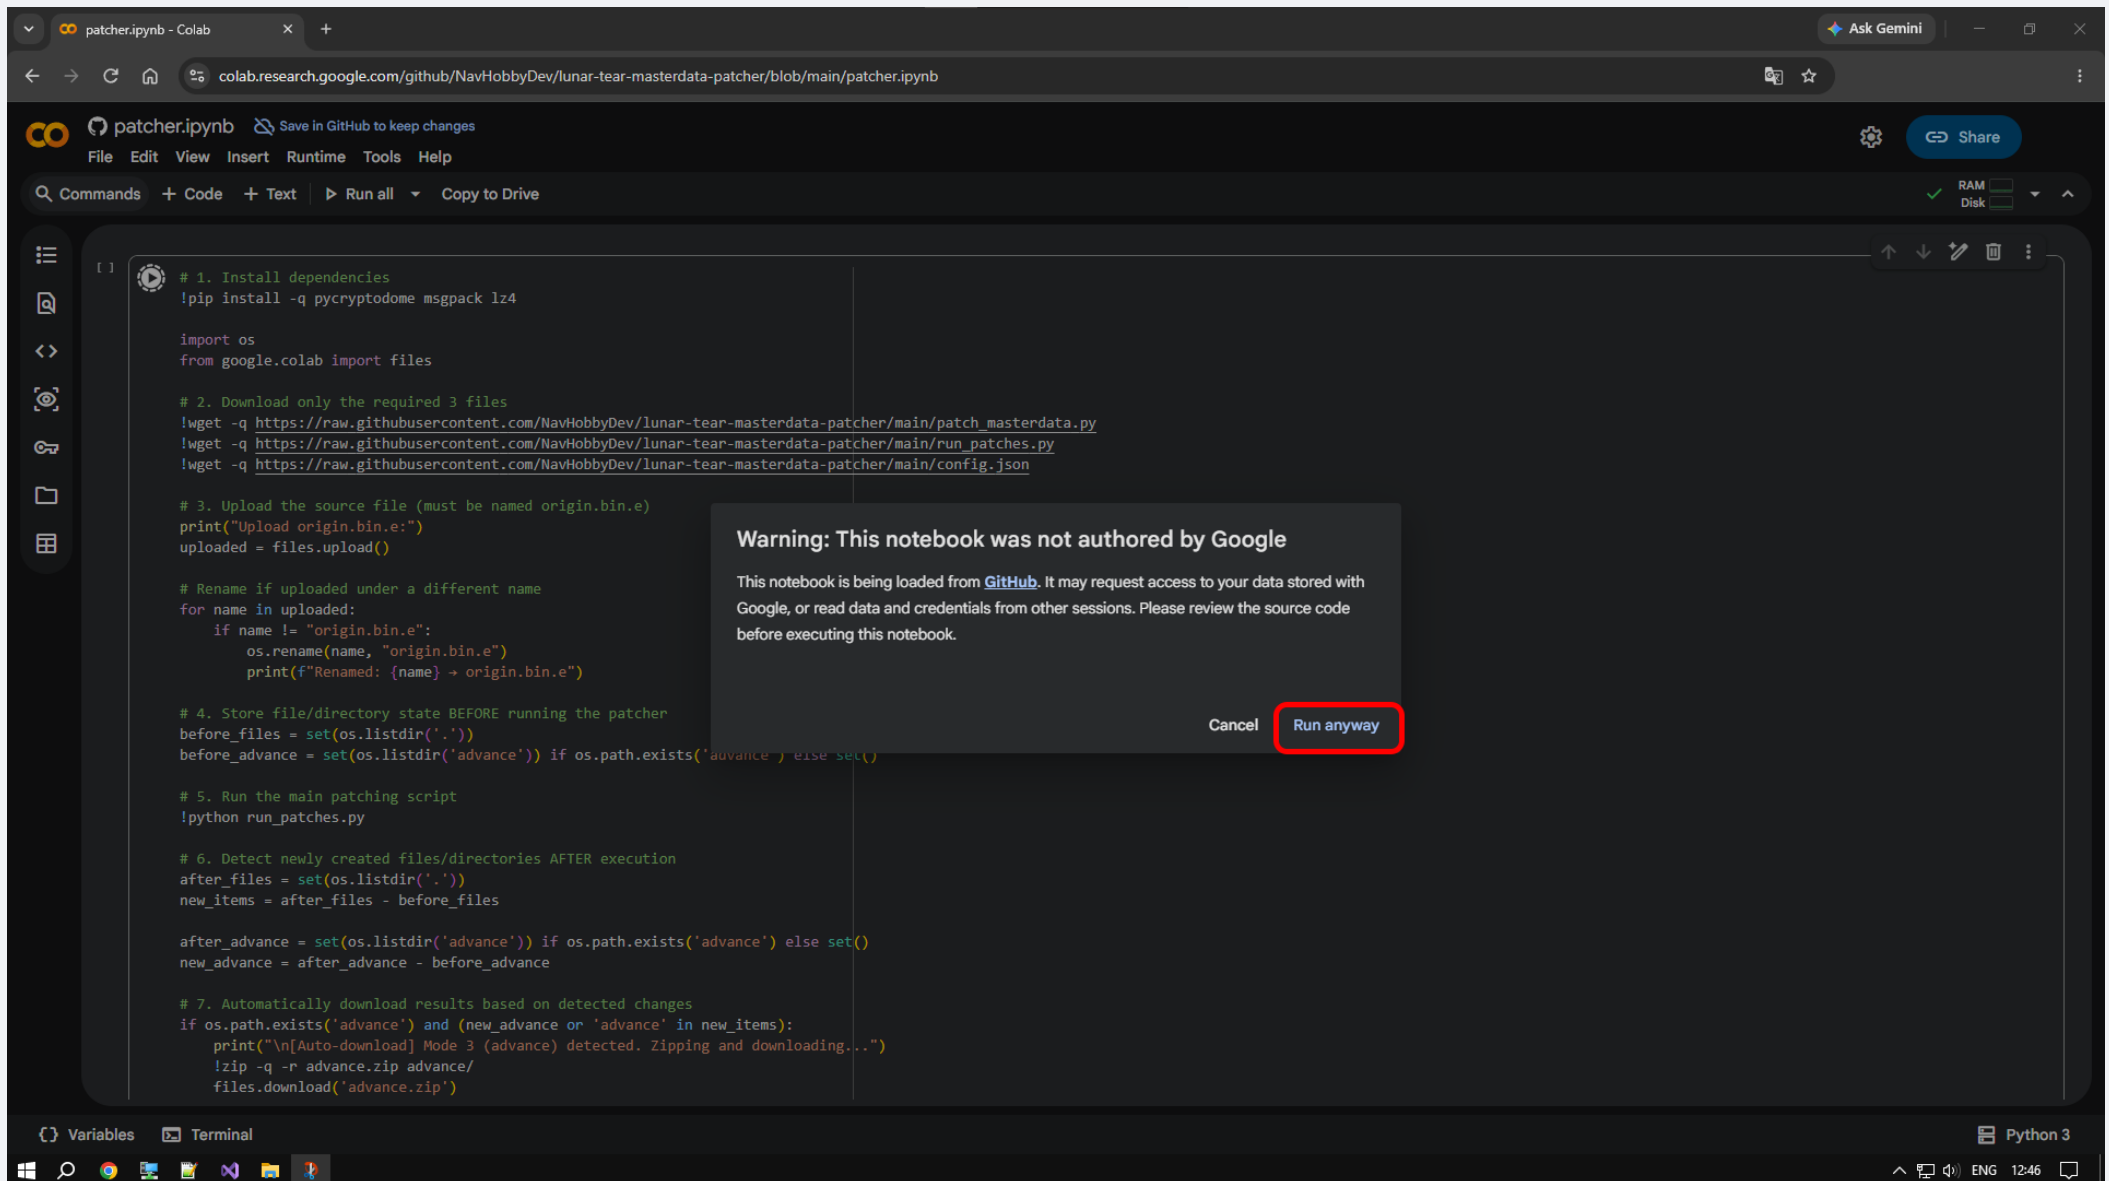

The screenshot shows a Google Colab notebook titled "patcher.ipynb" with the URL `colab.research.google.com/github/NavHobbyDev/lunar-tear-masterdata-patcher/blob/main/patcher.ipynb`. The notebook code is as follows:

```
# 1. Install dependencies
!pip install -q pycryptodome msgpack lz4

import os
from google.colab import files

# 2. Download only the required 3 files
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/patch_masterdata.py
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/run_patches.py
!wget -q https://raw.githubusercontent.com/NavHobbyDev/lunar-tear-masterdata-patcher/main/config.json

# 3. Upload the source file (must be named origin.bin.e)
print("Upload origin.bin.e:")
uploaded = files.upload()

# Rename if uploaded under a different name
for name in uploaded:
    if name != "origin.bin.e":
        os.rename(name, "origin.bin.e")
        print(f"Renamed: {name} → origin.bin.e")

# 4. Store file/directory state BEFORE running the patcher
before_files = set(os.listdir('.'))
before_advance = set(os.listdir('advance')) if os.path.exists('advance') else set()

# 5. Run the main patching script
!python run_patches.py


# 6. Detect newly created files/directories AFTER execution
after_files = set(os.listdir('.'))
new_items = after_files - before_files

after_advance = set(os.listdir('advance')) if os.path.exists('advance') else set()
new_advance = after_advance - before_advance

# 7. Automatically download results based on detected changes
if os.path.exists('advance') and (new_advance or 'advance' in new_items):
    print("\n[Auto-download] Mode 3 (advance) detected. Zipping and downloading...")
    !zip -q -r advance.zip advance/
    files.download('advance.zip')
```

A warning dialog box is displayed in the center of the notebook, stating: "Warning: This notebook was not authored by Google". Below this, it says: "This notebook is being loaded from [GitHub](#). It may request access to your data stored with Google, or read data and credentials from other sessions. Please review the source code before executing this notebook." At the bottom of the dialog, there are two buttons: "Cancel" and "Run anyway". The "Run anyway" button is highlighted with a red rectangle.

STEP 10 Scroll down and wait for the «Choose Files» button to appear

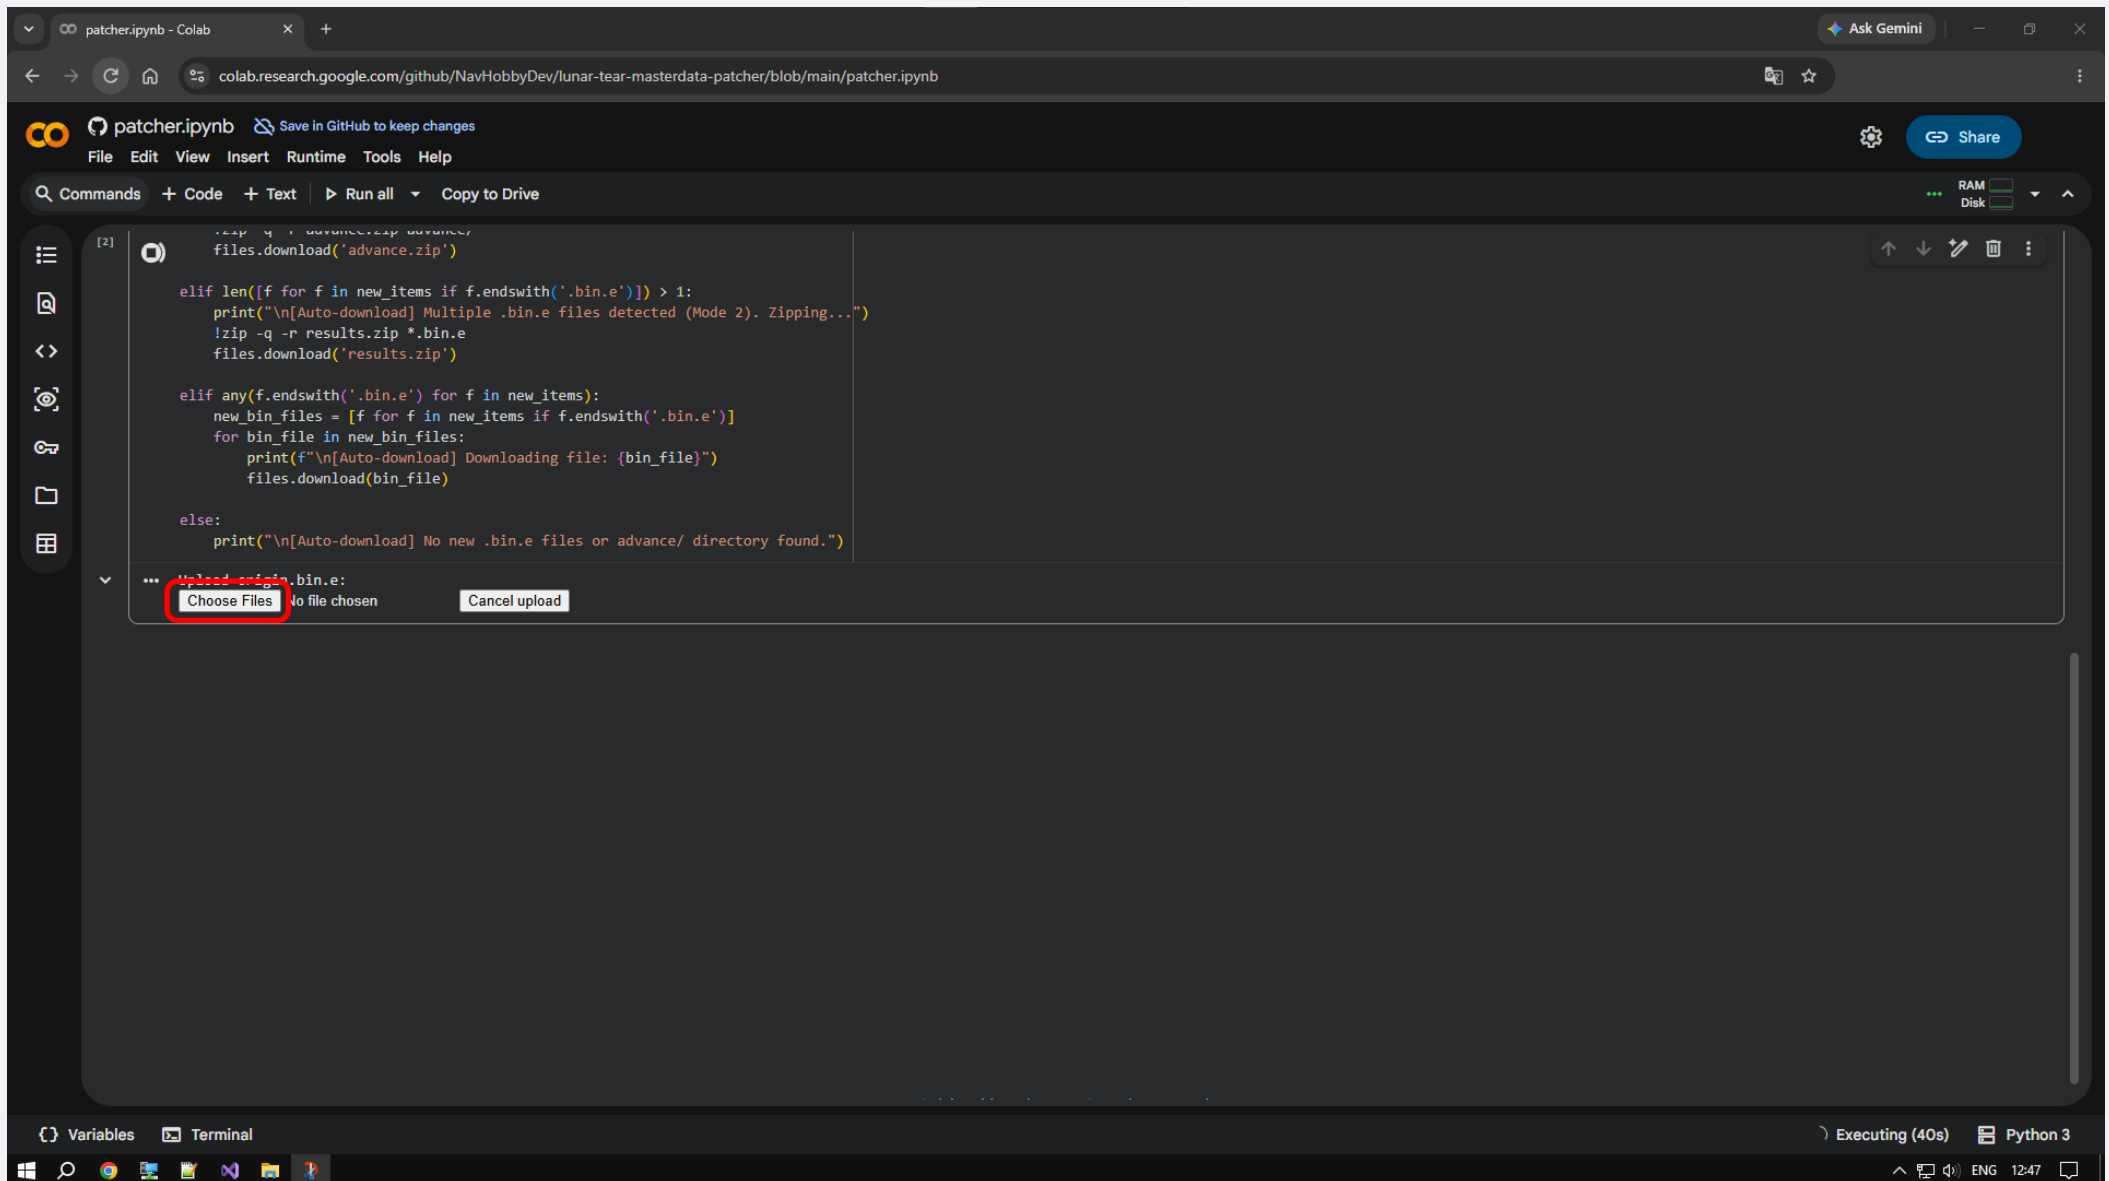

The screenshot shows a Google Colab notebook titled "patcher.ipynb" with the URL `colab.research.google.com/github/NavHobbyDev/lunar-tear-masterdata-patcher/blob/main/patcher.ipynb`. The notebook interface includes a menu bar (File, Edit, View, Insert, Runtime, Tools, Help), a toolbar with "Commands", "+ Code", "+ Text", "Run all", and "Copy to Drive", and a status bar at the bottom showing "Executing (40s)" and "Python 3".

The code cell contains the following Python code:

```
[2] !zip -q -r advance.zip advance/
files.download('advance.zip')


elif len([f for f in new_items if f.endswith('.bin.e')]) > 1:
    print("\n[Auto-download] Multiple .bin.e files detected (Mode 2). Zipping...")
    !zip -q -r results.zip *.bin.e
    files.download('results.zip')

elif any(f.endswith('.bin.e') for f in new_items):
    new_bin_files = [f for f in new_items if f.endswith('.bin.e')]
    for bin_file in new_bin_files:
        print(f"\n[Auto-download] Downloading file: {bin_file}")
        files.download(bin_file)


else:
    print("\n[Auto-download] No new .bin.e files or advance/ directory found.")
```

At the bottom of the code cell, a file upload dialog is visible. It shows a file named `Upload origin.bin.e:` with a status of `No file chosen`. A red rectangle highlights the `Choose Files` button, and a `Cancel upload` button is also present.

STEP 11 Select origin.bin.e and click Open

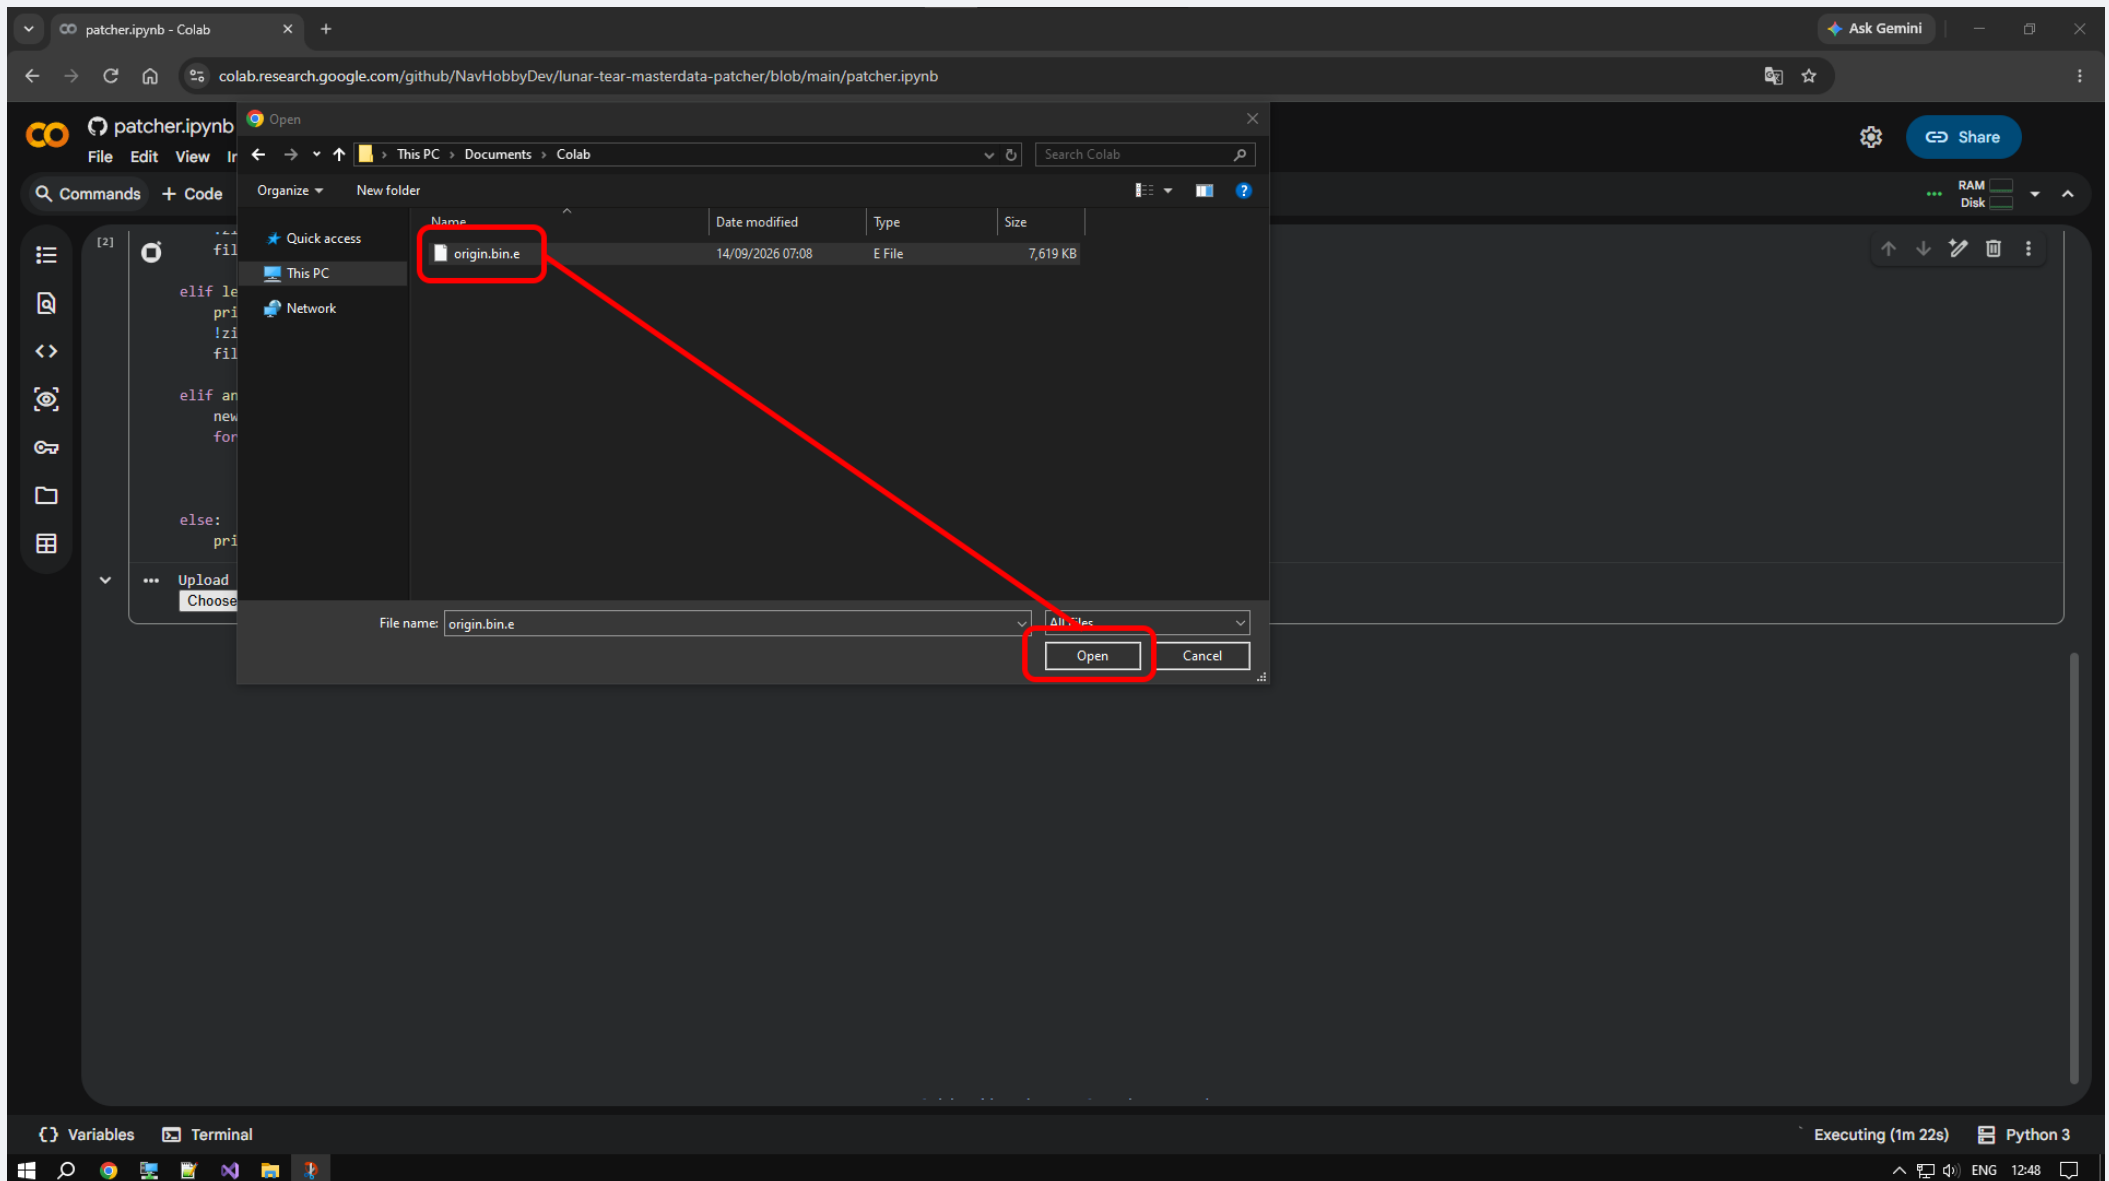

STEP 12 Type the option number (1, 2 or 3) and press Enter

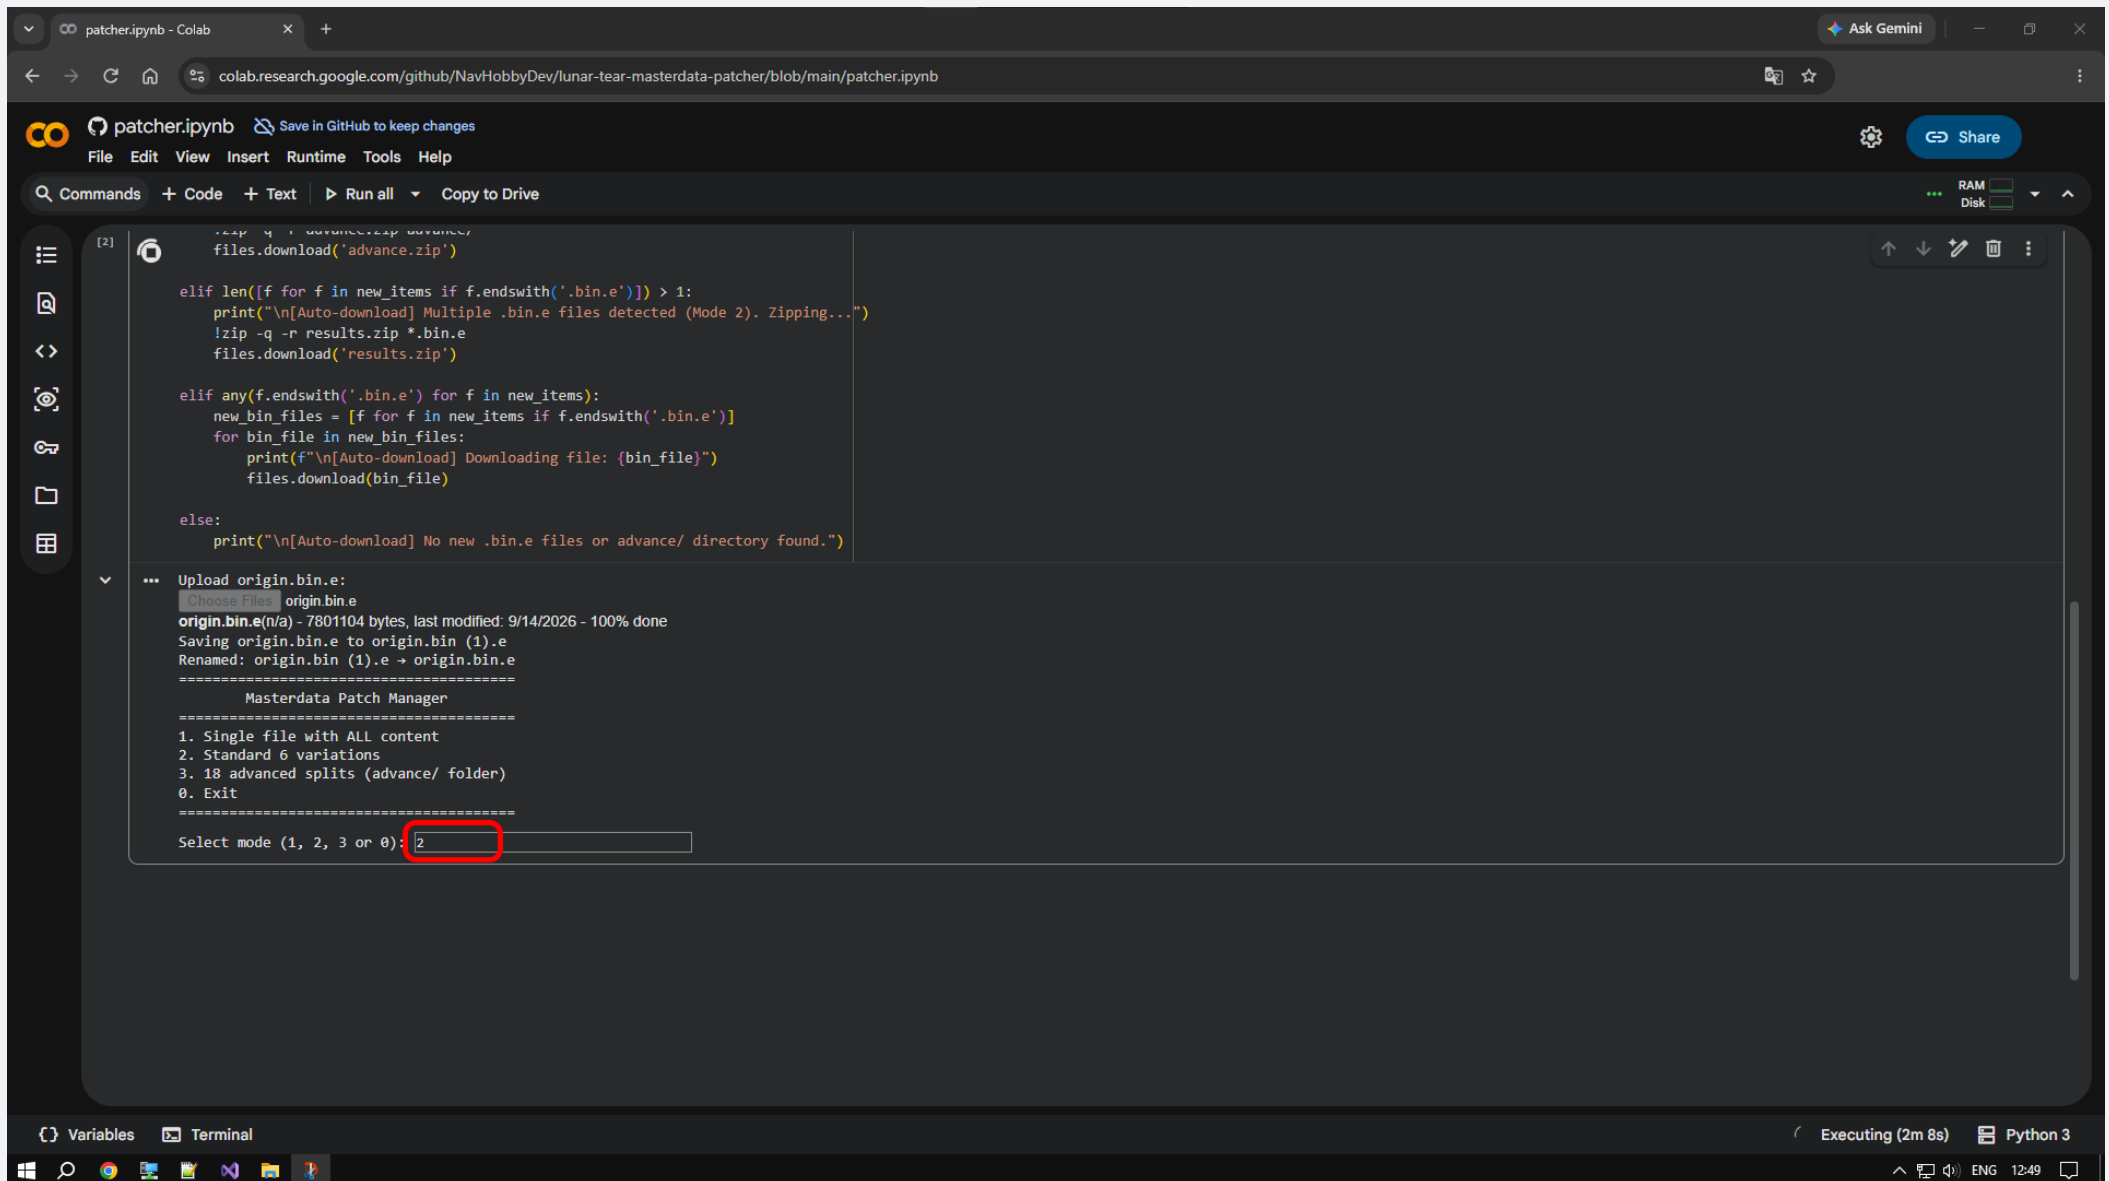

The screenshot shows a Google Colab notebook titled "patcher.ipynb". The code cell contains a Python script that prompts the user to select a mode (1, 2, 3, or 0). The user has entered '2', which is highlighted with a red box. The script also shows the upload of 'origin.bin.e' and the output of the 'Masterdata Patch Manager'.

```
[2] !zip -q -r advance.zip advance/
files.download('advance.zip')

elif len([f for f in new_items if f.endswith('.bin.e')]) > 1:
    print("\n[Auto-download] Multiple .bin.e files detected (Mode 2). Zipping...")
    !zip -q -r results.zip *.bin.e
    files.download('results.zip')

elif any(f.endswith('.bin.e') for f in new_items):
    new_bin_files = [f for f in new_items if f.endswith('.bin.e')]
    for bin_file in new_bin_files:
        print(f"\n[Auto-download] Downloading file: {bin_file}")
        files.download(bin_file)

else:
    print("\n[Auto-download] No new .bin.e files or advance/ directory found.")
```

Upload origin.bin.e:
Choose Files origin.bin.e
origin.bin.e(n/a) - 7801104 bytes, last modified: 9/14/2026 - 100% done
Saving origin.bin.e to origin.bin (1).e
Renamed: origin.bin (1).e → origin.bin.e
=====

Masterdata Patch Manager
=====

1. Single file with ALL content
2. Standard 6 variations
3. 18 advanced splits (advance/ folder)
0. Exit
=====

Select mode (1, 2, 3 or 0):

STEP 13 Wait until processing finishes — the file (or zip archive) downloads automatically

The screenshot shows a Google Colab notebook titled "patcher.ipynb" with the URL `colab.research.google.com/github/NavHobbyDev/lunar-tear-masterdata-patcher/blob/main/patcher.ipynb`. The notebook interface includes a menu bar (File, Edit, View, Insert, Runtime, Tools, Help) and a toolbar with options like "Run all" and "Copy to Drive".

The code cell displays the following output:

```
...
m_enhance_campaign: dedup-extended 5 rows (baseline-value per unique (effect, target))
m_quest_campaign: dedup-extended 13 rows (baseline-value per unique (effect, target))
Labyrinth seasons: 39 rows windowed (1 active per chapter)
Wolf chapter (314) BattlePointIndex: 10 rows corrected 8->5 (BG 1880-1889)
m_shop_item_content_possession: rewrote PossessionId on 15 row(s)

Rebuilding MasterMemory binary...
Header: 24088 bytes, blob: 7734282 bytes
Total: 7758370 bytes (original: 7801092)
Re-encrypting (AES-128-CBC)...
Re-encrypted size: 7758384 bytes
Writing 20240404193219_Bonus.bin.e...
Done! Patched binary written to 20240404193219_Bonus.bin.e
OK


=== Done ===

[Auto-download] Multiple .bin.e files detected (Mode 2). Zipping...
```

A red box highlights the "[Auto-download] Multiple .bin.e files detected (Mode 2). Zipping..." message. A red arrow points from this box to a notification in the top right corner of the browser window, which shows a file named "results.zip" (51.8 MB) with a status of "Done".

The bottom of the screen shows the Windows taskbar with various application icons and the system clock indicating 12:58 PM on Python 3.

STEP 14 Extract if needed → copy the desired .bin.e to server/assets/release/ → rename to 20240404193219.bin.e if required

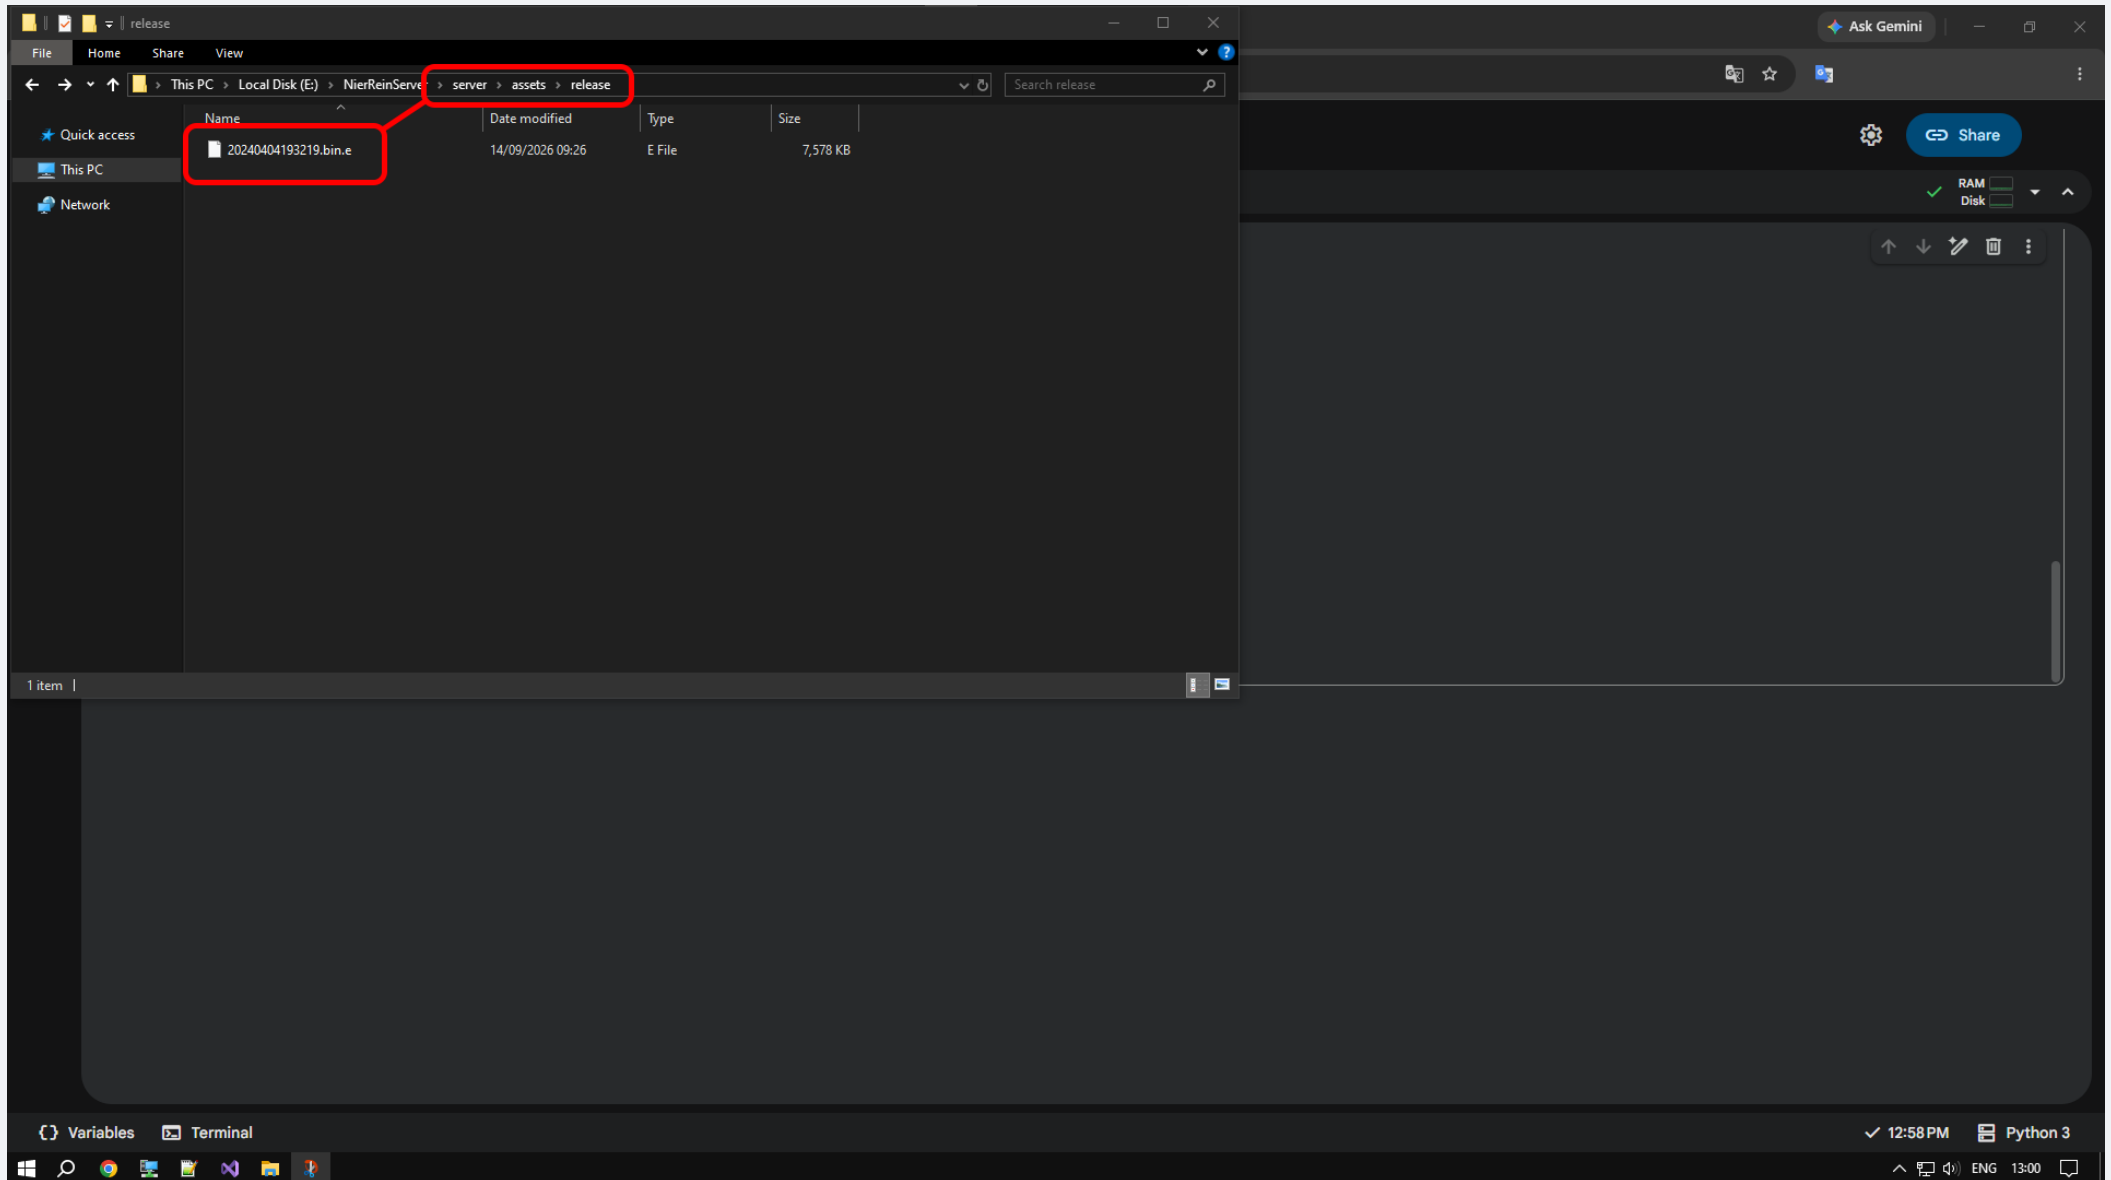

Done!

Copy the .bin.e file into
server/assets/release/

Rename to 20240404193219.bin.e if needed

Restart the server and the client

Enjoy the game!