

```
import numpy as np
import pandas as pd
df=pd.read_csv('/content/drive/MyDrive/Datasets_ML/owid-covid-data (1).csv')
df
```

	iso_code	continent	location	date	total_cases	new_cases	new_cases_smoothed	total_deaths	new_deaths
0	AFG	Asia	Afghanistan	2020-02-24	5.0	5.0	NaN	NaN	NaN
1	AFG	Asia	Afghanistan	2020-02-25	5.0	0.0	NaN	NaN	NaN
2	AFG	Asia	Afghanistan	2020-02-26	5.0	0.0	NaN	NaN	NaN
3	AFG	Asia	Afghanistan	2020-02-27	5.0	0.0	NaN	NaN	NaN
4	AFG	Asia	Afghanistan	2020-02-28	5.0	0.0	NaN	NaN	NaN
...
258742	ZWE	Africa	Zimbabwe	2023-02-15	263642.0	559.0	79.857	5662.0	3
258743	ZWE	Africa	Zimbabwe	2023-02-16	263642.0	NaN	NaN	5662.0	0
258744	ZWE	Africa	Zimbabwe	2023-02-17	263642.0	NaN	NaN	5662.0	0
258745	ZWE	Africa	Zimbabwe	2023-02-18	263642.0	NaN	NaN	5662.0	0
258746	ZWE	Africa	Zimbabwe	2023-02-19	263642.0	NaN	NaN	5662.0	0

258747 rows × 67 columns



```
#First 5 observation display
df.head()
```

	iso_code	continent	location	date	total_cases	new_cases	new_cases_smoothed	total_deaths	new_deaths
0	AFG	Asia	Afghanistan	2020-02-24	5.0	5.0	NaN	NaN	NaN
1	AFG	Asia	Afghanistan	2020-02-25	5.0	0.0	NaN	NaN	NaN
2	AFG	Asia	Afghanistan	2020-02-26	5.0	0.0	NaN	NaN	NaN
3	AFG	Asia	Afghanistan	2020-02-27	5.0	0.0	NaN	NaN	NaN
4	AFG	Asia	Afghanistan	2020-02-28	5.0	0.0	NaN	NaN	NaN

5 rows × 67 columns



```
#last 5 obsevation display
df.tail()
```

	iso_code	continent	location	date	total_cases	new_cases	new_cases_smoothed	total_deaths	new_deaths
258742	ZWE	Africa	Zimbabwe	2023-02-15	263642.0	559.0	79.857	5662.0	3.0
258743	ZWE	Africa	Zimbabwe	2023-02-16	263642.0	NaN	NaN	5662.0	0.0
~~~~~									

```
#Row and columns
df.shape

(258747, 67)
```

```
df.columns
```

```
Index(['iso_code', 'continent', 'location', 'date', 'total_cases', 'new_cases',
      'new_cases_smoothed', 'total_deaths', 'new_deaths',
      'new_deaths_smoothed', 'total_cases_per_million',
      'new_cases_per_million', 'new_cases_smoothed_per_million',
      'total_deaths_per_million', 'new_deaths_per_million',
      'new_deaths_smoothed_per_million', 'reproduction_rate', 'icu_patients',
      'icu_patients_per_million', 'hosp_patients',
      'hosp_patients_per_million', 'weekly_icu_admissions',
      'weekly_icu_admissions_per_million', 'weekly_hosp_admissions',
      'weekly_hosp_admissions_per_million', 'total_tests', 'new_tests',
      'total_tests_per_thousand', 'new_tests_per_thousand',
      'new_tests_smoothed', 'new_tests_smoothed_per_thousand',
      'positive_rate', 'tests_per_case', 'tests_units', 'total_vaccinations',
      'people_vaccinated', 'people_fully_vaccinated', 'total_boosters',
      'new_vaccinations', 'new_vaccinations_smoothed',
      'total_vaccinations_per_hundred', 'people_vaccinated_per_hundred',
      'people_fully_vaccinated_per_hundred', 'total_boosters_per_hundred',
      'new_vaccinations_smoothed_per_million',
      'new_people_vaccinated_smoothed',
      'new_people_vaccinated_smoothed_per_hundred', 'stringency_index',
      'population_density', 'median_age', 'aged_65_older', 'aged_70_older',
      'gdp_per_capita', 'extreme_poverty', 'cardiovasc_death_rate',
      'diabetes_prevalence', 'female_smokers', 'male_smokers',
      'handwashing_facilities', 'hospital_beds_per_thousand',
      'life_expectancy', 'human_development_index', 'population',
      'excess_mortality_cumulative_absolute', 'excess_mortality_cumulative',
      'excess_mortality', 'excess_mortality_cumulative_per_million'],
      dtype='object')
```

```
#To finding missing values
df.isna().sum()

iso_code      0
continent     14519
location      0
date          0
total_cases   14568
...
population    1109
excess_mortality_cumulative_absolute  250098
excess_mortality_cumulative         250098
excess_mortality                    250098
excess_mortality_cumulative_per_million  250098
Length: 67, dtype: int64
```

```
#Basic Summary of data
df.describe()
```

```
#Dropping the column
df.drop(['new_cases_smoothed', 'new_deaths_smoothed', 'new_cases_per_million', 'total_cases_per_million'],axis=1,inplace=True)
df
```

	iso_code	continent	location	date	total_cases	new_cases	total_deaths	new_deaths	new_cases_smoothed
0	AFG	Asia	Afghanistan	2020-02-24	5.0	5.0	NaN	NaN	
1	AFG	Asia	Afghanistan	2020-02-25	5.0	0.0	NaN	NaN	
2	AFG	Asia	Afghanistan	2020-02-26	5.0	0.0	NaN	NaN	
3	AFG	Asia	Afghanistan	2020-02-27	5.0	0.0	NaN	NaN	
4	AFG	Asia	Afghanistan	2020-02-28	5.0	0.0	NaN	NaN	
...	...	...	...	...	...	...	...	...	
258742	ZWE	Africa	Zimbabwe	2023-02-15	263642.0	559.0	5662.0	3.0	
258743	ZWE	Africa	Zimbabwe	2023-02-16	263642.0	NaN	5662.0	0.0	
258744	ZWE	Africa	Zimbabwe	2023-02-17	263642.0	NaN	5662.0	0.0	
258745	ZWE	Africa	Zimbabwe	2023-02-18	263642.0	NaN	5662.0	0.0	
258746	ZWE	Africa	Zimbabwe	2023-02-19	263642.0	NaN	5662.0	0.0	

258747 rows × 63 columns



```
df.shape

(258747, 63)
```

```
#Renaming the column name
df.rename(columns={'date':'Date','location':'Country','continent':'Continent','iso_code':'ISO_code'},inplace=True)
df
```

```
ISO_code Continent Country Date total_cases new_cases total_deaths new_deaths new_cases_smoothed

#List the continent name
continent_unique=list(df.Continent.unique())
continent_unique

['Asia', nan, 'Europe', 'Africa', 'North America', 'South America', 'Oceania']

#Fill missing value
from sklearn.impute import SimpleImputer
imputer=SimpleImputer(strategy='constant')
df2=pd.DataFrame(imputer.fit_transform(df),columns=df.columns)
df2
```

	ISO_code	Continent	Country	Date	total_cases	new_cases	total_deaths	new_deaths	new_cases_smoothed
0	AFG	Asia	Afghanistan	2020-02-24	5.0	5.0	missing_value	missing_value	
1	AFG	Asia	Afghanistan	2020-02-25	5.0	0.0	missing_value	missing_value	
2	AFG	Asia	Afghanistan	2020-02-26	5.0	0.0	missing_value	missing_value	
3	AFG	Asia	Afghanistan	2020-02-27	5.0	0.0	missing_value	missing_value	
4	AFG	Asia	Afghanistan	2020-02-28	5.0	0.0	missing_value	missing_value	
...	...	...	...	...	...	...	...	...	...
258742	ZWE	Africa	Zimbabwe	2023-02-15	263642.0	559.0	5662.0	3.0	
258743	ZWE	Africa	Zimbabwe	2023-02-16	263642.0	missing_value	5662.0	0.0	
258744	ZWE	Africa	Zimbabwe	2023-02-17	263642.0	missing_value	5662.0	0.0	
258745	ZWE	Africa	Zimbabwe	2023-02-18	263642.0	missing_value	5662.0	0.0	
258746	ZWE	Africa	Zimbabwe	2023-02-19	263642.0	missing_value	5662.0	0.0	

258747 rows × 63 columns



```
#Groupby
df3=df2.groupby(['Date','Country',])[['total_cases','total_deaths','total_vaccinations']].sum().reset_index()
df3
```

	Date	Country	total_cases	total_deaths	total_vaccinations
0	2020-01-01	Argentina	missing_value	missing_value	missing_value
1	2020-01-01	Mexico	missing_value	missing_value	missing_value
2	2020-01-02	Argentina	missing_value	missing_value	missing_value
3	2020-01-02	Mexico	missing_value	missing_value	missing_value
4	2020-01-03	Argentina	missing_value	missing_value	missing_value
...	...	...	...	...	...
258742	2023-02-19	Wallis and Futuna	3427.0	7.0	missing_value
258743	2023-02-19	World	673941526.0	6862848.0	13293920837.0
258744	2023-02-19	Yemen	11945.0	2159.0	missing_value
258745	2023-02-19	Zambia	342317.0	4051.0	missing_value
258746	2023-02-19	Zimbabwe	263642.0	5662.0	missing_value

258747 rows × 5 columns

```
#missing values to zero(0)-total_cases column
df3['total cases'].replace({'missing value':0},inplace=True)
```

```
#missing values to zero(0)-total_deaths column
df3['total_deaths'].replace({'missing_value':0},inplace=True)
```

```
#missing values to zero(0)-total_vaccinations column
df3['total_vaccinations'].replace({'missing_value':0},inplace=True)
```

```
df3
```

	Date	Country	total_cases	total_deaths	total_vaccinations
0	2020-01-01	Argentina	0.0	0.0	0.000000e+00
1	2020-01-01	Mexico	0.0	0.0	0.000000e+00
2	2020-01-02	Argentina	0.0	0.0	0.000000e+00
3	2020-01-02	Mexico	0.0	0.0	0.000000e+00
4	2020-01-03	Argentina	0.0	0.0	0.000000e+00
...	...	...	...	...	...
258742	2023-02-19	Wallis and Futuna	3427.0	7.0	0.000000e+00
258743	2023-02-19	World	673941526.0	6862848.0	1.329392e+10
258744	2023-02-19	Yemen	11945.0	2159.0	0.000000e+00
258745	2023-02-19	Zambia	342317.0	4051.0	0.000000e+00
258746	2023-02-19	Zimbabwe	263642.0	5662.0	0.000000e+00

258747 rows × 5 columns

```
#Plot subset of specific Data
df4=df3[df3['total_deaths']>1000000]
countries=df4['Country'].unique()
len(countries)
```






10

```
country_deaths_greaterthan1000000=list(df4.Country.unique())
country_deaths_greaterthan1000000
```


```
['World',
 'High income',
 'Upper middle income',
 'Europe',
 'South America',
 'Asia',
 'Lower middle income',
 'North America',
 'European Union',
 'United States']
```

```
import matplotlib.pyplot as plt
```

```
for idx in range(0,len(countries)):
    C = df4[df4['Country']==countries[idx]].reset_index()
    plt.scatter(np.arange(0,len(C)),C['total_cases'],color="blue",label="total_cases")
    plt.scatter(np.arange(0,len(C)),C['total_deaths'],color="red",label="total_deaths")
    plt.scatter(np.arange(0,len(C)),C['total_vaccinations'],color="green",label="total_vaccinations")
    plt.title(countries[idx])
    plt.xlabel("Number of days since first suspect")
    plt.ylabel("Number of cases")
    plt.legend()
    plt.show()
```

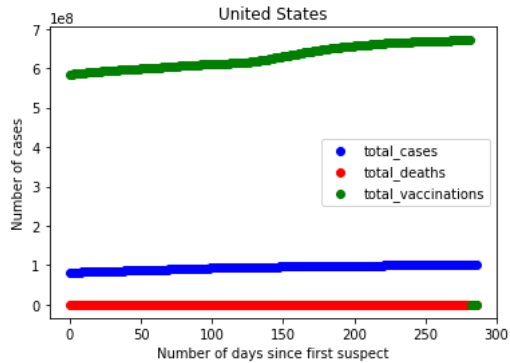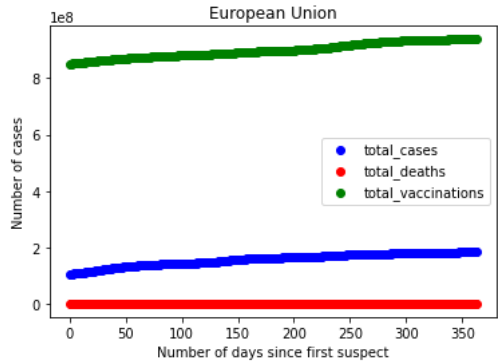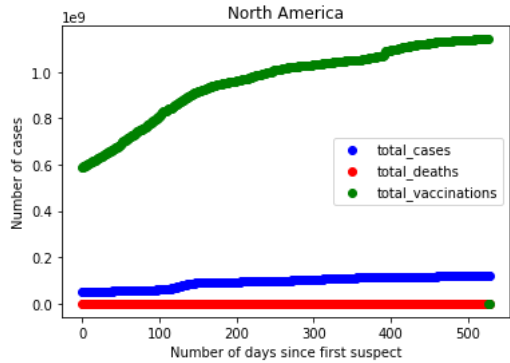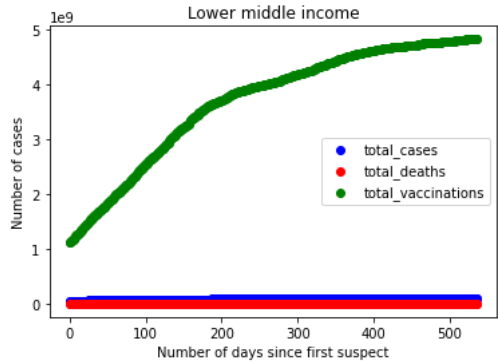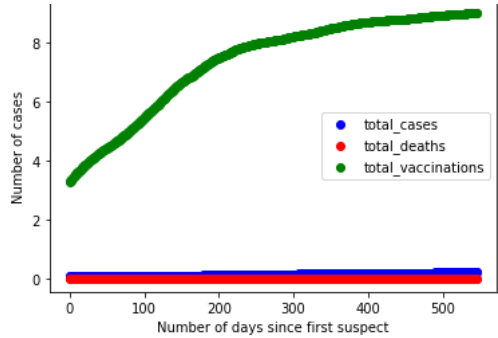

```
df5=df4.groupby(['Country'])[['Country', 'total_cases', 'total_deaths']].sum().reset_index()
C = df5
plt.scatter (np.arange(0,len (C)),C['total_cases'], color="blue", label="total_cases")
plt.scatter (np.arange(0,len (C)),C['total_deaths' ], color="red", label="total_deaths")
plt.title("World")
plt.xlabel("Number of days since first suspect")
plt.ylabel("Number of cases")
plt.legend()
plt.show()
```

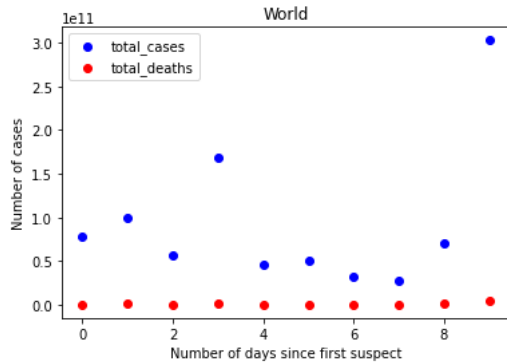

```
date= df4[ 'Date'].unique()
len (date)
```

887

```
df6=df4.groupby([ 'Date']) [['Date', 'total_cases', 'total_deaths']].sum().reset_index()
```

```
C=df6
plt.scatter(np.arange(0,len (C)),C['total_cases'],color="blue",label="total_cases")
plt.scatter(np.arange(0,len (C)),C['total_deaths'],color="red",label="total_deaths")
plt.title("World")
plt.xlabel("Number of days since first suspect")
plt.ylabel("Number of cases")
plt.legend()
plt.show()
```

