- ***NAME*** ***NAVEED ULLAH***
- ***ROLL NO*** ***26P3053***
- ***SECTION*** ***SE-1B***
- ***TASKS*** ***B & C***
- ***DATE*** ***11/09/2026***

TASK NO 01

```
int main(){
#include <stdio.h>
/* class work */
 float distance, time, avgspeed;
 printf("enter the value of distance:");
 scanf("%fkm", &distance);
 printf("enter the value of time:");
 scanf("%fhourse", &time);
 avgspeed=distance/time;
printf("%fkm/h", avgspeed);
return 0;
}
```

COMPILED FORM:

task1 - Notepad

File Edit Format View Help

```
#include <stdio.h>
int main(){
/* class work */
 float distance, time, avgspeed;
 printf("enter the value of distance:");
 scanf("%fkm", &distance);
 printf("enter the value of time:");
 scanf("%fhourse", &time);
 avgspeed=distance/time;
printf("%fkm/h", avgspeed);
return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task1.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter the value of distance:50
enter the value of time:5
10.000000km/h
C:\Users\BROTHERS\Desktop>
```


TASK NO O2

```
#include <stdio.h>
int main (){

int num1 , num2, temporary;
printf("enter num1:");
scanf("%d", &num1);
printf("enter num2:");
scanf("%d", &num2);
printf("num1= %d\n", num1);
printf("num2= %d\n", num2);
temporary = num1;
num1 =num2 ;
num2= temporary;

printf("num1= %d\n",num1);
printf("num2 = %d\n", num2);
return 0;
}
```

COMPILED FORM:

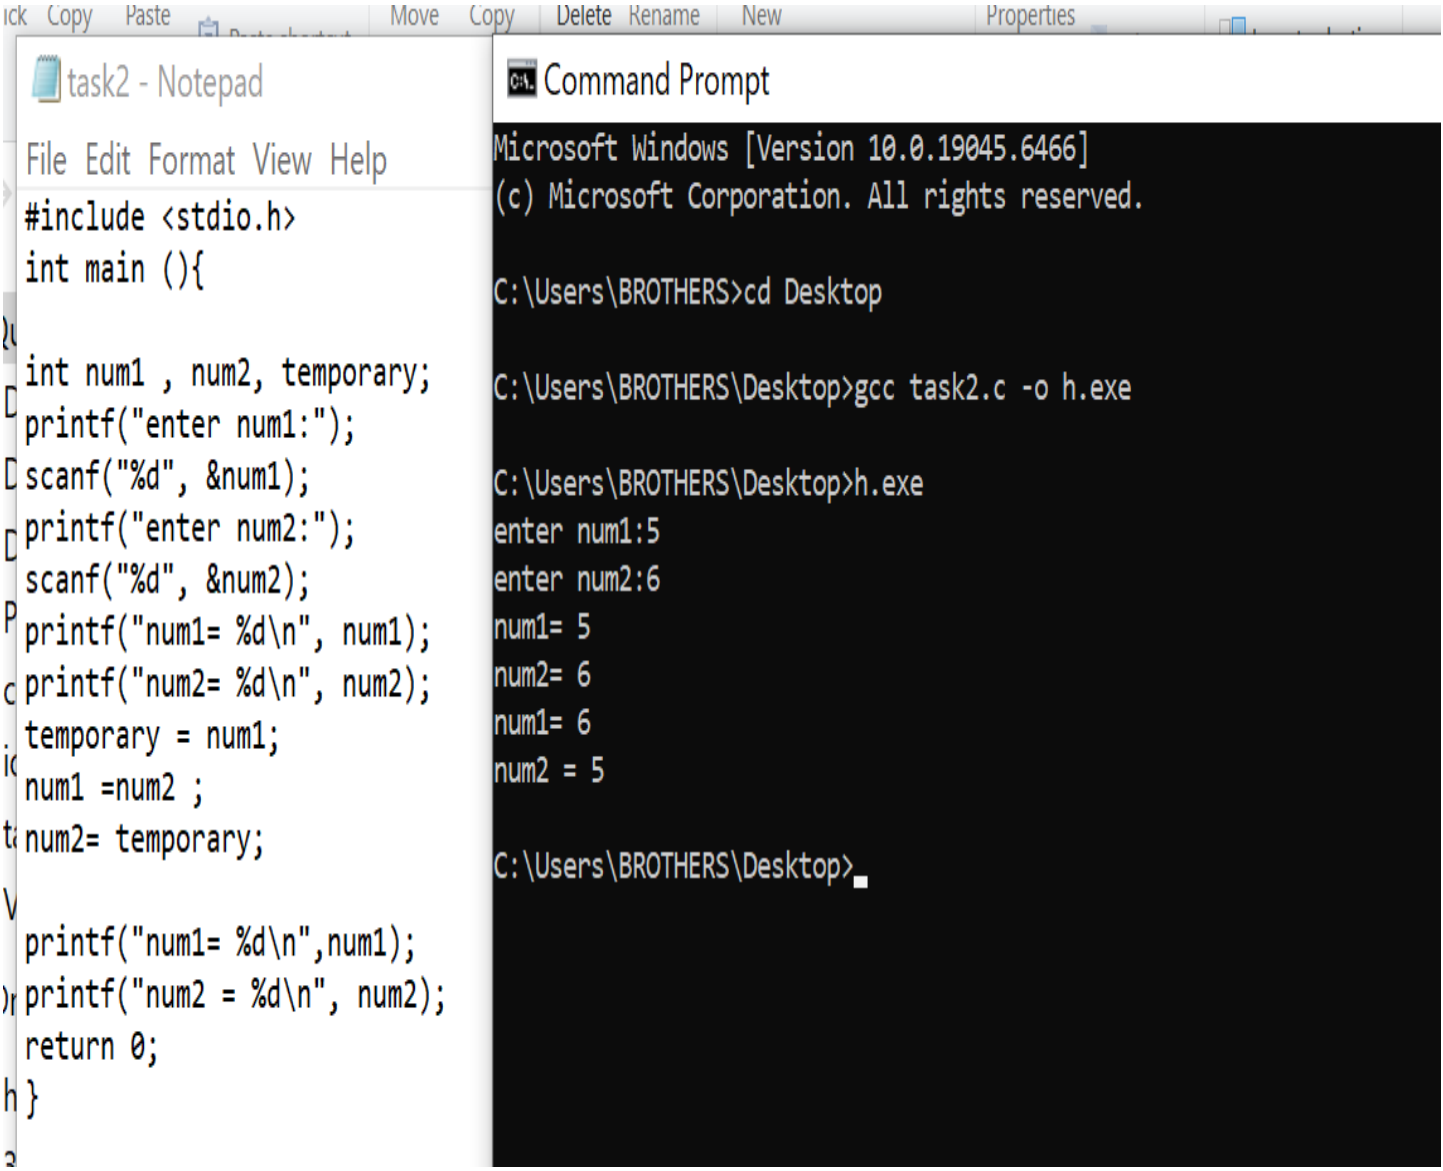

task2 - Notepad

File Edit Format View Help

```
#include <stdio.h>
int main (){

int num1 , num2, temporary;
printf("enter num1:");
scanf("%d", &num1);
printf("enter num2:");
scanf("%d", &num2);
printf("num1= %d\n", num1);
printf("num2= %d\n", num2);
temporary = num1;
num1 =num2 ;
num2= temporary;

printf("num1= %d\n",num1);
printf("num2 = %d\n", num2);
return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task2.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter num1:5
enter num2:6
num1= 5
num2= 6
num1= 6
num2 = 5

C:\Users\BROTHERS\Desktop>
```

TASK NO 03

```
#include <stdio.h>
int main(){
float salery, tax_rate;
float tax_amount , net_income;
printf("enter salery =");
scanf("%f", &salery);
printf("enter tax_rate(0-100)=");
scanf("%f", &tax_rate);
tax_amount= salery*(tax_rate / 100);
net_income = salery-tax_amount;
 printf("tax_amount= %.2f\n", tax_amount);
 printf("net_income = %.2f\n", net_income);

return 0;
}
```

COMPILED FORM:

task3 - Notepad

File Edit Format View Help

```
#include <stdio.h>
int main(){
float salery, tax_rate;
float tax_amount , net_income;
printf("enter salery =");
scanf("%f", &salery);
printf("enter tax_rate(0-100)=");
scanf("%f", &tax_rate);
tax_amount= salery*(tax_rate / 100);
net_income = salery-tax_amount;
 printf("tax_amount= %.2f\n", tax_amount);
 printf("net_income = %.2f\n", net_income);

return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task.c -o h.exe
gcc: error: task.c: No such file or directory
gcc: fatal error: no input files
compilation terminated.

C:\Users\BROTHERS\Desktop>gcc task3.c -o h.exe

C:\Users\BROTHERS\Desktop>exe
'exe' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\BROTHERS\Desktop>h.exe
enter salery =4000
enter tax_rate(0-100)=5
tax_amount= 200.00
net_income = 3800.00

C:\Users\BROTHERS\Desktop>
```

TASK NO 04

```
#include <stdio.h>
int main() {
        int pennies;
        pennies=368;
        int quater, dime, nickle, ali_carry;
        quater=pennies/25;
      pennies=pennies%25;
        dime=pennies/10;
      pennies=pennies%10;
        nickle=pennies/5;
      pennies=pennies%5;
        printf("quater= %d\n", quater);
        printf("dime= %d\n", dime);
        printf("nickle= %d\n\n", nickle);
        printf("pinnies= %d\n\n", pennies);
     ali_carry=quater+dime+nickle;

        printf("\tAli carries= %dcoins\n", ali_carry);
```

```
    return 0;
}
```

COMPILED FORM:

task4 - Notepad

File Edit Format View Help

```
#include <stdio.h>

int main() {
        int pennies;
        pennies=368;
        int quater, dime, nickle, ali_carry;
        quater=pennies/25;
        pennies=pennies%25;
        dime=pennies/10;
        pennies=pennies%10;
        nickle=pennies/5;
        pennies=pennies%5;
        printf("quater= %d\n", quater);
        printf("dime= %d\n", dime);
        printf("nickle= %d\n\n", nickle);
        printf("pinnies= %d\n\n", pennies);
       ali_carry=quater+dime+nickle;

        printf("\tAli carries= %dcoins\n", ali_carry);

        return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task4.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
quater= 14
dime= 1
nickle= 1

pinnies= 3

        Ali carries= 16coins

C:\Users\BROTHERS\Desktop>
```

TASK NO 05

```
#include <stdio.h>
#include <math.h>

int main() {
        int a, b, c;
         float X1, X2, power;
        printf("enter the value of a (a is not equal to 0)\n");
        scanf("%d", &a);
        printf("b and c must be greater than 0\n");
        printf("enter the value of b=\n");
        scanf("%d", &b);
        printf("enter the value of c=\n");
        scanf("%d", &c);
        power=b*b;
        X1= (-b+sqrt(power- 4*(a*c)))/2*a;
        printf("X1 = %.2f\n", X1);
        X2=(-b-sqrt(power- 4*(a*c)))/2*a;
        printf("X2 = %.2f\n", X2);
        return 0;
}
```

COMPILED FORM:

task5 - Notepad

File Edit Format View Help

```
#include <stdio.h>
#include <math.h>

int main() {
        int a, b, c;
         float X1, X2, power;
        printf("enter the value of a (a is not equal to 0)\n");
        scanf("%d", &a);
        printf("b and c must be greater than 0\n");
        printf("enter the value of b=\n");
        scanf("%d", &b);
        printf("enter the value of c=\n");
        scanf("%d", &c);
        power=b*b;
        X1= (-b+sqrt(power- 4*(a*c)))/2*a;
        printf("X1 = %.2f\n", X1);
        X2=(-b-sqrt(power- 4*(a*c)))/2*a;
        printf("X2 = %.2f\n", X2);
        return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task5.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter the value of a (a is not equal to 0)
1
b and c must be greater than 0
enter the value of b=
5
enter the value of c=
6
X1 = -2.00
X2 = -3.00

C:\Users\BROTHERS\Desktop>
```

TASK NO 06

```
#include <stdio.h>


int main() {
int num1, num2;
float first, second, third;
printf("enter num1(positve)=\n");
scanf("%d", &num1);
printf("enter num2(positive)=\n");
scanf("%d", &num2);
first=num1/num2;
second=(float)num1/num2;
third=(float)(num1/num2);
printf("first= %f\n", first);
printf("second= %f\n", second);
printf("third= %f\n", third);
        return 0;
}
```

COMPILED FORM:

task6 - Notepad

File Edit Format View Help

```
#include <stdio.h>

int main() {
int num1, num2;
float first, second, third;
printf("enter num1(positve)=\n");
scanf("%d", &num1);
printf("enter num2(positive)=\n");
scanf("%d", &num2);
first=num1/num2;
second=(float)num1/num2;
third=(float)(num1/num2);
printf("first= %f\n", first);
printf("second= %f\n", second);
printf("third= %f\n", third);
        return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task6.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter num1(positve)=
5
enter num2(positive)=
6
first= 0.000000
second= 0.833333
third= 0.000000

C:\Users\BROTHERS\Desktop>h.exe
enter num1(positve)=
17
enter num2(positive)=
8
first= 2.000000
second= 2.125000
third= 2.000000

C:\Users\BROTHERS\Desktop>
```

TASK NO 07

```
#include <stdio.h>

int main() {
int mark1 , mark2, mark3, total, whole_a;
float average , fraction_t;
printf("enter mark1(0-100)\n");
scanf("%d", &mark1);
printf("enter mark2(0-100)\n");
scanf("%d",& mark2);
printf("enter mark3(0-100)\n");
scanf("%d", &mark3);
total=mark2+mark2+mark3;
printf("total marks =  %d\n", total);
fraction_t=(float)(total);
printf("Total fraction form:%f\n",fraction_t);
average=(float)total/3;

printf("average marks = %f\n", average );
whole_a=(int)(average);
printf("average whole form: %d\n", whole_a);
```

```
        return 0;
}
```

COMPILED FORM:

task7 - Notepad

File Edit Format View Help

```
#include <stdio.h>

int main() {
int mark1 , mark2, mark3, total, whole_a;
float average , fraction_t;
printf("enter mark1(0-100)\n");
scanf("%d", &mark1);
printf("enter mark2(0-100)\n");
scanf("%d",& mark2);
printf("enter mark3(0-100)\n");
scanf("%d", &mark3);
total=mark2+mark2+mark3;
printf("total marks =  %d\n", total);
fraction_t=(float)(total);
printf("Total fraction form:%f\n",fraction_t);
average=(float)total/3;

printf("average marks = %f\n", average );
whole_a=(int)(average);
printf("average whole form: %d\n", whole_a);
        return 0;
}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task7.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter mark1(0-100)
70
enter mark2(0-100)
75
enter mark3(0-100)
80
total marks =  230
Total fraction form:230.000000
average marks = 76.666664
average whole form: 76

C:\Users\BROTHERS\Desktop>
```

TASK NO 08

```
#include <stdio.h>

int main() {
float num1, orignal, difference;
int converted;
printf("enter num1(float value)\n");
scanf("%f", &num1);
orignal=num1;
printf("Ogrignal= %.2f\n", orignal);
converted=(int)num1;
printf("converted value = %d\n", converted);
difference= num1-converted;
printf("difference = %.2f\n", difference);
return 0;

}
```

COMPILED FORM:

task8 - Notepad

File Edit Format View Help

```
#include <stdio.h>

int main() {
float num1, orignal, difference;
int converted;
printf("enter num1(float value)\n");
scanf("%f", &num1);
orignal=num1;
printf("Ogrignal= %.2f\n", orignal);
converted=(int)num1;
printf("converted value = %d\n", converted);
difference= num1-converted;
printf("difference = %.2f\n", difference);
return 0;

}
```

Command Prompt

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\BROTHERS>cd Desktop

C:\Users\BROTHERS\Desktop>gcc task8.c -o h.exe

C:\Users\BROTHERS\Desktop>h.exe
enter num1(float value)
19.65
Ogrignal= 19.65
converted value = 19
difference = 0.65

C:\Users\BROTHERS\Desktop>
```

==========THE END==========