

# C#

## Programming Language Fundamentals



# Prerequisites

- Computer and its basic knowledge.
- Integrated Development Environment or Code Editor
  - Visual Studio (Recommended)
  - Visual Studio Code

# Overview

- Introduction
- .NET Overview?
- Our First C# program
- IDE – Visual Studio quick tour
- C# syntax
- Variables and Data Types
- Type Conversions
- Conditionals
- Loops
- Classes
- Object Oriented Programming
- Value Types vs Reference Types
- Compilation and CLR
- Assemblies and Referencing
- Exceptional Handling

# C# Source Code Execution

C# Source Code


```

HelloWorldCSharp
└─ Dependencies
  └─ Program.cs

namespace HelloWorldCSharp
{
    0 references | 0 changes | 0 authors, 0 changes
    internal class Program
    {
        0 references | 0 changes | 0 authors, 0 changes
        static void Main(string[] args)
        {
            Console.WriteLine("Hello, World!");
        }
    }
}

```

Console Application

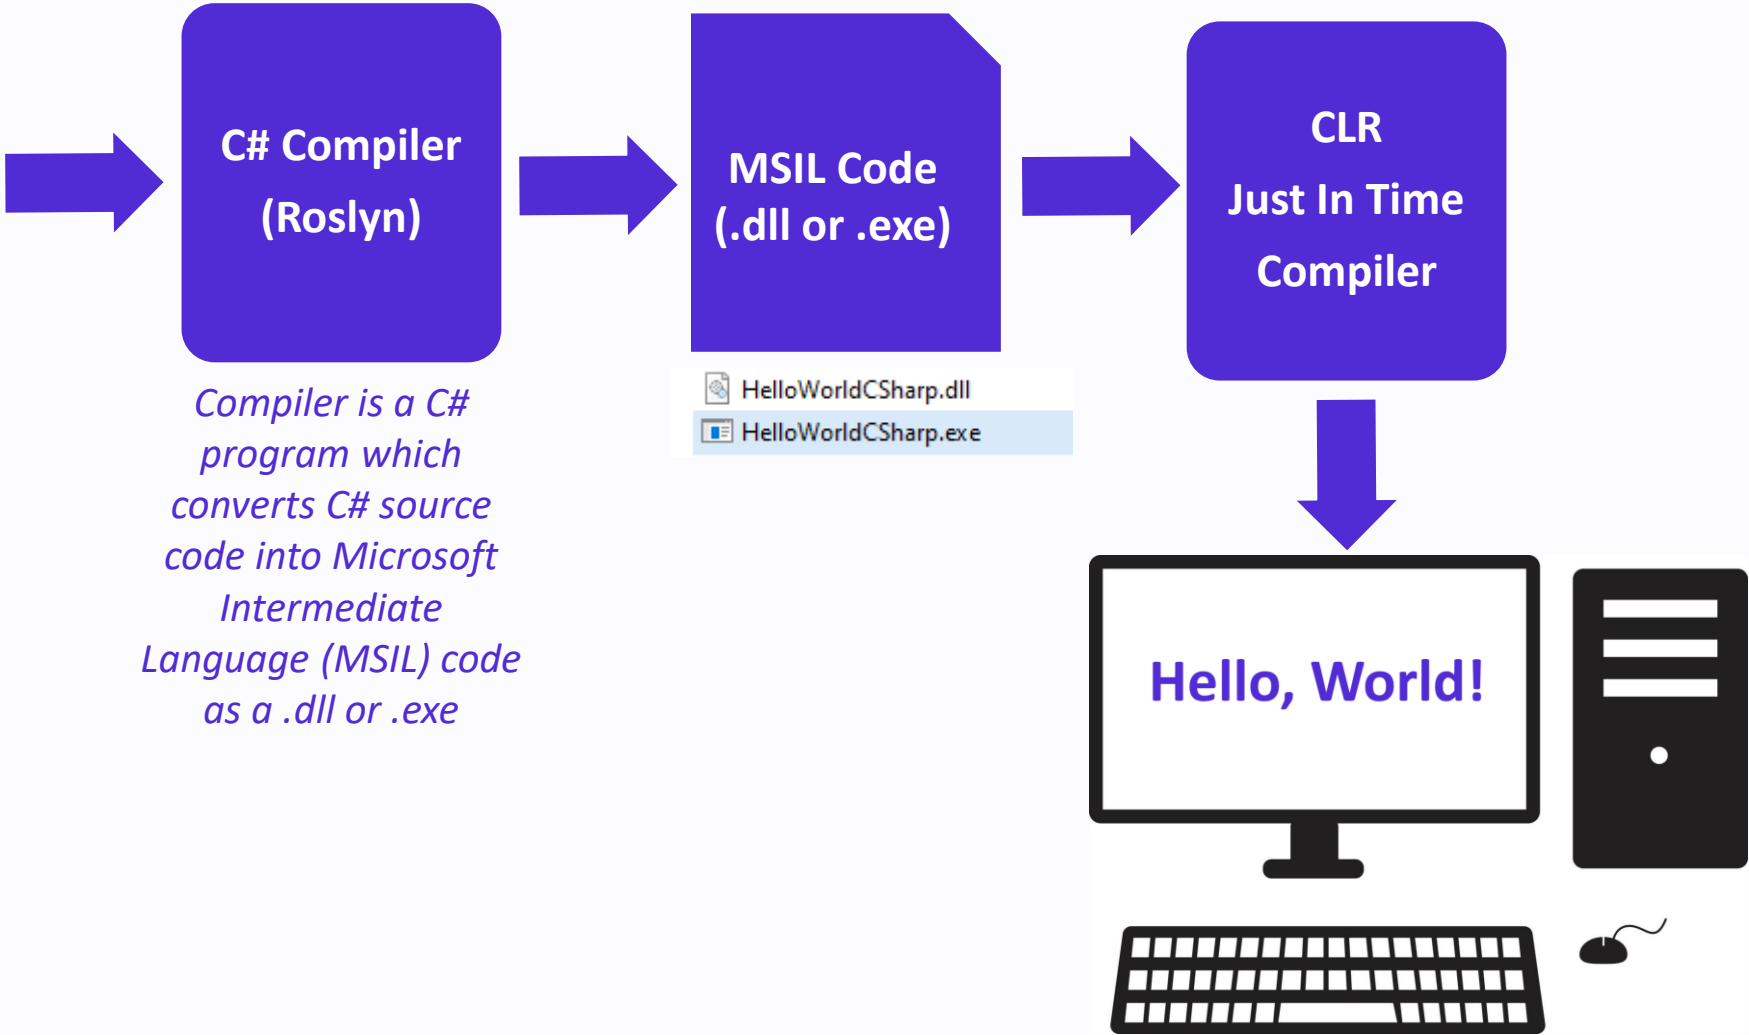

# Our First C# Program



```
namespace HelloWorldCSharp
{
    0 references | 0 changes | 0 authors, 0 changes
    internal class Program
    {
        0 references | 0 changes | 0 authors, 0 changes
        static void Main(string[] args)
        {
            Console.WriteLine("Hello, World!");
        }
    }
}
```


# Architecture

Two major components of .NET ecosystem are


- The **Common Language Runtime (CLR)** is the execution engine that handles running applications. It provides services like thread management, garbage collection, type-safety, exception handling, and more.
- The **Class Library** provides a set of APIs and types for common functionality. It provides types for strings, dates, numbers, etc. The Class Library includes APIs for reading and writing files, connecting to databases, drawing, and more.


.NET applications are written in the C#, F#, or Visual Basic programming language. Code is compiled into a language-agnostic Common Intermediate Language (CIL). Compiled code is stored in assemblies—files with a .dll or .exe file extension.

When an app runs, the CLR takes the assembly and uses a just-in-time compiler (JIT) to turn it into machine code that can execute on the specific architecture of the computer it is running on.

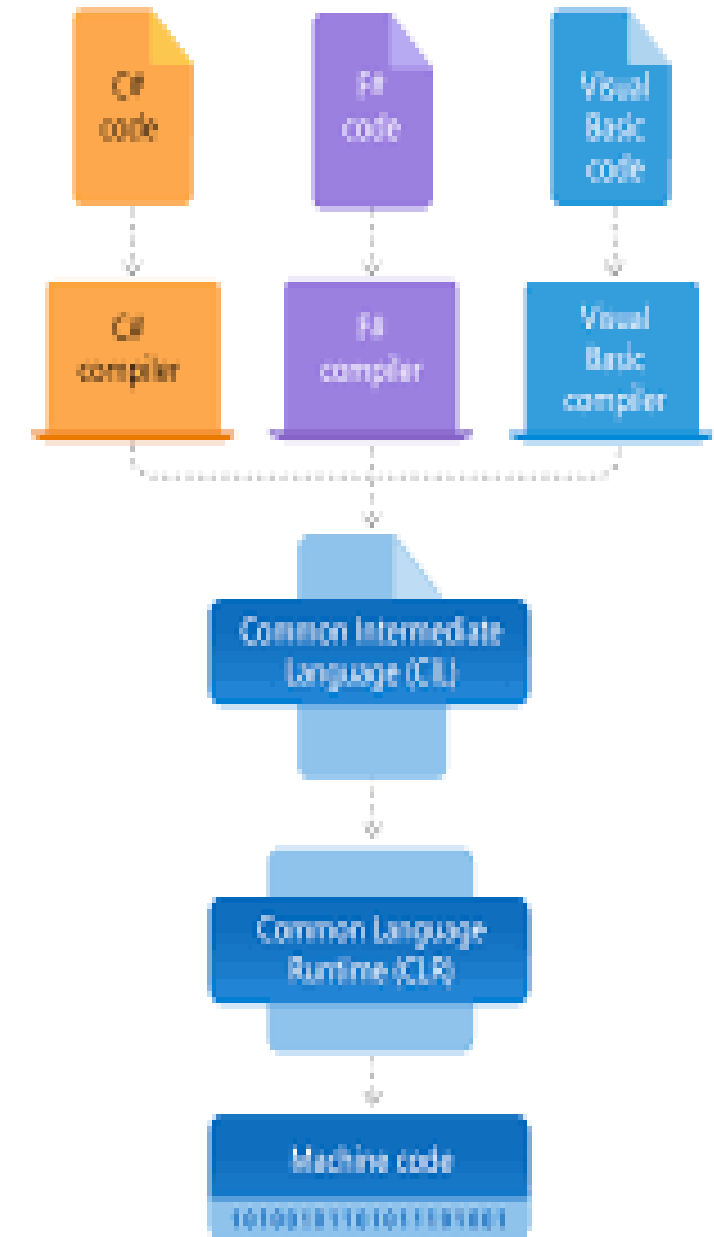

# .NET Ecosystem and its tools

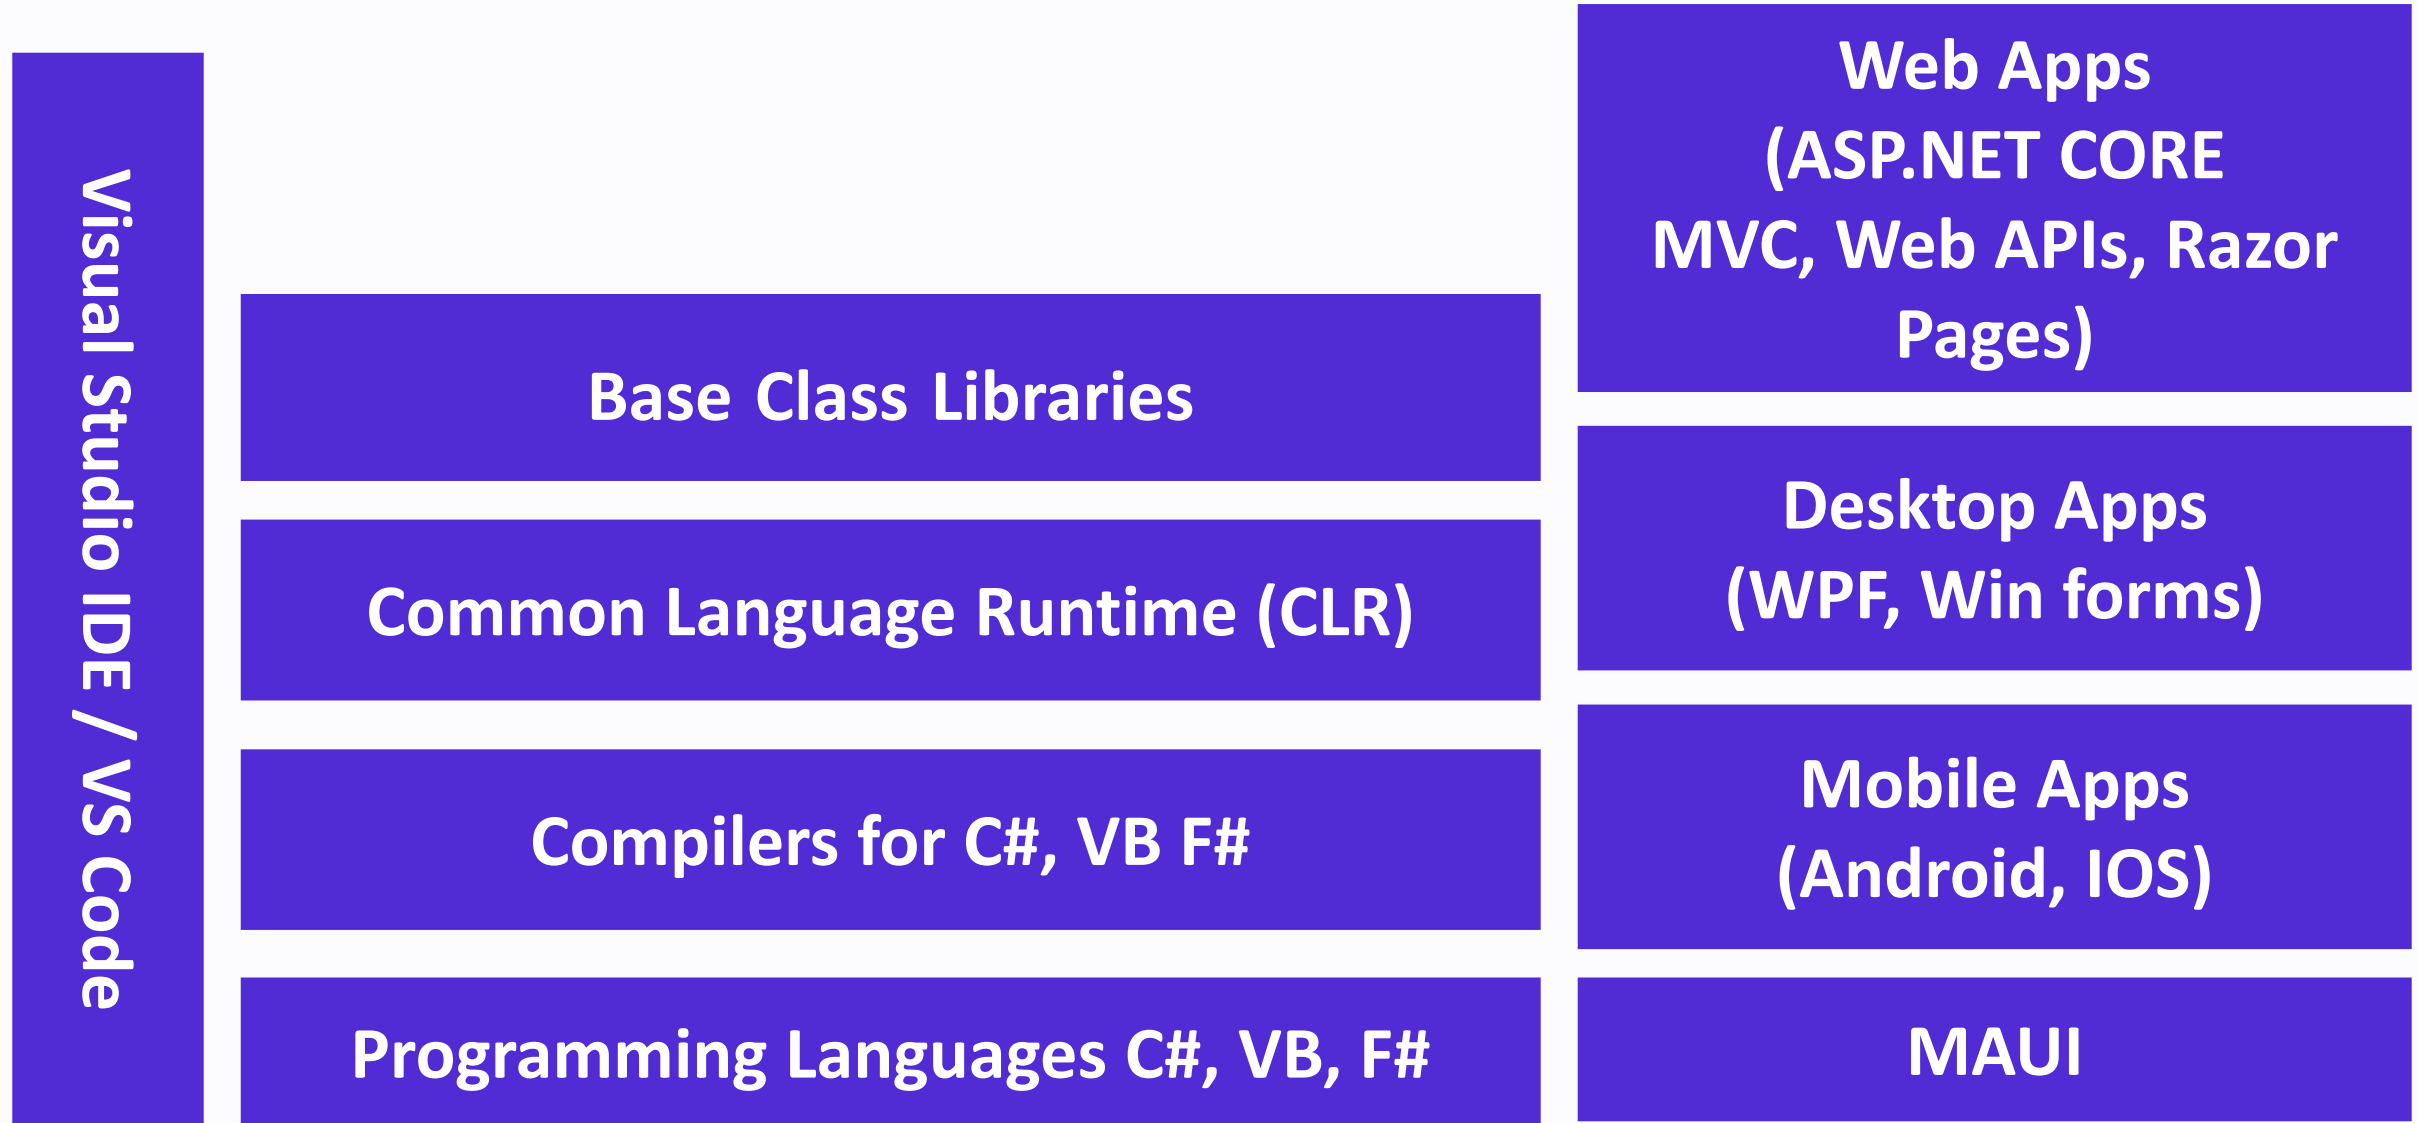

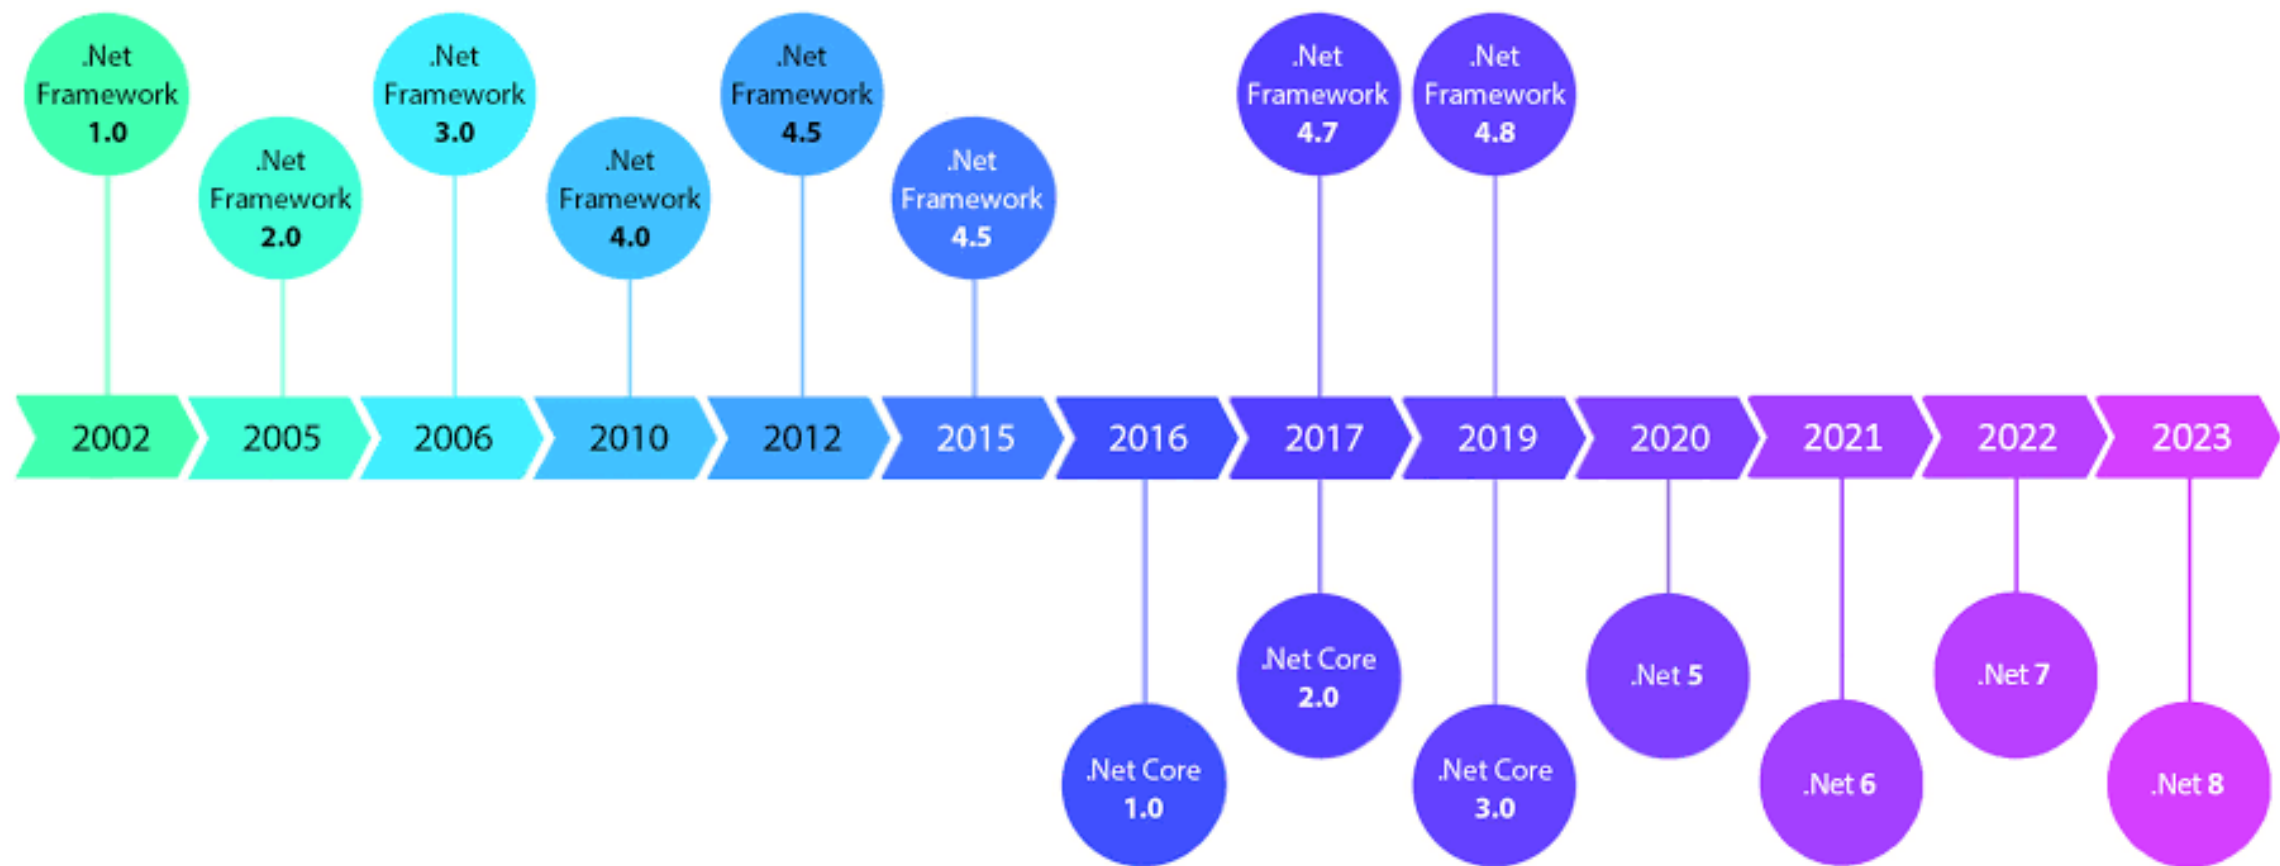



# C#

- Open Source
  - Cross Platform
  - Strongly Typed
  - Case Sensitive
  - Memory Management
  - Object Oriented
- Usage
    - Desktop Applications
    - Web Applications
    - Mobile Applications
    - Cloud Applications
    - Web APIs
    - SSIS Packages
    - Many More...

# Version History

Target	Version	C# language version default
.NET	8.x	C# 12
.NET	7.x	C# 11
.NET	6.x	C# 10
.NET	5.x	C# 9.0
.NET Core	3.x	C# 8.0
.NET Core	2.x	C# 7.3
.NET Standard	2.1	C# 8.0
.NET Standard	2	C# 7.3
.NET Standard	1.x	C# 7.3
.NET Framework	all	C# 7.3

[illegible]

The diagram shows a purple database cylinder. Inside the cylinder, there is a grid of 15 white rounded rectangles, each containing the word "Table" in blue text. The rectangles are arranged in 5 rows and 3 columns.

Table	Table	Table
Table	Table	Table
Table	Table	Table
Table	Table	Table
Table	Table	Table

# C# Assembly

namespace: MyApp.User

Class

Class

Class

Class

Class

Class

namespace: MyApp.Admin

Class

Class

Class

Class

Class

Class

# MS SQL Server Database

Schema: dbo User

Table

Table

Table

Table

Table

Table

Schema: Admin

Table

Table

Table

Table

Table


Table

# Keywords

abstract	delegate	if	override	struct	volatile
as	do	implicit	params	switch	while
base	double	in	private	this	
bool	else	int	protected	throw	
break	enum	interface	public	true	
byte	event	internal	readonly	try	
case	explicit	is	ref	typeof	
catch	extern	lock	return	uint	
char	false	long	sbyte	ulong	
checked	finally	namespace	sealed	unchecked	
class	fixed	new	short	unsafe	
const	float	null	sizeof	ushort	
continue	for	object	stackalloc	using	
decimal	foreach	operator	static	virtual	
default	goto	out	string	void	

# Contextual Keywords

add	group	record
and	init	remove
alias	into	required
ascending	join	scoped
args	let	select
async	managed	set
await	nameof	unmanaged
by	nint	value
descending	not	var
dynamic	notnull	when
equals	nuint	where
File	on	with
from	or	yield
get	orderby	
global	partial	

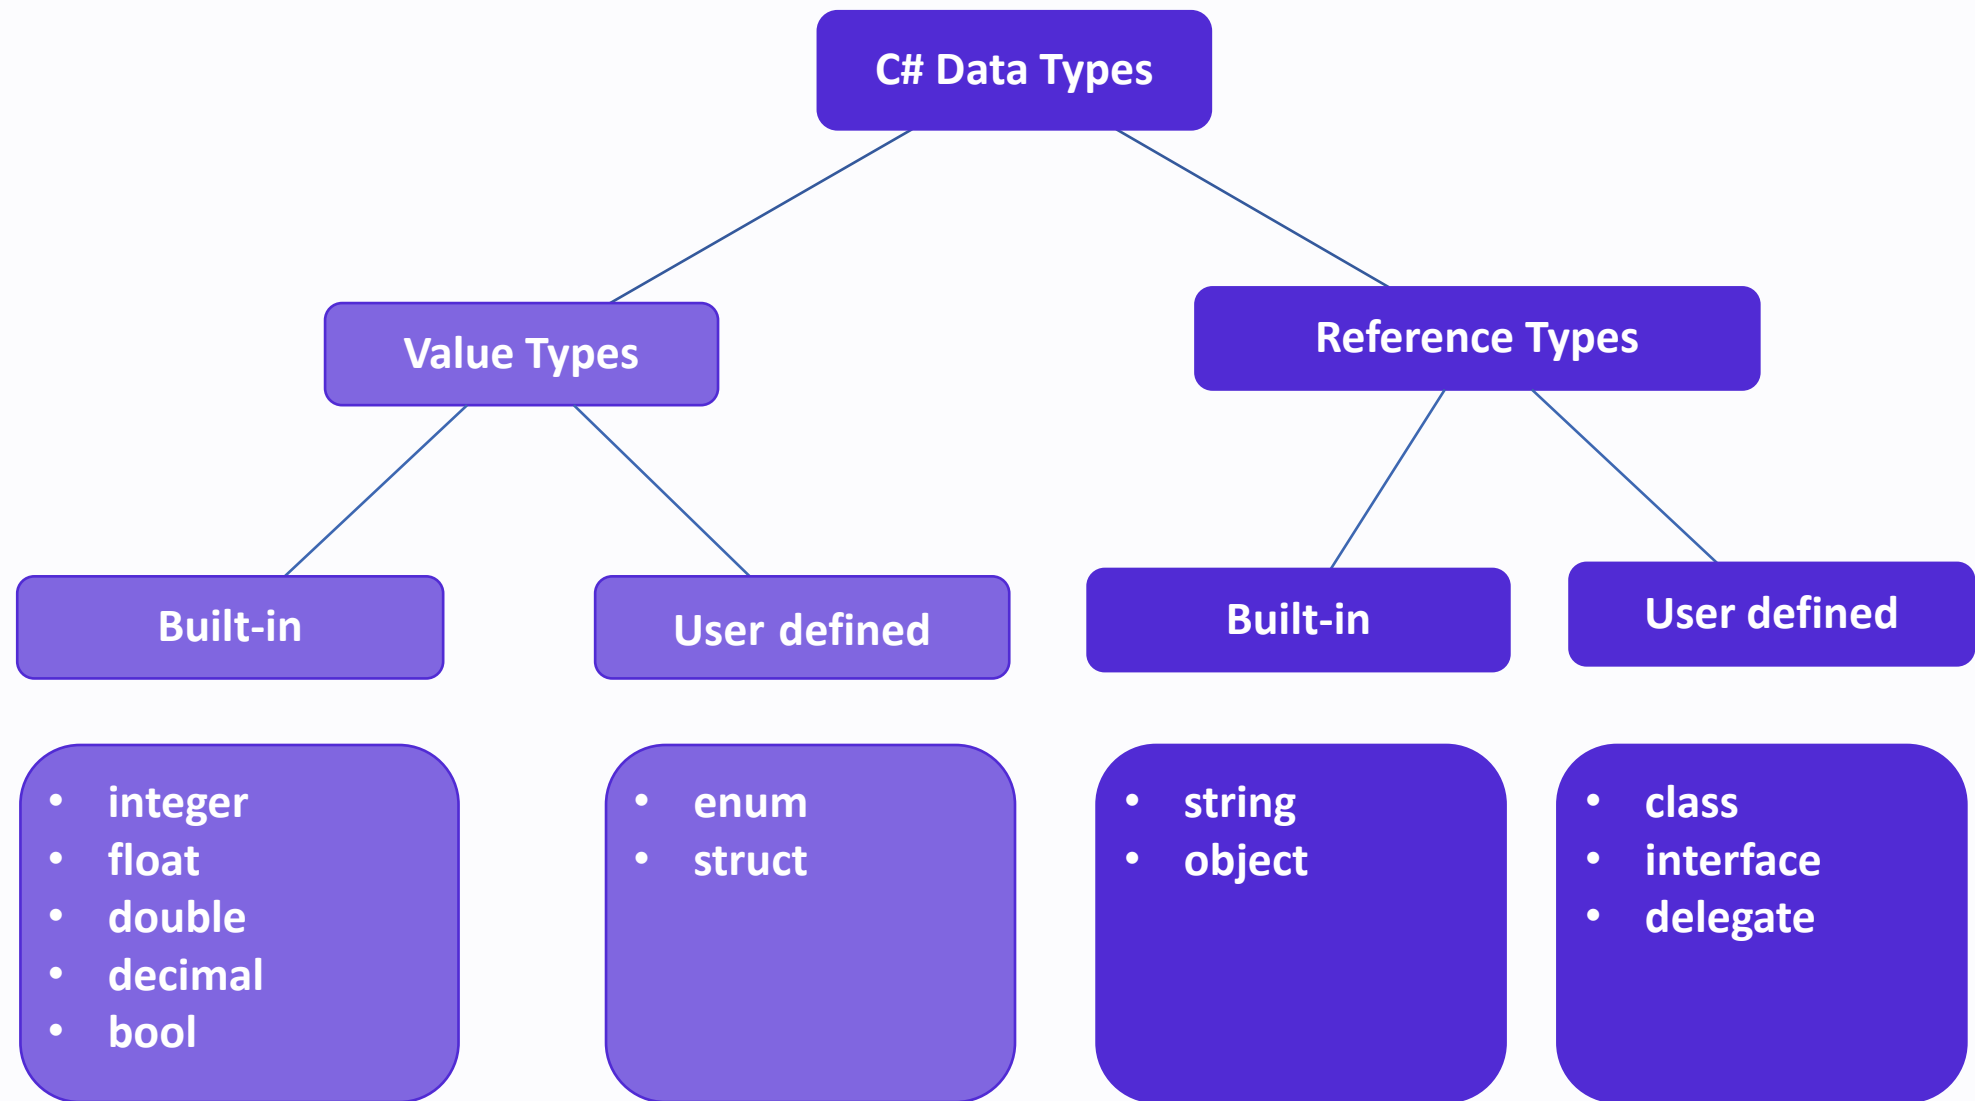

# Data Types


Data Type	Size	Description
<b>Integer</b>		
sbyte	8 bits	$-2^7$ to $2^7-1$
int	32 bits	$-2^{31}$ to $2^{31}-1$ (-2,147,483,648 to 2,147,483,647)
short	16 bits	$-2^{15}$ to $2^{15}-1$
long	64 bits	$-2^{63}$ to $2^{63}-1$ (-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807)
<b>Real Or Floating Point</b>		
float	32 bits	$\pm 1.5 \times 10^{-45}$ to $\pm 3.4 \times 10^{38}$ (7 decimal digits). Suffix: f
double	64 bits	$\pm 5.0 \times 10^{-324}$ to $\pm 1.7 \times 10^{308}$ (15 decimal digits). Suffix: D
decimal	128 bits	$\pm 1.0 \times 10^{-28}$ to $\pm 7.9228 \times 10^{28}$ . Suffix: M
bool	1 bit	true or false
<b>Free Text</b>		
char	2 bytes	'@'
string	2 bytes per character	"Hello". Size = (2* no of characters in the sequence) bytes.



# ADO.NET – Data Access API

*“ADO.NET is a data access api in .NET Platform to interact with different data sources such as databases (sql server, oracle, etc.), xml, Microsoft access, and other in a standard, and structured approach.”*

# ADO.NET Architecture

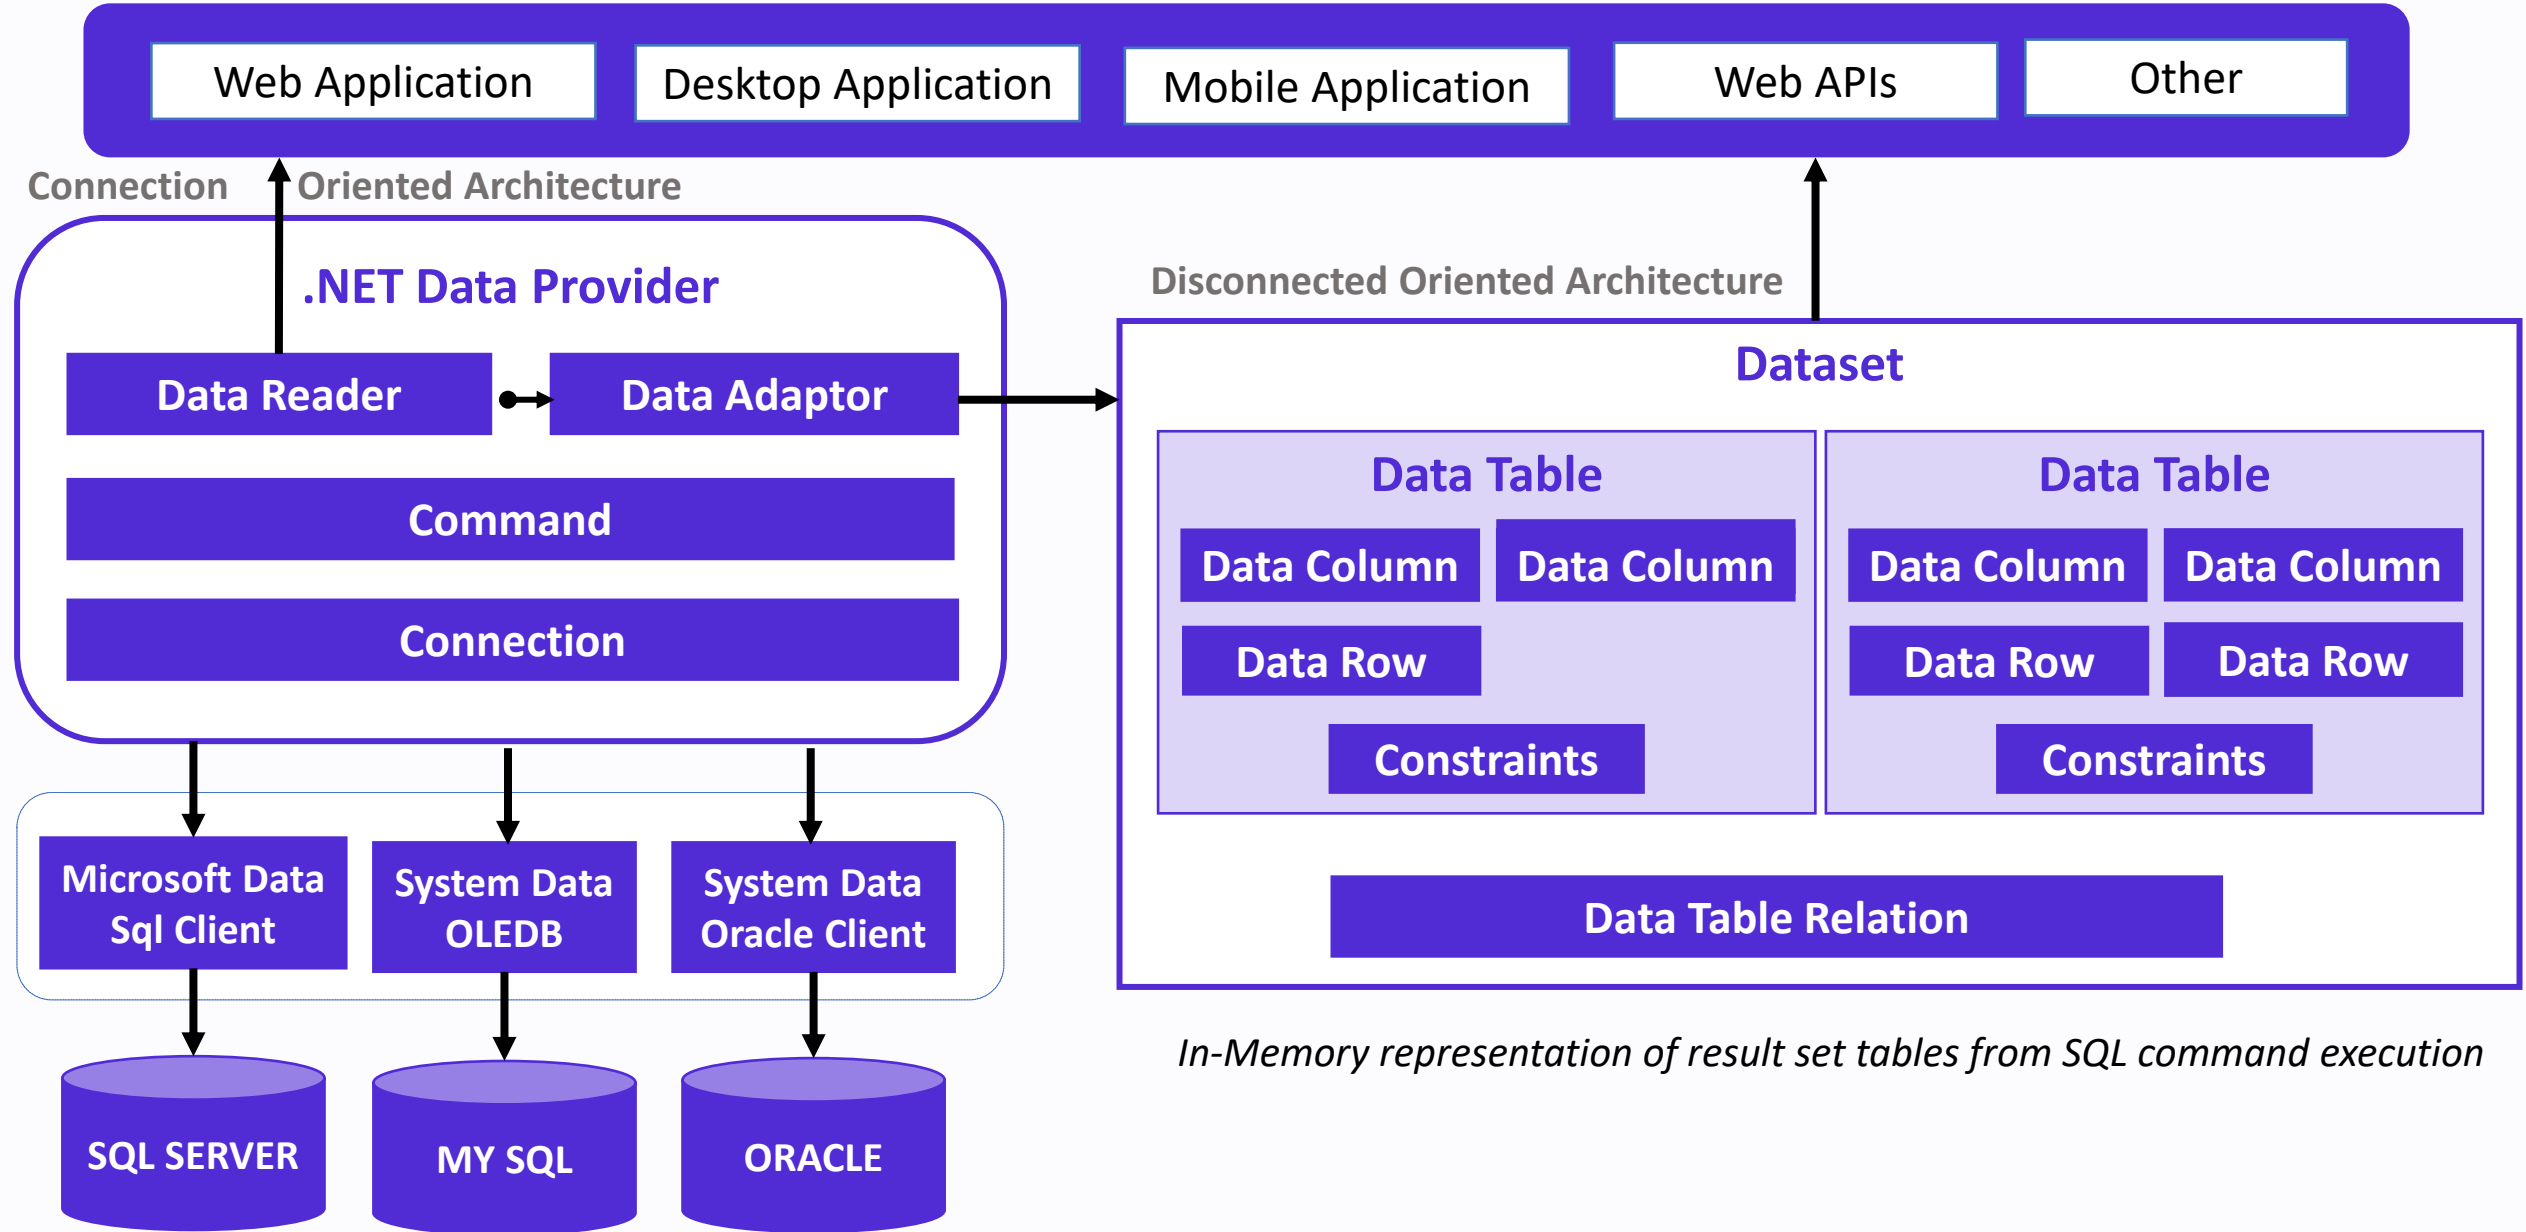

# MS SQL SERVER Data Access

- Add below DLL as project reference through manage NuGet package manager.
  - **Microsoft.Data.SqlClient**
  - **System.Data.SqlClient (Legacy library)**
- SQL Server data provider provides the following classes to interact with database.

Class	Description
<b>SqlConnection</b>	Establishes a connection to a database.
<b>SqlCommand</b>	Represents an individual SQL statement or stored procedure that can be executed against the database connected.
<b>SqlDataReader</b>	Provides read-only, forward-only access to the data in a database.
<b>SqlDataAdapter</b>	Acts as a bridge between the command and connection objects and a dataset

# UML Diagram

## SqlConnection

+ConnectionString : string

+ Open ( ) : void

+ Close ( ) : void

## SqlCommand

+ Connection : SqlConnection

+ CommandType : Text or SP

+ CommandText : Query or SP

+ Parameters : SqlParameter[]

+ ExecuteNonQuery ( ) : int

+ ExecuteScalar ( ) : object

+ ExecuteReader ( ) : data reader

## SqlDataReader

+ indexer : object

+ FieldCount : int

+ Read ( ) : bool

+ Close ( ) : void

## SqlDataAdapter

+ SelectCommand : SqlCommand

+ InsertCommand : SqlCommand

+ UpdateCommand : SqlCommand

+ DeleteCommand : SqlCommand

+ Fill ( ) : int

+ update ( ) : int

Thank You!