

AWS EC2 - SSH CONFIGURATION

- Taken default (VPC: CIDR 10.0.0.0/16, Public Subnet 10.0.1.0/24, attach Internet Gateway, add route 0.0.0.0/0 -> IGW.)

Launch an instance

VPC - required | Info

vpc-05d91da132991cda (default VPC) (default) [Info](#)

Subnet | Info

No preference [Create new subnet](#)

Availability Zone | Info

No preference [Enable additional zones](#)

Auto-assign public IP | Info

Enable

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

Security group name - required

SSH-CONFIG-SG

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-./[!@#%&'()*+,-:;{}~`|'"]\$*

Description - required | Info

launch-wizard-1 created 2026-07-10T15:44:44.931Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP: 22, 0.0.0.0/0)

[Remove](#)

Summary

Number of instances | Info

1

Software Image (AMI)

Canonical, Ubuntu, 26.04, amd64...[read more](#)
ami-01a00762f46d584a1

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

- Launch Ubuntu t2.micro/t3.micro. Create RSA PEM key pair named new-key and download new-key.pem.

Launch an instance

Instance type

t3.micro

Family: t3 2 vCPU 1 GiB Memory Current generation: true

On-Demand Linux base pricing: 0.0112 USD per Hour

On-Demand SUSE base pricing: 0.0112 USD per Hour

On-Demand Windows base pricing: 0.0204 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.0147 USD per Hour

On-Demand RHEL base pricing: 0.04 USD per Hour

[Compare instance types](#)

Additional costs apply for AMIs with pre-installed software

Key pair (login) | Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

new-keyyy-pair [Create new key pair](#)

Network settings | Info

[Edit](#)

Network | Info

vpc-05d91da132991cda | default VPC

Subnet | Info

No preference (Default subnet in any availability zone)

Auto-assign public IP | Info

Summary

Number of instances | Info

1

Software Image (AMI)

Canonical, Ubuntu, 26.04, amd64...[read more](#)
ami-01a00762f46d584a1

Virtual server type (instance type)

t3.micro

Firewall (security group)


New security group

Storage (volumes)

1 volume(s) - 8 GiB


[Cancel](#) [Launch instance](#) [Preview code](#)

- **Security Group: SSH 22 from My IP, HTTP 80 from 0.0.0.0/0.**

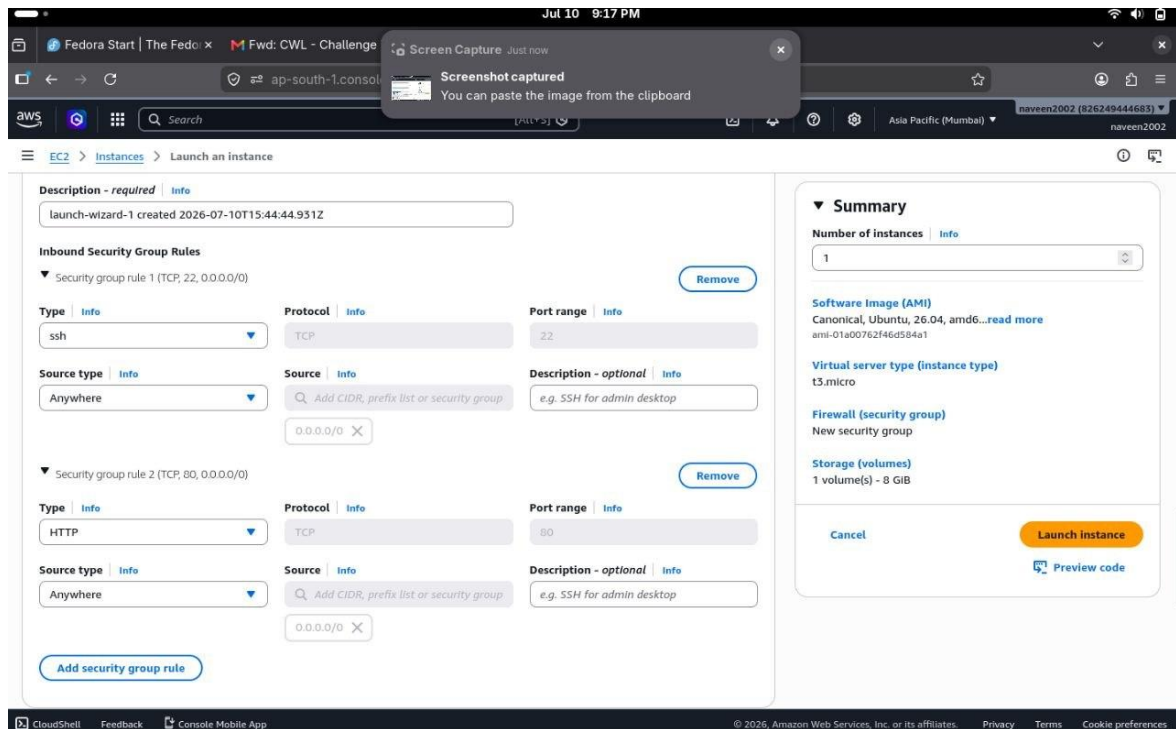

INSIDE THE EC2 WHAT I DONE GIVING STEP BY STEP ALSO ATTACH THE SCREENSHOT ALSO

- **ssh -i devops-key.pem ubuntu@<EC2_PUBLIC_IP>**
 - **Verify login: Welcome to Ubuntu...**
1. **setup the configuration of ec2**

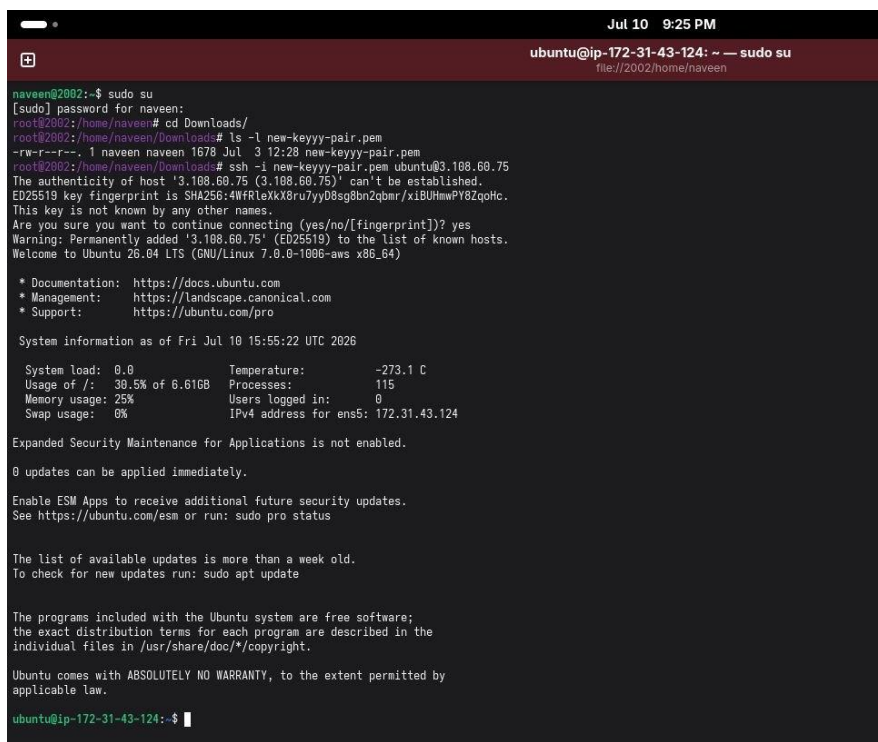

- Optional: disable password auth: `sudo nano /etc/ssh/sshd_config`

PasswordAuthentication: no

PubkeyAuthentication yes

PermitRootLogin no

Save then:

sudo systemctl restart ssh

```

Jul 10 9:28 PM
ubuntu@ip-172-31-43-124: /etc/ssh/sshd_config.d — sudo su
file:///2002/home/haeven

bindresvport.blacklist dhcpcd.conf hosts logrotate.conf nftables.conf rc3.d subgid vim
binfmt.d dpkg hosts.allow logrotate.d nsswitch.conf rc4.d subuid vmware-tools
ca-certificates dracut.conf hosts.deny lsb-release rc5.d subuid vtrgb
ca-certificates.conf dracut.conf.d init.d lvm os-release rc6.d sudo.conf wgetrc
chrony e2scrub.conf initramfs-tools machine-id overlayroot.conf rc6.d sudo_logsrvd.conf xattr.conf
cloud ec2_version inputrc magic overlayroot.local.conf rc6.d sudoers xdg
console-setup environment iscsi magic.mime pam.conf rmt sudoers.d xml
credstore etherypes issue manpath.config pam.d rpc supercat
credstore.encrypted fstab issue.net mdadm passwd rsyslog.conf sysctl.d zsh_command_not_found
cron.d fuse.conf kernel mime.types passwd rsyslog.d sysstat
cron.daily fwupd landscape mke2fs.conf perl screenrc systemd
cron.hourly gai.conf ld.so.cache modprobe.d pki security terminfo

ubuntu@ip-172-31-43-124:/etc$ cd ssh
ubuntu@ip-172-31-43-124:/etc/ssh$ ls
moduli ssh_config.d ssh_host_ecdsa_key.pub ssh_host_ed25519_key.pub ssh_host_rsa_key.pub sshd_config
ssh_config ssh_host_ecdsa_key ssh_host_ed25519_key ssh_host_rsa_key ssh_import_id sshd_config.d
ubuntu@ip-172-31-43-124:/etc/ssh$ cd ssh_config.d/
ubuntu@ip-172-31-43-124:/etc/ssh/ssh_config.d$ ls
20-systemd-ssh-proxy.conf
ubuntu@ip-172-31-43-124:/etc/ssh/ssh_config.d$ cat 20-systemd-ssh-proxy.conf
# SPDX-License-Identifier: LGPL-2.1-or-later
#
# Allow connecting to the local host directly via ".host"
Host .host machine/.host
    ProxyCommand /usr/lib/systemd/systemd-ssh-proxy unix/run/ssh-unix-local/socket %p
    ProxyUseFdpass yes
    CheckHostIP no
#
# Make sure unix/* and vsock/* can be used to connect to AF_UNIX and AF_VSOCK paths.
# Make sure machine/* can be used to connect to local machines registered in machined.
#
Host unix/* unix%* vsock/* vsock%* vsock-mux/* vsock-mux%* machine/* machine%*
    ProxyCommand /usr/lib/systemd/systemd-ssh-proxy %h %p
    ProxyUseFdpass yes
    CheckHostIP no
#
# Disable all kinds of host identity checks, since these addresses are generally ephemeral.
StrictHostKeyChecking no
UserKnownHostsFile /dev/null
ubuntu@ip-172-31-43-124:/etc/ssh/ssh_config.d$

```