

Spring Framework : Popular frameworks to develop java application

Highly Modular in nature

Framework :

1. Strict and disciplined implementation of an architecture
2. Reduce the boiler-plate code
3. Abstract implementations of API
4. Focus more on Business logic


**J2EE Framework :****1. Complex in nature :**

Service : need to create lots of interface, abstract classes, inherit class and interface  
reduces the productivity of developer  
reduces the efficiency  
Uses lots of deployment descriptors : xml files


**Rod Johnson**


Create a tool/resources : Object Factory/Bean Factory  
create and manage object


Spring : Lightweight

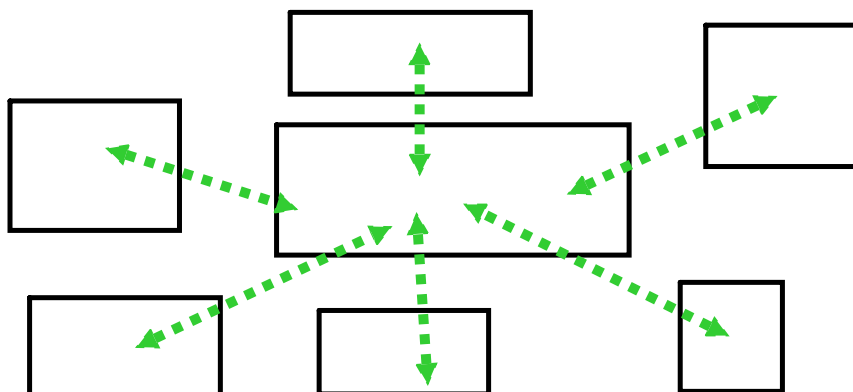


1. All implementation will be based on Object/Bean Factory
2. highly modular in nature
3. All implementation will be based on POJOs

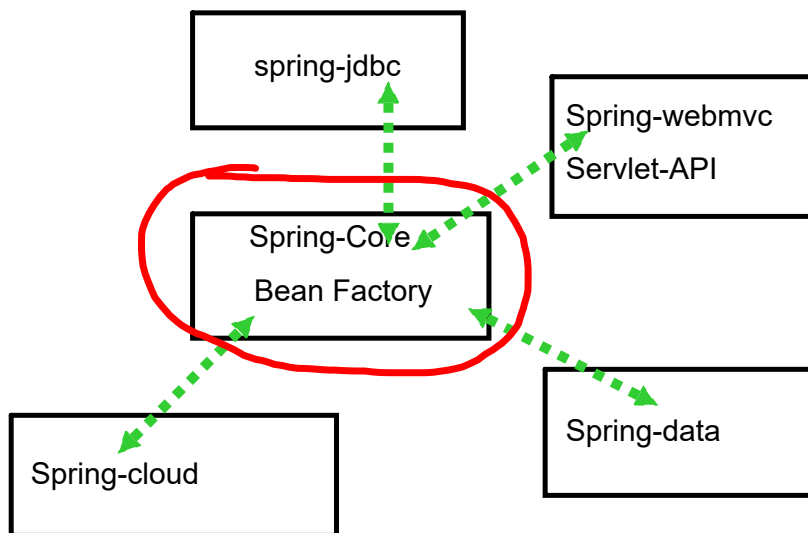

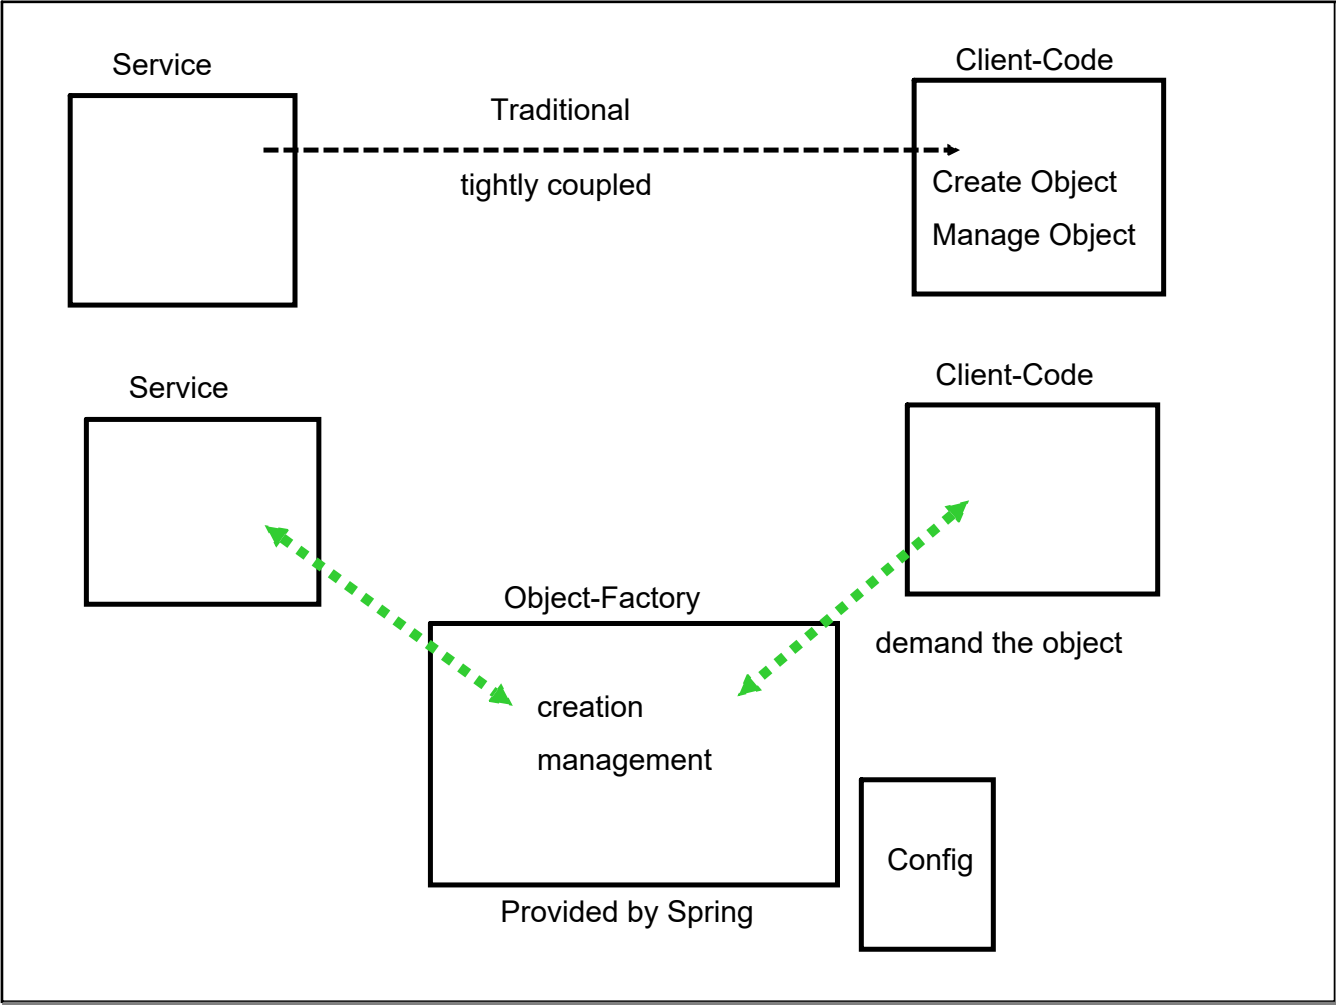

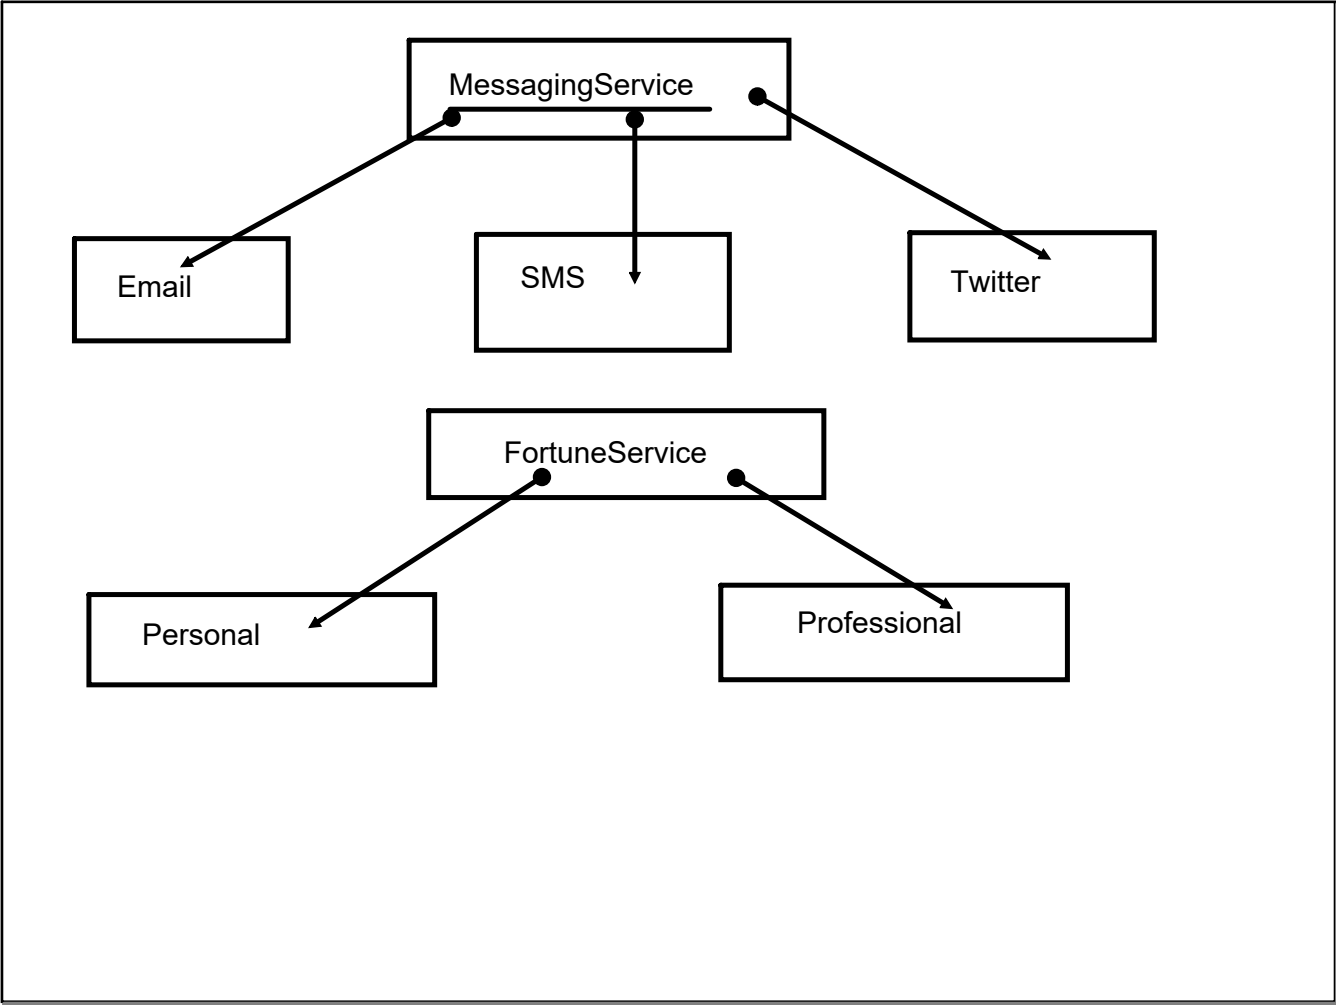

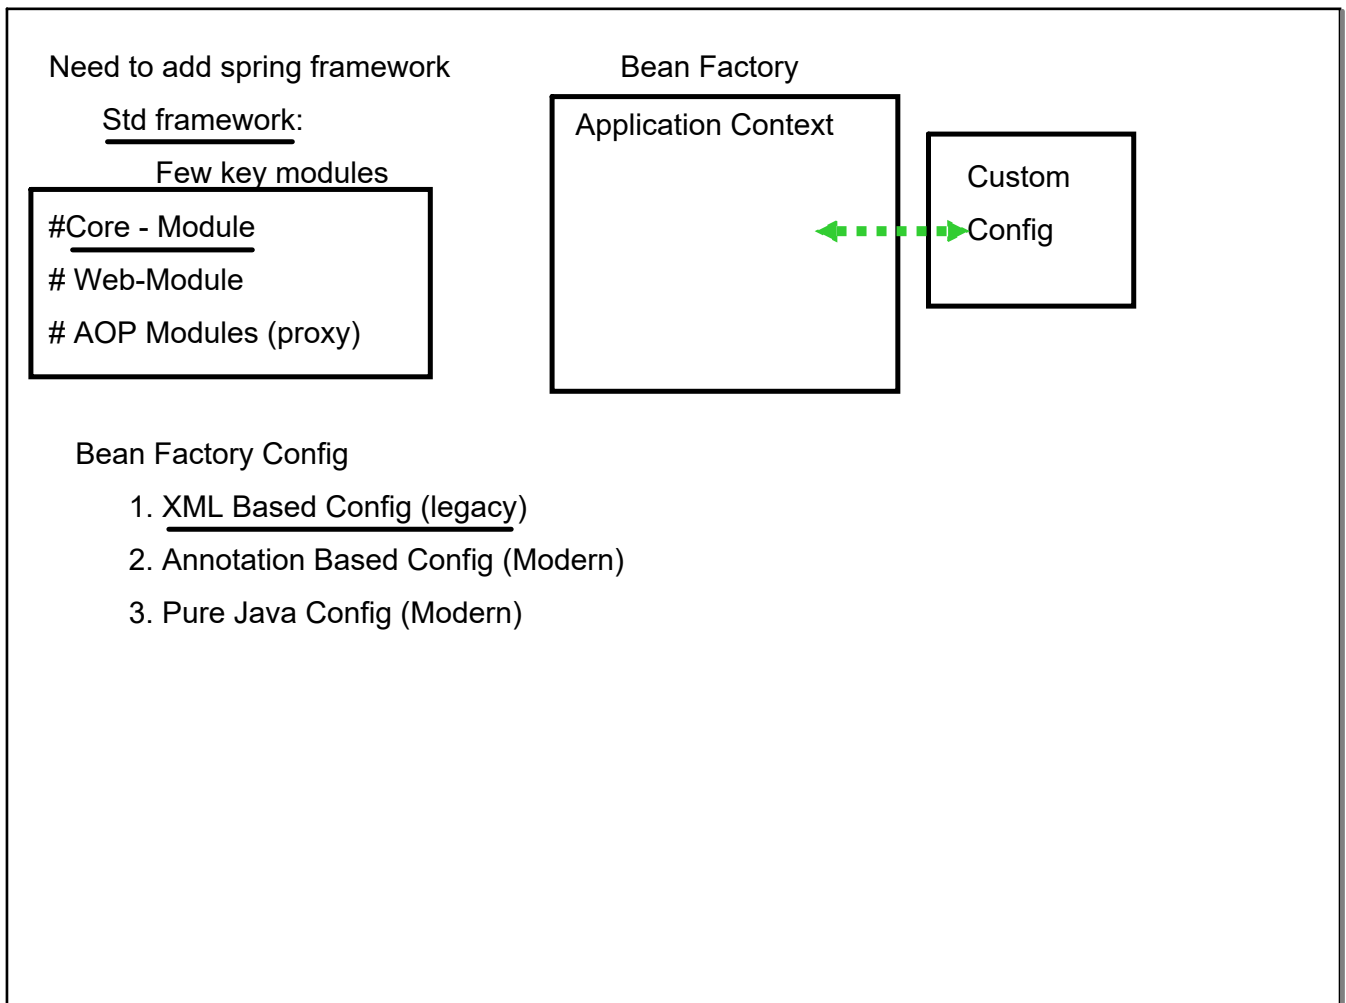

XML Based config : XML file + with spring dependency add (additional tags)  
xml config file

BEANS : Container(Object/Bean Factory) Managed Object

Two key principals of Bean Factory

1. IoC : Inversion of Control
2. DI : Dependency Injection


IoC : Outsourcing the (control of )creation and management of Object

Bean Factory :

to represent multiple classes



# type of config (xml, java...)

# env (java, web ...)

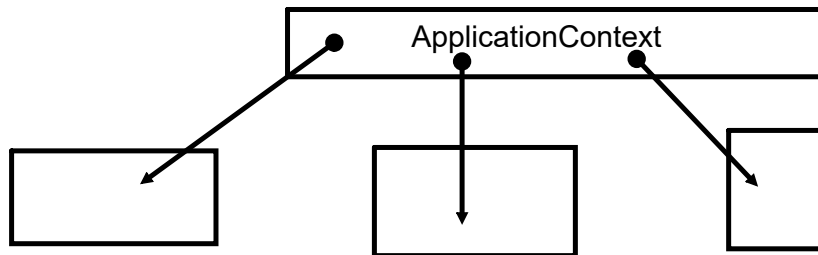



Dependency

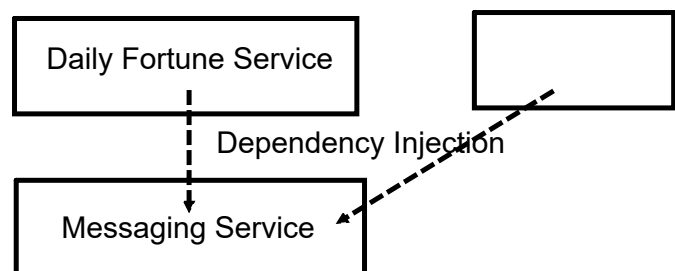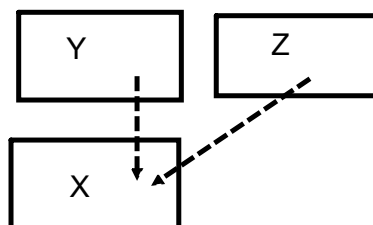


Two types of Dependency injection

1. Constructor based
2. Setter based

```
<bean id="personal"
class="com.wf.training.spring.factory.service.PersonalFortune"></bean>
  <bean id="professional"
class="com.wf.training.spring.factory.service.ProfessionallFortune"></bean>

  <!-- Injecting the dependency : How -->
  <!-- Constructor -->
  <bean id="email" class="com.wf.training.spring.factory.service.EmailService">
    <constructor-arg ref="personal"/>
  </bean>
```



### Injecting Literal Values :

Delegate values to a text file : properties file  
key-value pair

### IoC | DI : Create a Bean

#### Managing the Bean

1. Scope
2. Life cycle


### Scope : Accessibility of Bean

by-default : singleton  
explicit : prototype

request

session : Web App

application

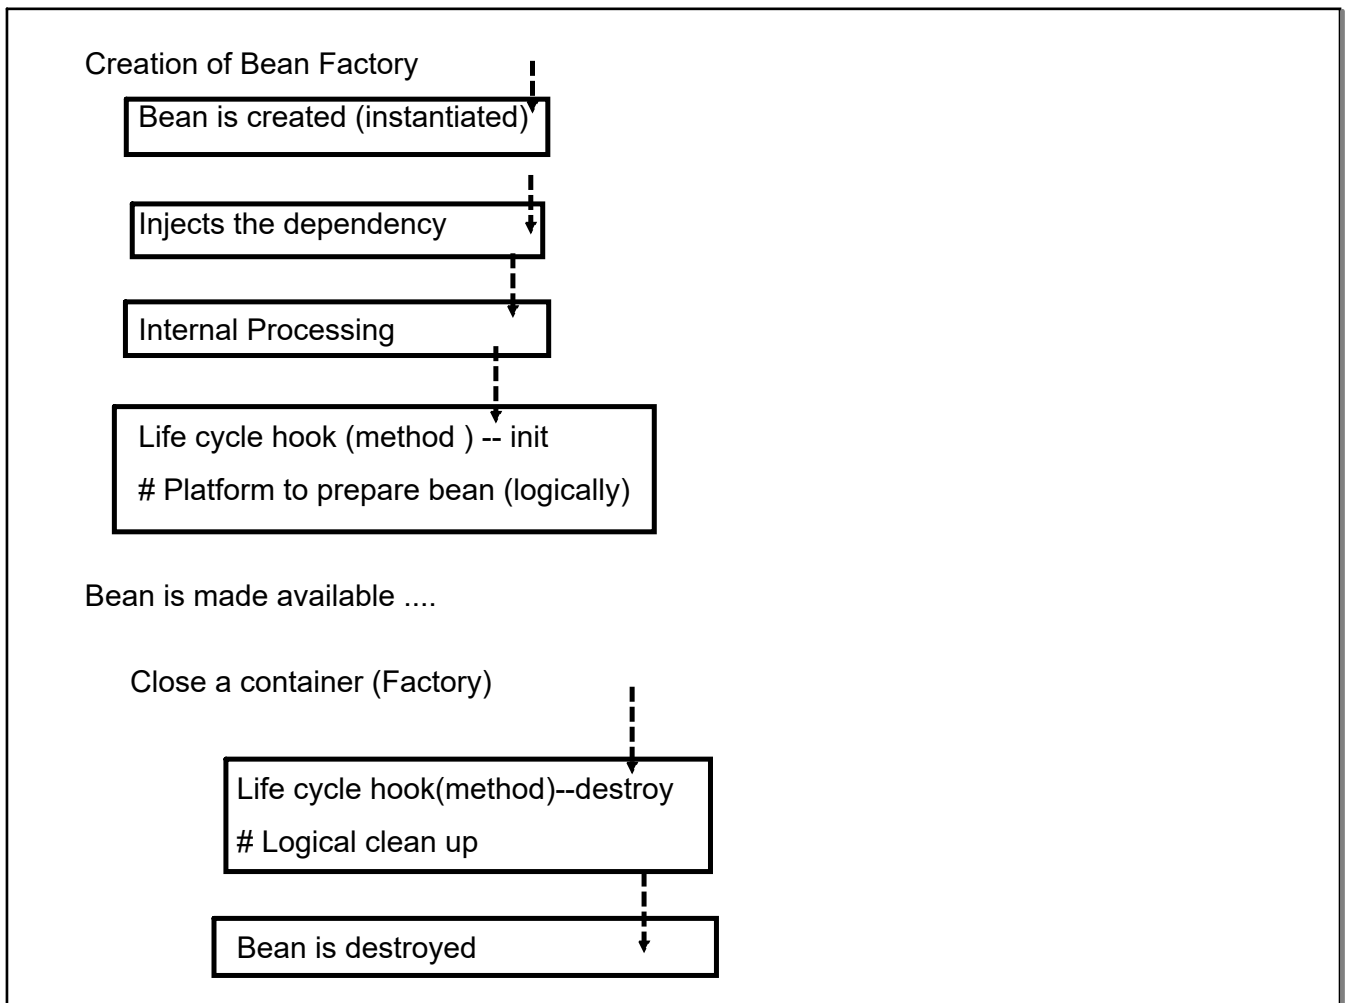

Prototype beans : Bean Factory does not manage the complete life-cycle

Annotation based configuration

still xml file : referencing the path/location

want to create and expose a bean of Messaging service

@Component : Any class decorated this ann. will intantiated by Bean Factory

XML : need to mention package(s) to scan for @Component ann.

id : Class Name is by-default considered as id : first character in lower case

DI ways:

1. Constructor
2. Setter Based
3. Field Based

@Autowired : searches for bean of param type, if found , inject it


@Qualifier : differentiate the bean


Literal Value : @Value

@Scope : for defining the scope of the bean

Pure Java Config

XML file will be replace with a Java class

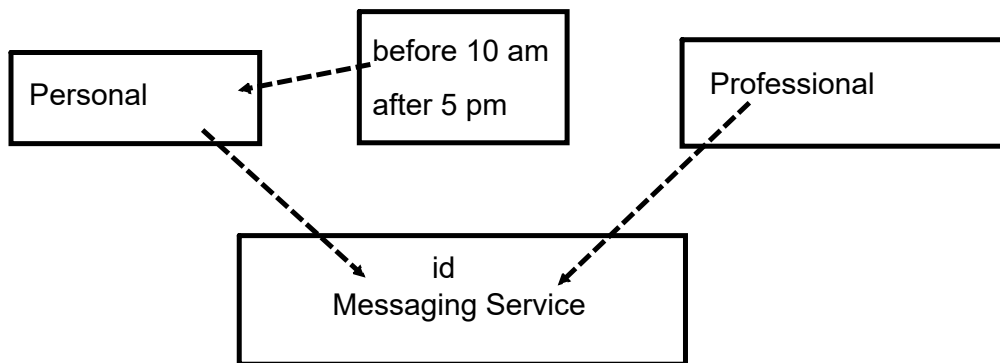

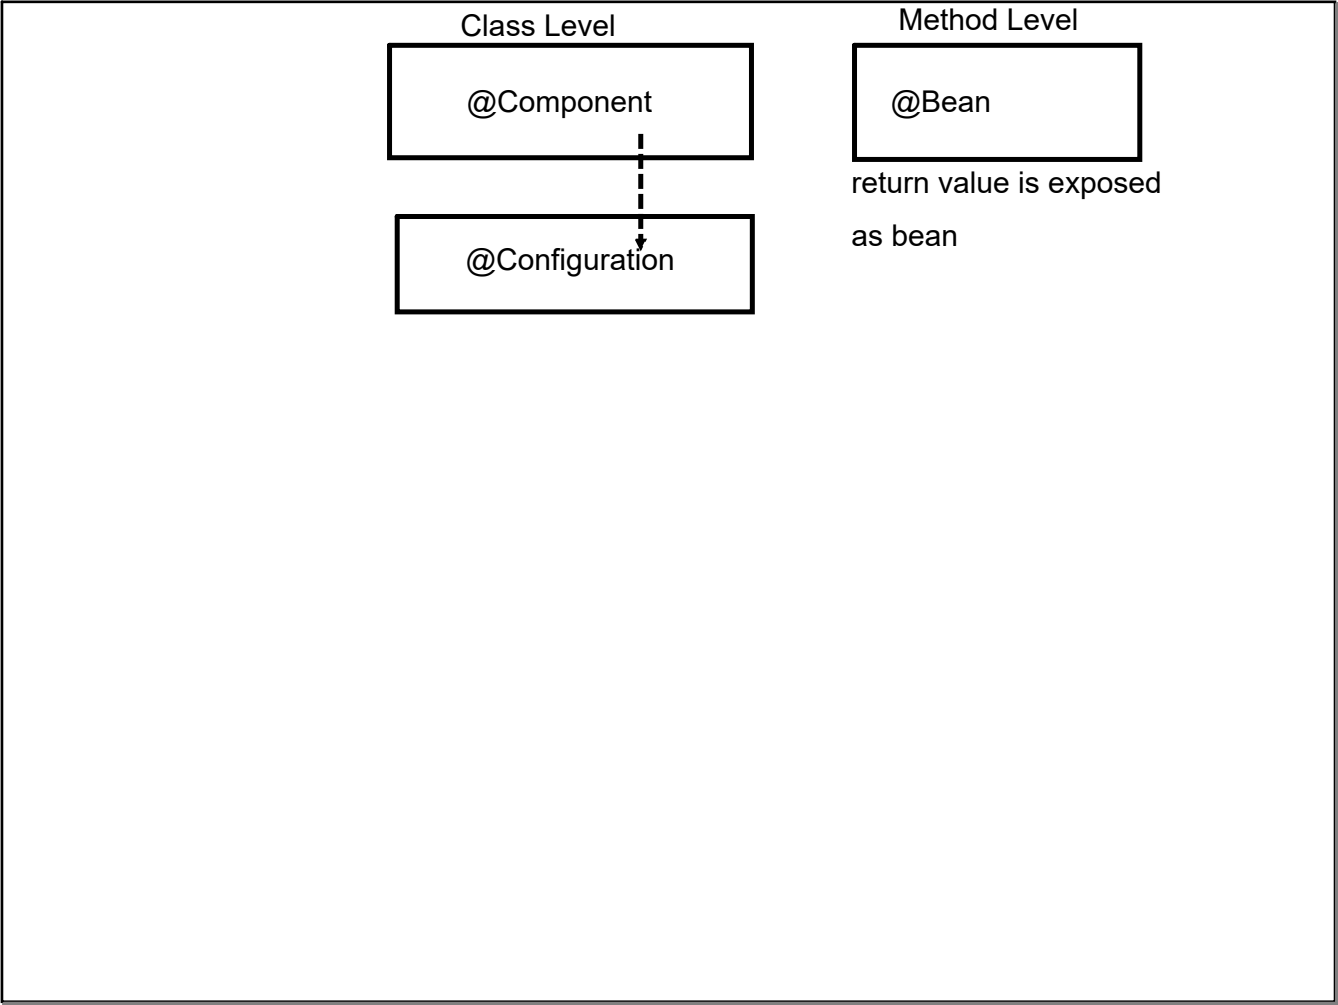




Spring Web-MVC Module : implements MVC architecture strictly

integrate the Servlet API and implement it in MVC

Front Controller Design Pattern

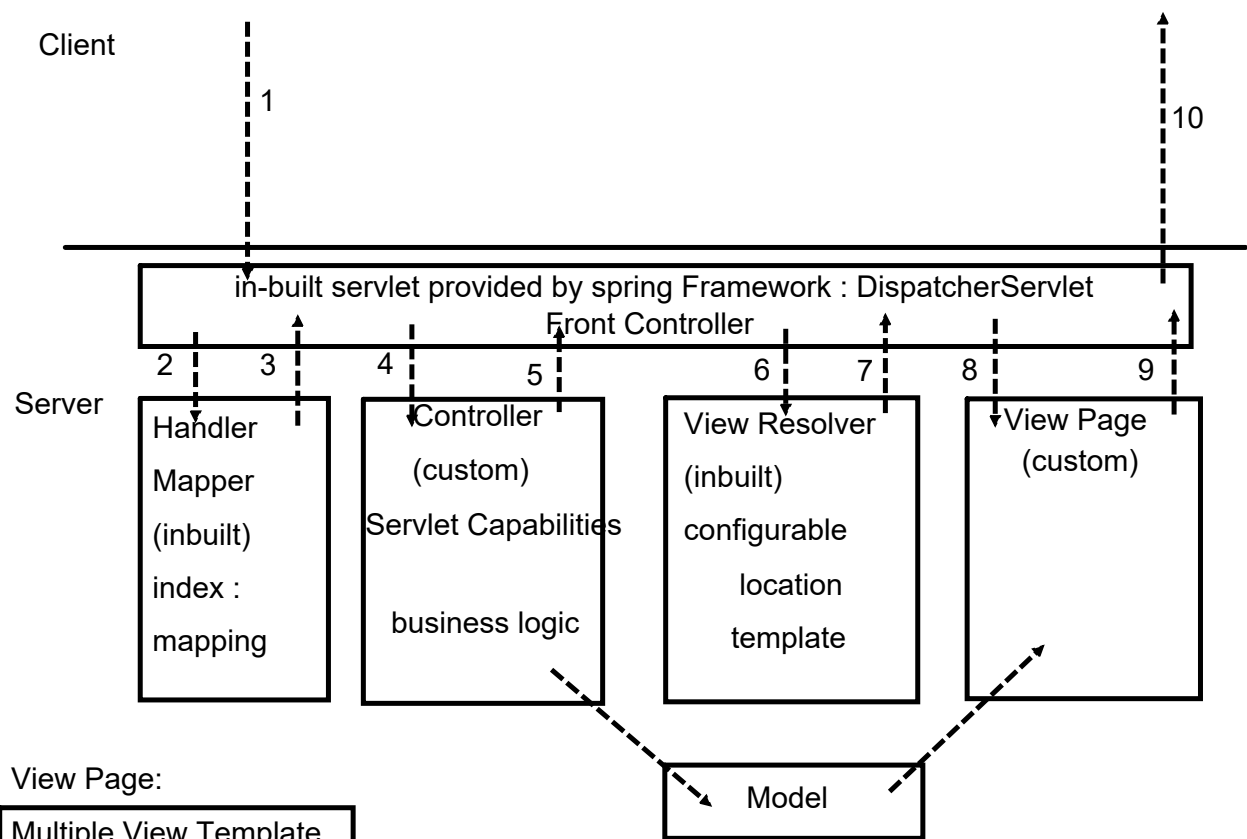

View Page:

Multiple View Template  
default : JSP + JSTL  
Thymeleaf  
Mustache  
Velocity  
Tiles  
FreeMarker