


Lecture 25

A More Secure Authentication Dialogue

- Once per user logon session
 - (1) $C \rightarrow AS: ID_C || ID_{tgs}$
 - (2) $AS \rightarrow C: E(K_C, Ticket_{tgs})$
- Once per type of service:
 - (3) $C \rightarrow TGS: ID_C || ID_v || Ticket_{tgs}$
 - (4) $TGS \rightarrow C: Ticket_v$
- Once per service session:
 - (5) $C \rightarrow V: ID_C || Ticket_v$

$$Ticket_{tgs} = E(K_{tgs}, [ID_C || AD_C || ID_{tgs} || TS_1 || Lifetime_1])$$

$$Ticket_v = E(K_v, [ID_C || AD_C || ID_v || TS_2 || Lifetime_2])$$

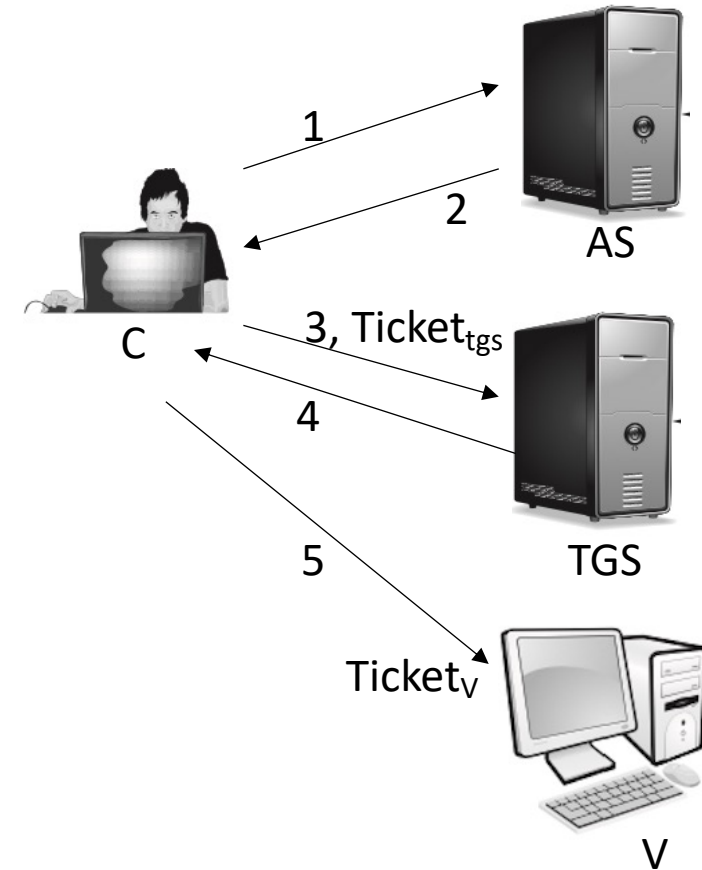

1. $C \rightarrow AS: ID_C || P_C || ID_v$
2. $AS \rightarrow C: Ticket = E(K_v, [ID_C || AD_C || ID_v])$
3. $C \rightarrow V: ID_C || Ticket$

Advantage


- No password transmitted in plaintext
- Ticket is reusable. Timestamp is added to prevent reuse of ticket by an attacker

Secure?


no user authentication

- Ticket hijacking
 - Malicious user may **steal the service ticket** of another user on the same workstation and try to use it
 - Network address verification does not help
 - Servers must verify that the user who is presenting the ticket is the same user to whom the ticket was issued
- No server authentication
 - Attacker may misconfigure the network so that he receives messages addressed to a legitimate server – man in the middle attack
 - Capture private information from users and/or deny service
 - Servers must prove their identity to users
- **Solution:** section key
 - Once per user logon session
 - (1) $C \rightarrow AS: ID_C || ID_{tgs}$
 - (2) $AS \rightarrow C: E(K_C, Ticket_{tgs})$
 - Once per type of service:
 - (3) $C \rightarrow TGS: ID_C || ID_v || Ticket_{tgs}$
 - (4) $TGS \rightarrow C: Ticket_v$
 - Once per service session:
 - (5) $C \rightarrow V: ID_C || Ticket_v$


Kerberos v4. - once per user logon session

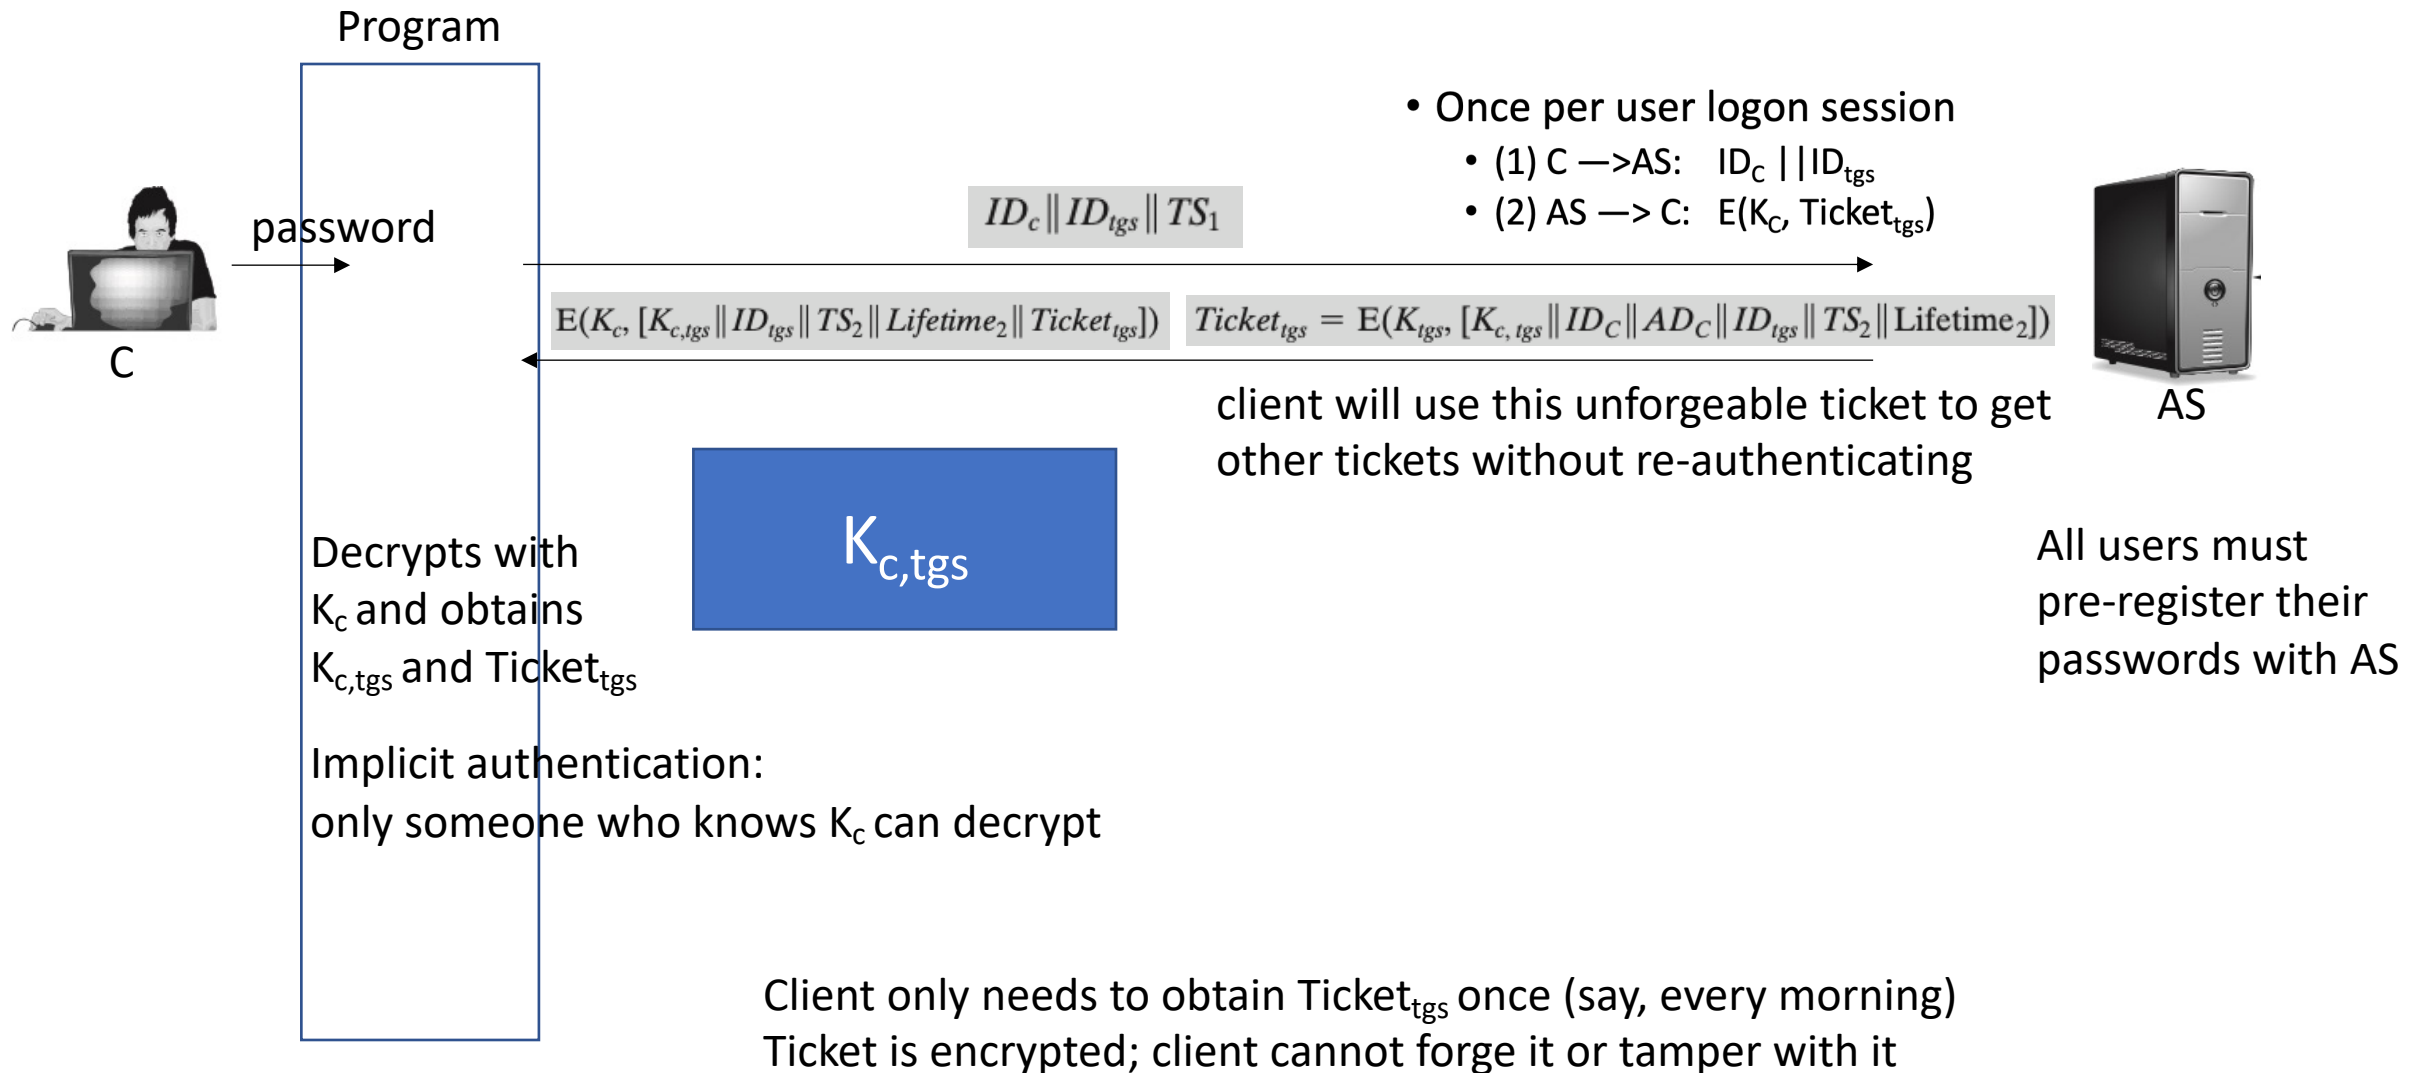

Kerberos v4. - once per type of service

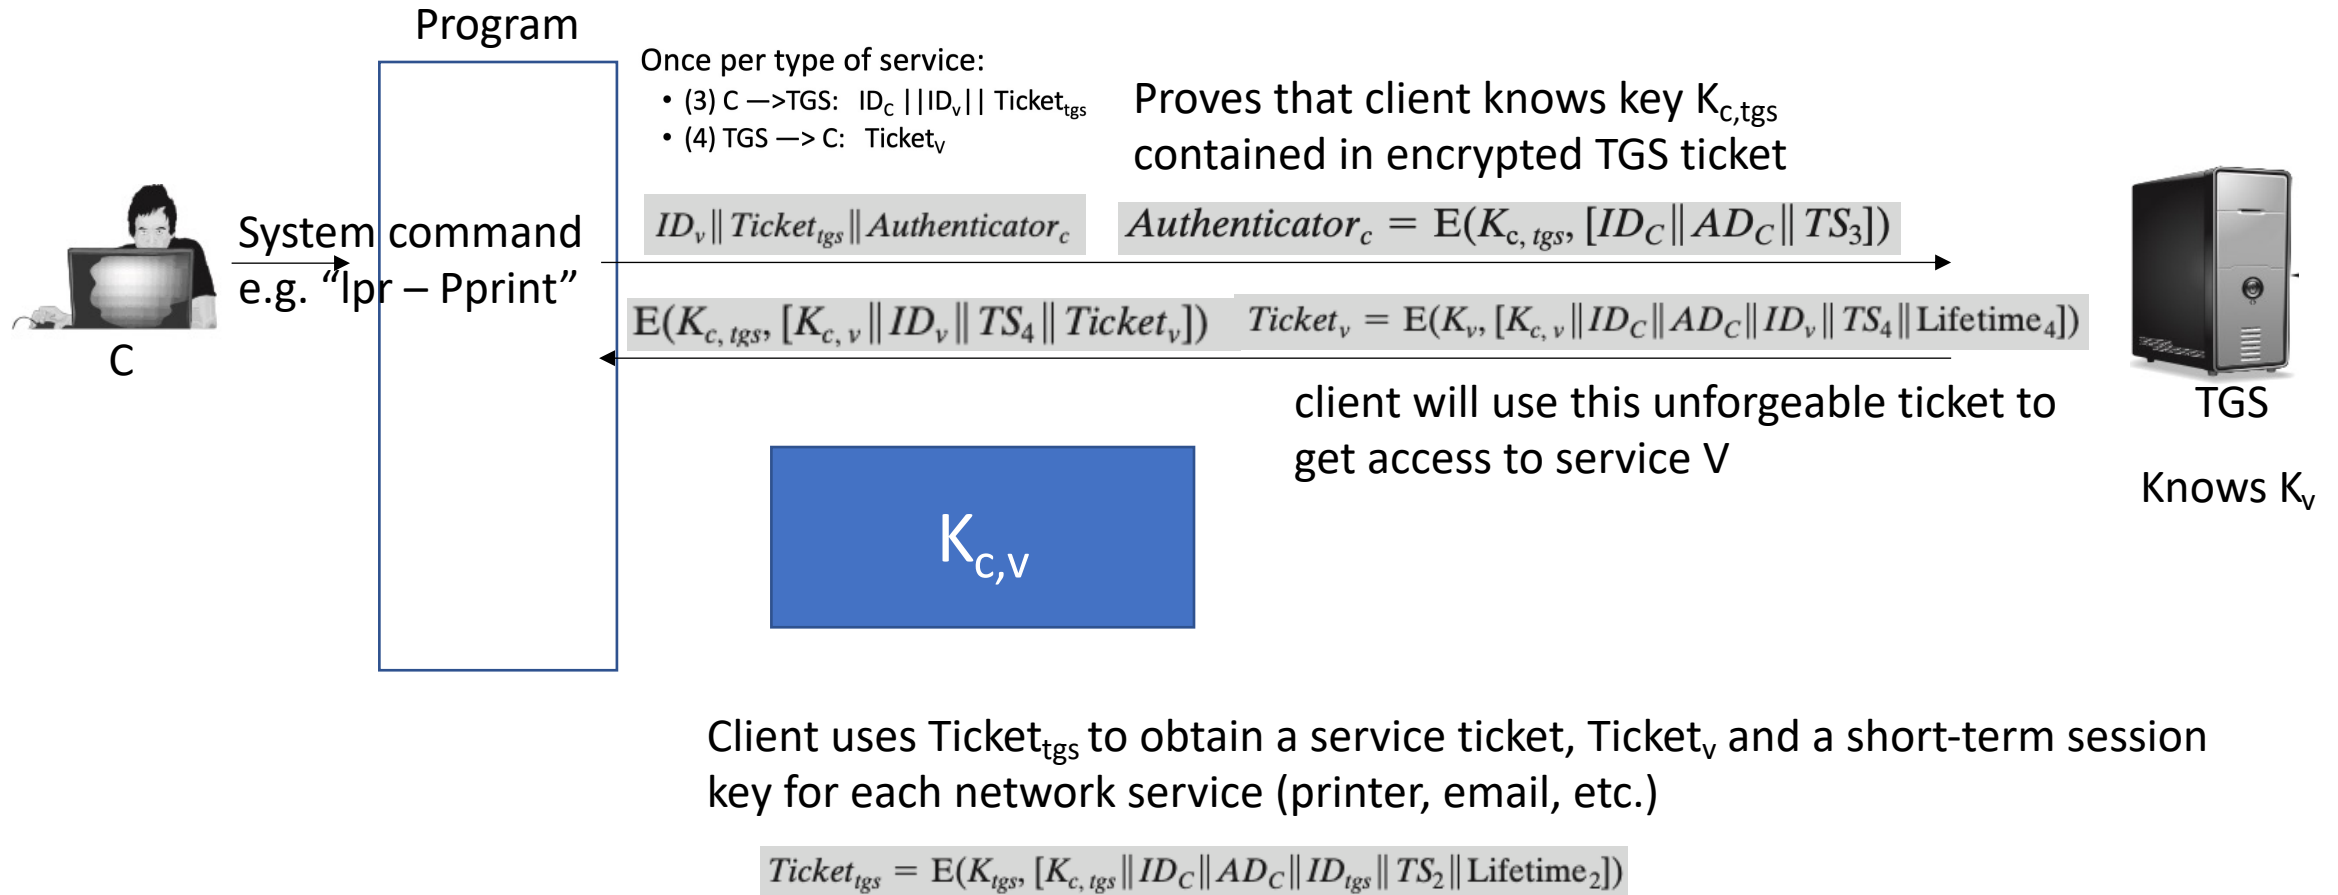

Kerberos v4. - once per service session

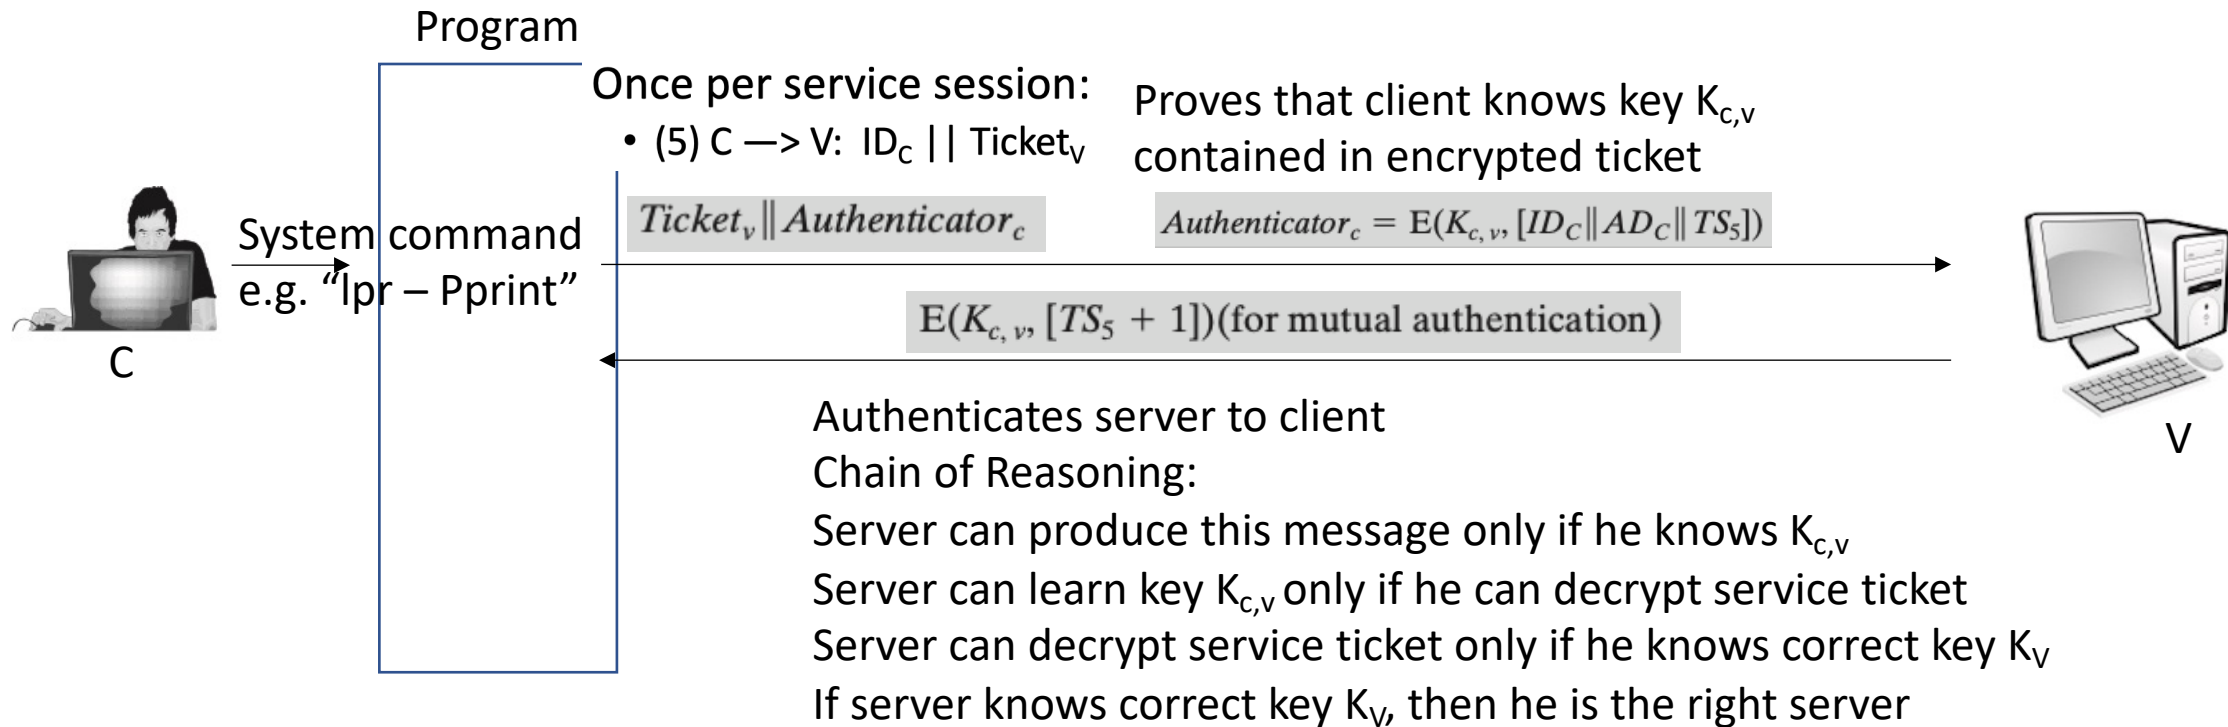

For each service request, client uses the short-term key, $K_{c,v}$, for that service and the ticket he received from TGS

$$Ticket_v = E(K_v, [K_{c,v} || ID_c || AD_c || ID_v || TS_4 || Lifetime_4])$$

Overview of Kerberos

