



Module Name:Automated Logic Testing
Test Case ID:ST_15
Webpage URL:https://sauce-demo.myshopify.com/


Scenario_ID:TC_01
Scenario:PyCharm Source code

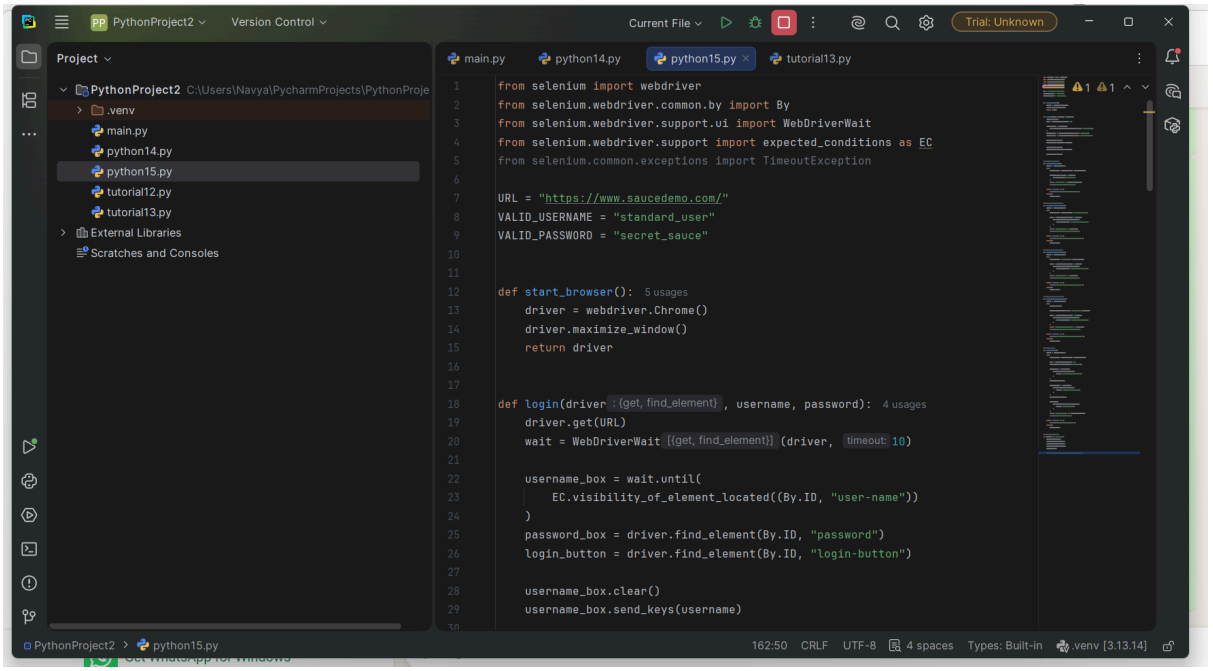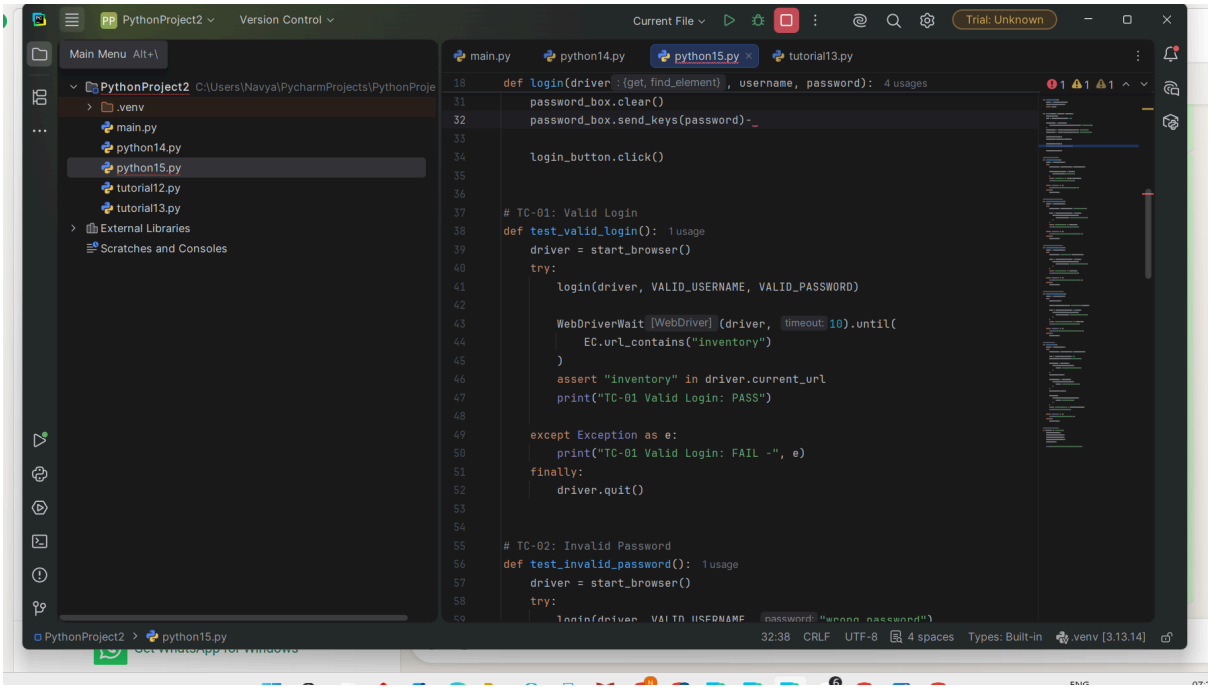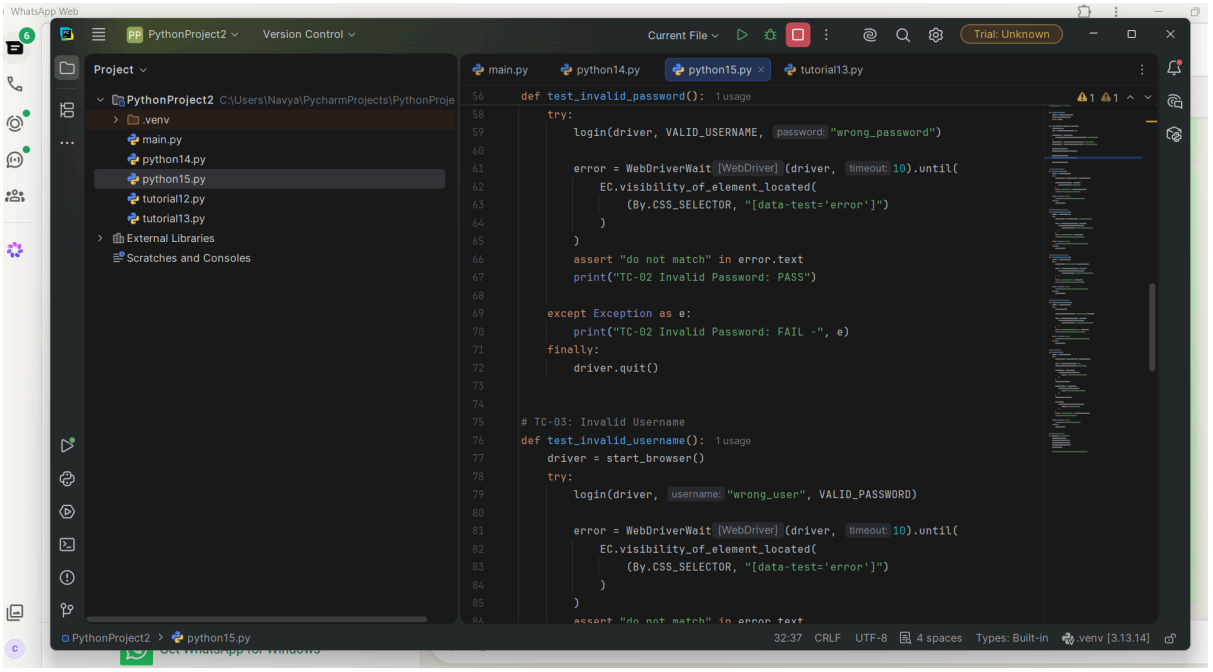


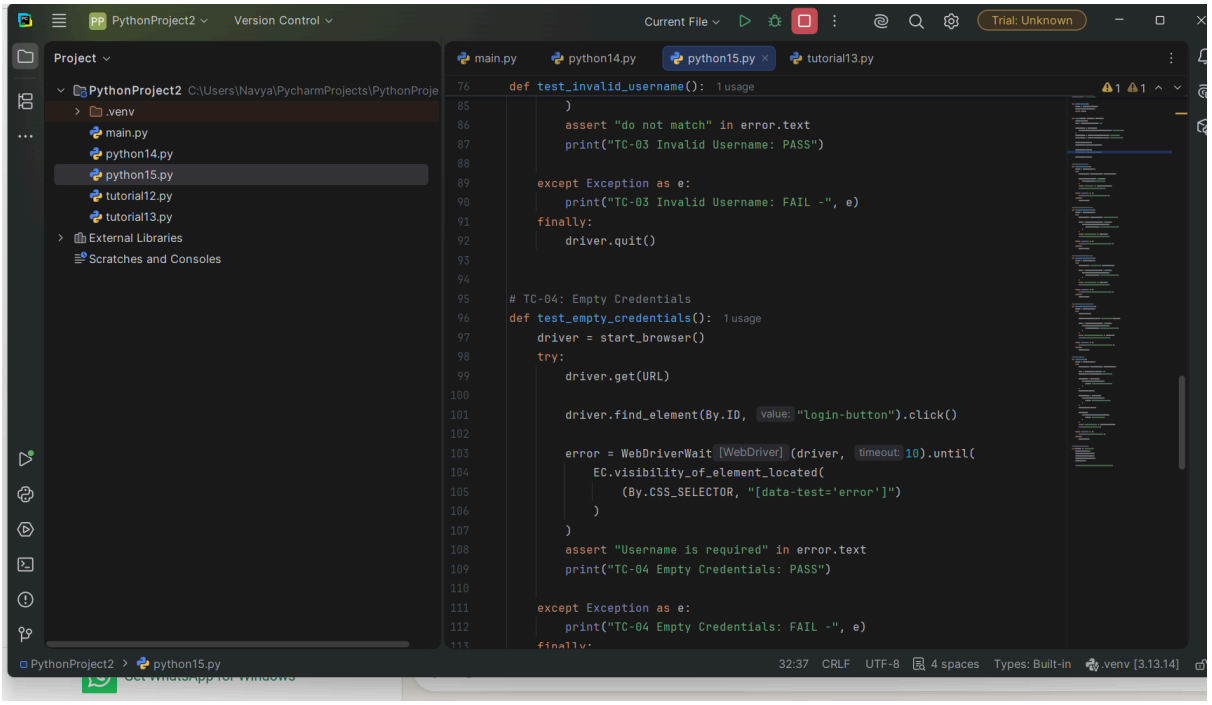



PythonProject2
Version Control
Current File
Trial: Unknown
Project
PythonProject2 C:\Users\Navya\PycharmProjects\PythonProje
.venv
main.py
python14.py
python15.py
tutorial12.py
tutorial13.py
External Libraries
Scratches and Consoles
main.py
python14.py
python15.py
tutorial13.py
def test_invalid_password(): 1 usage
try:
login(driver, VALID_USERNAME, password: "wrong_password")
error = WebDriverWait [WebDriver] (driver, timeout: 10).until(
EC.visibility_of_element_located(
(By.CSS_SELECTOR, "[data-test='error']")
)
)
assert "do not match" in error.text
print("TC-02 Invalid Password: PASS")
except Exception as e:
print("TC-02 Invalid Password: FAIL -", e)
finally:
driver.quit()
TC-03: Invalid Username
def test_invalid_username(): 1 usage
driver = start_browser()
try:
login(driver, username: "wrong_user", VALID_PASSWORD)
error = WebDriverWait [WebDriver] (driver, timeout: 10).until(
EC.visibility_of_element_located(
(By.CSS_SELECTOR, "[data-test='error']")
)
)
PythonProject2 > python15.py
32:37 CRLF UTF-8 4 spaces Types: Built-in venv [3.13.14]


PythonProject2
Version Control
Current File
Trial: Unknown
Project
PythonProject2 C:\Users\Navya\PycharmProjects\PythonProje
.venv
main.py
python14.py
python15.py
tutorial12.py
tutorial13.py
External Libraries
Scratches and Consoles
main.py
python14.py
python15.py
tutorial13.py
def test_invalid_username(): 1 usage
assert "do not match" in error.text
print("TC-03 Invalid Username: PASS")
except Exception as e:
print("TC-03 Invalid Username: FAIL -", e)
finally:
driver.quit()
TC-04: Empty Credentials
def test_empty_credentials(): 1 usage
driver = start_browser()
try:
driver.get(URL)
driver.find_element(By.ID, value: "login-button").click()
error = WebDriverWait [WebDriver] (driver, timeout: 10).until(
EC.visibility_of_element_located(
(By.CSS_SELECTOR, "[data-test='error']")
)
)
assert "Username is required" in error.text
print("TC-04 Empty Credentials: PASS")
except Exception as e:
print("TC-04 Empty Credentials: FAIL -", e)
PythonProject2 > python15.py
32:37 CRLF UTF-8 4 spaces Types: Built-in .venv [3.13.14]

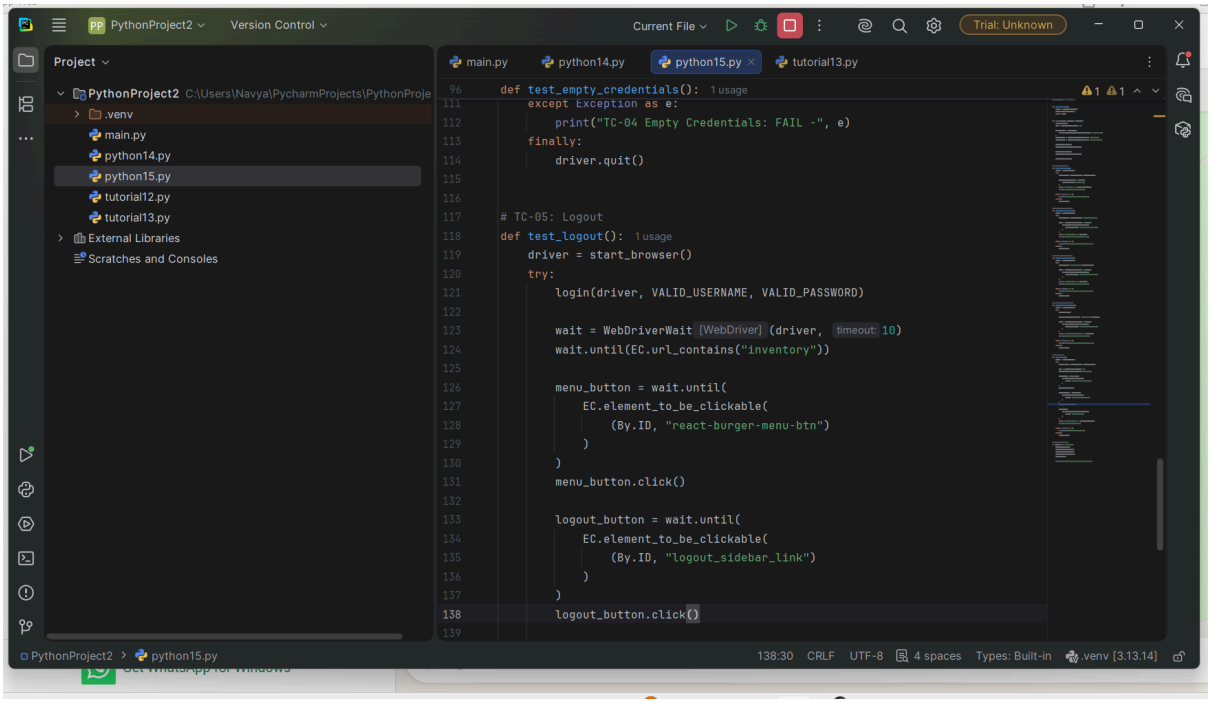


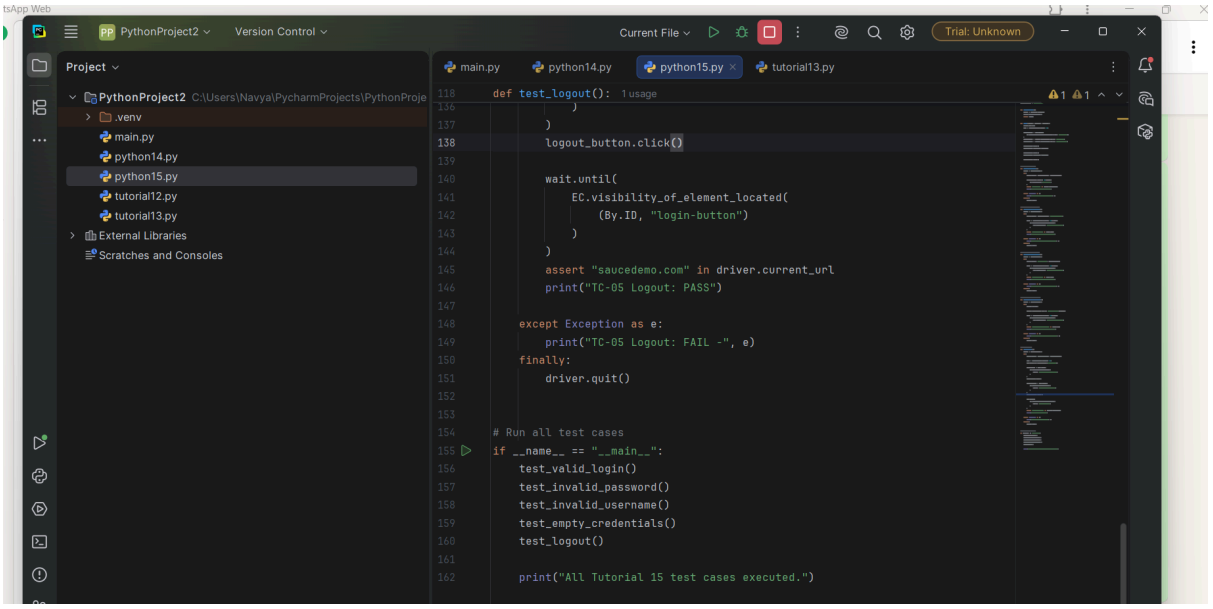


Scenario_ID:TC_02
Scenario:Valid Login

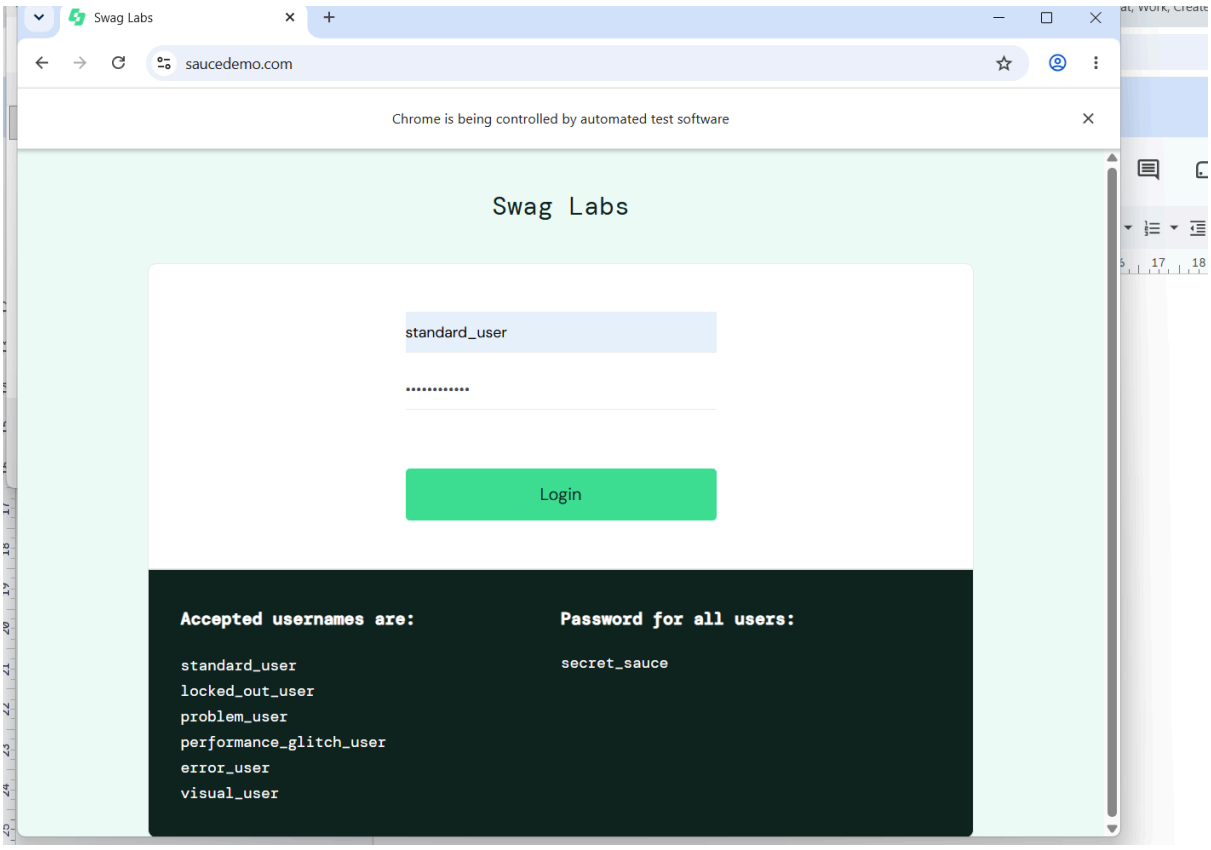


Scenario_ID:TC_03
Scenario:Invalid Password

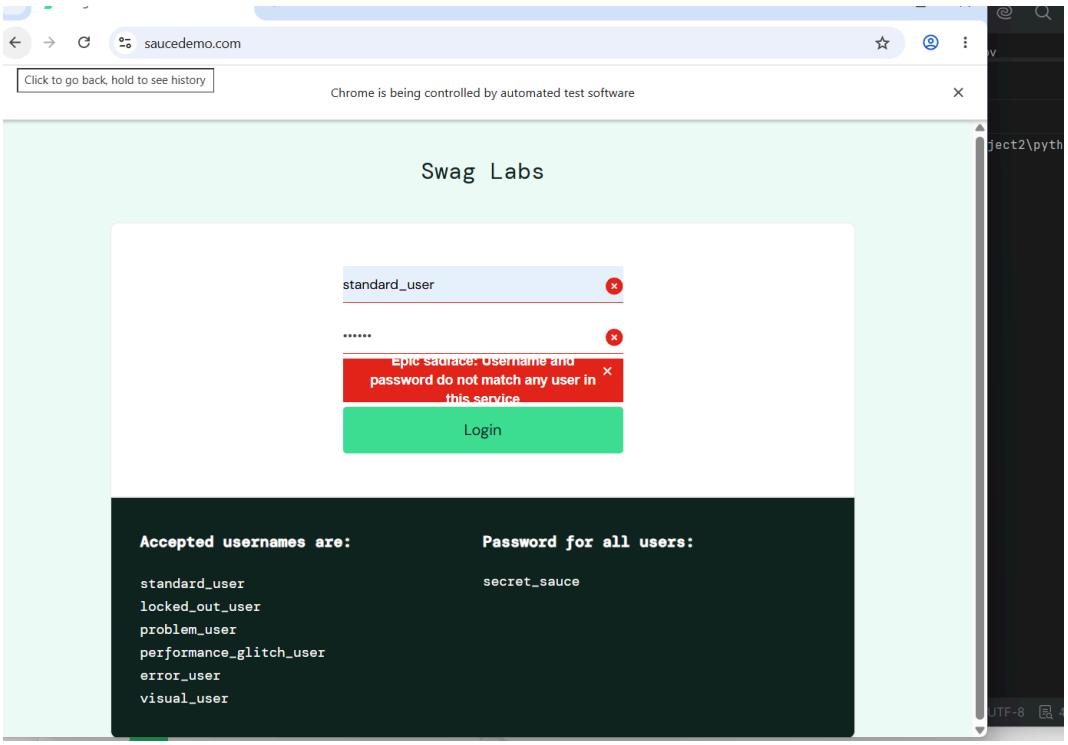


Scenario_ID:TC_04
Scenario:Invalid Username

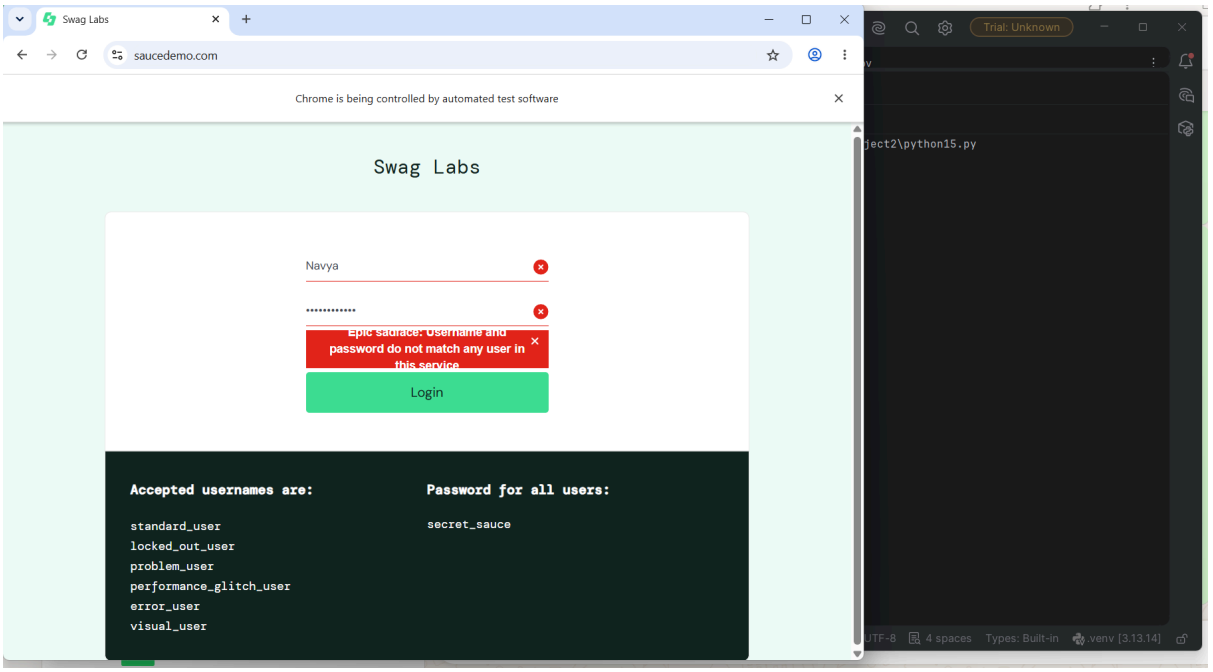


Scenario_ID:TC_05
Scenario:Empty Credentials

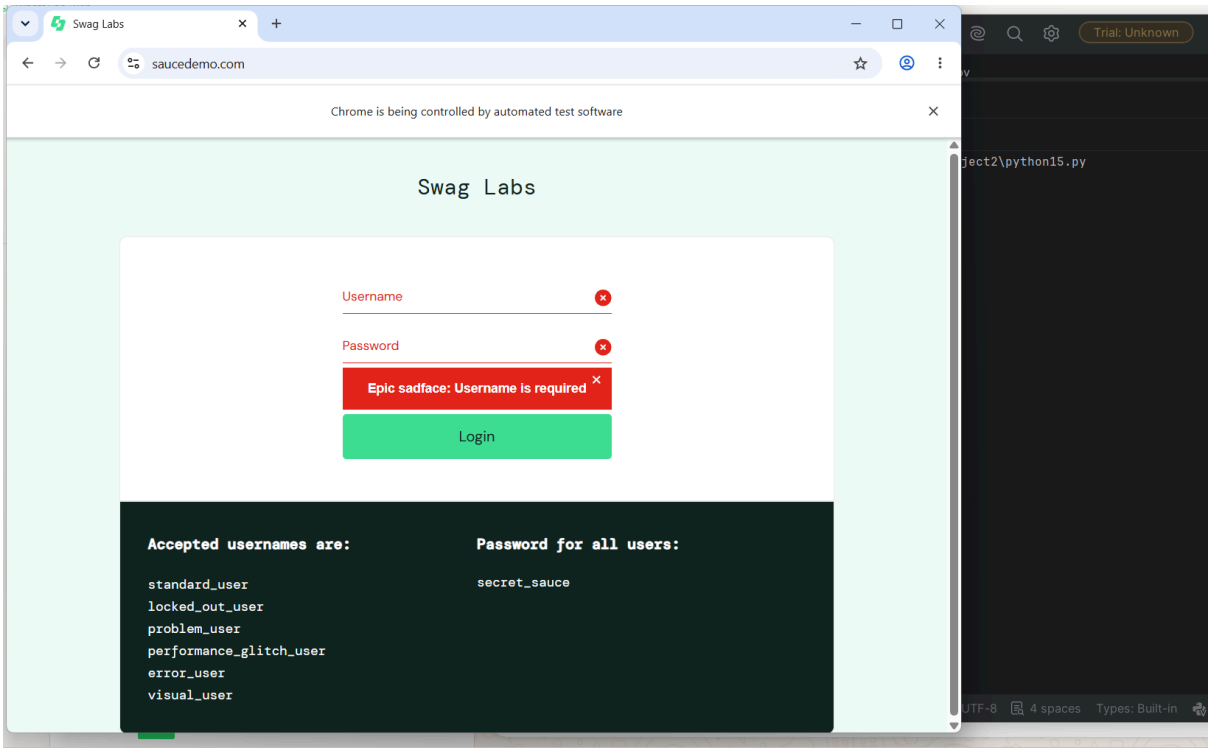


Scenario_ID:TC_06
Scenario:Logout

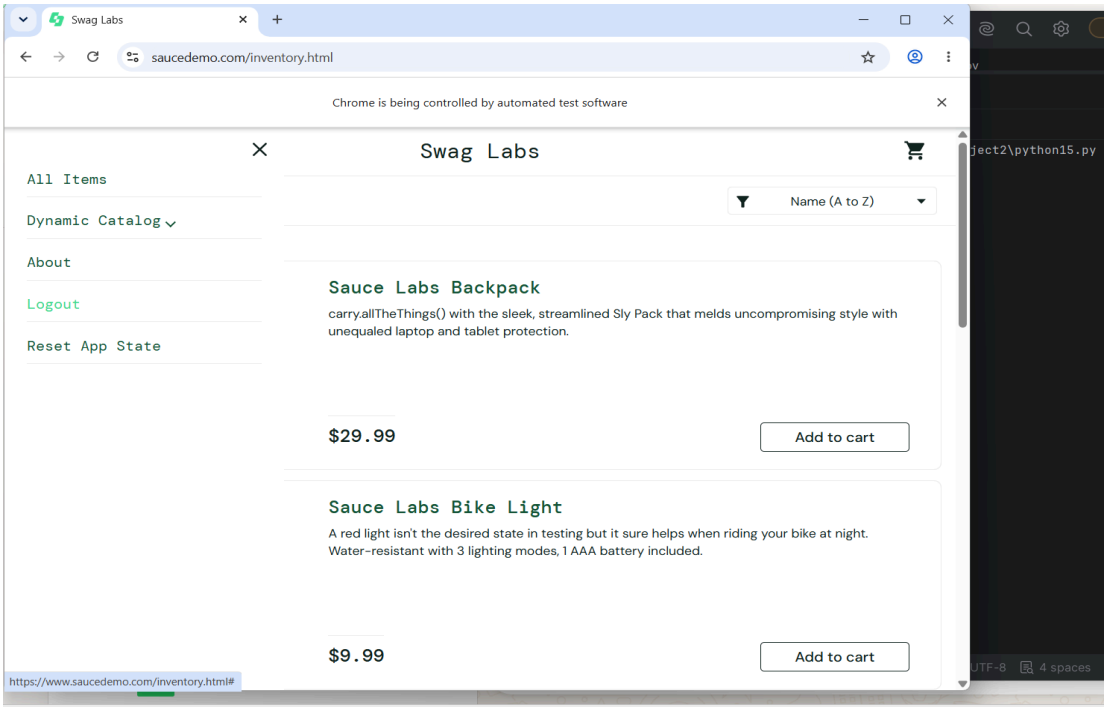

Scenario_ID:TC_07
Scenario:Console Output

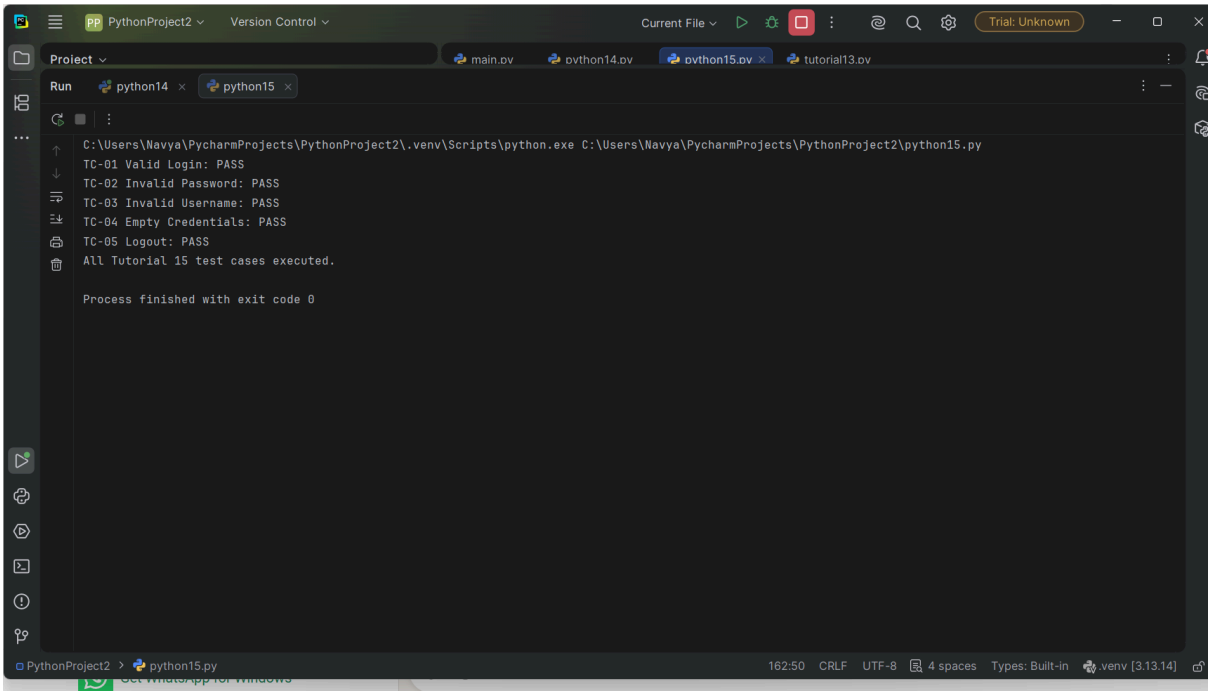

Scenario_ID:TC_08
Scenario:Exception Handling Code

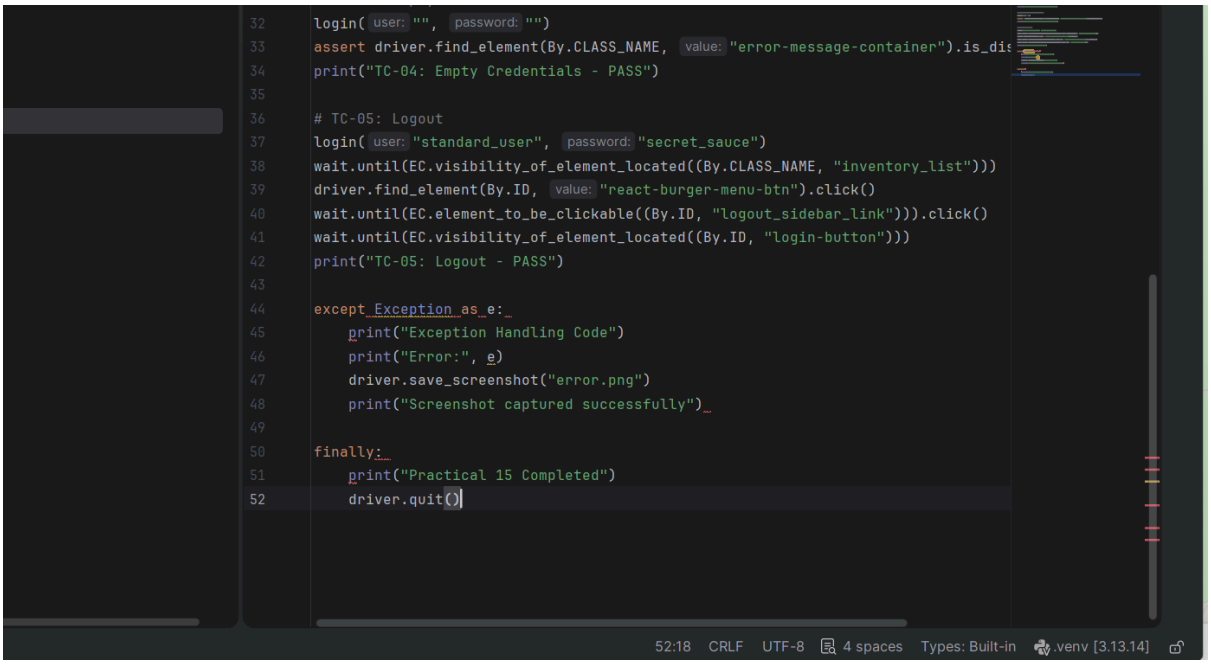

```
login( user: "", password: "")
assert driver.find_element(By.CLASS_NAME, value: "error-message-container").is_dis
print("TC-04: Empty Credentials - PASS")

# TC-05: Logout
login( user: "standard_user", password: "secret_sauce")
wait.until(EC.visibility_of_element_located((By.CLASS_NAME, "inventory_list")))
driver.find_element(By.ID, value: "react-burger-menu-btn").click()
wait.until(EC.element_to_be_clickable((By.ID, "logout_sidebar_link"))).click()
wait.until(EC.visibility_of_element_located((By.ID, "login-button")))
print("TC-05: Logout - PASS")

except Exception as e:
    print("Exception Handling Code")
    print("Error:", e)
    driver.save_screenshot("error.png")
    print("Screenshot captured successfully")

finally:
    print("Practical 15 Completed")
    driver.quit()
```

52:18 CRLF UTF-8 4 spaces Types: Built-in .venv [3.13.14]

Conclusion:

Automated login testing is fast and repeatable and is well suited to regression testing. Assertions and exception handling make failures clear and easy to trace.

Summary:

Five cases were automated: valid login, invalid password, invalid username, empty credentials and logout. Assertions checked the URL and error messages, and exceptions were handled so one ~failure did not stop the run.