

Homework 3

Instructions

- This homework focuses on understanding and applying DETR for object detection and attention visualization. It consists of **three questions** designed to assess both theoretical understanding and practical application.
- Please organize your answers and results for the questions below and submit this jupyter notebook as a **.pdf file**.
- Deadline: 11/14 (Thur) 23:59**

Reference

- End-to-End Object Detection with Transformers (DETR): <https://github.com/facebookresearch/detr>

Q1. Understanding DETR model

- Fill-in-the-blank exercise to test your understanding of critical parts of the DETR model workflow.

```
from torch import nn
class DETR(nn.Module):
    def __init__(self, num_classes, hidden_dim=256, nheads=8,
                 num_encoder_layers=6, num_decoder_layers=6, num_queries=100):
        super().__init__()

        # create ResNet-50 backbone
        self.backbone = resnet50()
        del self.backbone.fc

        # create conversion layer
        self.conv = nn.Conv2d(2048, hidden_dim, 1)

        # create a default PyTorch transformer
        self.transformer = nn.Transformer(
            hidden_dim, nheads, num_encoder_layers, num_decoder_layers)

        # prediction heads, one extra class for predicting non-empty slots
        # note that in baseline DETR linear_bbox layer is 3-layer MLP
        self.linear_class = nn.Linear(hidden_dim, num_classes + 1)
        self.linear_bbox = nn.Linear(hidden_dim, 4)

        # output positional encodings (object queries)
        self.query_pos = nn.Parameter(torch.rand(100, hidden_dim))

        # spatial positional encodings
        # note that in baseline DETR we use sine positional encodings
        self.row_embed = nn.Parameter(torch.rand(50, hidden_dim // 2))
        self.col_embed = nn.Parameter(torch.rand(50, hidden_dim // 2))

    def forward(self, inputs):
        # propagate inputs through ResNet-50 up to avg-pool layer
        x = self.backbone.conv1(inputs)
        x = self.backbone.bn1(x)
        x = self.backbone.relu(x)
        x = self.backbone.maxpool(x)

        x = self.backbone.layer1(x)
        x = self.backbone.layer2(x)
        x = self.backbone.layer3(x)
        x = self.backbone.layer4(x)

        # convert from 2048 to 256 feature planes for the transformer
        h = self.conv(x)

        # construct positional encodings
        H, W = h.shape[-2:]
        pos = torch.cat([
            self.col_embed[:W].unsqueeze(0).repeat(H, 1, 1),
            self.row_embed[:H].unsqueeze(1).repeat(1, W, 1),
        ], dim=-1).flatten(0, 1).unsqueeze(1)

        # propagate through the transformer
        h = self.transformer(pos + 0.1 * h.flatten(2).permute(2, 0, 1),
```

```
self.query_pos.unsqueeze(1)).transpose(0, 1)
```

```
# finally project transformer outputs to class labels and bounding boxes
pred_logits = self.linear_class(h)
pred_boxes = self.linear_bbox(h).sigmoid()

return {'pred_logits': pred_logits,
        'pred_boxes': pred_boxes}
```

✓ Q2. Custom Image Detection and Attention Visualization

In this task, you will upload an **image of your choice** (different from the provided sample) and follow the steps below:

- Object Detection using DETR
 - Use the DETR model to detect objects in your uploaded image.
- Attention Visualization in Encoder
 - Visualize the regions of the image where the encoder focuses the most.
- Decoder Query Attention in Decoder
 - Visualize how the decoder's query attends to specific areas corresponding to the detected objects.

```
import math

from PIL import Image
import requests
import matplotlib.pyplot as plt
%config InlineBackend.figure_format = 'retina'

import ipywidgets as widgets
from IPython.display import display, clear_output

import torch
from torch import nn

from torchvision.models import resnet50
import torchvision.transforms as T
torch.set_grad_enabled(False);

# COCO classes
CLASSES = [
    'N/A', 'person', 'bicycle', 'car', 'motorcycle', 'airplane', 'bus',
    'train', 'truck', 'boat', 'traffic light', 'fire hydrant', 'N/A',
    'stop sign', 'parking meter', 'bench', 'bird', 'cat', 'dog', 'horse',
    'sheep', 'cow', 'elephant', 'bear', 'zebra', 'giraffe', 'N/A', 'backpack',
    'umbrella', 'N/A', 'N/A', 'handbag', 'tie', 'suitcase', 'frisbee', 'skis',
    'snowboard', 'sports ball', 'kite', 'baseball bat', 'baseball glove',
    'skateboard', 'surfboard', 'tennis racket', 'bottle', 'N/A', 'wine glass',
    'cup', 'fork', 'knife', 'spoon', 'bowl', 'banana', 'apple', 'sandwich',
    'orange', 'broccoli', 'carrot', 'hot dog', 'pizza', 'donut', 'cake',
    'chair', 'couch', 'potted plant', 'bed', 'N/A', 'dining table', 'N/A',
    'N/A', 'toilet', 'N/A', 'tv', 'laptop', 'mouse', 'remote', 'keyboard',
    'cell phone', 'microwave', 'oven', 'toaster', 'sink', 'refrigerator', 'N/A',
    'book', 'clock', 'vase', 'scissors', 'teddy bear', 'hair drier',
    'toothbrush'
]

# colors for visualization
COLORS = [[0.000, 0.447, 0.741], [0.850, 0.325, 0.098], [0.929, 0.694, 0.125],
          [0.494, 0.184, 0.556], [0.466, 0.674, 0.188], [0.301, 0.745, 0.933]]
# standard PyTorch mean-std input image normalization
transform = T.Compose([
    T.Resize(800),
    T.ToTensor(),
    T.Normalize([0.485, 0.456, 0.406], [0.229, 0.224, 0.225])
])

# for output bounding box post-processing
def box_cxcywh_to_xyxy(x):
    x_c, y_c, w, h = x.unbind(1)
```

```

b = [(x_c - 0.5 * w), (y_c - 0.5 * h),
      (x_c + 0.5 * w), (y_c + 0.5 * h)]
return torch.stack(b, dim=1)

def rescale_bboxes(out_bbox, size):
    img_w, img_h = size
    b = box_cxcywh_to_xyxy(out_bbox)
    b = b * torch.tensor([img_w, img_h, img_w, img_h], dtype=torch.float32)
    return b

def plot_results(pil_img, prob, boxes):
    plt.figure(figsize=(16,10))
    plt.imshow(pil_img)
    ax = plt.gca()
    colors = COLORS * 100
    for p, (xmin, ymin, xmax, ymax), c in zip(prob, boxes.tolist(), colors):
        ax.add_patch(plt.Rectangle((xmin, ymin), xmax - xmin, ymax - ymin,
                                  fill=False, color=c, linewidth=3))
        cl = p.argmax()
        text = f'{CLASSES[cl]}: {p[cl]:0.2f}'
        ax.text(xmin, ymin, text, fontsize=15,
                bbox=dict(facecolor='yellow', alpha=0.5))
    plt.axis('off')
    plt.show()

```

In this section, we show-case how to load a model from hub, run it on a custom image, and print the result. Here we load the simplest model (DETR-R50) for fast inference. You can swap it with any other model from the model zoo.

```

model = torch.hub.load('facebookresearch/detr', 'detr_resnet50', pretrained=True)
model.eval();

url = 'https://img.i-scmp.com/cdn-cgi/image/fit=contain,width=1024,format=auto/sites/default/files/d8/images/methode/2020/11/15/34eaaeca-26e
im = Image.open(requests.get(url, stream=True).raw) # put your own image

# mean-std normalize the input image (batch-size: 1)
img = transform(im).unsqueeze(0)

# propagate through the model
outputs = model(img)

# keep only predictions with 0.7+ confidence
probas = outputs['pred_logits'].softmax(-1)[0, :, :-1]
keep = probas.max(-1).values > 0.9

# convert boxes from [0; 1] to image scales
bboxes_scaled = rescale_bboxes(outputs['pred_boxes'][0, keep], im.size)

# mean-std normalize the input image (batch-size: 1)
img = transform(im).unsqueeze(0)

# propagate through the model
outputs = model(img)

# keep only predictions with 0.7+ confidence
probas = outputs['pred_logits'].softmax(-1)[0, :, :-1]
keep = probas.max(-1).values > 0.9

# convert boxes from [0; 1] to image scales
bboxes_scaled = rescale_bboxes(outputs['pred_boxes'][0, keep], im.size)

# mean-std normalize the input image (batch-size: 1)
img = transform(im).unsqueeze(0)

# propagate through the model
outputs = model(img)


# keep only predictions with 0.7+ confidence
probas = outputs['pred_logits'].softmax(-1)[0, :, :-1]
keep = probas.max(-1).values > 0.9

# convert boxes from [0; 1] to image scales
bboxes_scaled = rescale_bboxes(outputs['pred_boxes'][0, keep], im.size)

```

```
plot_results(im, probas[keep], bboxes_scaled)
```

→ Using cache found in /root/.cache/torch/hub/facebookresearch_detr_main

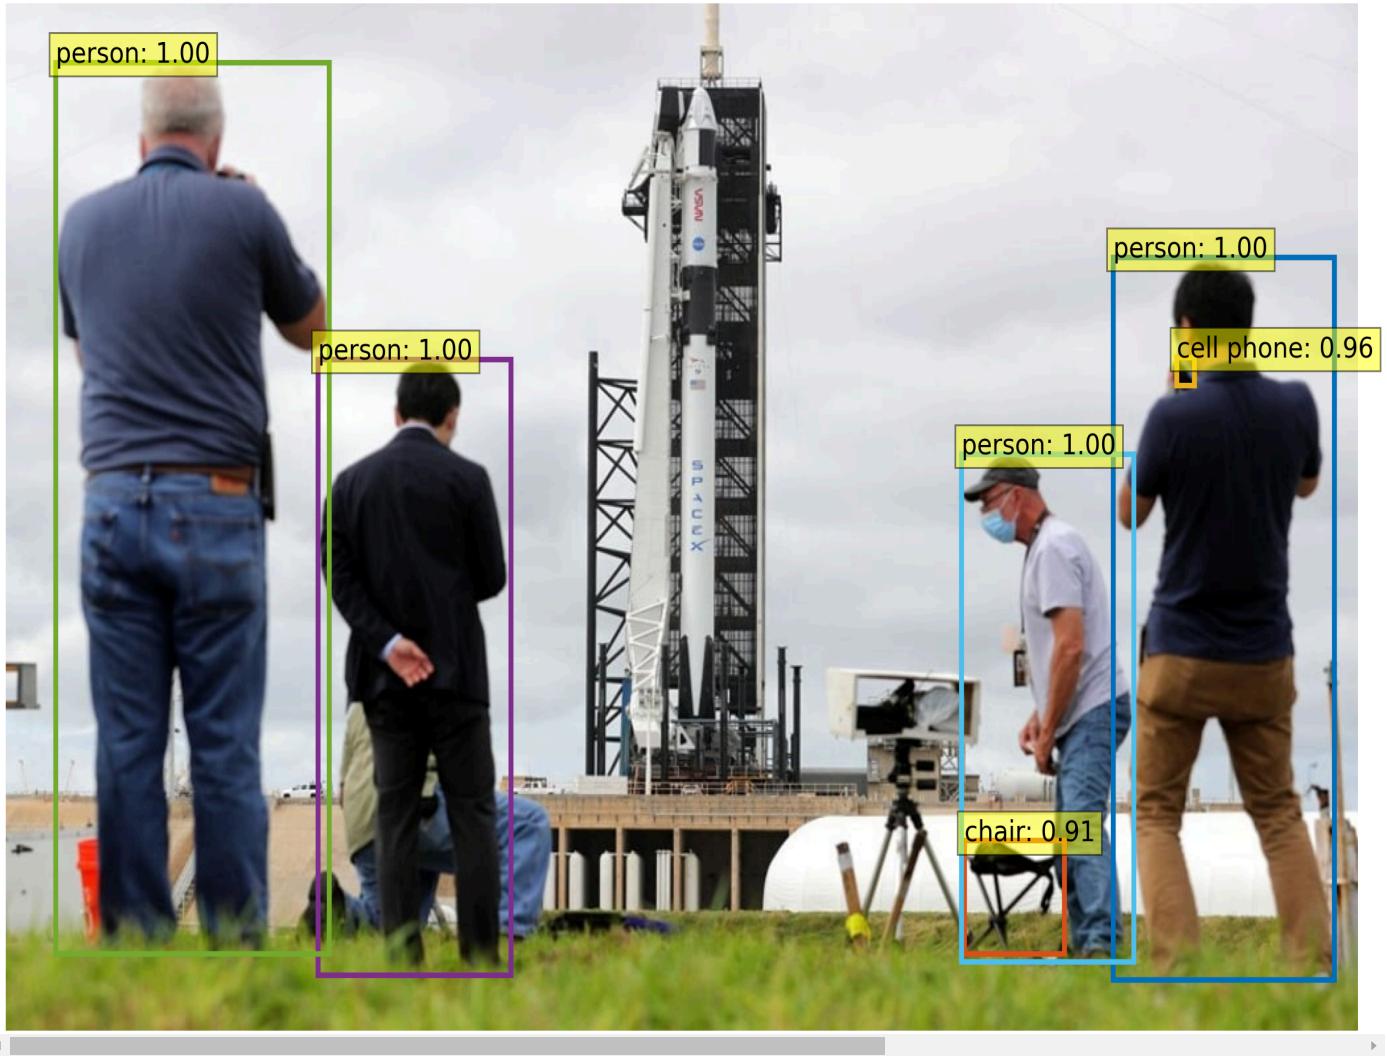

Here we visualize attention weights of the last decoder layer. This corresponds to visualizing, for each detected objects, which part of the image the model was looking at to predict this specific bounding box and class.

```
# use lists to store the outputs via up-values
conv_features, enc_attn_weights, dec_attn_weights = [], [], []

hooks = [
    model.backbone[-2].register_forward_hook(
        lambda self, input, output: conv_features.append(output)
    ),
    model.transformer.encoder.layers[-1].self_attn.register_forward_hook(
        lambda self, input, output: enc_attn_weights.append(output[1])
    ),
    model.transformer.decoder.layers[-1].multihead_attn.register_forward_hook(
        lambda self, input, output: dec_attn_weights.append(output[1])
    ),
]

# propagate through the model
outputs = model(img) # put your own image

for hook in hooks:
    hook.remove()



# don't need the list anymore
conv_features = conv_features[0]
```

```
enc_attn_weights = enc_attn_weights[0]
dec_attn_weights = dec_attn_weights[0]
```

```
# get the feature map shape
h, w = conv_features['0'].tensors.shape[-2:]

fig, axs = plt.subplots(ncols=len(bboxes_scaled), nrows=2, figsize=(22, 7))
COLORS = COLORS * 100
for idx, ax_i, (xmin, ymin, xmax, ymax) in zip(keep.nonzero(), axs.T, bboxes_scaled):
    ax = ax_i[0]

    ax.imshow(dec_attn_weights[0, idx].view(h, w))
    ax.axis('off')
    ax.set_title(f'query id: {idx.item()}')
    ax = ax_i[1]
    ax.imshow(im)
    ax.add_patch(plt.Rectangle((xmin, ymin), xmax - xmin, ymax - ymin,
                               fill=False, color='blue', linewidth=3))
    ax.axis('off')
    ax.set_title(CLASSES[probas[idx].argmax()])
fig.tight_layout()
```

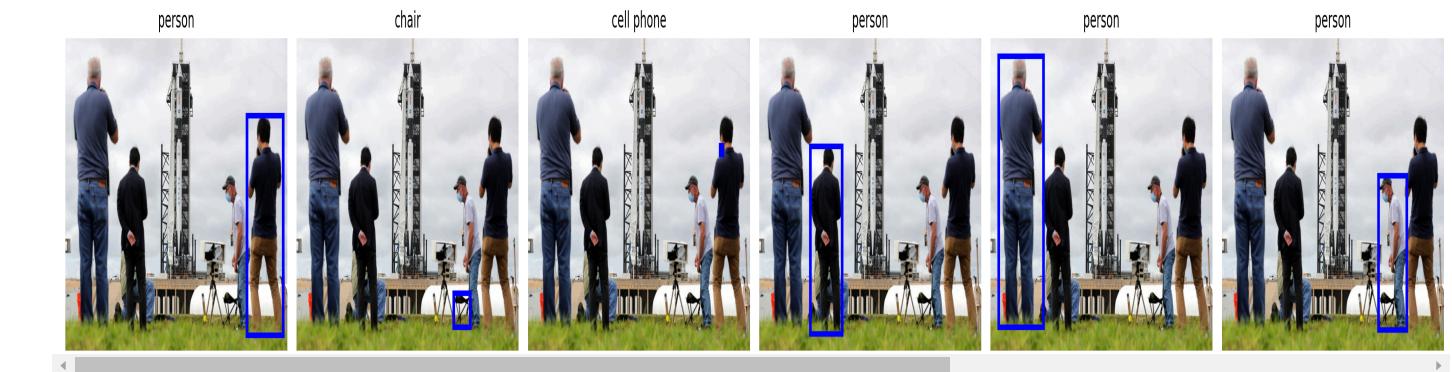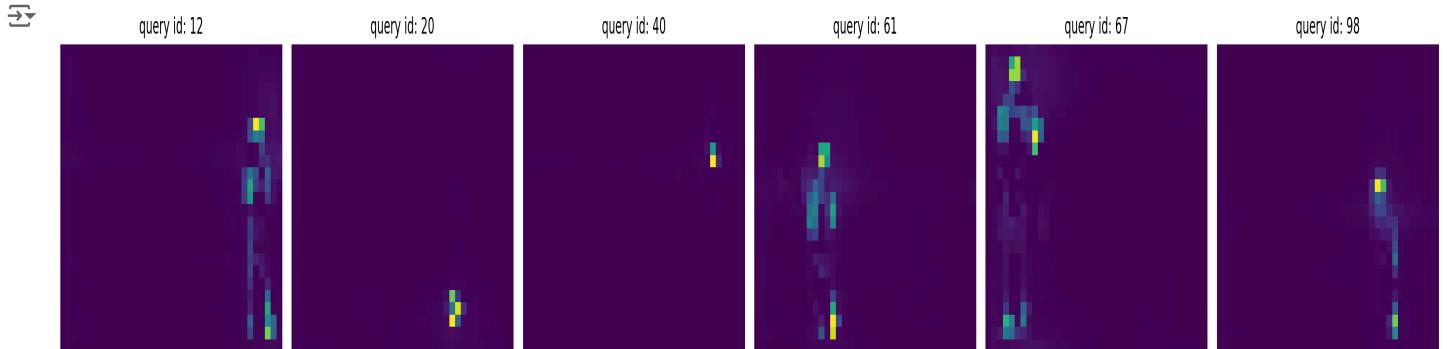

```
# output of the CNN
f_map = conv_features['0']
print("Encoder attention:      ", enc_attn_weights[0].shape)
print("Feature map:            ", f_map.tensors.shape)
```

Encoder attention: torch.Size([950, 950])
 Feature map: torch.Size([1, 2048, 25, 38])

```
# get the HxW shape of the feature maps of the CNN
shape = f_map.tensors.shape[-2:]
# and reshape the self-attention to a more interpretable shape
sattn = enc_attn_weights[0].reshape(shape + shape)
print("Reshaped self-attention:", sattn.shape)
```

Reshaped self-attention: torch.Size([25, 38, 25, 38])

```
# downsampling factor for the CNN, is 32 for DETR and 16 for DETR DC5
fact = 32
```

```
# let's select 4 reference points for visualization
```

```

idxs = [(200, 200), (280, 400), (200, 600), (440, 800),]

# here we create the canvas
fig = plt.figure(constrained_layout=True, figsize=(25 * 0.7, 8.5 * 0.7))
# and we add one plot per reference point
gs = fig.add_gridspec(2, 4)
axs = [
    fig.add_subplot(gs[0, 0]),
    fig.add_subplot(gs[1, 0]),
    fig.add_subplot(gs[0, -1]),
    fig.add_subplot(gs[1, -1]),
]

# for each one of the reference points, let's plot the self-attention
# for that point
for idx_o, ax in zip(idxs, axs):
    idx = (idx_o[0] // fact, idx_o[1] // fact)
    ax.imshow(sattn[..., idx[0], idx[1]], cmap='cividis', interpolation='nearest')
    ax.axis('off')
    ax.set_title(f'self-attention{idx_o}')

# and now let's add the central image, with the reference points as red circles
fcenter_ax = fig.add_subplot(gs[:, 1:-1])
fcenter_ax.imshow(im)
for (y, x) in idxs:
    scale = im.height / img.shape[-2]
    x = ((x // fact) + 0.5) * fact
    y = ((y // fact) + 0.5) * fact
    fcenter_ax.add_patch(pplt.Circle((x * scale, y * scale), fact // 2, color='r'))
    fcenter_ax.axis('off')

```



Q3. Understanding Attention Mechanisms

In this task, you focus on understanding the attention mechanisms present in the encoder and decoder of DETR.

- Briefly describe the types of attention used in the encoder and decoder, and explain the key differences between them.
- Based on the visualized results from Q2, provide an analysis of the distinct characteristics of each attention mechanism in the encoder and decoder. Feel free to express your insights.

1. For Encoder, it used 'self-attention' while Decoder used 'multihead-attention'. The key differences are as below:

Self Attention: It will process the other dependencies from the other patches in the same image of a given token feature to create context.

Multihead Attention: In the other hand, this type of attention will use the context from the given encoder by go through all the dependencies to predict the best prediction accuracy.

2. Encoder: Based on 4 pixel coordinates initialized (for visualization only) for self-attention encoder, it shows us that the encoder did not restricted to only the object as it also analyze the surrounding of the objects as well in order to grasp the big picture of the image. In addition that based on the image, we can see how the yellow color areas differ for every pixel coordinates representing the relation of nearest pixels to a specific point in the image and provide the attention weight for decoder. For example, from coordinate (200,200), it clearly showed us a yellow shape of person standing.

Decoder: It differs by showing how the query objects consisted of N spesific interests that interact with the weighted attention from encoder to provide a localized attention of spesific coordinates or pixels. Hence it will give a precise prediction of bounding box for a spesific object since it will response specifically for every object queries. Plus that, since the weight attention given by encoder was high (200,200), the decoder predicted a person with 1.0 probability.

