

Try following patterns:

1.

```
input.txt  X
input.txt
1  5

output.txt  X
output.txt
1      *
2     * *
3    * * *
4   * * * *
5  * * * * *
6
```

2.

```
input.txt  X
input.txt
1  5

output.txt  X
output.txt
1      1
2     1 2
3    1 2 3
4   1 2 3 4
5  1 2 3 4 5
6
```

3.

```
input.txt  X
input.txt
1  5


output.txt  X
output.txt
1  *****
2  | *****
3  |   *****
4  |     *****
5  |       *****
6  |         *****
```

4.

```
input.txt  X
input.txt
1  5

output.txt  X
output.txt
1  *****
2  | *****
3  |   *****
4  |     *****
5  |       *****
6  |         *****
```

5.

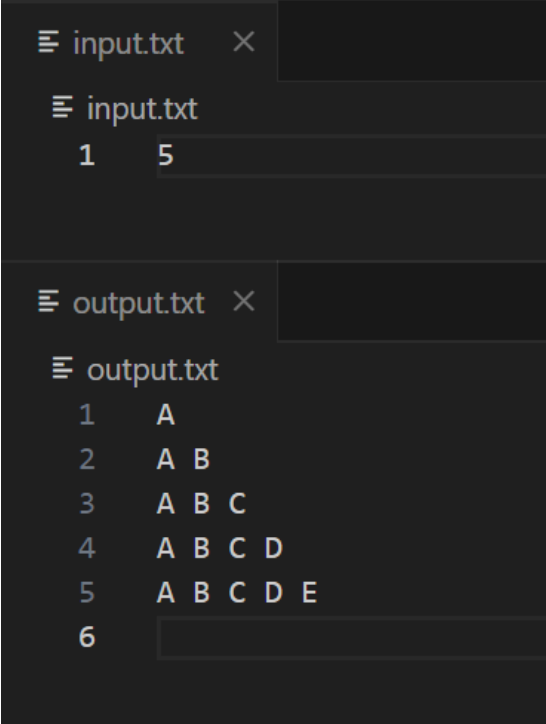

The image shows a code editor with two tabs: 'input.txt' and 'output.txt'. The 'input.txt' tab is active and contains the number '5'. The 'output.txt' tab is also visible and contains a sequence of strings: 'A', 'A B', 'A B C', 'A B C D', and 'A B C D E', each on a new line. The editor has a dark theme.

```
input.txt ×
input.txt
1 5

output.txt ×
output.txt
1 A
2 A B
3 A B C
4 A B C D
5 A B C D E
6
```