

SeqIKPy: a Python package for inverse kinematics in insects

Pembe Gizem Özdil^{1,2}, Chuanfang Ning², Auke Ijspeert², and Pavan Ramdya¹

¹ Neuroengineering Laboratory, Brain Mind Institute, EPFL, Lausanne, Switzerland ² Biorobotics Laboratory, Institute of Bioengineering, EPFL, Lausanne, Switzerland

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Open Journals](#) ↗

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

SeqIKPy is a Python package for inverse kinematics (IK) calculation in animal bodies with complex joint configurations. The name stands for Sequential Inverse Kinematics in Python, as our method computes joint angles sequentially by performing IK for each joint along a kinematic chain.

Our framework contains:

- Pose alignment: map tracked key point locations in 3D onto an animal body template.
- Inverse kinematics: calculate joint angles sequentially from 3D poses.
- Visualization: plot and animate the results in 3D.

SeqIKPy is aimed at researchers studying detailed joint motion in animals with complex, multiple degrees-of-freedom body appendages. We provide examples for the fruit fly, *Drosophila melanogaster*. However, each module can easily be extended to be used with another model organism; the only requirements are the 3D kinematics of the target animal and its corresponding kinematic chain. Our package requires minimal Python knowledge and we provide extensive tutorials at <https://nely-epfl.github.io/sequential-inverse-kinematics>.

Statement of need

Over the past decade, deep-learning based computer vision algorithms have transformed the analysis of behaviors in laboratory animals (Pereira et al., 2020), including for the widely-used model organism, *Drosophila melanogaster*. Recently, researchers have developed deep learning-based 3D pose estimation tools (Günel et al., 2019; Karashchuk et al., 2021) and detailed biomechanical models (Lobato-Rios et al., 2022; Vaxenburg et al., 2024; Wang-Chen et al., 2024), creating a growing need for tools to obtain more detailed descriptions of how body parts move in joint space. These computed joint angles can be replayed in physics-based simulations to estimate unmeasured physical quantities like joint torques (Lobato-Rios et al., 2022).

Inverse Kinematics (IK) spans multiple domains including robotics, biomechanics, and character animation (Aristidou et al., 2018). In robotics, IK typically computes joint angles to achieve a desired end-effector position while respecting joint constraints. By contrast, in biomechanics, IK algorithms calculate joint angles to track all marker positions rather than only a single end-effector. This process is also known as multi-body kinematics optimization and is a well-established area in human biomechanics research (Begon et al., 2018; Delp et al., 2007; Pagnon et al., 2022; Werling et al., 2023).

However, multi-body kinematics optimization is still an emerging field in insect research. Existing methods fall on two extremes along a spectrum of complexity. Simple approaches

have been employed to compute joint angles using the dot product of two consecutive body segment vectors (Karashchuk et al., 2021; Lobato-Rios et al., 2022). This often results in deviations from reference poses due to the lack of iterative corrections. On the other hand, more advanced gradient-based optimization methods have been developed to estimate joint angles in a biomechanical model of the fly (Vaxenburg et al., 2024), using simulation-based Jacobians in physics-engines like MuJoCo (Todorov et al., 2012). Although these methods provide higher accuracy, they are often entangled with pose estimation, rendering, or physics simulation frameworks (e.g. MuJoCo and various pose estimation postprocessing pipelines). This leads to complex dependencies and heavy overhead. Here, we aim to provide lightweight and stand-alone package focused on inverse kinematics in a modular way.

To address this gap, we have developed SeqIKPy, a fast and lightweight Python package for multi-body kinematics optimization in insects. Our package has two main stages: marker registration (aligning joint markers to a template in 3D) and inverse kinematics. The second stage draws upon the open-source IKPy (Manceron, 2016) library in a sequential manner. Through 3D visualizations, we demonstrate that our package can reliably reconstruct body kinematics for various fruit fly behaviors. Furthermore, recent studies have shown that the joint angles computed using SeqIKPy can accurately replicate animal behavior, both ground walking (Wang-Chen et al., 2024) and grooming (Özdil et al., 2024), in physics-based simulations. Although our examples focus on the fly, our package's modular design allows for customization and extension to other animals with a similar body morphology.

SeqIKPy can be used for animals and robots with arbitrarily configured kinematic chains consisting of rigid bodies connected with rotational joints. However, we have focused on the fruit fly *Drosophila melanogaster* in our demonstrations. Insects are some of the oldest model organisms in the study of motor control [delcomyn:2004]. In particular, the fly *Drosophila melanogaster* is one of the most common model organisms in neuroscience, thanks to its compact but versatile nervous system. In the past few years, *Drosophila melanogaster* has become the most complex organism whose entire central nervous system has been mapped out (for example, see [bates:2025]). This resulted in a rapidly growing community of researchers in field and a renewed demand for open-source data processing tools. With SeqIKPy, we aim to improve a crucial step in the data processing pipeline for behavior analysis.

Overview

SeqIKPy assumes that the 3D pose estimation has the following orientation (Figure 1, left):

- x-axis: anterioposterior axis
- y-axis: mediolateral axis
- z-axis: dorsoventral axis

After setting this orientation, users can use the AlignPose class to map body keypoints to a template body model (Figure 1, middle). This step is also known as “calibration” in pose estimation literature. Despite being optional for inverse kinematics, this step has two benefits:

- It aligns measured kinematics to a standardized body template, facilitating replay of behaviors in body models (Figure 1, right).
- It reduces noise and variation in kinematics by standardizing body lengths.

We provide a default body template based on a CT scan of the fly (Lobato-Rios et al., 2022). Users can also define custom templates manually or by importing SDF files. Utility functions are included to convert data into the required formats.

Next, the KinematicChainSeq class defines a pre-configured kinematic chain for fly legs. Users need a dictionary containing segment lengths and joint bounds (Figure 1, middle). Segment lengths can be derived from 3D kinematics, while joint bounds are optional. Using the defined kinematic chain, the LegInvKin class calculates joint angles sequentially for each

leg. This process supports parallelization to perform IK on multiple legs simultaneously. Additionally, our package contains features for animation and visualization of data in 3D. For more technical details on the implementation, please refer to the methodology section at <https://nely-epfl.github.io/sequential-inverse-kinematics>.

On a MacBook Pro with a 2.3 GHz Quad-Core Intel Core i7, the pipeline computes inverse kinematics for all six legs across 100 frames in 36 s when parallelized.

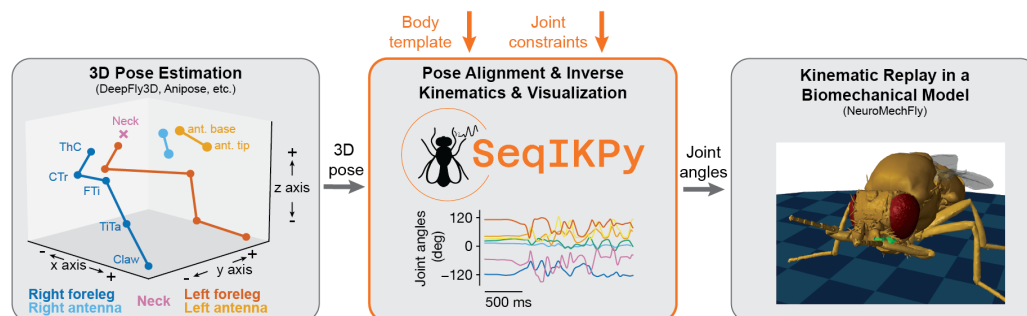


Figure 1: Overview of the SeqIKPy pipeline. **(Left)** Pose estimation tools (e.g., DeepFly3D and Anipose) estimates 3D positions of body key points. **(Middle)** SeqIKPy aligns these points to a body template, performs sequential inverse kinematics using joint constraints to calculate joint angles. **(Right)** The computed joint angles can be used to replay measured motions in biomechanical models, such as NeuroMechFly.

Acknowledgements

We acknowledge the contributors and maintainers of the open-source software tools that SeqIKPy builds upon, including Python, NumPy, SciPy, Matplotlib, and IKPy (Manceron, 2016), among others. PGÖ acknowledges support from a Swiss Government Excellence Scholarship for Doctoral Studies and a Google PhD Fellowship. PR acknowledges support from an SNSF Project Grant (175667) and an SNSF Eccellenza Grant (181239).

References

- Aristidou, A., Lasenby, J., Chrysanthou, Y., & Shamir, A. (2018). Inverse kinematics techniques in computer graphics: A survey. *Computer Graphics Forum*, 37, 35–58. <https://doi.org/10.1111/cgf.13310>
- Begon, M., Andersen, M. S., & Dumas, R. (2018). Multibody kinematics optimization for the estimation of upper and lower limb human joint kinematics: A systematized methodological review. *Journal of Biomechanical Engineering*, 140(3), 030801. <https://doi.org/10.1115/1.4038741>
- Delp, S. L., Anderson, F. C., Arnold, A. S., Loan, P., Habib, A., John, C. T., Guendelman, E., & Thelen, D. G. (2007). OpenSim: Open-source software to create and analyze dynamic simulations of movement. *IEEE Transactions on Biomedical Engineering*, 54(11), 1940–1950. <https://doi.org/10.1109/TBME.2007.901024>
- Günel, S., Rhodin, H., Morales, D., Campagnolo, J., Ramdya, P., & Fua, P. (2019). DeepFly3D, a deep learning-based approach for 3D limb and appendage tracking in tethered, adult *Drosophila*. *eLife*, 8, e48571. <https://doi.org/10.7554/eLife.48571>
- Karashchuk, P., Rupp, K. L., Dickinson, E. S., Walling-Bell, S., Sanders, E., Azim, E., Brunton, B. W., & Tuthill, J. C. (2021). Anipose: A toolkit for robust markerless 3D pose estimation. *Cell Reports*, 36(13), 109730. <https://doi.org/10.1016/j.celrep.2021.109730>

- 118 Lobato-Rios, V., Ramalingasetty, S. T., Özdil, P. G., Arreguit, J., Ijspeert, A. J., & Ramdya,
119 P. (2022). NeuroMechFly, a neuromechanical model of adult *Drosophila melanogaster*.
120 *Nature Methods*, 19(5), 620–627. <https://doi.org/10.1038/s41592-022-01466-7>
- 121 Manceron, P. (2016). IKPy. In *GitHub repository*. GitHub. [https://doi.org/10.5281/zenodo.](https://doi.org/10.5281/zenodo.6551105)
122 [6551105](https://doi.org/10.5281/zenodo.6551105)
- 123 Özdil, P. G., Arreguit, J., Scherrer, C., Ijspeert, A., & Ramdya, P. (2024). Centralized brain
124 networks underlie body part coordination during grooming. *bioRxiv*. [https://doi.org/10.](https://doi.org/10.1101/2024.12.17.628844)
125 [1101/2024.12.17.628844](https://doi.org/10.1101/2024.12.17.628844)
- 126 Pagnon, D., Domalain, M., & Reveret, L. (2022). Pose2Sim: An open-source python package
127 for multiview markerless kinematics. *Journal of Open Source Software*, 7(77), 4362.
128 <https://doi.org/10.21105/joss.04362>
- 129 Pereira, T. D., Shaevitz, J. W., & Murthy, M. (2020). Quantifying behavior to under-
130 stand the brain. *Nature Neuroscience*, 23(12), 1537–1549. [https://doi.org/10.1038/](https://doi.org/10.1038/s41593-020-00734-z)
131 [s41593-020-00734-z](https://doi.org/10.1038/s41593-020-00734-z)
- 132 Todorov, E., Erez, T., & Tassa, Y. (2012). Mujoco: A physics engine for model-based control.
133 *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, 5026–5033.
134 <https://doi.org/10.1109/IROS.2012.6386109>
- 135 Vaxenburg, R., Siwanowicz, I., Merel, J., Robie, A. A., Morrow, C., Novati, G., Stefanidi, Z.,
136 Card, G. M., Reiser, M. B., Botvinick, M. M., Branson, K. M., Tassa, Y., & Turaga, S. C.
137 (2024). *Whole-body simulation of realistic fruit fly locomotion with deep reinforcement*
138 *learning*. <https://doi.org/10.1101/2024.03.11.584515>
- 139 Wang-Chen, S., Stimpfling, V. A., Lam, T. K. C., Özdil, P. G., Genoud, L., Hurtak, F., &
140 Ramdya, P. (2024). NeuroMechFly v2: Simulating embodied sensorimotor control in adult
141 *drosophila*. *Nature Methods*, 1–10. <https://doi.org/10.1038/s41592-024-02497-y>
- 142 Werling, K., Bianco, N. A., Raitor, M., Stingel, J., Hicks, J. L., Collins, S. H., Delp, S. L.,
143 & Liu, C. K. (2023). AddBiomechanics: Automating model scaling, inverse kinematics,
144 and inverse dynamics from human motion data through sequential optimization. *Plos One*,
145 18(11), e0295152. <https://doi.org/10.1371/journal.pone.0295152>