

Kubernetes Configuration & Best Practices

Version 1.18-SNAPSHOT


2019-01-23

Table of Contents

| 1. | Installation | . 2 |
|----|---------------------------------|-----|
| 2. | Use helm to setup a CI/CD stack | . 2 |
| | 2.1. Initialization | . 2 |
| | 2.2. SonarQube | . 3 |
| | 2.3. Jenkins | . 4 |
| | 2.3.1. Gerrit | . 4 |
| | 2.4. Gitlab | . 5 |
| | 2.4.1. Prerequisite | . 5 |
| | 2.5. Installation | . 5 |
| | 2.6. Nexus3 | . 5 |

Table 1. History

| Date | Author | Detail |
|------------|----------|--|
| 2018-12-18 | bcouetil | Moved Gerrit plugin configuration from Jenkins to Gerrit page + Enhanced HTML CSS + Cropped some images + Improved PlantUML skin |
| 2018-11-13 | bcouetil | - Updated sample project with Reveal.js generation - Duplicated Reveal.js execution to have multiple styles - Compromised layout between 4/3 and 16/9 - Minor changes in Reveal.js css - Added some web comics |
| 2018-09-19 | bcouetil | - Sample asciidoctor maven project published on Github - Github & LinkedIn links - Sample project tree - new images + resizing and positioning |
| 2018-08-29 | bcouetil | Asciidoc HTML look & feel changes |
| 2018-08-24 | bcouetil | Icones added for download + favicon added for webpage |

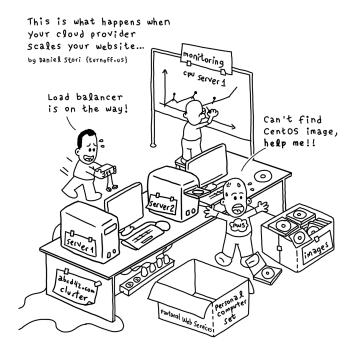

1. Installation

Create an account on Google Cloud.

2. Use helm to setup a CI/CD stack

2.1. Initialization

Enter these in console.

Cluster creation

```
gcloud container clusters get-credentials cluster-1 --zone us-central1-a kubectl create ns cicd kubectl config set-context cicd --cluster gke_zenika-test_us-central1-a_cluster-1 --user gke_zenika-test_us-central1-a_cluster-1 --namespace cicd
```

Helm installation

```
wget "https://storage.googleapis.com/kubernetes-helm/helm-v2.9.1-linux-amd64.tar.gz"
tar -zxvf helm-v2.9.1-linux-amd64.tar.gz
mv linux-amd64/ helm-install-files
cd helm-install-files/
sudo mv helm /usr/local/bin/helm
```

vi rbac-tiller-config.yaml

rbac-tiller-config.yaml

```
apiVersion: v1
kind: ServiceAccount
metadata:
 name: tiller
 namespace: kube-system
apiVersion: rbac.authorization.k8s.io/v1beta1
kind: ClusterRoleBinding
metadata:
 name: tiller
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
 name: cluster-admin
subjects:
  - kind: ServiceAccount
   name: tiller
   namespace: kube-system
```

```
kubectl create -f rbac-tiller-config.yaml
helm init --service-account tiller
helm repo update
```



if already initialized by mistake, use this command:

helm reset --force



2.2. SonarQube

helm install stable/sonarqube


deployment data example

```
resources:
    cpu: 100m
    memory: 1536Mi

persistence:
    enabled: true
    storageClass: "-"
    accessMode: ReadWriteOnce
    size: 5Gi

plugins:
    install:
        - "https://github.com/AmadeusITGroup/sonar-stash/releases/download/1.3.0/sonar-stash-plugin-1.3.0.jar"
        - "https://github.com/SonarSource/sonar-ldap/releases/download/2.2-RC3/sonar-ldap-plugin-2.2.0.601.jar"
```

- See how to add plugins
 - Findbugs
 - LDAP
 - SoftVis3D Sonar plugin
 - · SonarJava (update)
 - SonarQube :: Plugins :: SCM :: Git (update)

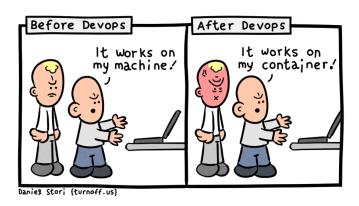

2.3. Jenkins


helm install stable/jenkins

To get the admin password:

printf \$(kubectl get secret --namespace cicd silly-clam-jenkins -o jsonpath="{.data.jenkins-admin-password}" | base64
--decode);echo

2.3.1. Gerrit

In progress, not in Helm/Charts yet. See ongoing project: https://github.com/Novitoll/charts/tree/master/incubator/gerrit



2.4. Gitlab

2.4.1. Prerequisite

Get a fixed IP

- Open the web console
- In the sidebar, browse to VPC Network > External IP addresses
- Click Reserve static address
- Choose Regional and select the region of your cluster
- Leave Attached to blank, as it will be automatically assigned during deployment

Have a domain

• TODO

2.5. Installation

Start the Gitlab installation, example:


```
helm upgrade --install gitlab gitlab/gitlab \
 --timeout 600 \
 --set global.hosts.domain=gitlab.nevrax-cicd.com \
 --set global.hosts.externalIP=35.184.74.117 \
 --set certmanager-issuer.email=nevraxgoespro@gmail.com
 --set gitlab.migrations.image.repository=registry.gitlab.com/gitlab-org/build/cng/gitlab-rails-ce
 --set gitlab.sidekiq.image.repository=registry.gitlab.com/gitlab-org/build/cng/gitlab-sidekiq-ce
 --set gitlab.unicorn.image.repository=registry.gitlab.com/gitlab-org/build/cng/gitlab-unicorn-ce
```

2.6. Nexus3



TODO



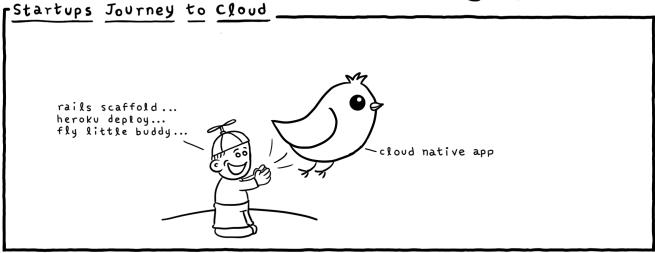

Daniel Stori {turnoff.us} Thanks to Michael Tharrington