


Figure 1 | Connectome-constrained network

Fixed (never trained)



only these are trained: per-edge gains $g = 1 + \delta$ (δ init 0, $\lambda \cdot \text{mean}(\delta^2)$ penalty) + the linear readout
topology is frozen: $W_{ij} = 0$ stays 0 -- no connection absent from the connectome can ever appear

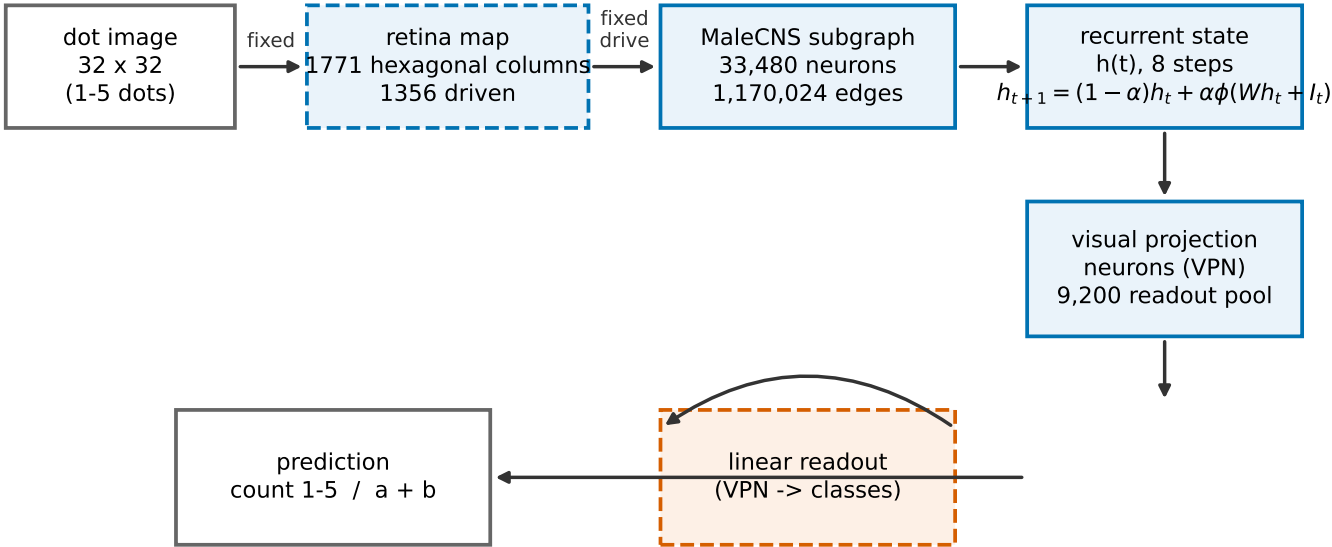