

# phylo2vec: a library for vector-based phylogenetic tree manipulation

Neil Scheidwasser<sup>1\*</sup>, Ayush Nag<sup>2\*</sup>, Matthew J Penn<sup>1</sup>, Anthony MV Jakob<sup>4</sup>, Frederik Mølkjær Andersen<sup>1</sup>, Mark P Khurana<sup>1</sup>, Landung Setiawan<sup>2</sup>, Madeline Gordon<sup>2</sup>, David A Duchêne<sup>1</sup>, and Samir Bhatt<sup>1,3¶</sup>

<sup>1</sup> Section of Health Data Science and AI, University of Copenhagen, Copenhagen <sup>2</sup> eScience Institute, University of Washington, Seattle, United States <sup>3</sup> MRC Centre for Global Infectious Disease Analysis, Imperial College London, London, United Kingdom <sup>4</sup> Independent researcher ¶ Corresponding author \* These authors contributed equally.

DOI: 10.xxxxxx/draft

## Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished


## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

## Summary

Phylogenetics is a fundamental component of many analysis frameworks in computational and evolutionary biology (Yang, 2014) as well as linguistics (Atkinson & Gray, 2005). Recently, the advent of large-scale genomics and the SARS-CoV-2 pandemic has underscored the necessity to scale phylogenetic software to handle large datasets of genomes or phylogenetic trees (Attwood et al., 2022; Kapli et al., 2020; Khurana et al., 2024; Kraemer et al., 2025). While significant efforts have focused on scaling phylogenetic inference (De Maio et al., 2023; Sanderson, 2021; Turakhia et al., 2021), visualization (Sanderson, 2022), and lineage identification (McBroome et al., 2024), an emerging body of research has been dedicated to efficient representations of data for genomes (Deorowicz et al., 2023) and phylogenetic trees such as phylo2vec (Penn et al., 2024), HOP (Chauve et al., 2025), and OLA (Richman et al., 2025). Compared to traditional tree representations such as the Newick format (Felsenstein, 2004), which describes a phylogenetic tree as a string of nested parentheses enclosing pairs of leaves or subtrees, these modern representations utilize integer vectors to define the tree topology traversal. This approach offers several advantages, including easier manipulability, increased memory efficiency, and applicability to downstream tasks such as machine learning (Penn et al., 2024).

Here, we present the new release of phylo2vec (or Phylo2Vec), a high-performance software package for encoding, manipulating, and analysing binary phylogenetic trees. At its core, the package is based on the phylo2vec (Penn et al., 2024) representation of binary trees, which defines a bijection from any tree topology with  $n$  leaves into an integer vector of size  $n - 1$ . Compared to the traditional Newick format, phylo2vec was designed with fast sampling and rapid tree comparison in mind. This release features a core implementation in Rust, providing significant performance improvements and memory efficiency (Figure 1), while remaining available in Python (superseding the release described in the original paper (Penn et al., 2024)) and R via dedicated wrappers, making it accessible to a broad audience in the bioinformatics community.

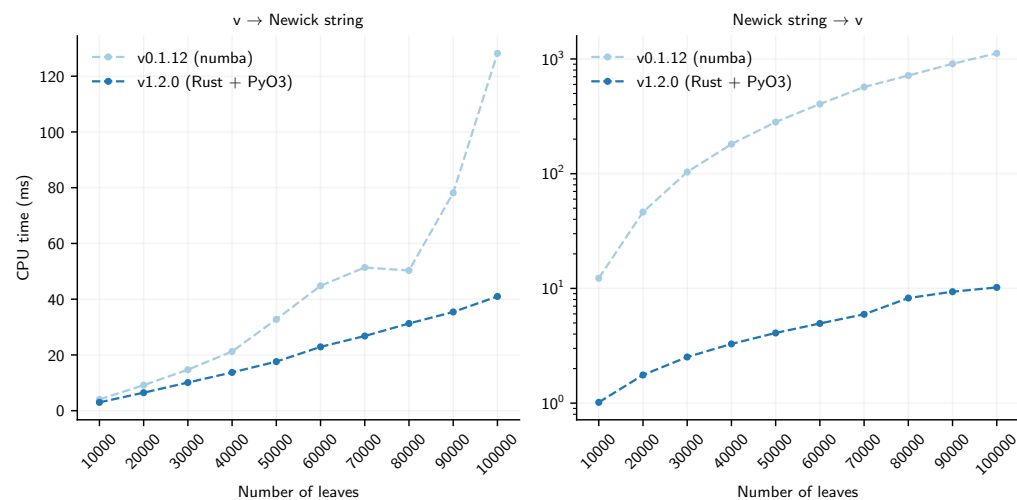


**Figure 1:** Benchmark times for converting a phylo2vec vector to a Newick string (left) and vice versa (right). For each size, we evaluated the execution time for a minimum of 20 rounds using pytest-benchmark. We compare the execution time of the Python functions in the latest release, which rely on Rust bindings via PyO3, with the previous release (Penn et al., 2024), which make use of just-in-time (JIT) compilation of Python functions using Numba (Lam et al., 2015). Execution times were benchmarked on an AMD Ryzen Threadripper PRO 5995WX with a 64-core CPU @ 7 GHz and 256 GB of RAM.

## Statement of need

The purpose of the phylo2vec library is threefold. First, the core of the library aims at providing a robust phylogenetic tree manipulation library in Rust, complementing other efforts such as light\_phylogeny (Duchemin et al., 2018), which focuses on tree visualization and manipulation of reconciled phylogenies (Nakhleh, 2013), and rust-bio (Köster, 2016), a comprehensive bioinformatics library which does not yet cover phylogenetics. Second, phylo2vec aims at complementing existing phylogenetic libraries such as ape (Paradis & Schliep, 2019) in R, and ete3 (Huerta-Cepas et al., 2016) and DendroPy (Moreno et al., 2024) in Python, by providing fast tree sampling, fast tree comparison and efficient tree data compression (Penn et al., 2024). Third, the inherent tree representation of phylo2vec offers a pathway to gradient-based optimization frameworks for phylogenetic inference. A notable example is GradME (Penn et al., 2023), which relaxes the vector representation of phylo2vec into a continuous space.

## Features

The presented release of phylo2vec addresses several limitations of (Penn et al., 2024). In particular, it allows for branch length annotations, extending the vector representation of size  $n - 1$  to a matrix of size  $(n - 1) \times 3$ , where  $n$  denotes the number of leaves (or taxa) in a tree (Figure 2), a  $\mathcal{O}(n \log n)$  implementation of vector-to-Newick conversion based on Adelson-Velsky and Landis (AVL; (Adelson-Velsky & Landis, 1962)) trees, and a  $\mathcal{O}(n \log n)$  implementation of Newick-to-vector conversion making use of Fenwick trees (Fenwick, 1994) during the vector construction. Moreover, the current release features several new additions, including several leaf-level operations (pruning, placement, MRCA finding), fast cophenetic distance matrix calculation, and a skeleton for Bayesian phylogenetic inference using Markov Chain Monte Carlo (MCMC) in the highly optimised Beagle library that underpins a number of phylogenetic software (Ayres et al., 2012; Suchard & Rambaut, 2009). The inference framework leverages similarities between phylo2vec and BEAGLE's inner representation of post-order traversal. Lastly, user-friendliness is enhanced by step-by-step demos of the inner workings of phylo2vec's vector representation.

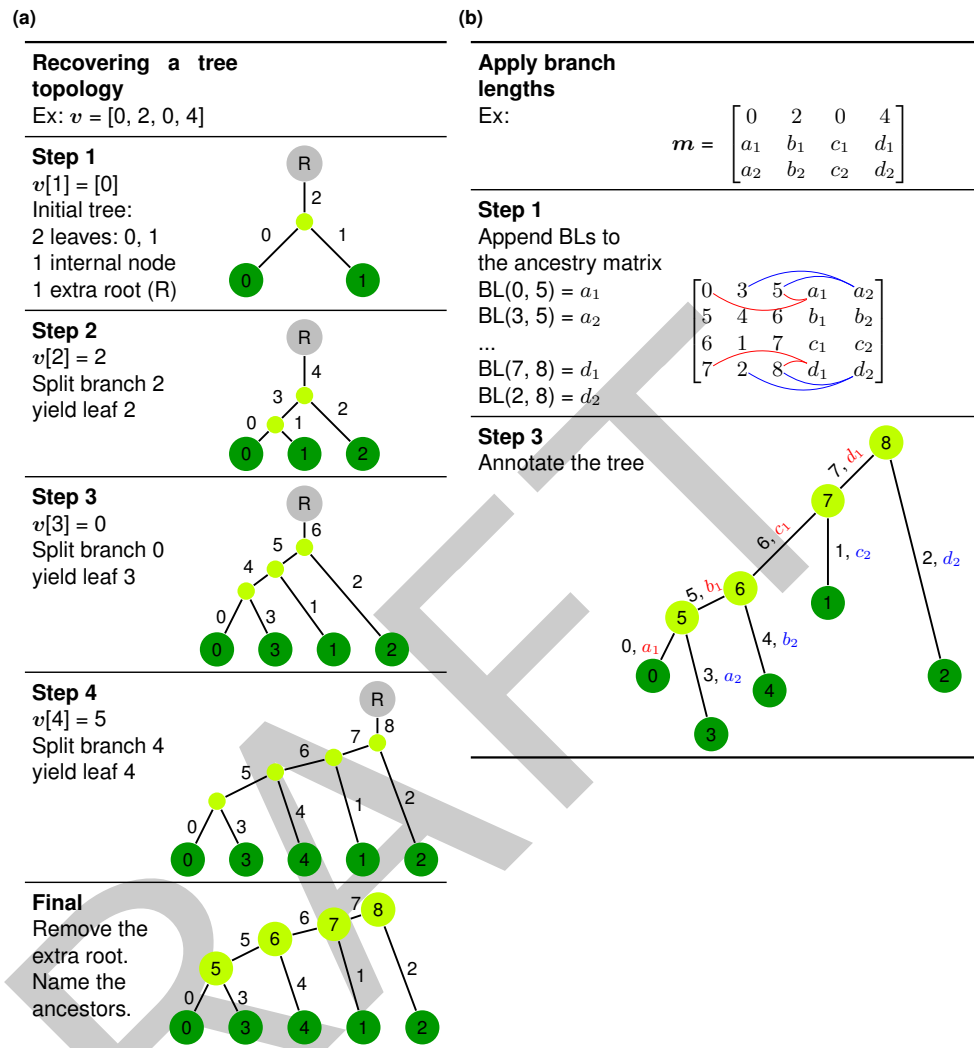

**Figure 2:** Recovering a tree from a phylo2vec vector: example for  $v = [0, 2, 0, 4]$ . (a) Main algorithm for leaf placement described in (Penn et al., 2024). (b) Augmenting the phylo2vec vector into a matrix  $m$  with branch lengths. We use an intermediary ancestry matrix whereby each row describes a cherry (two children nodes and the parent node), which we augment with two columns of branch lengths. The node with the smallest descendant will have the branch length in the 2nd column, and the other the branch length in the 3rd column.

## Maintenance

With Phylo2Vec, we aim to support long-term maintenance through implementing recommended software practices explicitly into the structure of the project and development workflow, rather than leaving them implied. This avoids human error as the repo's structure itself enforces good practices, rather than placing the responsibility solely on code contributors. More specifically, we have structured the project such that the Rust API contains the core algorithms, and all other language components are APIs that bind to the Rust functions. This avoids tight coupling, as it allows for the possibility of adding new languages to bind to the Rust API's, without needing to change anything in the Rust project itself. Additionally, we have established a robust continuous integration (CI) pipeline using GitHub Actions, which features:

- Unit test frameworks for Rust (cargo), Python (pytest), and R (testthat) (Wickham,

2011))

- Benchmarking on the Rust code ([criterion](#)) and its Python bindings ([pytest-benchmark](#))

Lastly, to complement Jupyter Notebook demos, comprehensive documentation is provided using [Jupyter Book](#) and [Read The Docs](#).

## Acknowledgements

S.B. acknowledges funding from the MRC Centre for Global Infectious Disease Analysis (reference MR/X020258/1), funded by the UK Medical Research Council (MRC). This UK funded award is carried out in the frame of the Global Health EDCTP3 Joint Undertaking. S.B. acknowledges support from the Danish National Research Foundation via a chair grant (DNRF160) which also supports N.S. and M.P.K. S.B. acknowledges support from The Eric and Wendy Schmidt Fund For Strategic Innovation via the Schmidt Polymath Award (G-22-63345) which also supports M.J.P. and F.M.A. S.B. acknowledges support from the Novo Nordisk Foundation via The Novo Nordisk Young Investigator Award (NNF20OC0059309). D.A.D. is supported by a Data Science - Emerging researcher award from Novo Nordisk Fonden (NNF23OC0084647).

## References

- Adelson-Velsky, Georgii, & Landis, E. (1962). An algorithm for the organization of information. *Soviet Math.*, 3, 1259–1263.
- Atkinson, Q. D., & Gray, R. D. (2005). Curious parallels and curious connections—phylogenetic thinking in biology and historical linguistics. *Systematic Biology*, 54(4), 513–526.
- Attwood, S. W., Hill, S. C., Aanensen, D. M., Connor, T. R., & Pybus, O. G. (2022). Phylogenetic and phylodynamic approaches to understanding and combating the early SARS-CoV-2 pandemic. *Nature Reviews Genetics*, 23(9), 547–562.
- Ayres, D. L., Darling, A., Zwickl, D. J., Beerli, P., Holder, M. T., Lewis, P. O., Huelsenbeck, J. P., Ronquist, F., Swofford, D. L., Cummings, M. P., & others. (2012). BEAGLE: An application programming interface and high-performance computing library for statistical phylogenetics. *Systematic Biology*, 61(1), 170–173.
- Chauve, C., Colijn, C., & Zhang, L. (2025). A vector representation for phylogenetic trees. *Philosophical Transactions B*, 380(1919), 20240226.
- De Maio, N., Kalaghatgi, P., Turakhia, Y., Corbett-Detig, R., Minh, B. Q., & Goldman, N. (2023). Maximum likelihood pandemic-scale phylogenetics. *Nature Genetics*, 55(5), 746–752.
- Deorowicz, S., Danek, A., & Li, H. (2023). AGC: Compact representation of assembled genomes with fast queries and updates. *Bioinformatics*, 39(3), btad097.
- Duchemin, W., Gence, G., Arigon Chifolleau, A.-M., Arvestad, L., Bansal, M. S., Berry, V., Boussau, B., Chevenet, F., Comte, N., Davín, A. A., Dessimoz, C., Dylus, D., Hasic, D., Mallo, D., Planel, R., Posada, D., Scornavacca, C., Szöllősi, G., Zhang, L., ... Daubin, V. (2018). RecPhyloXML: A format for reconciled gene trees. *Bioinformatics*, 34(21), 3646–3652. <https://doi.org/10.1093/bioinformatics/bty389>
- Felsenstein, J. (2004). *Inferring phylogenies* (Vol. 2). Sinauer Associates.
- Fenwick, P. M. (1994). A new data structure for cumulative frequency tables. *Software: Practice and Experience*, 24(3), 327–336.
- Huerta-Cepas, J., Serra, F., & Bork, P. (2016). ETE 3: Reconstruction, analysis, and visualization of phylogenomic data. *Molecular Biology and Evolution*, 33(6), 1635–1638.

- 119 Kapli, P., Yang, Z., & Telford, M. J. (2020). Phylogenetic tree building in the genomic age.  
120 *Nature Reviews Genetics*, 21(7), 428–444.
- 121 Khurana, M. P., Curran-Sebastian, J., Scheidwasser, N., Morgenstern, C., Rasmussen, M.,  
122 Fonager, J., Stegger, M., Tang, M.-H. E., Juul, J. L., Escobar-Herrera, L. A., & others.  
123 (2024). High-resolution epidemiological landscape from ~290,000 SARS-CoV-2 genomes  
124 from denmark. *Nature Communications*, 15(1), 7123.
- 125 Köster, J. (2016). Rust-bio: A fast and safe bioinformatics library. *Bioinformatics*, 32(3),  
126 444–446.
- 127 Kraemer, M. U., Tsui, J. L.-H., Chang, S. Y., Lytras, S., Khurana, M. P., Vanderslott, S., Bajaj,  
128 S., Scheidwasser, N., Curran-Sebastian, J. L., Semenova, E., & others. (2025). Artificial  
129 intelligence for modelling infectious disease epidemics. *Nature*, 638(8051), 623–635.
- 130 Lam, S. K., Pitrou, A., & Seibert, S. (2015). Numba: A llvm-based python jit compiler.  
131 *Proceedings of the Second Workshop on the LLVM Compiler Infrastructure in HPC*, 1–6.
- 132 McBroome, J., Bernardi Schneider, A. de, Roemer, C., Wolfinger, M. T., Hinrichs, A. S.,  
133 O'Toole, A. N., Ruis, C., Turakhia, Y., Rambaut, A., & Corbett-Detig, R. (2024). A  
134 framework for automated scalable designation of viral pathogen lineages from genomic  
135 data. *Nature Microbiology*, 9(2), 550–560.
- 136 Moreno, M. A., Holder, M. T., & Sukumaran, J. (2024). DendroPy 5: A mature python  
137 library for phylogenetic computing. *Journal of Open Source Software*, 9(101), 6943.  
138 <https://doi.org/10.21105/joss.06943>
- 139 Nakhleh, L. (2013). Computational approaches to species phylogeny inference and gene tree  
140 reconciliation. *Trends in Ecology & Evolution*, 28(12), 719–728.
- 141 Paradis, E., & Schliep, K. (2019). Ape 5.0: An environment for modern phylogenetics and  
142 evolutionary analyses in R. *Bioinformatics*, 35, 526–528.
- 143 Penn, M. J., Scheidwasser, N., Khurana, M. P., Duchêne, D. A., Donnelly, C. A., & Bhatt, S.  
144 (2024). Phylo2Vec: A vector representation for binary trees. *Systematic Biology*, syae030.
- 145 Penn, M. J., Scheidwasser, N., Penn, J., Donnelly, C. A., Duchêne, D. A., & Bhatt, S. (2023).  
146 Leaping through tree space: Continuous phylogenetic inference for rooted and unrooted  
147 trees. *Genome Biology and Evolution*, 15(12), evad213.
- 148 Richman, H., Zhang, C., & IV, F. A. M. (2025). Vector encoding of phylogenetic trees by  
149 ordered leaf attachment. <https://arxiv.org/abs/2503.10169>
- 150 Sanderson, T. (2021). Chronumetal: Time tree estimation from very large phylogenies. In  
151 *bioRxiv* (pp. 2021–2010). Cold Spring Harbor Laboratory.
- 152 Sanderson, T. (2022). Taxonium, a web-based tool for exploring large phylogenetic trees. *Elife*,  
153 11.
- 154 Suchard, M. A., & Rambaut, A. (2009). Many-core algorithms for statistical phylogenetics.  
155 *Bioinformatics*, 25(11), 1370–1376.
- 156 Turakhia, Y., Thornlow, B., Hinrichs, A. S., De Maio, N., Gozashti, L., Lanfear, R., Haussler,  
157 D., & Corbett-Detig, R. (2021). Ultrafast sample placement on existing tRees (USHER)  
158 enables real-time phylogenetics for the SARS-CoV-2 pandemic. *Nature Genetics*, 53(6),  
159 809–816.
- 160 Wickham, H. (2011). Testthat: Get started with testing. *The R Journal*, 3(1), 5–10.
- 161 Yang, Z. (2014). *Molecular evolution: A statistical approach*. Oxford University Press.