

Computer Vision Pipeline Specification

Source: docs/COMPUTER_VISION.md • Status: Verified & Synchronized

Computer Vision Pipeline Specification

Product: Cubyntra

Organization: Necookie Labs

Document Version: 1.0

Status: V1 Release

Last Updated: 2026-09-26

1. Computer Vision Overview

Cubyntra features a 100% client-side, privacy-first computer vision pipeline capable of running in standard browser sandboxes without WebAssembly overhead or server-side vision APIs. The perceptual pipeline transforms raw WebRTC video frames into a discrete 54-facelet physical cube model with high confidence and resilience to ambient illumination shifts.

```
flowchart LR
    Frame[Camera Frame] --> ROI[Square ROI Reticle]
    ROI --> Grid[3x3 Sampling Grid]
    Grid --> Trim[Trimmed-Mean Aggregation]
    Trim --> Spaces[sRGB -> HSV & CIELAB]
    Spaces --> Classify[Hybrid Metric Classifier]
    Classify --> Conf[Confidence Calculation]
    Conf --> Buffer[Temporal Stability Buffer]
    Buffer --> Capture[Face Capture Matrix]
```

2. Why Raw RGB Is Insufficient

Relying on raw RGB Euclidean distance is one of the most common failure modes in computer vision cube scanners:

- Intensity Non-Linearity: A blue sticker under bright sunlight has higher R, G, and B channel values than a white sticker under dim room lighting.
- Perceptual Non-Uniformity: The human visual system perceives chromatic differences non-linearly (MacAdam ellipses). In RGB space, equal Euclidean distances do not correspond to equal perceptual differences.
- Specular Glare: Plastic stickers reflect concentrated point-light sources (phone flashes, ceiling bulbs), saturating all three channels $(255, 255, 255)$ regardless of underlying plastic pigment.
- Color Cast / White Balance: Incandescent lighting shifts whites and yellows towards orange/red; cool fluorescent lighting shifts greens towards blue.

To resolve these challenges, Cubyntra employs a dual-space transformation ($sRGB \rightarrow HSV$ and $sRGB \rightarrow CIELAB$) combined with center-sticker calibration.

3. Mathematical Color Space Transformations

3.1 RGB to HSV Conversion

Given normalized color components $r, g, b \in [0, 1]$ where $r = R/255, g = G/255, b = B/255$:

$$C_{\max} = \max(r, g, b), \quad C_{\min} = \min(r, g, b), \quad \Delta = C_{\max} - C_{\min}$$

Hue ($H \in [0^\circ, 360^\circ)$):

\$\$

$$H = \begin{cases} 0^\circ & \text{if } \Delta = 0 \\ 60^\circ \times \left(\frac{g - b}{\Delta} \right) \pmod{6} & \text{if } C_{\max} = r \\ 60^\circ \times \left(\frac{b - r}{\Delta} + 2 \right) & \text{if } C_{\max} = g \\ 60^\circ \times \left(\frac{r - g}{\Delta} + 4 \right) & \text{if } C_{\max} = b \end{cases}$$

\$\$

Saturation ($S \in [0\%, 100\%]$):

\$\$

$$S = \begin{cases} 0\% & \text{if } C_{\max} = 0 \\ \frac{\Delta}{C_{\max}} \times 100\% & \text{if } C_{\max} > 0 \end{cases}$$

\$\$

Value ($V \in [0\%, 100\%]$):

$$V = C_{\max} \times 100\%$$

3.2 RGB to CIELAB Conversion

- Gamma Expansion (sRGB to linear RGB):

\$\$

$$c_{\text{linear}} = \begin{cases} \frac{c}{12.92} & \text{if } c \leq 0.04045 \\ \left(\frac{c + 0.055}{1.055} \right)^{2.4} & \text{if } c > 0.04045 \end{cases}$$

$$\quad \text{for } c \in \{r, g, b\}$$

\$\$

- Linear RGB to CIE XYZ (under D65 standard illuminant):

\$\$

$$\begin{bmatrix} X \\ Y \\ Z \end{bmatrix} = \begin{bmatrix} 0.4124564 & 0.3575761 & 0.1804375 \\ 0.2126729 & 0.7151522 & 0.0721750 \\ 0.0193339 & 0.1191920 & 0.9503041 \end{bmatrix} \begin{bmatrix} r_{\text{linear}} \\ g_{\text{linear}} \\ b_{\text{linear}} \end{bmatrix}$$

\$\$

- XYZ to CIELAB ($X_n = 0.95047, Y_n = 1.00000, Z_n = 1.08883$):

\$\$

$$L^* = 116 f(Y / Y_n) - 16, \quad a^* = 500 [f(X / X_n) - f(Y / Y_n)], \quad b^* = 200 [f(Y / Y_n) - f(Z / Z_n)]$$

\$\$

where:

\$\$

$$f(t) = \begin{cases}$$

$$t^{1/3} \ \& \ \text{if } t > 0.008856 \ \backslash$$

$$7.787 \ t + \frac{16}{116} \ \& \ \text{if } t \leq 0.008856$$


$$\end{cases}$$

\$\$

- CIE76 Color Difference (\$\Delta E\$):

$$\Delta E_{ab} = \sqrt{(L_1 - L_2)^2 + (a_1 - a_2)^2 + (b_1 - b_2)^2}$$

4. Sampling Strategy & Outlier Rejection

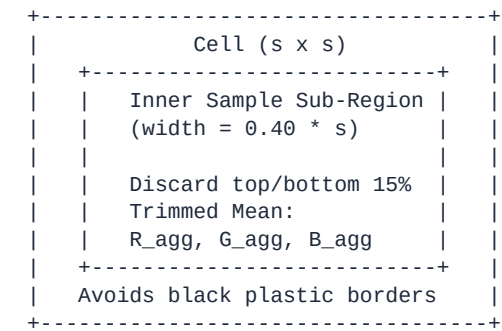

Trimmed-Mean Aggregation Algorithm

- Extract all pixel triplets $\{p_1, p_2, \dots, p_N\}$ from the inner central 40% box of cell (row, col) .
- Sort red, green, and blue values independently:

$$R_{\text{sorted}} = \text{sort}(\{p_{i.r}\}), \quad G_{\text{sorted}} = \text{sort}(\{p_{i.g}\}), \quad B_{\text{sorted}} = \text{sort}(\{p_{i.b}\})$$

- Compute trim offset $k = \lfloor N \times 0.15 \rfloor$.
 - Calculate mean exclusively over the central interval $[k, N - k]$:
- $$\bar{R} = \frac{1}{N - 2k} \sum_{i=k}^{N-k-1} R_{\text{sorted}}[i]$$

This rejects specular reflection spikes (which cluster in the top 10% highest brightness values) and boundary shadow/gaps (which cluster in the bottom 10%).

5. Color Classification Rules & Heuristics

Reference plastic centroid coordinates in CIELAB space:

- White: $L^*=92, a^*=0, b^*=2$
- Yellow: $L^*=85, a^*=-8, b^*=85$
- Green: $L^*=56, a^*=-55, b^*=35$
- Blue: $L^*=32, a^*=15, b^*=-60$
- Red: $L^*=45, a^*=65, b^*=45$
- Orange: $L^*=62, a^*=50, b^*=65$

HSV Boundary Thresholds:

- White Detection: Low saturation ($S < 22\%$ or $S < 30\%$ when $V > 70\%$). High lightness ($L^* > 70$).
- Yellow Detection: Hue $H \in [42^\circ, 75^\circ]$, $S \geq 35\%$, $V \geq 45\%$, and strongly positive $b^* > 20$.
- Green Detection: Hue $H \in [80^\circ, 168^\circ]$, $S \geq 28\%$, and strongly negative $a^* < -10$.
- Blue Detection: Hue $H \in [175^\circ, 265^\circ]$, $S \geq 30\%$, and strongly negative $b^* < -10$.
- Orange Detection: Hue $H \in [12^\circ, 42^\circ]$, $S \geq 40\%$, positive $a^* > 10$, and positive $b^* > 20$.
- Red Detection: Hue wrap-around $H \in [0^\circ, 12^\circ] \cup [340^\circ, 360^\circ]$, $S \geq 40\%$, and high positive $a^* > 25$.

6. Confidence Scoring

For each sticker sample, candidate scores S_{white} , S_{yellow} , S_{green} , S_{blue} , S_{red} , S_{orange} are calculated. The candidates are ranked in descending order:

$$S_{(1)} \geq S_{(2)} \geq \dots \geq S_{(6)}$$

Confidence $C \in [0.0, 1.0]$ is computed as the normalized margin between the best candidate $S_{(1)}$ and the runner-up $S_{(2)}$:

$$C = \min\left(1.0, \max\left(0.20, \frac{S_{(1)} - S_{(2)}}{45}\right)\right)$$

A high confidence score ($C > 0.85$) indicates clear, unambiguous color identity; a low score ($C < 0.60$) indicates boundary ambiguity (typically between orange and red or white and faded yellow).

7. Temporal Stability Buffer

Cubyntra never captures based on an isolated frame. The TemporalStabilityBuffer:

- Maintains a rolling window of recent frame classifications ($N = 15$).
- Compares all 9 sticker predictions with the immediate previous frame.
- If all 9 stickers match and average confidence ≥ 0.70 , increments consecutive match counter.
- Requires $M = 8$ consecutive matching frames before asserting `isStable: true` (Stability Progress = 100%).
- Fluctuations decay the counter by 2, preventing accidental captures during motion.

8. Failure Modes & Mitigations

Failure Mode	Root Cause	System Mitigation
Specular Glare	Overhead light bulb reflection saturating pixels	Trimmed-mean aggregation discards top 15% brightest outliers.
Orange / Red Ambiguity	Warm incandescent light shifting red into yellow-orange	CIELAB a^* (green-red) and b^* (blue-yellow) dual metric weighting.
White / Yellow Ambiguity	Dim warm lighting causing white stickers to appear yellow	Saturation gating: Yellow requires $S > 35\%$; white requires $S < 25\%$.
Hand Tremor / Motion Blur	Moving cube while holding in front of camera	Temporal stability buffer requiring 8 consecutive identical frames.

9. Benchmark Status

- Synthetic Color Space Unit Tests: PASSED (11/11 tests)
- Hardware-specific physical lighting field benchmarks: NOT YET BENCHMARKED (empirical multi-camera lighting trials are planned for V1.x).

