

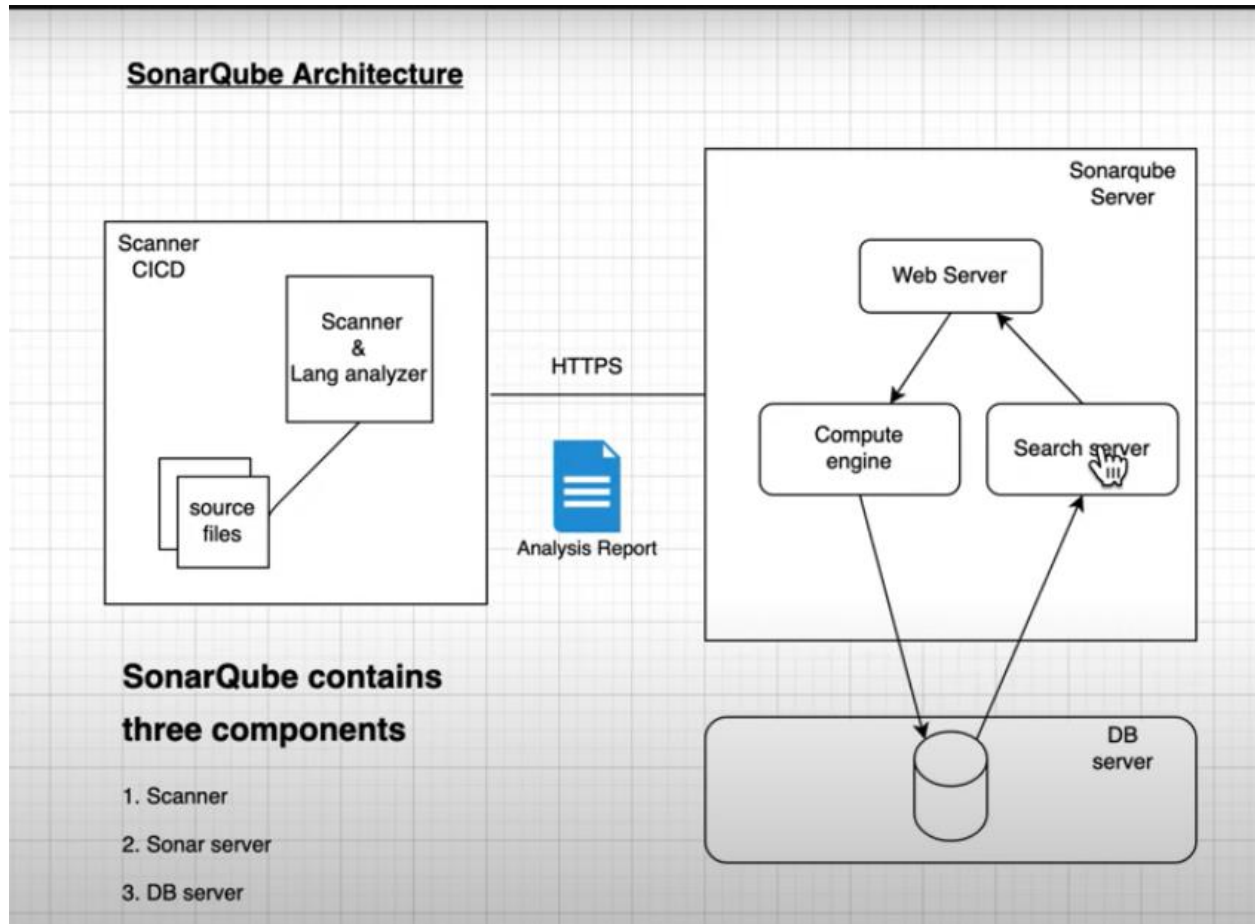


Integrate SonarQube with Jenkins

Pre-requisite:

- Sonar Server is running
- Jenkins's server is running

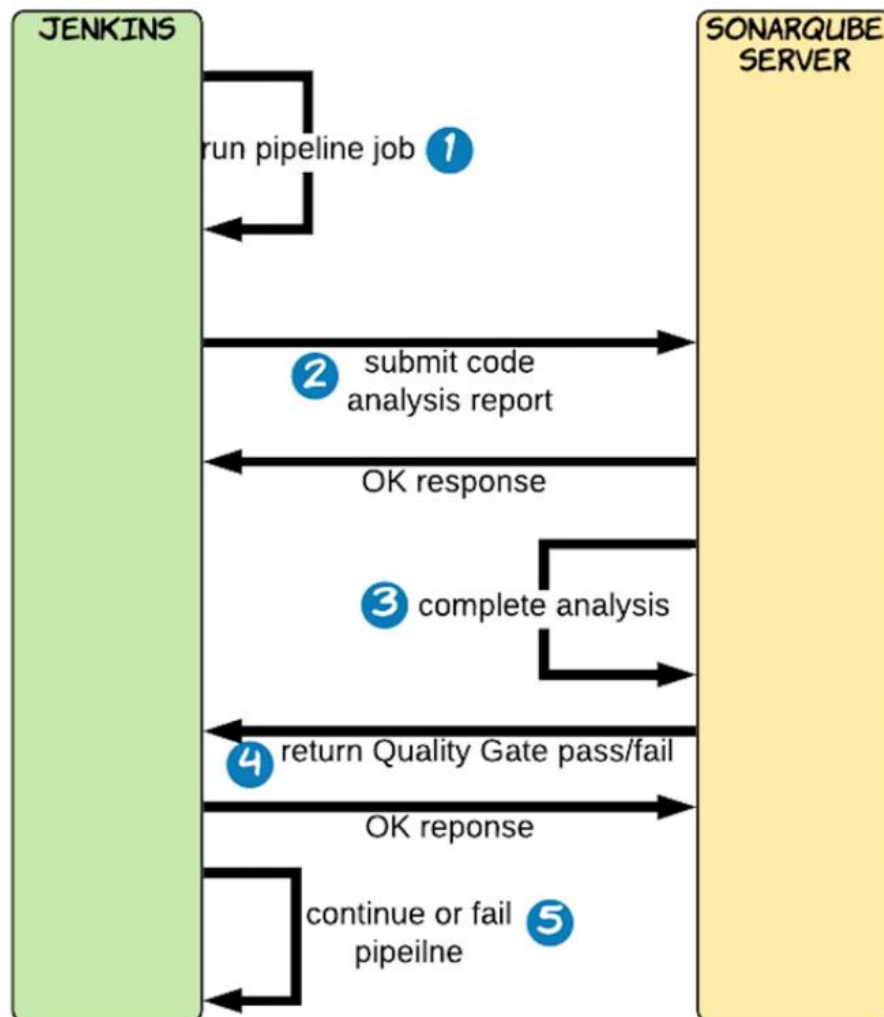

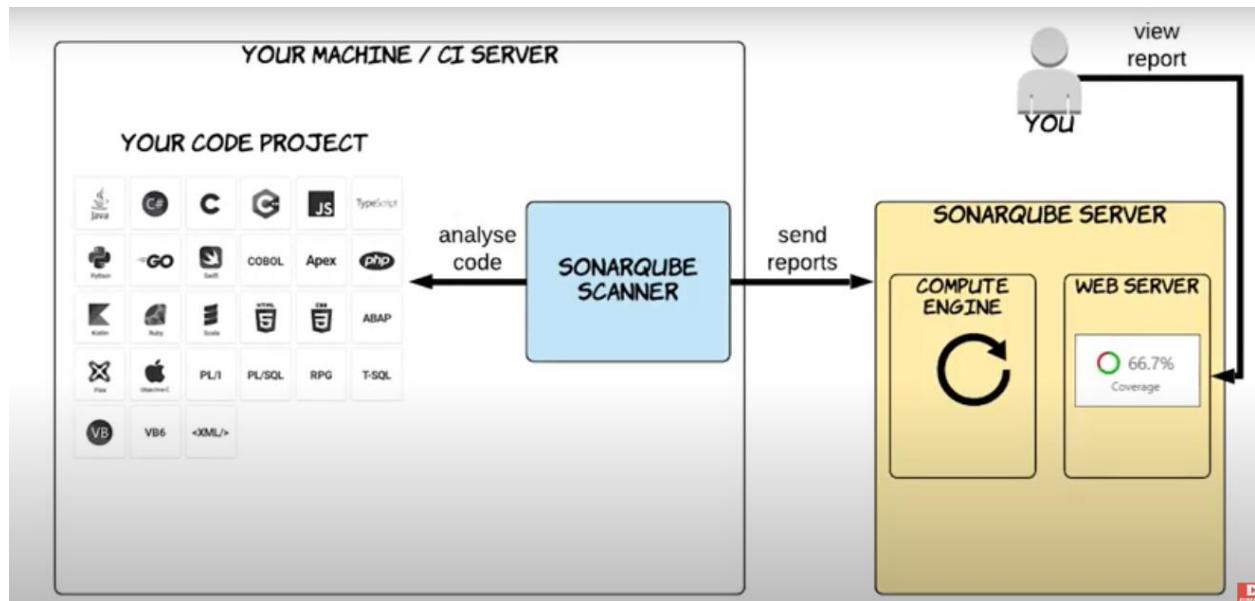


Step1: Sonar Plugins

Manage Jenkins-> Manage Plugins (SonarQube Scanner)


Step2: Go to SonarQube and create a token

Step3: Register SonarQube with Jenkins

Manage Jenkins-> Configure Systems

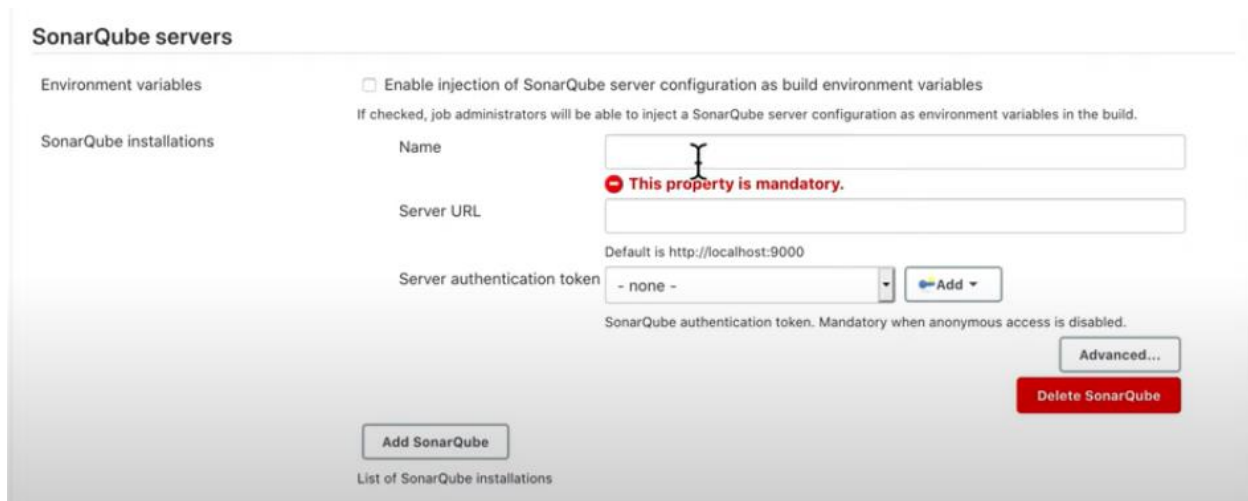

The screenshot shows the 'SonarQube servers' configuration page. It has a section for 'Environment variables' with a checkbox 'Enable injection of SonarQube server configuration as build environment variables'. Below this is a note: 'If checked, job administrators will be able to inject a SonarQube server configuration as environment variables in the build.' The main section is 'SonarQube installations'. It contains fields for 'Name', 'Server URL', and 'Server authentication token'. The 'Name' field has a red error message: 'This property is mandatory.' The 'Server URL' field has a default value of 'http://localhost:9000'. The 'Server authentication token' field has a dropdown menu with '- none -' and an 'Add' button. Below the token field is a note: 'SonarQube authentication token. Mandatory when anonymous access is disabled.' At the bottom, there are buttons for 'Add SonarQube', 'Advanced...', and 'Delete SonarQube'. A link 'List of SonarQube installations' is also present.

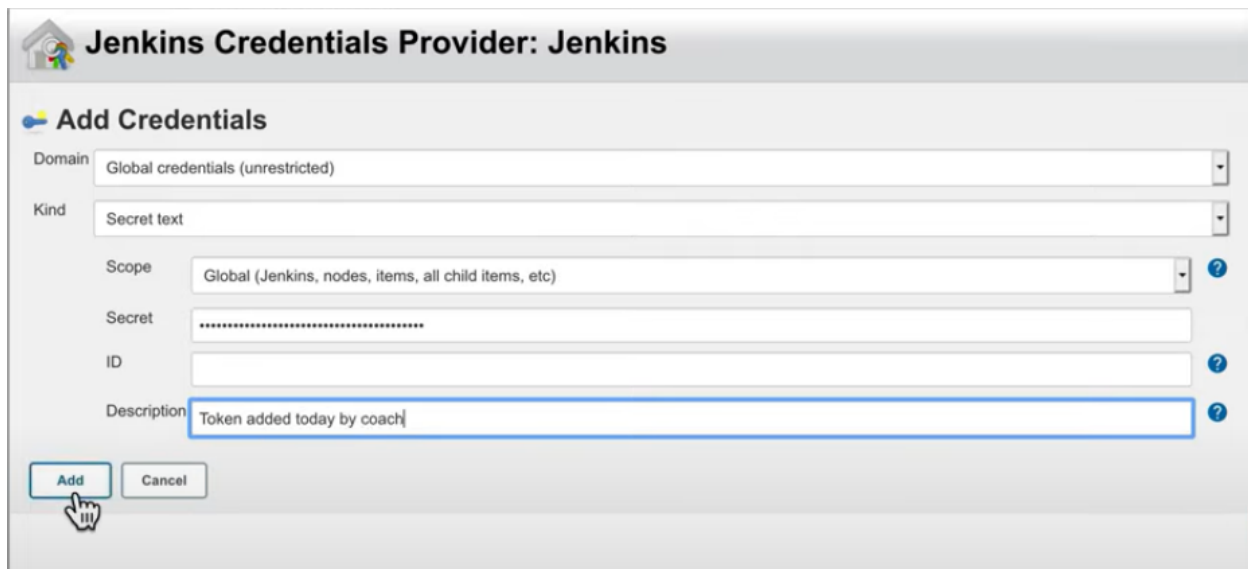


The screenshot shows the 'Jenkins Credentials Provider: Jenkins' page. It has a section 'Add Credentials' with a key icon. The form includes fields for 'Domain' (set to 'Global credentials (unrestricted)'), 'Kind' (set to 'Secret text'), 'Scope' (set to 'Global (Jenkins, nodes, items, all child items, etc)'), 'Secret' (masked with dots), 'ID' (empty), and 'Description' (set to 'Token added today by coach'). At the bottom, there are 'Add' and 'Cancel' buttons. A hand cursor is pointing at the 'Add' button.

Step4: Create a new Job in Jenkins

Type: freestyle



Click on the Advance (Give Path of the. pom)

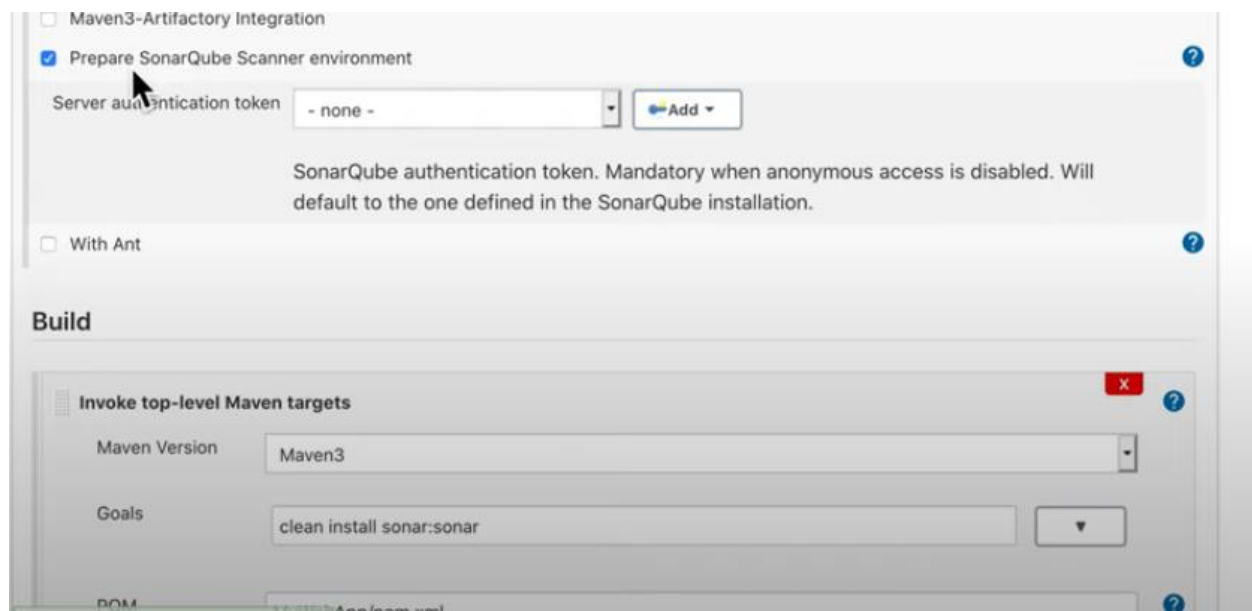

How to apply sonar scan in pipeline?

Create a new Job

Type: Pipeline

```
stage ('Code quality') {
    withSonarQubeEnv('SonarQube') {
        sh "${mvnHome}/bin/mvn sonar:sonar -f MyWebApp/pom.xml"
    }
}
```

Variable Name?

SonarQube servers

Environment variables

☒ Enable injection of SonarQube server configuration as build environment variables

If checked, job administrators will be able to inject a SonarQube server configuration as environment variables in the build.

SonarQube installations

Name

SonarQube

Server URL

http://ec2-3-140-123-228.us-east-2.compute.amazonaws.com:9000

Default is http://localhost:9000

Server authentication token

SQ Token added today by coach

Add

SonarQube authentication token. Mandatory when anonymous access is disabled.

Advanced...

Add SonarQube

List of SonarQube installations

Delete SonarQube