

```

import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
%matplotlib inline
import warnings
warnings.filterwarnings('ignore')

df= pd.read_csv('magic_bricks_clean.csv')
df.head()

```

	Area	BHK	Bathroom	Furnishing	Location	District \
0	950.0	2	2	Furnished	Karol Bagh	Central Delhi
1	535.0	2	1	Furnished	Karol Bagh	Central Delhi
2	1280.0	3	3	Furnished	Karol Bagh	Central Delhi
3	1135.0	3	3	Furnished	Karol Bagh	Central Delhi
4	1135.0	3	3	Furnished	Karol Bagh	Central Delhi

	Status \	Locality	Parking
0	DDA MIG Flats Prasad Nagar Phase 2, Prasad Nag...		1
1	Ready_to_move	Dev Nagar, Karol Bagh	1
2	Ready_to_move	Karol Bagh	2
3	Almost_ready	The Amaryllis, Karol Bagh	2
4	Almost_ready	The Amaryllis, Karol Bagh	2

	Transaction	Type	Per_Sqft	Price
0	Resale	Apartment	8761.0	12500000
1	New_Property	Apartment	7290.0	3900000
2	Resale	Builder_Floor	14092.0	15000000
3	Resale	Apartment	22222.0	25000000
4	Resale	Apartment	22222.0	25000000

```
# smartwork
```

```

num = list(df.describe().columns)
cat = []
for i in df.columns:
    # print(i)
    if i not in num:
        cat.append(i)

```

```

print('num',num)
print('cat',cat)


```

```
num ['Area', 'BHK', 'Bathroom', 'Parking', 'Per_Sqft', 'Price']
cat ['Furnishing', 'Location', 'District', 'Locality', 'Status',
'Transaction', 'Type']
```


```
num
```

```
# univariate analysis
```


```
for i in num:
    plt.figure(figsize=(12,3))
    sns.histplot(df[i])
    plt.title(f'Distribution of {i}')
    plt.show()
    print('skewness',df[i].skew())
```

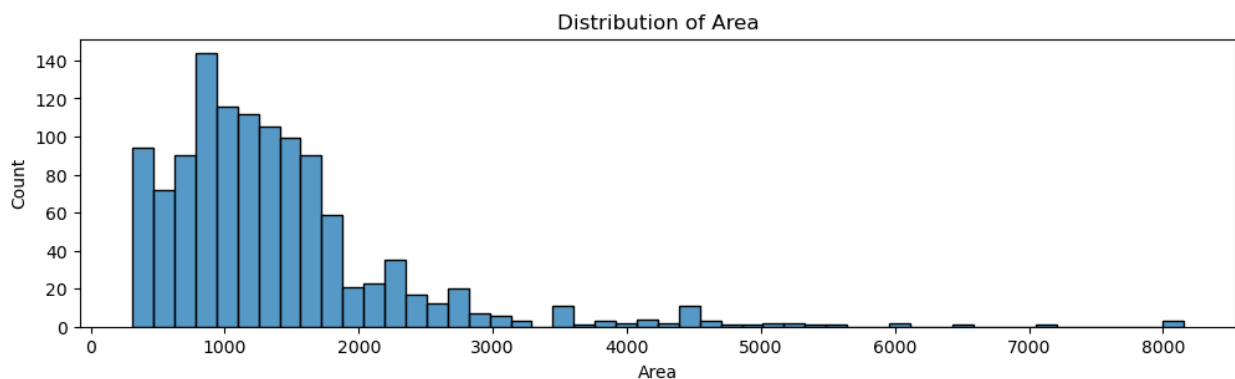


```
skewness 2.6391860184329223
```

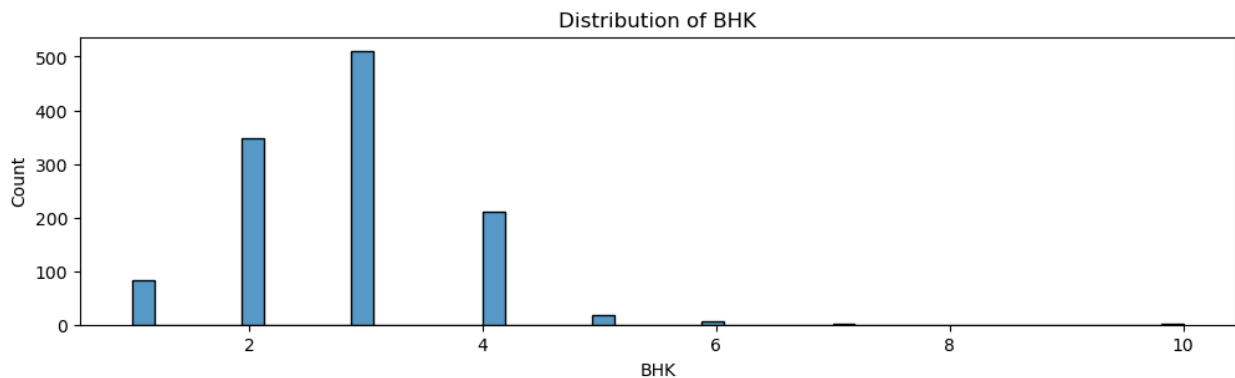


```
skewness 0.5675972483372655
```

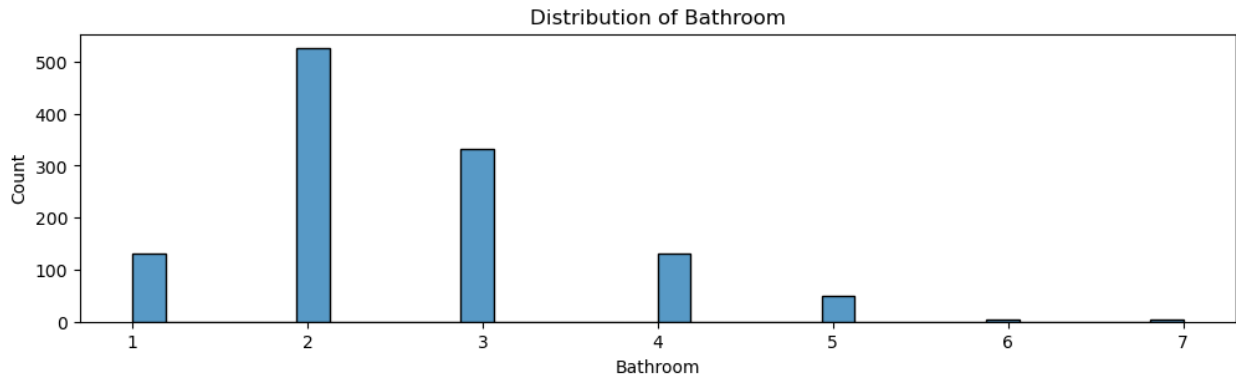


skewness 0.827096516765247

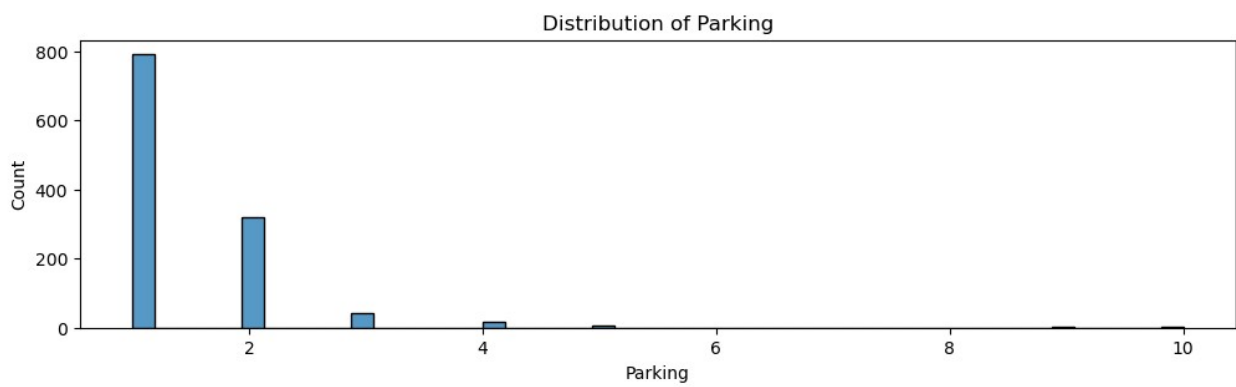

skewness 3.569360331143726

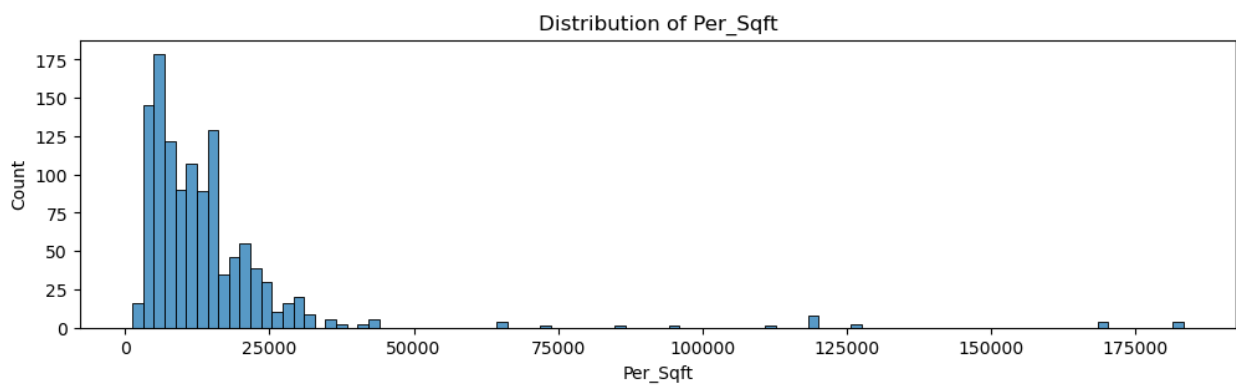

skewness 5.947452653771996

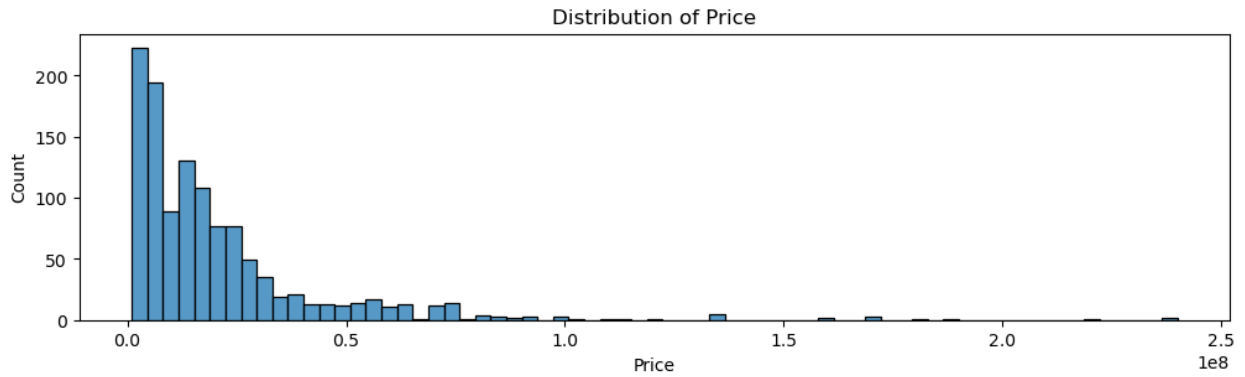

skewness 3.6022192749319326

cat.remove('Location')

```
for i in cat:
    plt.figure(figsize=(12,3))
    sns.countplot(df[i])
    plt.title(f'Distribution of {i}')
    plt.show()
    # print('skewness',df[i].skew())
```

