CS 348
Computer Networks
Lec 10

Spring 2020 IIT Goa

Course Instructor: Dr. Neha Karanjkar

Disclaimer: These slides are adapted from Computer Networking: A Top-down Approach by Kurose & Ross, 7th ed. and lecture slides of cs 168-2020 (http://cs168.io/) by Prof. Sylvia Ratnasamy

An overview of things to come ...

- **What is the “Interface” between applications and the Internet? How can applications use services of the layers below?**
- Some popular applications, how they work, protocols they use:
  - The Web and HTTP, Email, Peer-to-peer applications
- **How can “names” be translated to IP addresses? DNS**

The Application Layer

- **Consists of:** Applications running on hosts communicating over the Internet.

- **What is the “Interface” between applications and the Internet?**
- How can applications use services of the layers below?
  - For Reliable, connection-oriented data transfer? (TCP)
  - For Best-effort, connectionless data transfer? (UDP)

Recall: Client-Server Architecture

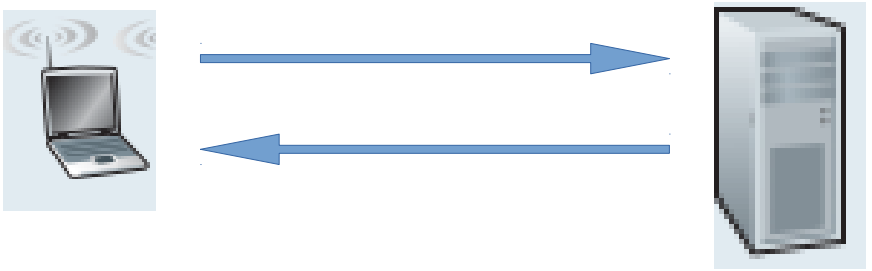

- **Server:** always ON, listening for requests.
  - Has a fixed, well-known IP address
- **Client:** initiates communication with the Server, makes requests
  - Need not have a well-known IP address
- Example: Web-Browser (Client) and Web-Server

Peer-to-Peer (P2P) Architecture

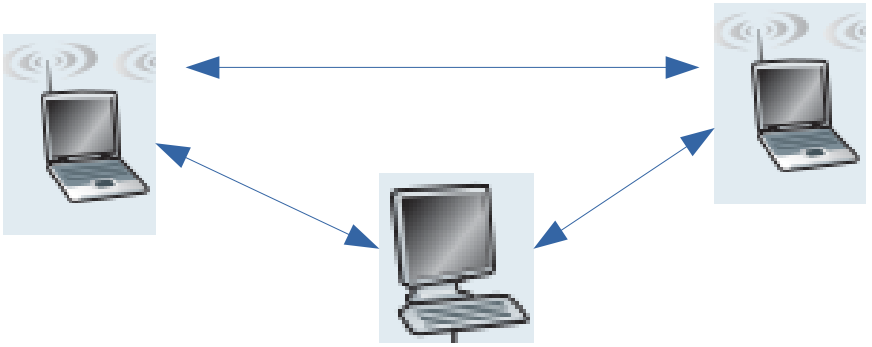

- **Minimal (or no) reliance on “always-ON” servers**
- Direct communication between pairs of hosts (that may have intermittent connectivity)
- Examples: BitTorrent, Skype

Client and Server Processes

In the context of communicating processes ...

- **Client:** The process that initiates the communication.
  - Client needs to know the address of the server to contact it
- **Server:** The process that waits to be contacted to begin the communication session

Sockets

- **Sockets serve as an Interface between Applications and the Transport layer**

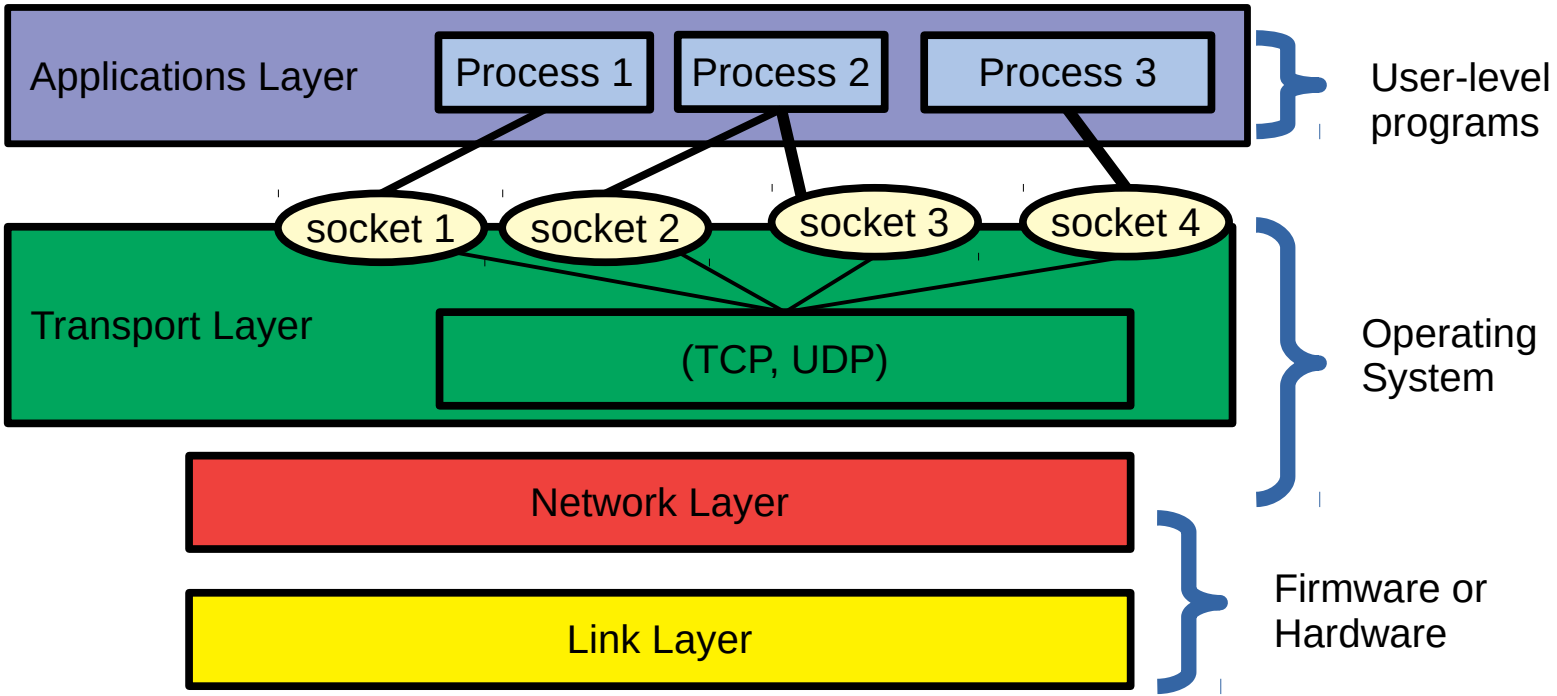

- **Demo:** A Client-Server Example

UDP Sockets

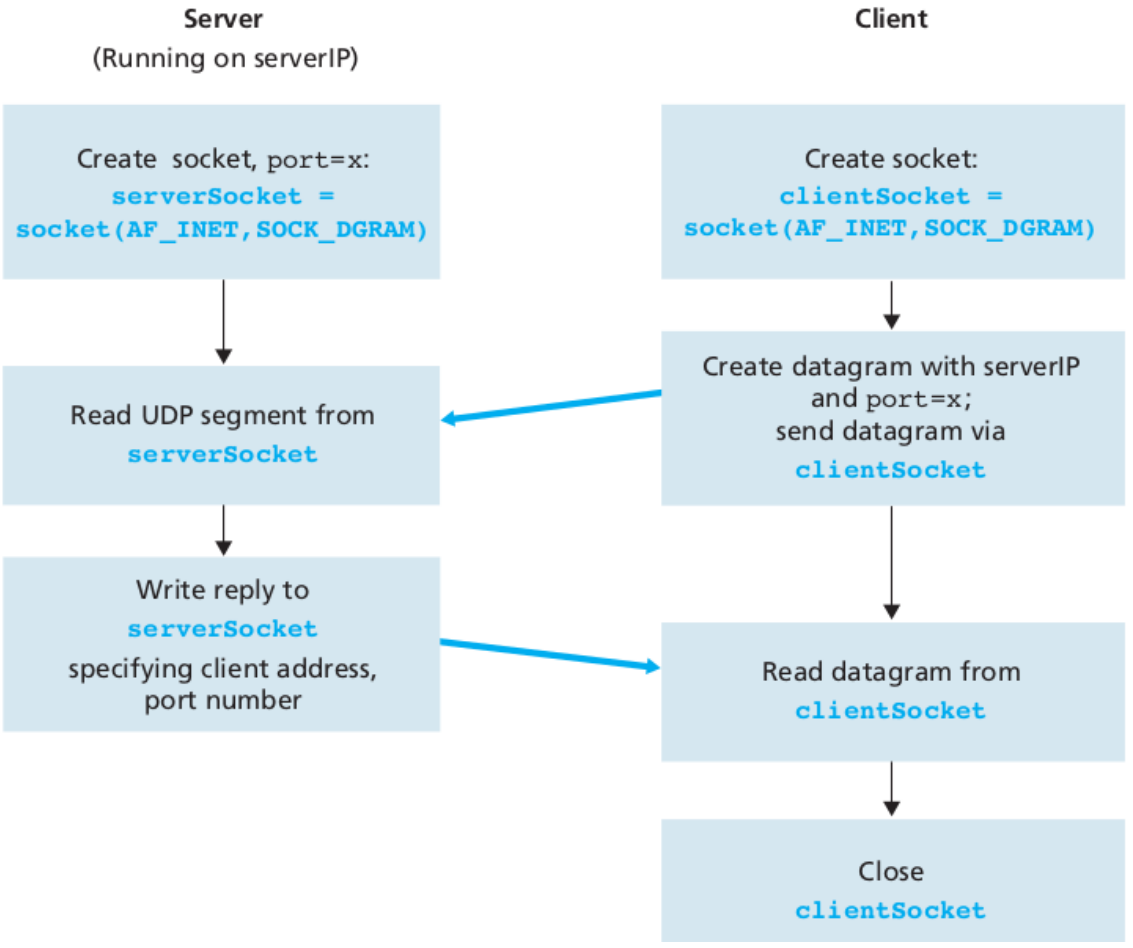
Server
(Running on serverIP)
Client
Create socket, port=x:
serverSocket =
socket(AF_INET,SOCK_DGRAM)
Create socket:
clientSocket =
socket(AF_INET,SOCK_DGRAM)
Create datagram with serverIP
and port=x;
send datagram via
clientSocket
Read UDP segment from
serverSocket
Write reply to
serverSocket
specifying client address,
port number
Read datagram from
clientSocket
Close
clientSocket

TCP Sockets

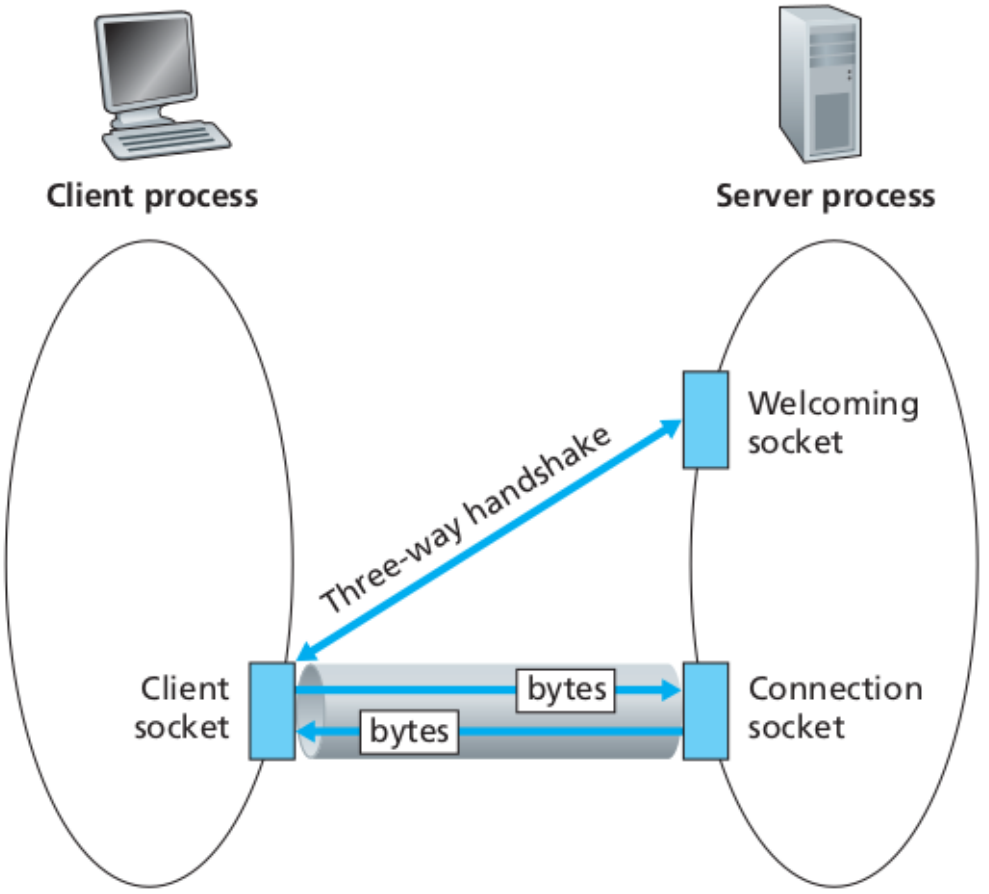
Client process
Server process
Welcoming socket
Three-way handshake
Client socket
bytes
bytes
Connection socket

TCP Sockets

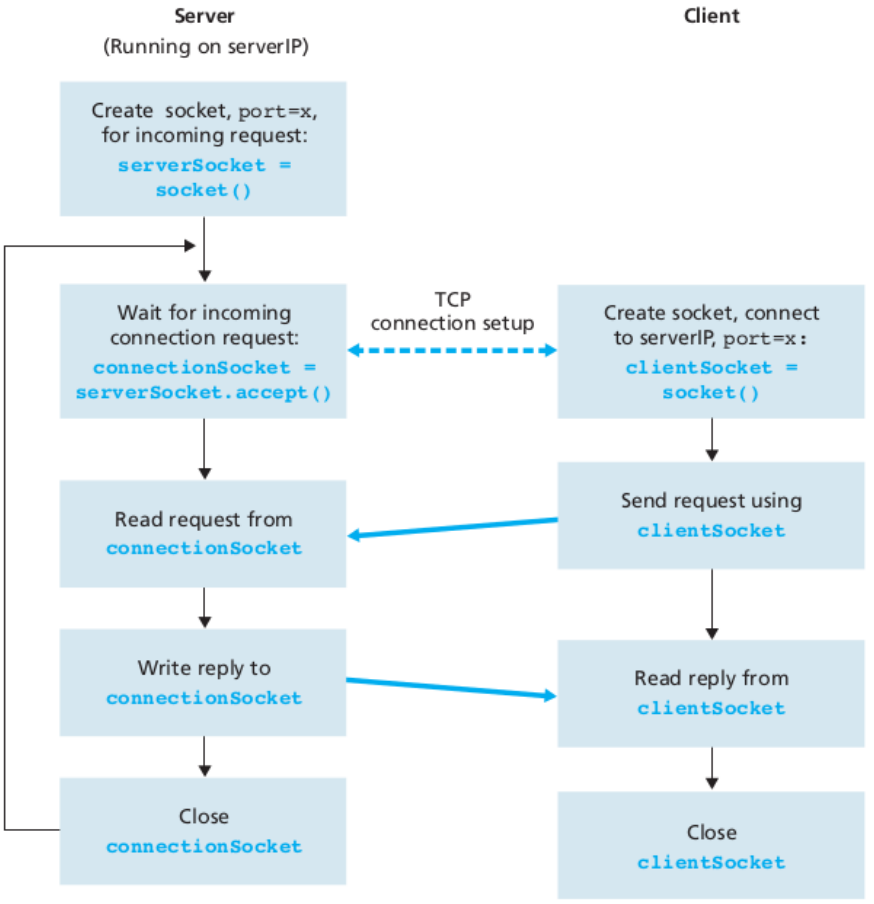
Server
(Running on serverIP)
Client
Create socket, port=x, for incoming request:
serverSocket = socket()
Wait for incoming connection request:
connectionSocket = serverSocket.accept()
TCP connection setup
Create socket, connect to serverIP, port=x:
clientSocket = socket()
Read request from connectionSocket
Send request using clientSocket
Write reply to connectionSocket
Read reply from clientSocket
Close connectionSocket
Close clientSocket

Questions

- How should the applications interpret the Byte stream?
  - Application level protocols: Stateful vs Stateless
- What is the Web? What does it consist of?
- DNS: How are names/urls translated to IP addresses?

Reference and Reading Assignment

- Kurose and Ross 6th ed
  - Section 2.1: Principles of Networked Applications
  - Section 2.7: Socket Programming
- Tutorial on Socket Programming using Python:

  https://realpython.com/python-sockets/