

NAME: Neha Guglot

PRN: 202501050032

4.1.1. Pandas - series creation and manipulation

Write a Python program that takes a list of numbers from the user, creates a Pandas series from it, and then calculates the mean of even and odd numbers separately using the groupby and mean() operations.

Hint: You can group the Series based on whether each number is even or odd.

Input Format:

- The user should enter a list of numbers separated by space when prompted.

Output Format:

Product Pairs

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the following columns: Date, Product, Quantity, Price, and City.
- For each date, find all pairs of products that were sold together (i.e., two products sold on the same date).
- Output the product pair/s that was sold most frequently.

CODE:


```
import pandas as pd
```

```
# Take inputs from the user to create a list of numbers
numbers = list(map(int, input().split()))
```

```
# Create a Pandas series from the list of numbers
series = pd.Series(numbers)
# Grouping by even and odd numbers and calculating the mean
grouped = series.groupby(series % 2 == 0).mean()
```

```
# Display the mean of even and odd numbers with labels
grouped.index = ['Even' if is_even else 'Odd' for is_even in grouped.index]
```

```
print("Mean of even and odd numbers:")
print(grouped)
```

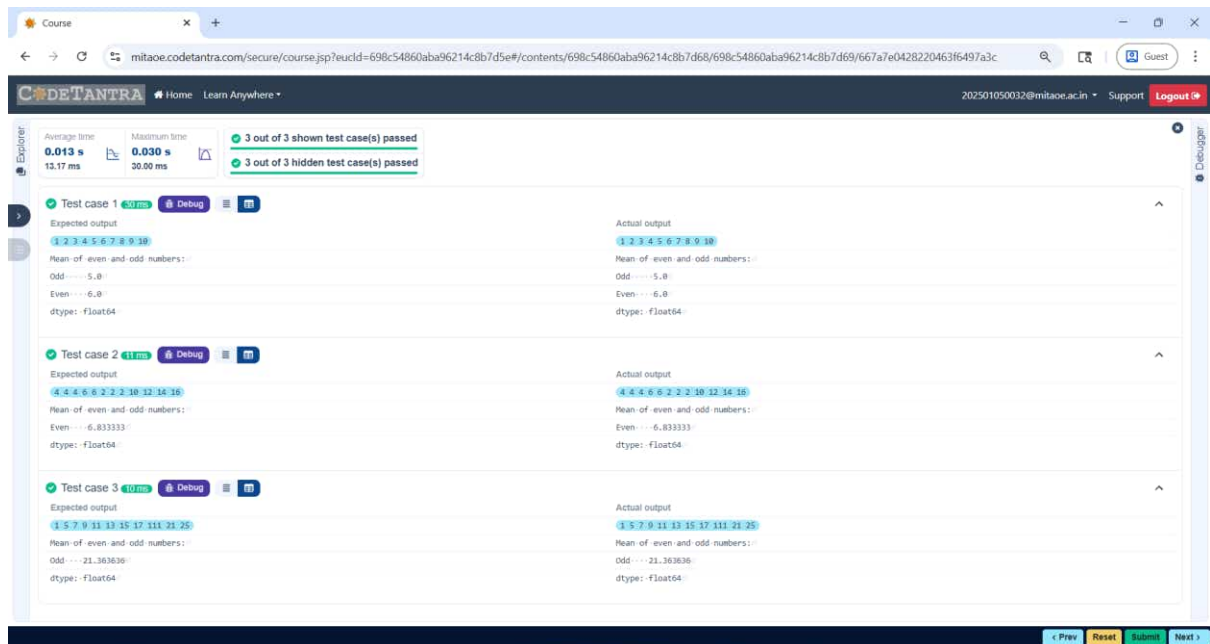

4.1.2. Dictionary to dataframe

A dictionary of lists has been provided to you in the editor. Create a DataFrame from the dictionary of lists and perform the listed operations, then display the DataFrame before and after each manipulation.

Create the DataFrame:

- Convert the dictionary to a Pandas DataFrame.

Add a new row:

- Take inputs from the user for the new row data (name, age).
- Add the new row to the DataFrame.
- Display the DataFrame after adding the new row.

Modify a row:

- Modify a specific row by changing the age. Take the row index and new age value from the user.
- Display the DataFrame after modifying the row.

Delete a row:

- Take the row index to be deleted from the user.
- Remove the specified row.
- Display the DataFrame after deleting the row.

Add a new column:

- Add a column **Gender** with values taken from the user.
- Display the DataFrame after adding the new column.

Modify a column:

- Convert names to uppercase.
- Display the DataFrame after modifying the column.

Delete a column:

- Remove the **Age** column.
- Display the DataFrame after deleting the column.

CODE:

```
import pandas as pd
```

```
# Provided dictionary of lists
```

```
data = {  
    'Name': ['Alice', 'Bob', 'Charlie'],  
    'Age': [25, 30, 35],  
}
```

```
# Convert the dictionary to a DataFrame
```

```
df = pd.DataFrame(data)
```

```
# Display the original DataFrame
```

```
print("Original DataFrame:")
```

```
print(df)
```

```
# Adding a new row
```

```
new_name = input("New name: ")
```

```
new_age = int(input("New age: "))
```

```
df.loc[len(df)] = [new_name, new_age]
```

```
# Display the DataFrame after adding a new row
```

```
print("After adding a row:\n",df)
```

```
# Modifying a row
```

```
row_to_modify = int(input("Index of row to modify: "))
```

```
new_age_value = int(input("New age: "))
```

```
df.at[row_to_modify, "Age"] = new_age_value
```

```
# Display the DataFrame after modifying a row
```

```
print("After modifying a row:")
```

```
print(df)
```

```
# Deleting a row
```

```
row_to_delete = int(input("Index of row to delete: "))
```

```
df = df.drop(index=row_to_delete).reset_index(drop=True)
```

```
# Display the DataFrame after deleting a row
```

```
print("After deleting a row:")
```

```
print(df)
```

```
# Adding a new column
```

```
genders = input("Enter genders separated by space: ").split()
```

```
df["Gender"]=genders
```

```
# Display the DataFrame after adding a new column
```

```
print("After adding a new column:")
```

```
print(df)
```

```
# Modifying a column
```

```
df["Name"] = df["Name"].str.upper()
```

```
# Display the DataFrame after modifying a column
```

```
print("After modifying a column:")
```

```
print(df)
```


```
# Deleting a column
```

```
df = df.drop(columns=["Age"])
```

```
# Display the DataFrame after deleting a column
```

```
print("After deleting a column:")
```

```
print(df)
```

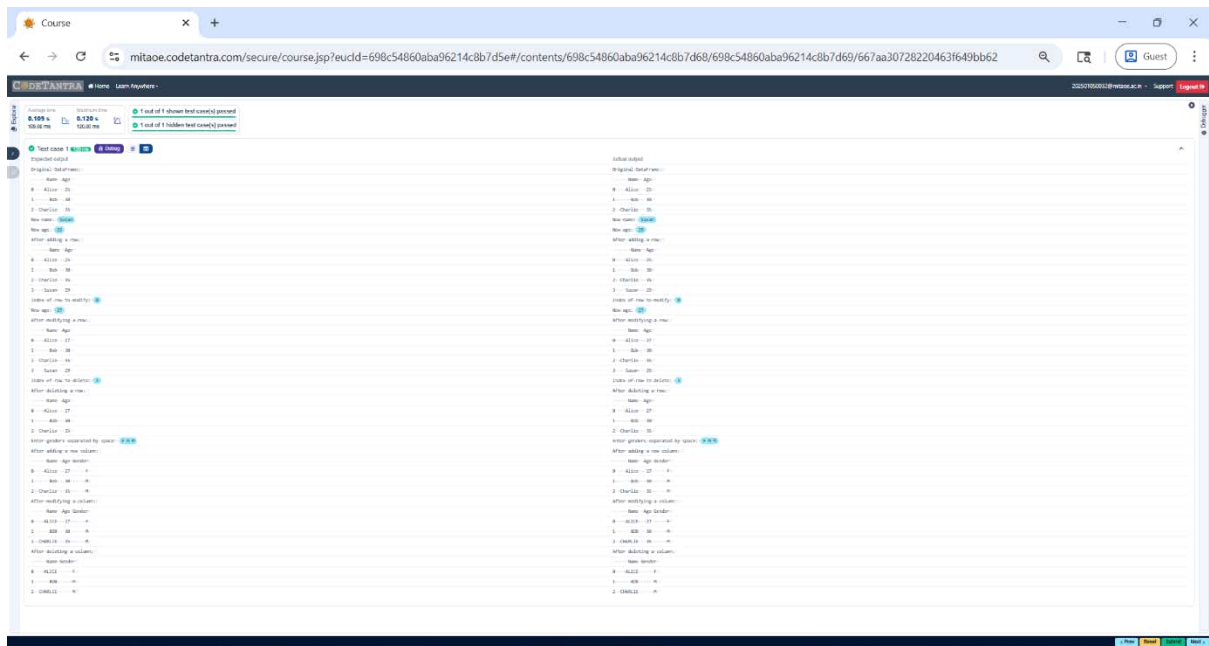

4.1.3. Student Information

Write a program to read a text file containing student information (name, age, and grade) using Pandas. Perform the following tasks:

- Display the first five rows of the data frame.
- Calculate the average age of the students (limit the average age up to 2 decimal places).
- Filter out the students who have a grade above a certain threshold (consider the threshold grade is 'B').

CODE:

```
import pandas as pd
```

```
# Read the text file into a DataFrame
```

```
file = input()
```

```
data = pd.read_csv(file, sep="\s+", header=None, names=["Name", "Age", "Grade"])
```

```
# write your code here..
```

```
print("First five rows:")

print(data.head())


average_age = round(data["Age"].mean(), 2)

print(f"Average age: {average_age}")

filtered_students = data[data["Grade"]<= "B"]

print("Students with a grade up to B")

print(filtered_students)
```

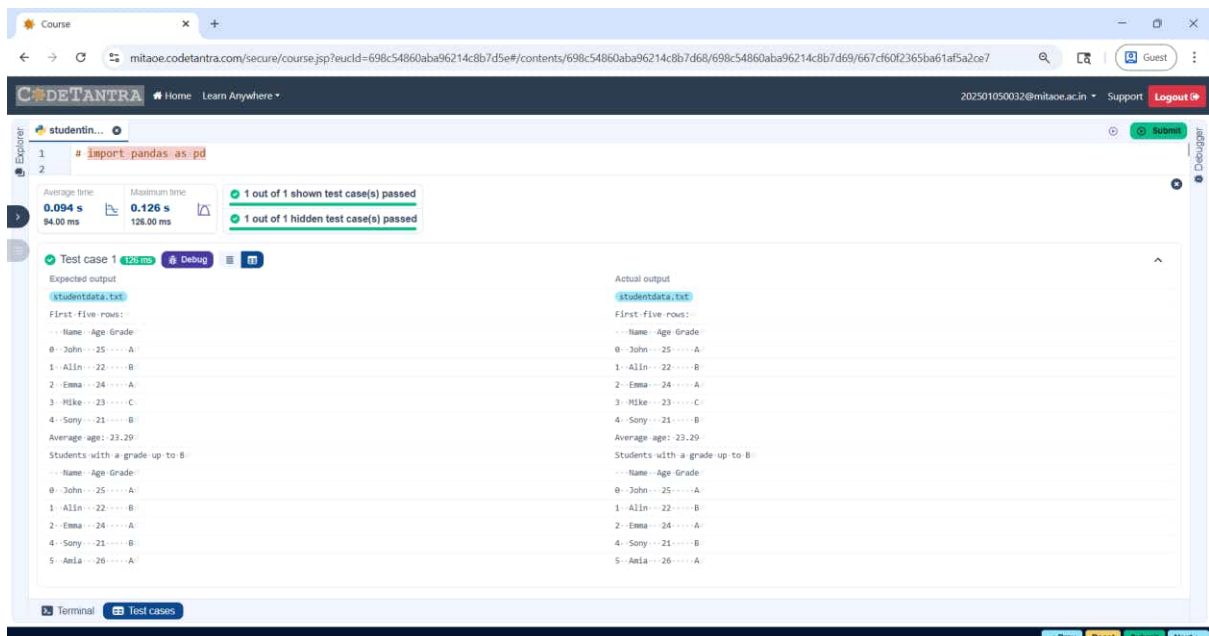

4.2.1. Month with the Highest Total Sales

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Group the data by Month and calculate the total sales for each month.
- Find the month with the highest total sales and display it.
- Also, display the total sales for the best month.

Sample Data:

Date	Product	Quantity	Price	City
2025-01-01	Product A	5	20	New York
2025-01-01	Product B	3	15	Los Angeles
2025-01-02	Product A	7	20	New York
2025-01-02	Product C	4	30	Chicago
2025-01-03	Product B	2	15	Chicago
2025-01-03	Product A	8	20	Los Angeles
2025-01-04	Product C	6	30	New York
2025-01-04	Product B	5	15	Los Angeles
2025-01-05	Product A	3	20	Chicago
2025-01-05	Product C	10	30	Los Angeles

CODE:

```
import pandas as pd

# Prompt the user for the file name
file_name = input()

# Load the data
df = pd.read_csv(file_name)
df["Date"] = pd.to_datetime(df["Date"])

df["Month"] = df["Date"].dt.to_period("M")

df["Total Sales"] = df["Quantity"] * df["Price"]

monthly_sales = df.groupby("Month")["Total Sales"].sum()
```




```
# Find the month with the highest total sales
```

```
best_month = monthly_sales.idxmax()
```

```
highest_sales = monthly_sales.max()
```

```
print(f"Best month: {best_month}")
```

```
print(f"Total sales: ${highest_sales:.2f}")
```

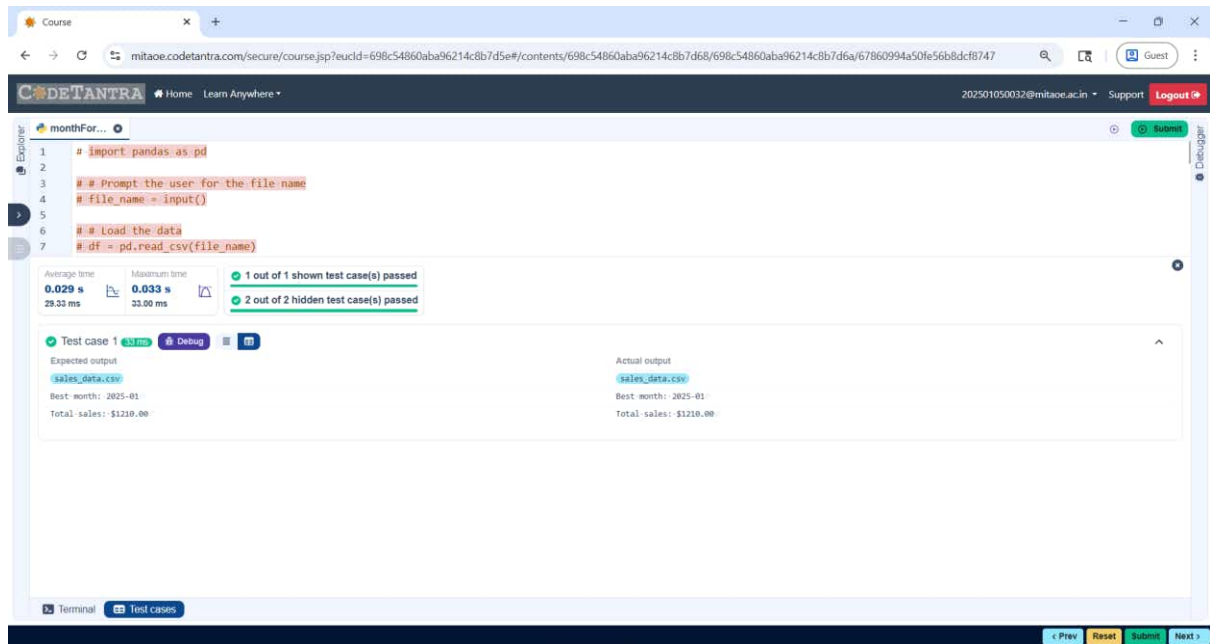

4.2.2. Best Selling Product

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Find the product that sold the most in terms of quantity sold.
- Display the product that sold the most and the total quantity sold for that product.

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product **B**,3,15,Los Angeles

2025-01-02,Product **A**,7,20,New York

2025-01-02,Product **C**,4,30,Chicago

2025-01-03,Product **B**,2,15,Chicago

2025-01-03,Product **A**,8,20,Los Angeles

2025-01-04,Product **C**,6,30,New York

2025-01-04,Product **B**,5,15,Los Angeles

2025-01-05,Product **A**,3,20,Chicago

CODE:

```
import pandas as pd
```

```
# Prompt the user for the file name
```

```
file_name = input()
```

```
# Load the data
```

```
df = pd.read_csv(file_name)
```

```
product_sales = df.groupby("Product")["Quantity"].sum()
```

```
# Find the product with the highest total quantity sold
```

```
best_product = product_sales.idxmax()
```

```
highest_quantity = product_sales.max()
```

```
# Display the result
```

```
print(f"Best selling product: {best_product}")
```

```
print(f"Total quantity sold: {highest_quantity}")
```

```
1 import pandas as pd
2
3 # Prompt the user for the file name
4 file_name = input()
5
6 # Load the data
7 df = pd.read_csv(file_name)
8
9
10 # Find the product with the highest total quantity sold
11 best_product = df.groupby('Product')['Quantity'].sum().idxmax()
12 highest_quantity = df.groupby('Product')['Quantity'].sum().max()
13
14 # Display the result
```

Average time: 0.047 s, Maximum time: 0.094 s
1 out of 1 shown test case(s) passed
2 out of 2 hidden test case(s) passed

Test case 1 44ms Debug

Expected output	Actual output
sales_data.csv	sales_data.csv
Best-selling product: Product A	Best-selling product: Product A
Total quantity sold: 23	Total quantity sold: 23

4.2.3. City that Sold the Most Products

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Group the data by City and calculate the total quantity of products sold for each city.
- Find the city that sold the most products (based on the total quantity sold).

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York

2025-01-02,Product C,4,30,Chicago

2025-01-03,Product B,2,15,Chicago

2025-01-03,Product A,8,20,Los Angeles

2025-01-04,Product C,6,30,New York

2025-01-04,Product B,5,15,Los Angeles

2025-01-05,Product A,3,20,Chicago

2025-01-05,Product C,10,30,Los Angeles

CODE:

```
import pandas as pd
```

```
# Prompt the user for the file name
```

```
file_name = input()
```

```
# Load the data
```

```
df = pd.read_csv(file_name)
```

```
city_sales = df.groupby("City")["Quantity"].sum()
```

```
best_city = city_sales.idxmax()
```

```
# write the code..
```

```
# Display the result
```

```
print(f"City sold the most products: {best_city}")
```

The screenshot displays a web-based coding environment. At the top, a browser address bar shows a URL from mitaoe.codetrantra.com. Below the browser, a header bar for 'CODETANTRA' includes navigation links and a user profile. The main area is a code editor with a file named 'monthFor...'. The code is as follows:

```
1 import pandas as pd
2
3 # Prompt the user for the file name
4 file_name = input()
5
6 # Load the data
7 df = pd.read_csv(file_name)
8
9 city_sales = df.groupby("City")["Quantity"].sum()
10
11 best_city = city_sales.idxmax()
12
13
14 # Display the result
```

Below the code editor, a 'Test cases' section shows performance metrics (Average time: 0.039 s, Maximum time: 0.080 s) and test results (1 out of 1 shown test case(s) passed, 2 out of 2 hidden test case(s) passed). A 'Test case 1' section compares the 'Expected output' and 'Actual output', both of which are 'City sold the most products: Los Angeles'.

4.2.4. Most Frequently Sold Product Pairs

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the following columns: Date, Product, Quantity, Price, and City.
- For each date, find all pairs of products that were sold together (i.e., two products sold on the same date).
- Output the product pair/s that was sold most frequently.

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York

2025-01-02,Product C,4,30,Chicago

2025-01-03,Product B,2,15,Chicago

2025-01-03,Product A,8,20,Los Angeles

2025-01-04,Product C,6,30,New York

2025-01-04,Product B,5,15,Los Angeles

2025-01-05,Product A,3,20,Chicago

2025-01-05,Product C,10,30,Los Angeles

Explanation:

Transactions:

- **2025-01-01:** Product A, Product B
- **2025-01-02:** Product A, Product C
- **2025-01-03:** Product B, Product A
- **2025-01-04:** Product C, Product B
- **2025-01-05:** Product A, Product C

Now, let's count how often the pairs of products appear together:

- **Product A and Product B:** Appear in transactions on 2025-01-01 and 2025-01-03.
- **Product A and Product C:** Appear in transactions on 2025-01-02 and 2025-01-05.
- **Product B and Product C:** Appears in transactions on 2025-01-04.

Most Frequent Product Combinations:

- **Product A and Product B** (2 times)
- **Product A and Product C** (2 times)

CODE:

```
import pandas as pd

from itertools import combinations

from collections import Counter

# Prompt user to input the file name
file_name = input()

# Read data from the specified CSV file
df = pd.read_csv(file_name)

# write the code
grouped = df.groupby("Date")["Product"].apply(list)

pairs_counter = Counter()

for products in grouped:
    pairs = combinations(sorted(products),2)
    pairs_counter.update(pairs)


max_frequency = max(pairs_counter.values())

most_common_pairs = [(pair,freq) for pair, freq in pairs_counter.items() if freq ==
max_frequency]
```

Output the most frequent product pairs

for (product1,product2),frequency in most_common_pairs:

print(f"{product1} and {product2}: {frequency} times")

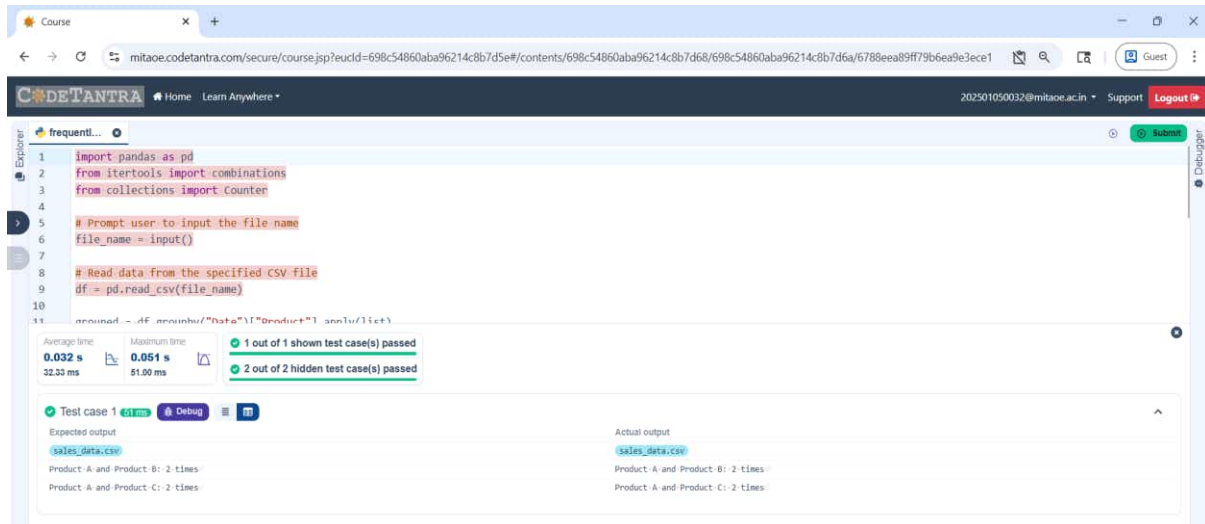

4.2.5. Titanic Dataset Analysis and Data Cleaning

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset. For each question, perform necessary data cleaning, transformations, and calculations as required.

1. Display the first 5 rows of the dataset.
2. Display the last 5 rows of the dataset.
3. Get the shape of the dataset (number of rows and columns).
4. Get a summary of the dataset (using `.info()`).
5. Get basic statistics (mean, standard deviation, etc.) of the dataset using `.describe()`.
6. Check for missing values and display the count of missing values for each column.
7. Fill missing values in the 'Age' column with the median age.
8. Fill missing values in the 'Embarked' column with the most frequent value (`mode()`).
9. Drop the 'Cabin' column due to many missing values.
10. Create a new column, 'FamilySize' by adding the 'SibSp' and 'Parch' columns.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Emb

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

CODE:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# 1. Display the first 5 rows of the dataset
```

```
print(data.head())
```


2. Display the last 5 rows of the dataset

```
print(data.tail())
```

3. Get the shape of the dataset

```
print(data.shape)
```

4. Get a summary of the dataset (info)

```
print(data.info())
```

5. Get basic statistics of the dataset

```
print(data.describe())
```

6. Check for missing values

```
print(data.isnull().sum())
```

7. Fill missing values in the 'Age' column with the median age

```
median_age = data['Age'].median()
```

```
data['Age'].fillna(median_age,inplace= True)
```

8. Fill missing values in the 'Embarked' column with the mode


```
mode_embarked =data['Embarked'].mode() [0]
```

```
data['Embarked'].fillna(mode_embarked, inplace = True)
```

9. Drop the 'Cabin' column due to many missing values

```
data.drop('Cabin', axis=1, inplace=True)
```

10. Create a new column 'FamilySize' by adding 'SibSp' and 'Parch'

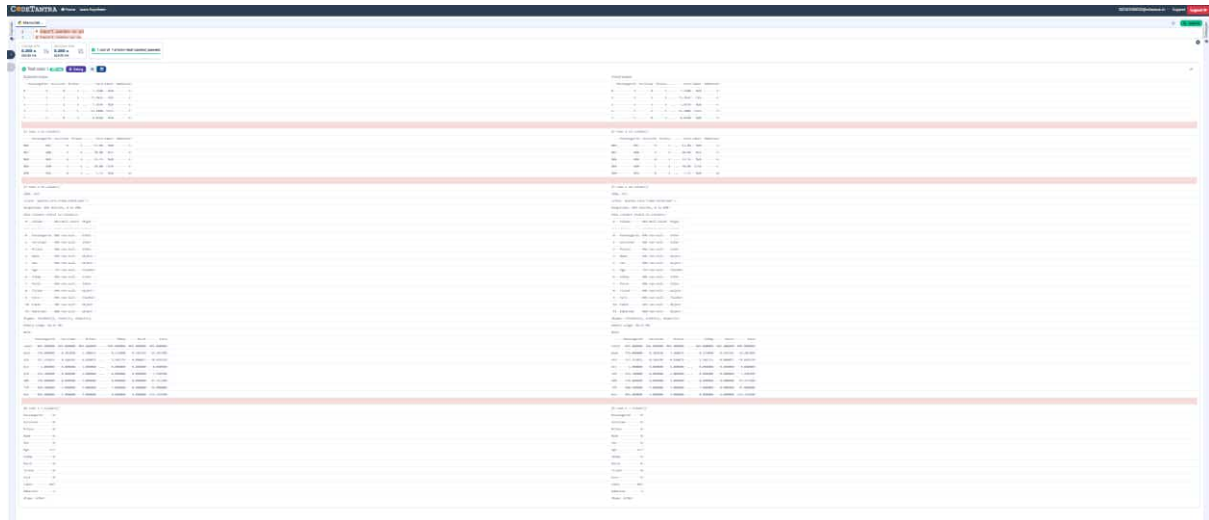

4.2.6. Titanic Dataset Analysis and Data Cleaning - 2

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Create a new column 'IsAlone' which is 1 if the passenger is alone (FamilySize = 0), otherwise 0.
2. Convert the 'Sex' column to numeric values (male: 0, female: 1).
3. One-hot encode the 'Embarked' column, dropping the first category.
4. Get the mean age of passengers.
5. Get the median fare of passengers.
6. Get the number of passengers by class.
7. Get the number of passengers by gender.
8. Get the number of passengers by survival status.
9. Calculate the survival rate of passengers.
10. Calculate the survival rate by gender.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
-------------	----------	--------	------	-----	-----	-------	-------	--------	------	-------	----------

--	--	--	--	--	--	--	--	--	--	--	--

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

CODE:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

```
# 1. Create a new column 'IsAlone' (1 if alone, 0 otherwise)
```

```
data['Alone'] = np.where(data['FamilySize']==0,1,0)
```

2. Convert 'Sex' to numeric (male: 0, female: 1)

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

3. One-hot encode the 'Embarked' column

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

4. Get the mean age of passengers

```
mean_age = data['Age'].mean()
```

```
print(mean_age)
```

5. Get the median fare of passengers

```
median_fare = data['Fare'].median()
```

```
print(median_fare)
```

6. Get the number of passengers by class

```
passengers_by_class = data['Pclass'].value_counts()
```

```
print(passengers_by_class)
```

7. Get the number of passengers by gender

```
passengers_by_gender = data['Sex'].value_counts().sort_index()
```

```
print(passengers_by_gender)
```

8. Get the number of passengers by survival status

```
passengers_by_survival = data['Survived'].value_counts().sort_index()
```

```
print(passengers_by_survival)
```

9. Calculate the survival rate


```
survival_rate = data['Survived'].mean()

print(survival_rate)
```

10. Calculate the survival rate by gender

```
gender_survival = data.groupby('Sex')['Survived'].mean()

print(gender_survival)
```

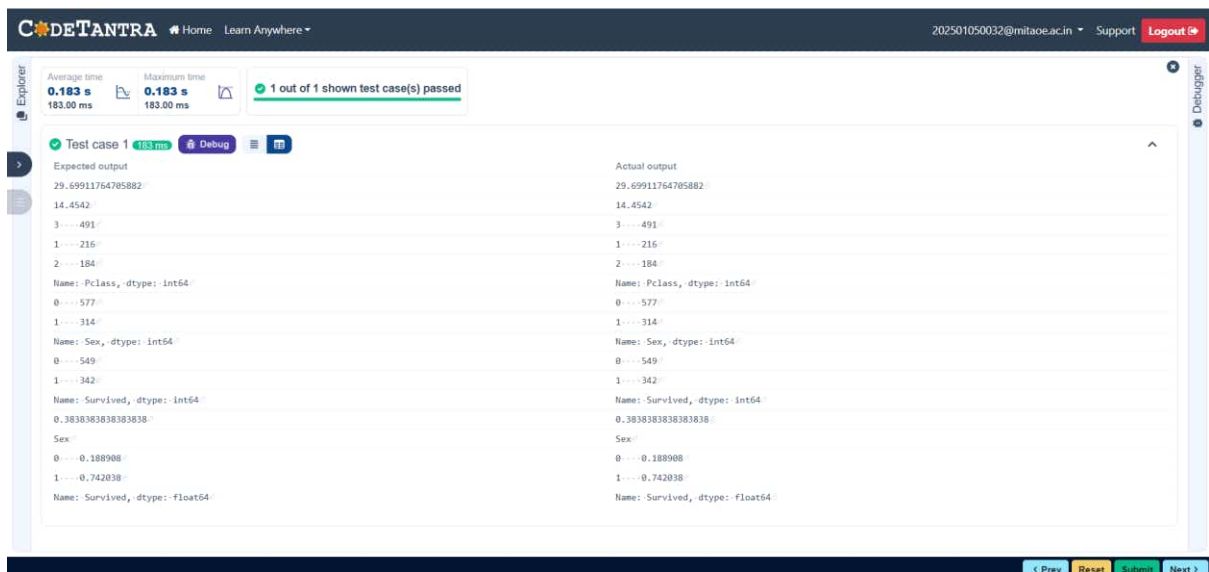

4.2.7. Titanic Dataset Analysis and Data Cleaning - 3

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Calculate the survival rate by class.
2. Calculate the survival rate by embarkation location (Embarked_S).
3. Calculate the survival rate by family size (FamilySize).
4. Calculate the survival rate by being alone (IsAlone).
5. Get the average fare by passenger class (Pclass).
6. Get the average age by passenger class (Pclass).
7. Get the average age by survival status (Survived).

8. Get the average fare by survival status (Survived).
9. Get the number of survivors by class (Pclass).
10. Get the number of non-survivors by class (Pclass).

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

CODE:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
data['FamilySize'] = data['SibSp'] + data['Parch']
data['IsAlone'] = np.where(data['FamilySize'] > 0, 0, 1)
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

1. Calculate the survival rate by class

```
print(data.groupby('Pclass')['Survived'].mean())
```

2. Calculate the survival rate by embarked location

```
print(data.groupby('Embarked_S')['Survived'].mean())
```

3. Calculate the survival rate by family size

```
print(data.groupby('FamilySize')['Survived'].mean())
```

4. Calculate the survival rate by being alone

```
print(data.groupby('IsAlone')['Survived'].mean())
```

5. Get the average fare by class

```
print(data.groupby('Pclass')['Fare'].mean())
```

6. Get the average age by class

```
print(data.groupby('Pclass')['Age'].mean())
```

7. Get the average age by survival status

```
print(data.groupby('Survived')['Age'].mean())
```

8. Get the average fare by survival status

```
print(data.groupby('Survived')['Fare'].mean())
```

9. Get the number of survivors by class

```
print(data[data['Survived'] == 1]['Pclass'].value_counts())
```

10. Get the number of non-survivors by class

```
print(data[data['Survived'] == 0]['Pclass'].value_counts())
```



4.2.8. Titanic Dataset Analysis and Data Cleaning - 4

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Get the number of survivors by gender (Sex).
2. Get the number of non-survivors by gender (Sex).
3. Get the number of survivors by embarkation location (Embarked_S).
4. Get the number of non-survivors by embarkation location (Embarked_S).
5. Calculate the percentage of children (Age < 18) who survived.
6. Calculate the percentage of adults (Age >= 18) who survived.
7. Get the median age of survivors.
8. Get the median age of non-survivors.
9. Get the median fare of survivors.
10. Get the median fare of non-survivors.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

CodeTANTRA Home Learn Anywhere 202501050032@mitaoe.ac.in Support Logout

Average time: 0.086 s 86.00 ms Maximum time: 0.086 s 86.00 ms 1 out of 1 shown test case(s) passed

Test case 1 00:00 Debug

Expected output

```
female --- 233
male --- 109
Name: Sex, dtype: int64
male --- 468
female --- 81
Name: Sex, dtype: int64
1 --- 217
0 --- 125
Name: Embarked_S, dtype: int64
1 --- 427
0 --- 122
Name: Embarked_S, dtype: int64
0, 539823088495575
0, 3818316139767055
28.0
28.0
26.0
10.5
```

Actual output

```
female --- 233
male --- 109
Name: Sex, dtype: int64
male --- 468
female --- 81
Name: Sex, dtype: int64
1 --- 217
0 --- 125
Name: Embarked_S, dtype: int64
1 --- 427
0 --- 122
Name: Embarked_S, dtype: int64
0, 539823088495575
0, 3818316139767055
28.0
28.0
26.0
10.5
```