

Test Run Report




Test Run Overview

Started 02 Aug 2020, 22:55:38
Ended 02 Aug 2020, 23:02:30
Duration (mm:ss) 06:52.259

Test Results Summary

Passed 2
Failed 2
Skipped 0

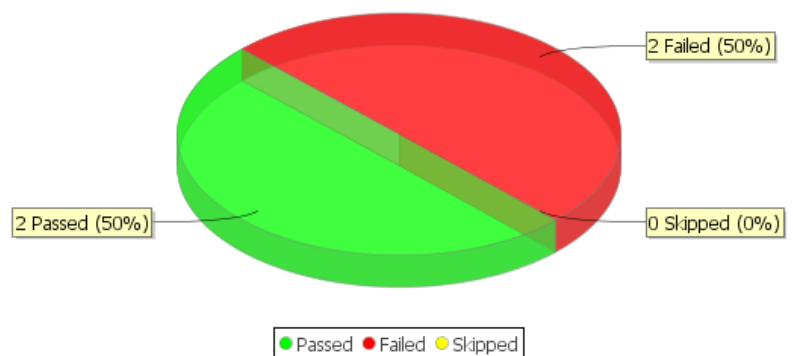


Test Case Summary

- tests
 - Test Cases for POC
 - Lead Creation .testcase
 - failed
 - failed
 - failed
 - The control was not found. Locator: By.xpath: //div[contains(@class,'bRelatedList')][1]/input[@name='new' or (contains(@name,'__new') and not(substring-after(@name,'__new')))]
 - Failed to resolve the field to a WebElement.
 - One or more Sub-Test Steps failed.
 - Sub-Test Steps failed for iteration 0
 - Lead generation through API.testcase
 - successful
 - Verify wheather a Qualified Lead is created and Convert to a Closed Won opportunity2.testcase
 - failed
 - The control was not found. Locator: By.xpath: (//div[@id='InlineEditDialogContent']/div[contains(@class, 'inlineEditDiv' or contains(@class, 'inlineEditCompoundDiv')]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1] | //div[contains(@class, 'pbBody') and not(//div[@id='InlineEditDialog' and contains(@style, 'visible')])]/div[contains(@class, 'pbSubheader') and h3/text()[not(parent::span)] = 'Lead Information']/following-sibling::div[contains(@class, 'pbSubsection')][1]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1])
 - One or more Sub-Test Steps failed.
 - Sub-Test Steps failed for iteration 0
 - Verify whether unqualified Lead is created.testcase
 - successful


Lead Creation .testcase


Summary


Started 02 Aug 2020, 22:55:38
Ended 02 Aug 2020, 22:57:23
Duration (mm:ss) 01:45.331
Outcome  failed

Output

Digital Mortgages Stage Connection

 Opening Salesforce connection Connection name: Test1

 Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]


 Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(4)\Artifacts\Test1-objectids.log


Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test


Test


 Loading data from Parameter Value Source ...


 Loading Parameter Value Source row 1:


 ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


Loaded 1 rows from Parameter Value Source.


Test Data


 Start of iteration 1 of 1.


Iteration 1


On SF Lead Home screen

 Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe


 Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107

 Added Desired Capability for chrome browser proxy: Null

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

- ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
- ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iITJqAAM
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 1359
- ① Polling for field. attempt: 1, by: By.xpath: //*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.224
- ① Polling for field. attempt: 1, by: By.xpath: //*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.587
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.615
- ① Waited for lightning page to load. Attempts: 1, duration: 0.101
- ① Waiting for chrome to get window handles...
- ① Doing wait before switching to window...
- ① Browser window has been opened. Name: main
- ① Doing wait before switching to window...
- ① Browser window has been opened. Name: provar with ant - Google Search

● Click the New button

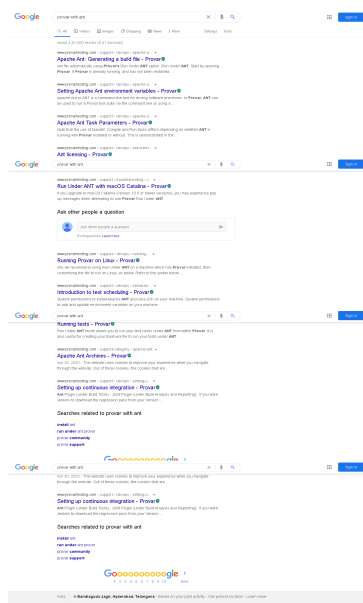

Error Screenshot

```

Start of Interaction: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default

Waiting for chrome to get window handles...

Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26action%3DNew

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://www.google.com/search?q=provar+with+ant&oq=provar+with+ant&aqs=chrome..69i57.5840j0j7&sourceid=chrome&ie=UTF-8

Interaction: ui:interaction?name=action

Find element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop')]or (contains(@class, 'slids-table_joined') and contains(@class, 'test-listViewManager')))/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@title, 'New')]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of &lt;default> wait.

Doing after wait. waitUrl: default

Getting webElement: By.xpath: //div[contains(@class,'bRelatedList')][1]/input[@name='new' or (contains(@name,'__new') and not(substring-after(@name,'__new')))]

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

The control was not found. Locator: By.xpath: //div[contains(@class,'bRelatedList')][1]/input[@name='new' or (contains(@name,'__new') and not(substring-after(@name,'__new')))]

Failed to resolve the field to a WebElement.

Doing after wait. waitUrl: default

End of &lt;default> wait.

Waiting for chrome to get window handles...

Waiting for chrome to get window handles...

Waiting for chrome to get window handles...

Waited for lightning page to load. Attempts: 1, duration: 0.113

Waiting for chrome to get window handles...

```

● One or more Sub-Test Steps failed.

① Waiting for chrome to get window handles...

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

① Waiting for chrome to get window handles...

● Sub-Test Steps failed for iteration 0

Lead generation through API.testcase

Summary

Started	02 Aug 2020, 22:57:27
Ended	02 Aug 2020, 22:57:37
Duration (mm:ss)	00:09.989
Outcome	● successful

Output

● Digital Mortgage Stage Connection

① Opening Salesforce connection Connection name: Test1

① Connection details. Connection name: Test1, urlString:

sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment: <default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

① Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(4)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

● Test

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [value: Indira, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Company = PrimitiveValueImpl [value: Tirumala, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [value: Deeksha, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Company = PrimitiveValueImpl [value: Manaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 3:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 4, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LastName = PrimitiveValueImpl [value: Anaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Company = PrimitiveValueImpl [value: Sosha , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

● Test Data

① Start of iteration 1 of 3.

● Iteration 1

● Create Object: Lead

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11

① Setting fields:

① =Field=> Status = New

① =Field=> Loan_Amount__c = 20000

① =Field=> Company = Tirumala

① =Field=> Income_per_Annum__c = 20000

① =Field=> Loan_Type__c = Purchase

① =Field=> LastName = Indira

① =Field=> Property_Type__c = Residential

① =Field=> Salutation = Mr.

① =Field=> SSN__c = 123456789

① =Field=> Mortgage_asset_value__c = 20000

① =Field=> DOB__c = 1986-11-09

■ Lead created successfully. Object Id: 00Q2w000003esupEAA, Result Name: LeadId

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esupEAA

① Start of iteration 2 of 3.

● Iteration 2

● Create Object: Lead

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11

① Setting fields:

① =Field=> Status = New

① =Field=> Loan_Amount__c = 20000

① =Field=> Company = Manaya

① =Field=> Income_per_Annum__c = 20000

① =Field=> Loan_Type__c = Purchase

① =Field=> LastName = Deeksha

① =Field=> Property_Type__c = Residential

① =Field=> Salutation = Mr.

① =Field=> SSN__c = 123456789

① =Field=> Mortgage_asset_value__c = 20000

① =Field=> DOB__c = 1986-11-09

■ Lead created successfully. Object Id: 00Q2w000003esuuEAA, Result Name: LeadId

- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esuuEAA
- ① Start of iteration 3 of 3.
- Iteration 3
 - Create Object: Lead
 - ① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11
 - ① Setting fields:
 - ① =Field=> Status = New
 - ① =Field=> Loan_Amount__c = 20000
 - ① =Field=> Company = Sosha
 - ① =Field=> Income_per_Annum__c = 20000
 - ① =Field=> Loan_Type__c = Purchase
 - ① =Field=> LastName = Anaya
 - ① =Field=> Property_Type__c = Residential
 - ① =Field=> Salutation = Mr.
 - ① =Field=> SSN__c = 123456789
 - ① =Field=> Mortgage_asset_value__c = 20000
 - ① =Field=> DOB__c = 1986-11-09
 - 📄 Lead created successfully. Object Id: 00Q2w000003esuzEAA, Result Name: LeadId
 - ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esuzEAA
- ① Reached the end of the List.

Verify wheather a Qualified Lead is created and Convert to a Closed Won opportunity2.testcase

Summary

Started	02 Aug 2020, 22:57:37
Ended	02 Aug 2020, 22:59:34
Duration (mm:ss)	01:56.196
Outcome	● failed

Output

- Salesforce Connect: Test1 (Test)
 - ① Opening Salesforce connection Connection name: Test1
 - ① Connection details. Connection name: Test1, urlString: sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment: <default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]
 - ① Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(4)\Artifacts\Test1-objectids.log
 - Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test
- Read Excel
 - ① Loading data from Parameter Value Source ...
 - ① Loading Parameter Value Source row 1:
 - ① ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - ① ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ① ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

⚠ On SF Lead Home screen

● For Each: {ExcelData}=>Row

① Start of iteration 1 of 1.

● Iteration 1

● Navigate to Lead Home Screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
 ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
 ① Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107
 ① Added Desired Capability for chrome browser proxy: Null
 ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
 ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
 ① Opening Page context. Name: screen, data: null, frame: null
 ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
 ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iITJqAAM
 ① Start of waitForPageToLoad. Timeout(ms): 90000
 ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
 ① End of waitForPageToLoad. Duration(ms): 758
 ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ① Waited for lightning page to load. Attempts: 1, duration: 0.245
 ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ① Polling for field. attempt: 3, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ① Waited for lightning page to load. Attempts: 1, duration: 3.985

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.110

ⓘ Browser window has been opened. Name: main

● Click the New button

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew

ⓘ Interaction: ui:interaction?name=action

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

ⓘ Interaction: ui:interaction?name=action

ⓘ Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1126:0')]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[ChromeDriver: chrome on XP (65445572b5b9c22b62a1d828dcd7c838)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1126:0')]]

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ All Sub-Test Steps were successful.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● Enter Lead Details

ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.110

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.108


ⓘ Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

ⓘ Waiting for chrome to get window handles...

ⓘ Doing wait before switching to window...

ⓘ Browser window has been opened. Name: provar help - Google Search

● Set the First Name field

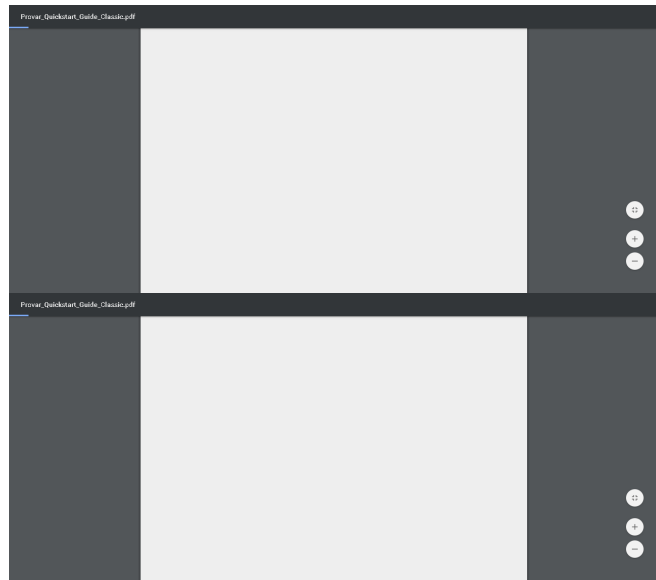

Error Screenshot

Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

Waiting for chrome to get window handles...

Locator: ui:locator?name=FirstName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://www.google.com/search?ei=xPcmX8LXA9P8rQH12r_QCQ&q=provar+trail

+guide&oq=provar+trail

+guide&gs_lcp=CgZwc3ktYWIQAzIHCCCEQChCgAToECAAAQRzoECAAAQZzoGCAAAQFhAeOggIABAWEAoQHjoCCAA6CAguEMcBEK8BOgQIABANoggIABab&ved=0ahUKEwjCye3Qhf3qAhVTfisKHXXtD5oQ4dUDCAw&uact=5

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]`

Doing before wait. waitUrl: default

End of <default> wait.

Doing after wait. waitUrl: default

Getting webElement: By.xpath: `(//div[@id='InlineEditDialogContent']/div[contains(@class, 'inlineEditDiv') or contains(@class, 'inlineEditCompoundDiv')]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1] | //div[contains(@class, 'pbBody') and not(//div[@id='InlineEditDialog' and contains(@style, 'visible')])]/div[contains(@class, 'pbSubheader') and h3/text()[not(parent::span)] = 'Lead Information']/following-sibling::div[contains(@class, 'pbSubsection')][1]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1])`

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500





















Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
 The control was not found. Locator: By.xpath: (//div[@id='InlineEditDialogContent']/div[contains(@class, 'inlineEditDiv') or contains(@class, 'inlineEditCompoundDiv')]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1] | //div[contains(@class, 'pbBody') and not(//div[@id='InlineEditDialog' and contains(@style, 'visible')])]/div[contains(@class, 'pbSubheader') and h3/text()[not(parent::span)] = 'Lead Information']/following-sibling::div[contains(@class, 'pbSubsection')][1]/table/tr/td[contains(@class, 'labelCol') and (./text() = 'First Name')]/following-sibling::td[1])
 Doing after wait. waitUrl: default
 End of <default> wait.
 Waiting for chrome to get window handles...
 Waiting for chrome to get window handles...
 Waiting for chrome to get window handles...
 Waited for lightning page to load. Attempts: 1, duration: 0.123
 Waiting for chrome to get window handles...
 Set the Last Name field
 Set the Company field
 Set the DOB field
 Set the SSN field
 Set the Mobile field
 Set the City field
 Set the Street field
 Set the Zip/Postal Code field
 Set the Loan Type picklist
 Set the Property Type picklist
 Set the Loan Amount field
 Set the Mortgage asset value field
 Set the Income per Annum field
 Set the Lead Status picklist to New
 Set the Phone field
 Set the Email field
 Click the Save button
 One or more Sub-Test Steps failed.
 Waiting for chrome to get window handles...
 Switched focus to main window. URL: https://provartesting.com/support/Provar_Quickstart_Guide_Classic.pdf
 Start of waitForPageToLoad. Timeout(ms): 90000
 Reattempting of waitForPageToLoad. Timeout(ms): 90000
 End of waitForPageToLoad. Duration(ms): 55
 Injecting script to get created object ID from aura component
 Fetching created Id from URL
 Reattempting for the createdId
 Reattempting for the createdId
 Reattempting for the createdId
 Storing created Salesforce Object ID. Result Name: leadId, created ID: null, location: https://provartesting.com/support/Provar_Quickstart_Guide_Classic.pdf
 Closing Page context. Name: screen, data: null, frame: null
 Main window reselected. Window: main
 Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Waiting for chrome to get window handles...

● Sub-Test Steps failed for iteration 0

Verify whether unqualified Lead is created.testcase

Summary

Started 02 Aug 2020, 22:59:39
Ended 02 Aug 2020, 23:02:26
Duration (mm:ss) 02:47.546
Outcome ● successful

Output

● Digital Mortgage Connection

ⓘ Opening Salesforce connection Connection name: Test1

ⓘ Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

ⓘ Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\...\ANT\Results(4)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

● Call Lead Creation

● Lead Creation

● Salesforce Connect: Test1 (Test)

ⓘ Opening Salesforce connection Connection name: Test1

ⓘ Re-using existing connection. Connection: Test1, Result Name: Test1

● Read Excel

ⓘ Loading data from Parameter Value Source ...

ⓘ Loading Parameter Value Source row 1:

ⓘ ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

● On SF Lead Home screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
- ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
- ① Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107
- ① Added Desired Capability for chrome browser proxy: Null
- ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
- ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
- ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Fflightning%2Fapp%2F06m2w000000iJqAAM
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 322
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.131
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.117
- ① Browser window has been opened. Name: main
- Click the New button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
 - ① Interaction: ui:interaction?name=action
 - ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
 - ① Doing after wait. waitUrl: default

① End of <default>; wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● For Each: {ExcelData}>=>Row

① Start of iteration 1 of 1.

● Iteration 1

● On SF Lead Home screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: https://ap16.lightning.force.com/lightning/o/Lead/new

① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent

① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent

① Polling for field. attempt: 1, by: By.xpath: /*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]

① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]

① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]

① Waited for lightning page to load. Attempts: 1, duration: 0.249

● Click the New button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default>; wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Waited for lightning page to load. Attempts: 1, duration: 0.108
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]] -> xpath: ./input
- ① Got webElement. tagName: INPUT, id: 178:1262;a, type: text, class: firstName compoundBorderBottom form-element__row input
- ① Typing value. tagName: INPUT, type: text, value: John, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Last Name field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 188:1262;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Company field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 225:1262;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: John, blur: true

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class,

'hide ')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB']/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class,'forcePageBlockSection'))][1]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide ')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB']/ancestor::div[1]] -> xpath: ./input]

① Typing value. Element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class,'forcePageBlockSection'))][1]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide ')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB']/ancestor::div[1]] -> xpath: ./input], value: 11/9/1986, blur: false

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class,'forcePageBlockSection'))][1]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide ')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text()='SSN']/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class,'forcePageBlockSection'))][1]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide ')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text()='SSN']/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1262;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')]/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 466:1262;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

- ① Got webElement. tagName: INPUT, id: 551:1262;a, type: text, class: city compoundBorderBottom compoundBorderRight input
- ① Typing value. tagName: INPUT, type: text, value: PA, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Street field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]
- ① Find field using relative xpath: ./textarea
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [[[[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ./textarea]
- ① Got webElement. tagName: TEXTAREA, id: 541:1262;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea
- ① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Zip/Postal Code field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [[[[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[2]/*[(self::label and

(contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()=Zip/Postal Code))/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 562:1262;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]

① Find field using relative xpath: ../../*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]] -> xpath: ../../*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Property Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,

'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')/ancestor::div[1]

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')/ancestor::div[1]]] -> xpath: `//*[@self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Residential, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Amount field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')/ancestor::div[1]]] -> xpath: `./input`

① Got webElement. tagName: INPUT, id: 654:1262:a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 722:1262;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 758:1262;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label'))) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (/text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]

① Find field using relative xpath: ../../[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label'))) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (/text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]] -> xpath: ../../[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label'))) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (/text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]

① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 46:1262;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Email field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DEmail

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]] -> xpath: ./input


① Got webElement. tagName: INPUT, id: 205:1262;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click the Save button

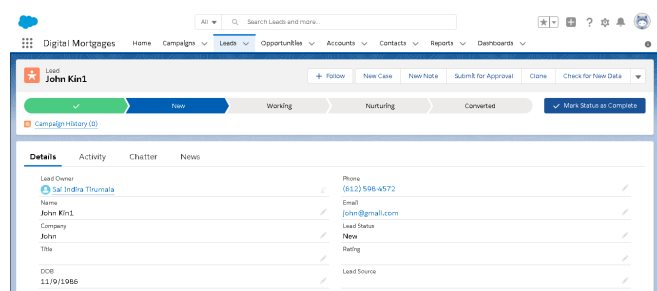

After Screenshot : 2020/08/02 23:01:47

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default
- ① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=20
- ① Start of Timed Wait. Seconds: 20
- ① End of Timed Wait. Actual duration(seconds): 20.0
- ① Sending screenshot. Data length: 48723
- ① All Sub-Test Steps were successful.
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 50
- ① Injecting script to get created object ID from aura component
- ① Fetching created Id from URL
- Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003esv9EAA, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view
- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esv9EAA
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view

- ① Reached the end of the List.

- ① Not closing Salesforce Connection because it is still being used. Name: Test1

● Un-Qualify Lead

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=PathAssistant
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Waited for lightning page to load. Attempts: 1, duration: 0.117

● Click the Un-qualified

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified, before wait: ui:wait:timed?seconds=20, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view
- ① Interaction: ui:interaction?name=action
- ① The Salesforce sFlexiPage could not be found. FlexiPage: null
- ① Waiting for element to be present. Timeout(seconds): 10

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2170:0')]/a`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.001

① Found element: `[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2170:0')]/a]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: stage complete unqualified, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click Mark Status as Complete button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view>

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2139:0')]/ancestor::button`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (8048ac2bfb35526442fc21c8b27adc07)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2139:0')]/ancestor::button]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark as Current Status]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esv9EAA/view>