

Test Run Report




Test Run Overview

Started 02 Aug 2020, 12:29:46
Ended 02 Aug 2020, 12:40:08
Duration (mm:ss) 10:21.632

Test Results Summary

Passed 3
Failed 1
Skipped 0

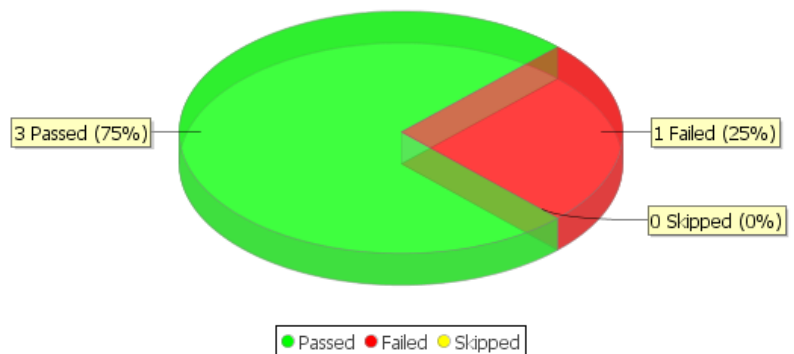

Test Case Summary

tests	failed
Test Cases for POC	failed
Lead Creation .testcase	successful
Lead generation through API.testcase	successful
Verify wheather a Qualified Lead is created and Converted to a Closed Won opportunity.testcase	failed

● Error doing interaction. Connection Name: Test1, cause: [ElementNotVisibleException: element not interactable (Session info: chrome=84.0.4147.105) (Driver info: chromedriver=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@#{310}),platform=Windows NT 10.0.18362 x86_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 48 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'BURGER', ip: '192.168.100.107', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_191' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog:chromeOptions={debuggerAddress=localhost:51544}, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, unexpectedAlertBehaviour=ignore, applicationCacheEnabled=false, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@#{310}), userDataDir=C:\Users\SailIndira\Provar1\Workspace6\provarCaches\chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=84.0.4147.105, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}] Session ID: c2717b4de608f4018d12ea98ddcbebfd]

● org.openqa.selenium.ElementNotVisibleException: element not interactable

● (Session info: chrome=84.0.4147.105)

● (Driver info: chromedriver=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@#{310}),platform=Windows NT 10.0.18362 x86_64) (WARNING: The server did not provide any stacktrace information)


● Command duration or timeout: 48 milliseconds

● Build info: version: 'unknown', revision: 'unknown', time: 'unknown'

● System info: host: 'BURGER', ip: '192.168.100.107', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_191'

- Driver info: org.openqa.selenium.chrome.ChromeDriver
- Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog:chromeOptions={debuggerAddress=localhost:51544}, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, unexpectedAlertBehaviour=ignore, applicationCacheEnabled=false, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@{#310}), userDataDir=C:\Users\SaiIndira\Provar1\Workspace6\provarCaches\chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=84.0.4147.105, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}]
- Session ID: c2717b4de608f4018d12ea98ddcbebfd
- at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
- at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)
- at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
- at java.lang.reflect.Constructor.newInstance(Constructor.java:423)
- at org.openqa.selenium.remote.ErrorHandler.createThrowable(ErrorHandler.java:215)
- at org.openqa.selenium.remote.ErrorHandler.throwIfResponseFailed(ErrorHandler.java:167)
- at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:671)
- at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:272)
- at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:82)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.setComboBoxInput(SfLightningSetInteractionImpl.java:751)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.setForInputElement(SfLightningSetInteractionImpl.java:604)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.performInteraction(SfLightningSetInteractionImpl.java:286)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:1869)
- at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:4671)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.perform(SeleniumUiHandler.java:398)
- at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.delegateToUiHandler(SfConnectionHandler.java:366)
- at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.perform(SfConnectionHandler.java:355)
- at com.provar.core.testexecution.common.java.TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.java:848)
- at com.provar.plugins.forcedotcom.core.ui.UiDoAction.execute(UiDoAction.java:167)
- at sun.reflect.GeneratedMethodAccessor75.invoke(Unknown Source)
- at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
- at java.lang.reflect.Method.invoke(Method.java:498)
- at com.provar.core.testexecution.container.java.TestExecutionContainerImpl.invokeTestApi(TestExecutionContainerImpl.java:752)
- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.java:650)
- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.access\$11(LocalTestExecutionContainerRunner.java:591)
- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner\$MessageProcessor.run(LocalTestExecutionContainerRunner.java:1242)
- One or more Sub-Test Steps failed.
- Sub-Test Steps failed for iteration 0

 Verify whether unqualified Lead is created.testcase

 successful


Lead Creation .testcase


Summary


Started 02 Aug 2020, 12:29:46
Ended 02 Aug 2020, 12:31:59
Duration (mm:ss) 02:12.748
Outcome  successful

Output

Digital Mortgages Stage Connection

 Opening Salesforce connection Connection name: Test1

 Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]


 Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(3)\Artifacts\Test1-objectids.log


Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test


Test


 Loading data from Parameter Value Source ...


 Loading Parameter Value Source row 1:


 ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


Loaded 1 rows from Parameter Value Source.


For Each: {ExcelData}>Row


 Start of iteration 1 of 1.


Iteration 1


On SF Lead Home screen

 Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

 Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107

 Added Desired Capability for chrome browser proxy: Null

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

- ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
- ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iITJqAAM
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 67
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 2, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 3, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 4, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 5, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 6, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 7, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 8, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.178
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.142
- ① Waited for lightning page to load. Attempts: 1, duration: 0.242
- ① Browser window has been opened. Name: main

● Click the New button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '706:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '706:0')]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2FList%3FilterName%3DRecent

● On SF Lead New screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.207

① Waited for lightning page to load. Attempts: 1, duration: 0.230

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2FList%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))]/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 178:1266;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2FList%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-`

container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 188:1266;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Company field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 225:1266;a, type: text, class: input

Typing value. tagName: INPUT, type: text, value: John, blur: true

Doing after wait. waitUrl: default

End of <default> wait.

Set the DOB field

Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]/[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>> wait.

① Found element: [][ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]] -> xpath: ./input]

① Typing value. Element: [][ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]] -> xpath: ./input, value: 11/9/1986, blur: false

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default>> wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>> wait.

① Found element: [][ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1266;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Mobile field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [[[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]]]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: 466:1266;a, type: tel, class: input

❗ Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the City field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [[[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: 551:1266;a, type: text, class: city compoundBorderBottom compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ../textarea

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ../textarea]

① Got webElement. tagName: TEXTAREA, id: 541:1266;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ../input]

- Got webElement. tagName: INPUT, id: 562:1266;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input
- Typing value. tagName: INPUT, type: text, value: 19406, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Loan Type picklist

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')/ancestor::div[1]
- Find field using relative xpath: ../../self::a or self::input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- Found element: [Chromedriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')/ancestor::div[1]] -> xpath: ../../self::a or self::input
- Got webElement. tagName: A, id: null, type: null, class: select
- Typing value. tagName: A, type: null, value: Purchase, blur: false
- Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Property Type picklist

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')/ancestor::div[1]
- Find field using relative xpath: ../../self::a or self::input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [][[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]] -> xpath: .//*[self::a or self::input]

❗ Got webElement. tagName: A, id: null, type: null, class: select

❗ Typing value. tagName: A, type: null, value: Residential, blur: false

❗ Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

❗ Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Loan Amount field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [][[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]] -> xpath: ./input

❗ Got webElement. tagName: INPUT, id: 654:1266;a, type: text, class: input uiInputSmartNumber

❗ Typing value. tagName: INPUT, type: text, value: 200000, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Mortgage asset value field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/

[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]

Find field using relative xpath: //input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]] -> xpath: //input]

Got webElement. tagName: INPUT, id: 722:1266;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 100000, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Income per Annum field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflighting%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]

Find field using relative xpath: //input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]] -> xpath: //input]

Got webElement. tagName: INPUT, id: 758:1266;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 40000, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Lead Status picklist to New

Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]]] -> xpath: //*[@self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 46:1266;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

End of <default> wait.

Set the Email field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email'))/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [Chromedriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email'))/ancestor::div[1]] -> xpath: ./input


Got webElement. tagName: INPUT, id: 205:1266;a, type: email, class: input

Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Click the Save button

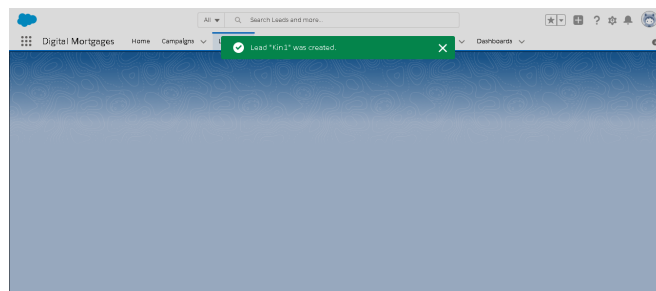

After Screenshot : 2020/08/02 12:31:52

Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

Interaction: ui:interaction?name=action

Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1520:0')]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

- ① Found element: [[ChromeDriver: chrome on XP (900a5499c640554e7df3481c8ac5b982)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1520:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Sending screenshot. Data length: 152678
- ① All Sub-Test Steps were successful.
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erndEAA/view
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 52
- ① Injecting script to get created object ID from aura component
- ① Fetching created Id from URL
- 📄 Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003erndEAA, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erndEAA/view
- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003erndEAA
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erndEAA/view
- ① Reached the end of the List.

Lead generation through API.testcase

Summary

Started	02 Aug 2020, 12:32:07
Ended	02 Aug 2020, 12:32:18
Duration (mm:ss)	00:10.736
Outcome	 successful

Output

Digital Mortgage Stage Connection

- ① Opening Salesforce connection Connection name: Test1
- ① Connection details. Connection name: Test1, urlString: sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment: <default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]
- ① Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(3)\Artifacts\Test1-objectids.log
- Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

Test

- ① Loading data from Parameter Value Source ...
- ① Loading Parameter Value Source row 1:
- ① ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> LastName = PrimitiveValueImpl [value: Indira, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Company = PrimitiveValueImpl [value: Tirumala, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [value: Deeksha, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Company = PrimitiveValueImpl [value: Manaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 3:

① ==Column=> RowNumber = PrimitiveValueImpl [value: 4, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [value: Anaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Company = PrimitiveValueImpl [value: Sosha , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

● For Each: {ExcelData}>Row

① Start of iteration 1 of 3.

● Iteration 1

● Create Object: Lead=>LeadId

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11

① Setting fields:

① =Field=> Status = New

① =Field=> Loan_Amount__c = 20000

① =Field=> Company = Tirumala

① =Field=> Income_per_Annum__c = 20000

① =Field=> Loan_Type__c = Purchase

① =Field=> LastName = Indira

① =Field=> Property_Type__c = Residential

① =Field=> Salutation = Mr.

① =Field=> SSN__c = 123456789

① =Field=> Mortgage_asset_value__c = 20000

① =Field=> DOB__c = 1986-11-09

📄 Lead created successfully. Object Id: 00Q2w000003ernnEAA, Result Name: LeadId

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003ernnEAA

① Start of iteration 2 of 3.

● Iteration 2

● Create Object: Lead=>LeadId

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11

- ① Setting fields:
- ① =Field=> Status = New
- ① =Field=> Loan_Amount__c = 20000
- ① =Field=> Company = Manaya
- ① =Field=> Income_per_Annum__c = 20000
- ① =Field=> Loan_Type__c = Purchase
- ① =Field=> LastName = Deeksha
- ① =Field=> Property_Type__c = Residential
- ① =Field=> Salutation = Mr.
- ① =Field=> SSN__c = 123456789
- ① =Field=> Mortgage_asset_value__c = 20000
- ① =Field=> DOB__c = 1986-11-09
- 📄 Lead created successfully. Object Id: 00Q2w000003ernsEAA, Result Name: LeadId
- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003ernsEAA
- ① Start of iteration 3 of 3.
- Iteration 3
 - Create Object: Lead=>LeadId
 - ① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11
 - ① Setting fields:
 - ① =Field=> Status = New
 - ① =Field=> Loan_Amount__c = 20000
 - ① =Field=> Company = Sosha
 - ① =Field=> Income_per_Annum__c = 20000
 - ① =Field=> Loan_Type__c = Purchase
 - ① =Field=> LastName = Anaya
 - ① =Field=> Property_Type__c = Residential
 - ① =Field=> Salutation = Mr.
 - ① =Field=> SSN__c = 123456789
 - ① =Field=> Mortgage_asset_value__c = 20000
 - ① =Field=> DOB__c = 1986-11-09
 - 📄 Lead created successfully. Object Id: 00Q2w000003ernxEAA, Result Name: LeadId
 - ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003ernxEAA
- ① Reached the end of the List.

Verify wheather a Qualified Lead is created and Converted to a Closed Won opportunity.testcase

Summary

Started	02 Aug 2020, 12:32:18
Ended	02 Aug 2020, 12:37:00
Duration (mm:ss)	04:42.236
Outcome	● failed

Output

- Digital Mortgages Stage Connection
 - ① Opening Salesforce connection Connection name: Test1

① Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

① Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(3)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

● Test

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

● For Each: {ExcelData}>Row

① Start of iteration 1 of 1.

● Iteration 1

● Navigate to Lead Home Screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

① Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107

① Added Desired Capability for chrome browser proxy: Null

① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

① Successfully opened Chrome WebDriver to https://login.salesforce.com/.

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html

① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w00000iJqAAM

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 58

① Polling for field. attempt: 1, by: By.xpath: //*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]

① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active')] and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]

① Waited for lightning page to load. Attempts: 1, duration: 0.543

- ① Polling for field. attempt: 1, by: By.xpath: `//*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]`
- ① Polling for field. attempt: 1, by: By.xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]`
- ① Waited for lightning page to load. Attempts: 1, duration: 0.210
- ① Qualified relative URL. URL: `https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent`
- ① Opening page. Requested URL: `/lightning/o/00Q/list?filterName=Recent`, Absolute URL: `https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent`
- ① Polling for field. attempt: 1, by: By.xpath: `//*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]`
- ① Polling for field. attempt: 1, by: By.xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]`
- ① Waited for lightning page to load. Attempts: 1, duration: 0.202
- ① Waited for lightning page to load. Attempts: 1, duration: 0.232
- ① Browser window has been opened. Name: main

● Click the New button

- ① Start of Interact. Connection: Test1, Locator: `ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew`, before wait: default, after wait: default, auto retry: default
 - ① Locator: `ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew`
 - ① Interaction: `ui:interaction?name=action`
 - ① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent`
 - ① Interaction: `ui:interaction?name=action`
 - ① Find action link element using xpath: `((div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '1126:0')]`
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: `[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefb)] -> xpath: ((div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '1126:0')]`
 - ① Clicking WebElement using Javascript Click. WebElement: `WebElement [tag: a, text: New, href: javascript:void(0);]`
 - ① Doing after wait. waitUrl: default
 - ① End of <default> wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

● Enter Lead Details

- ① Start of With Screen. Connection Name: Test1, target: `sf:ui:target?object=Lead&action=New&noOverride=true`
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Waited for lightning page to load. Attempts: 1, duration: 0.246
- ① Waited for lightning page to load. Attempts: 1, duration: 0.254
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

- ① Start of Interact. Connection: Test1, Locator: `ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName`, before wait: default, after wait: default, auto retry: default
 - ① Locator: `ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName`
 - ① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbdf) -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 178:1279;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbdf) -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 188:1279;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Company field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [][[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: 225:1279;a, type: text, class: input
- ① Typing value. tagName: INPUT, type: text, value: John, blur: true
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the DOB field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [][[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]] -> xpath: ./input]
- ① Typing value. Element: [][[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and

contains(@class,'forcePageBlockSection '))[1]/*[[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))] or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]] -> xpath: ./input, value: 11/9/1986, blur: false

Clicking WebElement. WebElement [tag: span, text: 9]

Doing after wait. waitUrl: default

End of <default> wait.

Set the SSN field

Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))[1]/*[[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))] or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')]/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbd) -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))[1]/*[[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))] or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')]/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 430:1279;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Mobile field

Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))[1]/*[[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))] or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')]/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

❗ End of <code></code> wait.

❗ Found element: [Chromedriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebf)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (.//text()[normalize-space()='Mobile'] or .//text()='Mobile')]/ancestor::div[1]] -> xpath: ./input

❗ Got webElement. tagName: INPUT, id: 466:1279;a, type: tel, class: input

❗ Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <code></code> wait.

● Set the City field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=City&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DCity

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (.//text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <code></code> wait.

❗ Found element: [Chromedriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebf)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (.//text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1] -> xpath: ./input

❗ Got webElement. tagName: INPUT, id: 551:1279;a, type: text, class: city compoundBorderBottom compoundBorderRight input

❗ Typing value. tagName: INPUT, type: text, value: PA, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <code></code> wait.

● Set the Street field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Street&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DStreet

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (.//text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

❗ Find field using relative xpath: ./textarea

❗ Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea]

① Got webElement. tagName: TEXTAREA, id: 541:1279;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 562:1279;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]

Find field using relative xpath: `//*[@self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]] -> xpath: //*[@self::a or self::input]`

Got webElement. tagName: A, id: null, type: null, class: select

Typing value. tagName: A, type: null, value: Purchase, blur: false

Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

Doing after wait. waitUrl: default

End of <default> wait.

Set the Property Type picklist

Start of Interact. Connection: Test1, Locator: `ui:locator?name=Property_Type__c&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c`, before wait: default, after wait: default, auto retry: default

Locator: `ui:locator?name=Property_Type__c&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c`

Interaction: `ui:interaction?name=set`

Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

Interaction: `ui:interaction?name=set`

Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]`

Find field using relative xpath: `//*[@self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]] -> xpath: //*[@self::a or self::input]`

Got webElement. tagName: A, id: null, type: null, class: select

Typing value. tagName: A, type: null, value: Residential, blur: false

Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

Doing after wait. waitUrl: default

End of <default> wait.

Set the Loan Amount field

Start of Interact. Connection: Test1, Locator: `ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c`, before wait: default, after wait: default, auto retry: default

Locator: `ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c`

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 654:1279;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 722:1279;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

End of <default> wait.

Set the Income per Annum field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]] -> xpath: ./input

Got webElement. tagName: INPUT, id: 758:1279;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 40000, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Lead Status picklist to New

Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]

Find field using relative xpath: /*[self::a or self::input]

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and

contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]] -> xpath: ../../self::a or self::input]]

- Got webElement. tagName: A, id: null, type: null, class: select
- Typing value. tagName: A, type: null, value: New, blur: false
- Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Phone field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]
- Find field using relative xpath: ./input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]] -> xpath: ./input
- Got webElement. tagName: INPUT, id: 46:1279;a, type: tel, class: input
- Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Email field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]
- Find field using relative xpath: ./input
- Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]]] -> xpath: ./input]

ⓘ Got webElement. tagName: INPUT, id: 205:1279;a, type: email, class: input

ⓘ Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Click the Save button

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

ⓘ Interaction: ui:interaction?name=action

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Interaction: ui:interaction?name=action

ⓘ Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1518:0')]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1518:0')]]

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ All Sub-Test Steps were successful.

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Start of waitForPageToLoad. Timeout(ms): 90000

ⓘ Reattempting of waitForPageToLoad. Timeout(ms): 90000

ⓘ End of waitForPageToLoad. Duration(ms): 212

ⓘ Injecting script to get created object ID from aura component

ⓘ Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003eroCEAQ, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

ⓘ Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003eroCEAQ

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

● Navigation through Lead Stages

ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=PathAssistant

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.234

● Click the New stage and Mark Status as Complete button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view
- ① Interaction: ui:interaction?name=action
- ① The Salesforce sfFlexiPage could not be found. FlexiPage: null
- ① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2413:0')]/ancestor::button`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2413:0')]/ancestor::button`
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Status as Complete]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Log a Call with Lead to Re-verify his details

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=QuickAction&quickAction=LogACall
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: View, Page URL: /lightning/r/00Q2w000003eroCEAQ/view, Current URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/r/00Q2w000003eroCEAQ/view
- ① Opening page. Requested URL: /lightning/r/00Q2w000003eroCEAQ/view, Absolute URL: https://ap16.lightning.force.com/lightning/r/00Q2w000003eroCEAQ/view
- ① Polling for field. attempt: 1, by: By.xpath: `//*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]`
- ① Polling for field. attempt: 1, by: By.xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]`
- ① Polling for field. attempt: 2, by: By.xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]`
- ① Waited for lightning page to load. Attempts: 1, duration: 0.147
- ① Waited for lightning page to load. Attempts: 1, duration: 0.219
- ① Initiating Publisher Action: Log a Call
- ① Activating activityTab tab
- ① Hovers>Clicking WebElement. WebElement [tag: a, text: Activity, href: javascript:void(0)]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.201
- ① Activating LogACall tab
- ① Hovers>Clicking WebElement. WebElement [tag: a, text: Log a Call, href: javascript:void(0);]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.172
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button]

● Set the Subject field to Call

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DSubject, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DSubject
- ① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view>

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject'))/ancestor::div[1]]]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: input-228, type: text, class: slds-input slds-combobox__input

① Typing value. tagName: INPUT, type: text, value: Call, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: Call]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Comments field to Call John Kin to re-verify the details

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Description&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DDescription, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Description&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DDescription

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view>

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Comments'] or ./text() = 'Comments'))/ancestor::div[1]`

① Find field using relative xpath: `./textarea`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Comments'] or ./text() = 'Comments'))/ancestor::div[1]]]] -> xpath: ./textarea`

① Got webElement. tagName: TEXTAREA, id: 1780:0, type: null, class: textarea textarea uiInput uiInputTextArea uiInput--default uiInput--textarea

① Typing value. tagName: TEXTAREA, type: null, value: Call John Kin to re-verify the details, blur: false

① Clicking WebElement. WebElement [tag: textarea]

① Clicking WebElement. WebElement [tag: textarea, text: Call John Kin to re-verify the details]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click the Create button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26action%3Dpublishersharebutton, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26action%3Dpublishersharebutton

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

① Interaction: ui:interaction?name=action

① Find publishersharebutton using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherShareButton')]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherShareButton')]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Start of waitForPageToLoad. Timeout(ms): 100000

① Reattempting of waitForPageToLoad. Timeout(ms): 100000

① End of waitForPageToLoad. Duration(ms): 45

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

● Click the Working Stage and Mark Status as Complete button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '453:0')]/ancestor::button`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

Found element: [[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbdf) -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '453:0')]/ancestor::button]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Status as Complete]

Doing after wait. waitUrl: default

End of <default> wait.

Click the Nurturing Stage and Mark Status as Complete button

Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete

Interaction: ui:interaction?name=action

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

Interaction: ui:interaction?name=action

The Salesforce sFlexiPage could not be found. FlexiPage: null

Find element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '48:2283:a')]/ancestor::button

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbdf) -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '48:2283:a')]/ancestor::button]

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Status as Complete]

Doing after wait. waitUrl: default

End of <default> wait.

All Sub-Test Steps were successful.

Closing Page context. Name: screen, data: null, frame: null

Main window reselected. Window: main

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

Lead Conversion to a Qualified Lead

Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=Convert


Opening Page context. Name: screen, data: null, frame: null

Waited for lightning page to load. Attempts: 1, duration: 0.161

Waited for lightning page to load. Attempts: 1, duration: 0.227

Hover>Clicking WebElement. WebElement [tag: h2, text: Convert Lead]

Click the Convert button

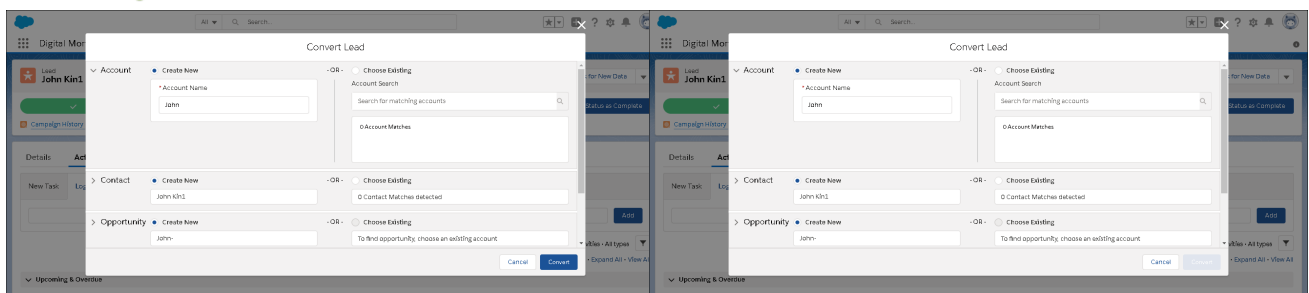


Before Screenshot : 2020/08/02 12:35:38

After Screenshot : 2020/08/02 12:35:41

- 1 Start of Interact. Connection: Test1, Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DsubmitConvert, before wait: default, after wait: ui:wait:pageload?timeout=60, auto retry: default
- 1 Locator: ui:locator?name=submitConvert&binding=sf%3Aui%3Abinding%3Aobject%3Faction%3DsubmitConvert
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view
- 1 Interaction: ui:interaction?name=action
- 1 Sending screenshot. Data length: 34267
- 1 Find element using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[contains(@data-aura-rendered-by, '2915:0')]
- 1 Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- 1 End of <default> wait.
- 1 Found element: [[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefbd)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[contains(@data-aura-rendered-by, '2915:0')]]
- 1 Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Convert]
- 1 Doing after wait. waitUrl: ui:wait:pageload?timeout=60
- 1 Waiting for page to load. Page URL: null, Timeout(secs): 60
- 1 Start of waitForPageToLoad. Timeout(ms): 60000
- 1 Reattempting of waitForPageToLoad. Timeout(ms): 60000
- 1 End of waitForPageToLoad. Duration(ms): 113
- 1 End for wait for page to load.
- 1 Sending screenshot. Data length: 34274
- 1 All Sub-Test Steps were successful.
- 1 Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main
- 1 Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

● Lead to Oppurtunity conversion

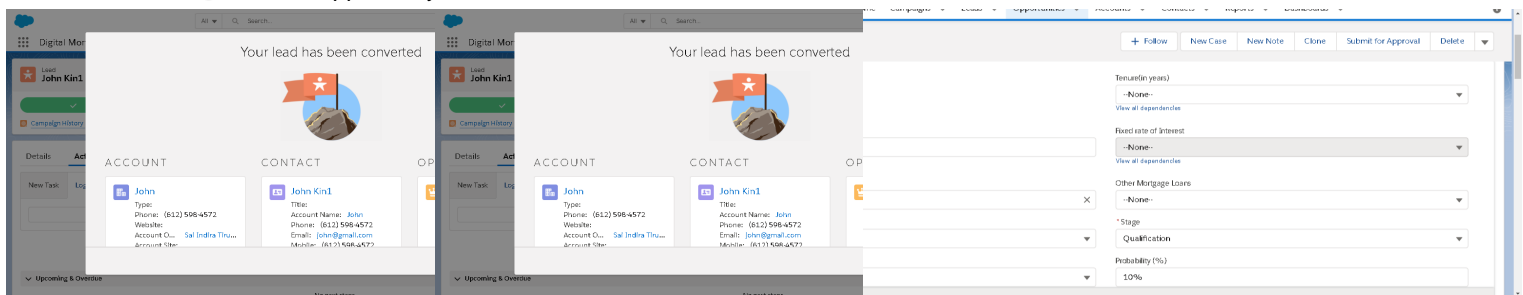

Before Screenshot : 2020/08/02 12:35:44

Before Screenshot : 2020/08/02 12:35:45

After Screenshot : 2020/08/02 12:36:07

- 1 Start of With Screen. Connection Name: Test1, target: ui:pageobject:target?pagelId=pageobjects.MyPageObject3
- 1 Sending screenshot. Data length: 50118
- 1 Opening Page context. Name: screen, data: null, frame: null
- 1 Sending screenshot. Data length: 50160
- Click the Oppurtunity Name
- 1 Start of Interact. Connection: Test1, Locator: ui:pageobject:field?field=john&pagelId=pageobjects.MyPageObject3, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default
- 1 Locator: ui:pageobject:field?field=john&pagelId=pageobjects.MyPageObject3
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eroCEAQ/view

- ① Interaction: ui:interaction?name=action
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: //a[contains(@href,'/lightning/r/006')]]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: John-, href: https://ap16.lightning.force.com/lightning/r/0062w000006MCMKAA4/view]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=20
- ① Start of Timed Wait. Seconds: 20
- ① End of Timed Wait. Actual duration(seconds): 20.0
- ① All Sub-Test Steps were successful.
- ① Sending screenshot. Data length: 23063
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view

● Opportunity Details screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Opportunity&action=View
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Waited for lightning page to load. Attempts: 1, duration: 0.113

● UI Assert

- ① Start of UIAssert. Connection: Test1
- ① Resolving field CC_Score__c
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view
- ① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score')]/ancestor::div[1]
- ① Find field using relative xpath: ../../self::a or self::input]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score')]/ancestor::div[1]] -> xpath: ../../self::a or self::input]
- ① Clicking WebElement. WebElement [tag: input, text: --None--]
- ① Clicking WebElement. WebElement [tag: input, text: --None--]
- ① Asserting field attributes: CC_Score__c
- ① Reading Attribute: value
- ① Object read successfully. Result Name: Values

● Double Click the Payments Frequency picklist

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c

Interaction: ui:interaction?name=doubleClick

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view

Interaction: ui:interaction?name=doubleClick

Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/1/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Payments Frequency'] or ./text() = 'Payments Frequency'))/ancestor::div[1]

Find field using relative xpath: ../../self::a or self::input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefb)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/1/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Payments Frequency'] or ./text() = 'Payments Frequency'))/ancestor::div[1]] -> xpath: ../../self::a or self::input

Got webElement. tagName: INPUT, id: input-492, type: text

Doing after wait. waitUrl: default

End of <default> wait.

Set the Tenure(in years)

Start of Interact. Connection: Test1, Locator: ui:locator?name=Tenure_in_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DTenure_in_years__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Tenure_in_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DTenure_in_years__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/1/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Tenure(in years)'] or ./text() = 'Tenure(in years'))/ancestor::div[1]

Find field using relative xpath: ../../self::a or self::input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (c2717b4de608f4018d12ea98ddcbefb)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/1/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Tenure(in years)'] or ./text() = 'Tenure(in years'))/ancestor::div[1]] -> xpath: ../../self::a or self::input


Got webElement. tagName: INPUT, id: input-466, type: text, class: slds-input slds-combobox__input

Typing value. tagName: INPUT, type: text, value: 15, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the CC Score

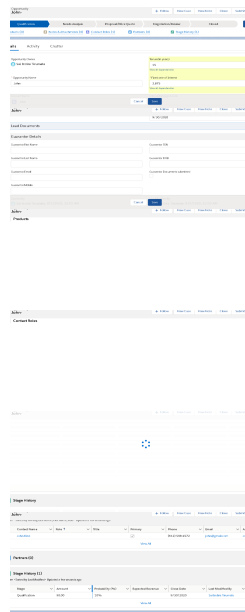

Error Screenshot

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=CC_Score__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCC_Score__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=CC_Score__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCC_Score__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score'))/ancestor::div[1]

ⓘ Find field using relative xpath: ../../self::a or self::input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [Chromedriver: chrome on XP (c2717b4de608f4018d12ea98ddcbebfd)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score'))/ancestor::div[1]] -> xpath: ../../self::a or self::input

ⓘ Got webElement. tagName: INPUT, id: input-507, type: text, class: slds-input slds-combobox__input

ⓘ Typing value. tagName: INPUT, type: text, value: Excellent(740+), blur: false

● Error doing interaction. Connection Name: Test1, cause: [ElementNotVisibleException: element not interactable (Session info: chrome=84.0.4147.105) (Driver info: chromedriver=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@#310)),platform=Windows NT 10.0.18362 x86_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 48 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'BURGER', ip: '192.168.100.107', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_191' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog.chromeOptions={debuggerAddress=localhost:51544}, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, unexpectedAlertBehaviour=ignore}]]

applicationCacheEnabled=false, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@{#310}), userDataDir=C:\Users\SaiIndira\Provar1\Workspace6\provarCaches\chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=84.0.4147.105, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}} Session ID: c2717b4de608f4018d12ea98ddcbefdf]

- org.openqa.selenium.ElementNotVisibleException: element not interactable
- (Session info: chrome=84.0.4147.105)
- (Driver info: chromedriver=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@{#310}), platform=Windows NT 10.0.18362 x86_64) (WARNING: The server did not provide any stacktrace information)
- Command duration or timeout: 48 milliseconds
- Build info: version: 'unknown', revision: 'unknown', time: 'unknown'
- System info: host: 'BURGER', ip: '192.168.100.107', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_191'
- Driver info: org.openqa.selenium.chrome.ChromeDriver
- Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog.chromeOptions={debuggerAddress=localhost:51544}, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, unexpectedAlertBehaviour=ignore, applicationCacheEnabled=false, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=84.0.4147.30 (48b3e868b4cc0aa7e8149519690b6f6949e110a8-refs/branch-heads/4147@{#310}), userDataDir=C:\Users\SaiIndira\Provar1\Workspace6\provarCaches\chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=84.0.4147.105, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}]
- Session ID: c2717b4de608f4018d12ea98ddcbefdf
- at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
- at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)
- at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
- at java.lang.reflect.Constructor.newInstance(Constructor.java:423)
- at org.openqa.selenium.remote.ErrorHandler.createThrowable(ErrorHandler.java:215)
- at org.openqa.selenium.remote.ErrorHandler.throwIfResponseFailed(ErrorHandler.java:167)
- at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:671)
- at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:272)
- at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:82)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.setComboBoxInput(SfLightningSetInteractionImpl.java:751)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.setForInputElements(SfLightningSetInteractionImpl.java:604)
- at com.provar.plugins.forcedotcom.core.ui.lightning.interaction.SfLightningSetInteractionImpl.performInteraction(SfLightningSetInteractionImpl.java:286)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:1869)
- at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:4671)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.perform(SeleniumUiHandler.java:398)
- at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.delegateToUiHandler(SfConnectionHandler.java:366)
- at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.perform(SfConnectionHandler.java:355)
- at com.provar.core.testexecution.common.java.TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.java:848)
- at com.provar.plugins.forcedotcom.core.ui.UiDoAction.execute(UiDoAction.java:167)
- at sun.reflect.GeneratedMethodAccessor75.invoke(Unknown Source)
- at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
- at java.lang.reflect.Method.invoke(Method.java:498)
- at com.provar.core.testexecution.container.java.TestExecutionContainerImpl.invokeTestApi(TestExecutionContainerImpl.java:752)
- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.java:650)

● at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.access
\$11(LocalTestExecutionContainerRunner.java:591)

● at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner
\$MessageProcessor.run(LocalTestExecutionContainerRunner.java:1242)

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.199

- ⚠ Set the Payments Frequency
- ⚠ Set the Other Mortgage Loans
- ⚠ Check the Paycheck stubs
- ⚠ Check the Co-lateral Documents field
- ⚠ Check the W2 or I-9 forms from past 2 years field
- ⚠ Set the Process Documentation
- ⚠ Set the Guarantor First Name field
- ⚠ Set the Guarantor Last Name field
- ⚠ Set the Guarantor Email field
- ⚠ Set the Guarantor Mobile field
- ⚠ Set the Guarantor SSN field
- ⚠ Set the Guarantor DOB field
- ⚠ Check the Guarantor Documents submitted field
- ⚠ Click the Save button

● One or more Sub-Test Steps failed.

ⓘ Closing Page context. Name: screen, data: null, frame: null

ⓘ Main window reselected. Window: main

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MCMKAA4/view

● Sub-Test Steps failed for iteration 0

Verify whether unqualified Lead is created.testcase

Summary

Started	02 Aug 2020, 12:37:04
Ended	02 Aug 2020, 12:39:59
Duration (mm:ss)	02:55.064
Outcome	● successful

Output

● Digital Mortgage Connection

ⓘ Opening Salesforce connection Connection name: Test1

ⓘ Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

ⓘ Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(3)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

● Call Lead Creation

● Lead Creation

● Salesforce Connect: Test1 (Test)

ⓘ Opening Salesforce connection Connection name: Test1

ⓘ Re-using existing connection. Connection: Test1, Result Name: Test1

● Read Excel

ⓘ Loading data from Parameter Value Source ...

ⓘ Loading Parameter Value Source row 1:

ⓘ ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 ⓘ ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 Loaded 1 rows from Parameter Value Source.

● On SF Lead Home screen

ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
 ⓘ Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
 ⓘ Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107
 ⓘ Added Desired Capability for chrome browser proxy: Null
 ⓘ Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
 ⓘ Successfully opened Chrome WebDriver to https://login.salesforce.com/.
 ⓘ Opening Page context. Name: screen, data: null, frame: null
 ⓘ Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
 ⓘ Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w00000iJqAAM
 ⓘ Start of waitForPageToLoad. Timeout(ms): 90000
 ⓘ Reattempting of waitForPageToLoad. Timeout(ms): 90000
 ⓘ End of waitForPageToLoad. Duration(ms): 928
 ⓘ Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ⓘ Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.211
 ⓘ Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ⓘ Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ⓘ Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 ⓘ Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 ⓘ Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 ⓘ Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ⓘ Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.225
 ⓘ Browser window has been opened. Name: main

● Click the New button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1126:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1126:0')]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

● For Each: {ExcelData}=>Row

- ① Start of iteration 1 of 1.

● Iteration 1

● On SF Lead Home screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: https://ap16.lightning.force.com/lightning/o/Lead/new
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.196
- ① Waited for lightning page to load. Attempts: 1, duration: 0.228

● Click the New button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class,

'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]//a[contains(@data-aura-rendered-by, '1126:0')]

⌚ Waiting for element to be present. Timeout(seconds): 10

⌚ Doing before wait. waitUrl: default

⌚ End of <default>; wait.

⌚ Found element: [[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]//a[contains(@data-aura-rendered-by, '1126:0')])]

⌚ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

⌚ Doing after wait. waitUrl: default

⌚ End of <default>; wait.

⌚ All Sub-Test Steps were successful.

⌚ Closing Page context. Name: screen, data: null, frame: null

⌚ Main window reselected. Window: main

⌚ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

⌚ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

⌚ Opening Page context. Name: screen, data: null, frame: null

⌚ Waited for lightning page to load. Attempts: 1, duration: 0.242

⌚ Waited for lightning page to load. Attempts: 1, duration: 0.187

⌚ Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

⌚ Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

⌚ Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

⌚ Interaction: ui:interaction?name=set

⌚ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

⌚ Interaction: ui:interaction?name=set

⌚ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text()='First Name')/ancestor::div[1]

⌚ Find field using relative xpath: //input

⌚ Waiting for element to be present. Timeout(seconds): 10

⌚ Doing before wait. waitUrl: default

⌚ End of <default>; wait.

⌚ Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: (//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text()='First Name')/ancestor::div[1]])] -> xpath: //input]

⌚ Got webElement. tagName: INPUT, id: 178:1256;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 188:1256;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Company field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Company'] or ./text()='Company')]/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 225:1256;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: John, blur: true

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')]/ancestor::div[1]] -> xpath: ./input]

① Typing value. Element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')]/ancestor::div[1]] -> xpath: ./input], value: 11/9/1986, blur: false

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1256;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 466:1256;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 551:1256;a, type: text, class: city compoundBorderBottom compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./textarea

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]]] -> xpath: ./textarea]

① Got webElement. tagName: TEXTAREA, id: 541:1256;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 562:1256;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]

① Find field using relative xpath: /*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-

id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')/ancestor::div[1]] -> xpath: ../../[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Property Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')/ancestor::div[1]

① Find field using relative xpath: ../../[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')/ancestor::div[1]] -> xpath: ../../[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Residential, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Loan Amount field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection')))

[3]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))[3]/*[(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 654:1256;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))[3]/*[(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value'))/ancestor::div[1]]]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))[3]/*[(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value'))/ancestor::div[1]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 722:1256;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 758:1256;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]

① Find field using relative xpath: /*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1] -> xpath: /*[self::a or self::input]

- ① Got webElement. tagName: A, id: null, type: null, class: select
- ① Typing value. tagName: A, type: null, value: New, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Phone field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: 46:1256;a, type: tel, class: input
- ① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Email field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]] -> xpath: ./input]


① Got webElement. tagName: INPUT, id: 205:1256;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click the Save button

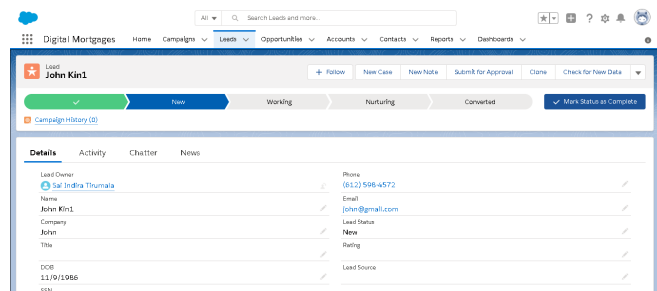

After Screenshot : 2020/08/02 12:39:22

① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1518:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1518:0')]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.001

① Sending screenshot. Data length: 48723

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 44

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003erobEAA, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003erobEAA

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view

① Reached the end of the List.

① Not closing Salesforce Connection because it is still being used. Name: Test1

● Un-Qualify Lead

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=PathAssistant

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.251

● Click the Un-qualified

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified, before wait: ui:wait:timed?seconds=20, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Waiting for element to be present. Timeout(seconds): 10

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2526:0')]/a`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.001

① Found element: `[[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2526:0')]/a`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: stage complete unqualified, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click Mark Status as Complete button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2495:0')]/ancestor::button`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (fee64c318522b4568eaacc6725967150)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2495:0')]/ancestor::button]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark as Current Status]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003erobEAA/view>