

Test Run Report




Test Run Overview

Started 02 Aug 2020, 23:07:35
Ended 02 Aug 2020, 23:22:46
Duration (mm:ss) 15:11.915

Test Results Summary

Passed 4
Failed 0
Skipped 0

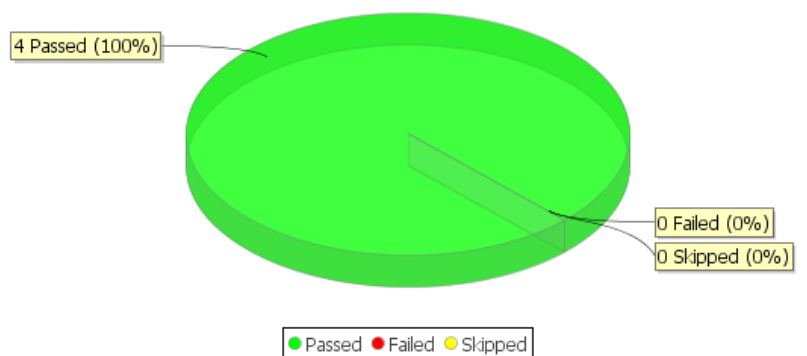

Test Case Summary

tests	successful
Test Cases for POC	successful
Lead Creation .testcase	successful
Lead generation through API.testcase	successful
Verify wheather a Qualified Lead is created and Convert to a Closed Won opportunity2.testcase	successful
Verify whether unqualified Lead is created.testcase	successful


Lead Creation .testcase


Summary


Started 02 Aug 2020, 23:07:35
Ended 02 Aug 2020, 23:14:17
Duration (mm:ss) 06:42.743
Outcome  successful

Output

Digital Mortgages Stage Connection

 Opening Salesforce connection Connection name: Test1

 Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]


 Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(5)\Artifacts\Test1-objectids.log


Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test


Test


 Loading data from Parameter Value Source ...


 Loading Parameter Value Source row 1:


 ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


 ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

 ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]


Loaded 1 rows from Parameter Value Source.


Test Data


 Start of iteration 1 of 1.


Iteration 1


On SF Lead Home screen

 Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

 Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107

 Added Desired Capability for chrome browser proxy: Null

 Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe

- ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
- ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iITJqAAM
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 100
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.230
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.118
- ① Browser window has been opened. Name: main
- Click the New button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
 - ① Interaction: ui:interaction?name=action
 - ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1148:0')]
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1148:0')]]
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
 - ① Doing after wait. waitUrl: default
 - ① End of <default> wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.109

① Waited for lightning page to load. Attempts: 1, duration: 0.148

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 178:1276;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]] -> xpath: ./input

ⓘ Got webElement. tagName: INPUT, id: 188:1276;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

ⓘ Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Company field

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]

ⓘ Find field using relative xpath: ./input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]] -> xpath: ./input

ⓘ Got webElement. tagName: INPUT, id: 225:1276;a, type: text, class: input

ⓘ Typing value. tagName: INPUT, type: text, value: John, blur: true

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the DOB field

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-

container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]]] -> xpath: ./input]

Typing value. Element: [][ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')/ancestor::div[1]]] -> xpath: ./input, value: 11/9/1986, blur: false

Clicking WebElement. WebElement [tag: span, text: 9]

Doing after wait. waitUrl: default

End of <default> wait.

Set the SSN field

Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%26Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 430:1276;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Mobile field

Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')/ancestor::div[1]] -> xpath: ./input

Got webElement. tagName: INPUT, id: 466:1276;a, type: tel, class: input

Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the City field

Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input

Got webElement. tagName: INPUT, id: 551:1276;a, type: text, class: city compoundBorderBottom compoundBorderRight input

Typing value. tagName: INPUT, type: text, value: PA, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Street field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]
- ① Find field using relative xpath: ./textarea
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea]
- ① Got webElement. tagName: TEXTAREA, id: 541:1276;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea
- ① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Zip/Postal Code field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: 562:1276;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input
- ① Typing value. tagName: INPUT, type: text, value: 19406, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Loan Type picklist

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]
- ① Find field using relative xpath: ../../[self::a or self::input]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]
- ① Got webElement. tagName: A, id: null, type: null, class: select
- ① Typing value. tagName: A, type: null, value: Purchase, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Property Type picklist

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]
- ① Find field using relative xpath: ../../[self::a or self::input]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]

contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]] -> xpath: ../../self::a or self::input]]

- Got webElement. tagName: A, id: null, type: null, class: select
- Typing value. tagName: A, type: null, value: Residential, blur: false
- Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Loan Amount field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')/ancestor::div[1]]
- Find field using relative xpath: ../input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')/ancestor::div[1]] -> xpath: ../input
- Got webElement. tagName: INPUT, id: 654:1276;a, type: text, class: input uiInputSmartNumber
- Typing value. tagName: INPUT, type: text, value: 200000, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.

Set the Mortgage asset value field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]]
- Find field using relative xpath: ../input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')]/ancestor::div[1]] -> xpath: //input]

ⓘ Got webElement. tagName: INPUT, id: 722:1276;a, type: text, class: input uiInputSmartNumber

ⓘ Typing value. tagName: INPUT, type: text, value: 100000, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Income per Annum field

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]

ⓘ Find field using relative xpath: //input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]] -> xpath: //input]

ⓘ Got webElement. tagName: INPUT, id: 758:1276;a, type: text, class: input uiInputSmartNumber

ⓘ Typing value. tagName: INPUT, type: text, value: 40000, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Lead Status picklist to New

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[self::label

and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label'))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]

Find field using relative xpath: `//*[@self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]] -> xpath: `//*[@self::a or self::input]`

Got webElement. tagName: A, id: null, type: null, class: select

Typing value. tagName: A, type: null, value: New, blur: false

Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

Doing after wait. waitUrl: default

End of <default> wait.

Set the Phone field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]`

Find field using relative xpath: `./input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [][[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]] -> xpath: `./input`

Got webElement. tagName: INPUT, id: 46:1276;a, type: tel, class: input

Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Email field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default>; wait.

❗ Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]] -> xpath: ./input


❗ Got webElement. tagName: INPUT, id: 205:1276;a, type: email, class: input

❗ Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default>; wait.

● Click the Save button

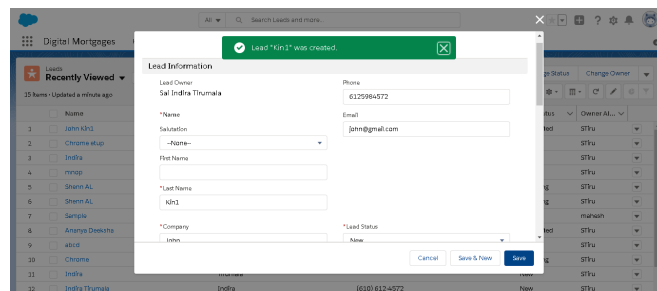

After Screenshot : 2020/08/02 23:09:19

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

❗ Interaction: ui:interaction?name=action

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

❗ Interaction: ui:interaction?name=action

❗ Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default>; wait.

❗ Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]

❗ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

❗ Doing after wait. waitUrl: default

❗ End of <default>; wait.

① Sending screenshot. Data length: 39742

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 56

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003esvTEAQ, location: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvTEAQ/view>

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esvTEAQ

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvTEAQ/view>

● For Each: {ExcelData}=>Row

① Start of iteration 1 of 1.

● Iteration 1

● On SF Lead Home screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvTEAQ/view>

① Qualified relative URL. URL: <https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent>

① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: <https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent>

① Polling for field. attempt: 1, by: By.xpath: `//*[self::div and contains(@class, 'oneGlobalNav')] or (@id='oneHeader')]`

① Polling for field. attempt: 1, by: By.xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]`

① Waited for lightning page to load. Attempts: 1, duration: 0.117

● Click the New button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent>

① Interaction: ui:interaction?name=action

① Find action link element using xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]/div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]/div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.103

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a481f83)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 178:1284;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')]/ancestor::div[1]`

[1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))/ancestor::div[1]

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))/ancestor::div[1]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 188:1284;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Company field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))) and (./text()[normalize-space()='Company'] or ./text() = 'Company'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')))) and (./text()[normalize-space()='Company'] or ./text() = 'Company'))/ancestor::div[1]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 225:1284;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: John, blur: true

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB'))/ancestor::div[1]]] -> xpath: ./input]`

① Typing value. Element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB'))/ancestor::div[1]]] -> xpath: ./input], value: 11/9/1986, blur: false`

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%2Ffield%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%2Ffield%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN'))/ancestor::div[1]]] -> xpath: ./input]`

id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1])]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1])]

① Got webElement. tagName: INPUT, id: 466:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='City'] or ./text() = 'City')/ancestor::div[1])]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 551:1284;a, type: text, class: city compoundBorderBottom compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./textarea

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea

① Got webElement. tagName: TEXTAREA, id: 541:1284;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]/[2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='Zip/Postal Code')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 562:1284;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')/ancestor::div[1]`

① Find field using relative xpath: `./*[self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')/ancestor::div[1]] -> xpath: ./*[self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Property Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]] -> xpath: //*[self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Residential, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Amount field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 654:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 722:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 758:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]

① Find field using relative xpath: ./*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]] -> xpath: ./*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*[(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone'))/ancestor::div[1]] ->

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*[(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone'))/ancestor::div[1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 46:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Email field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3FObject%3DLead%26field%3DEmail

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*[(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email'))/ancestor::div[1]] ->

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*[(((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email'))/ancestor::div[1]]]] -> xpath: ./input]


① Got webElement. tagName: INPUT, id: 205:1284;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click the Save button

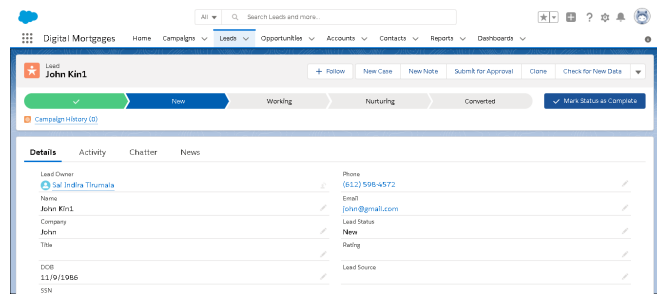

After Screenshot : 2020/08/02 23:10:52

① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.001

① Sending screenshot. Data length: 48723

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvYEAQ/view

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 45

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

① Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003esvYEAQ, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvYEAQ/view

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esvYEAQ

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvYEAQ/view

① Reached the end of the List.

● For Each: {ExcelData}=>Row

① Start of iteration 1 of 1.

● Iteration 1

● On SF Lead Home screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

① Opening Page context. Name: screen, data: null, frame: null

- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvYEAQ/view
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.236

● Click the New button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1130:0')]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1130:0')])]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-

```
root'))/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))/ancestor::div[1]
```

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))/ancestor::div[1]]] -> xpath: `./input`

① Got webElement. tagName: INPUT, id: 178:1284;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection '))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))/ancestor::div[1]]] -> xpath: `./input`

① Got webElement. tagName: INPUT, id: 188:1284;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Company field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 225:1284;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: John, blur: true

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]] -> xpath: ./input

① Typing value. Element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class,

'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*/[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text() = 'DOB')]/ancestor::div[1]] -> xpath: ./input, value: 11/9/1986, blur: false

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*/[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*/[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')]/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*/[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')]/ancestor::div[1]

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup') or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')/ancestor::div[1])]` -> xpath: `./input`

① Got webElement. tagName: INPUT, id: 466:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=City&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DCity`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=City&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DCity`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

① Interaction: `ui:interaction?name=set`

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]` -> xpath: `./input`

① Got webElement. tagName: INPUT, id: 551:1284;a, type: text, class: city compoundBorderBottom compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DStreet`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DStreet`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

① Interaction: `ui:interaction?name=set`

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')][2]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

root'))/"/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide
'))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Street')/
ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./textarea

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //
div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,
'uiModal'))][last()]/"/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and
(contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or
self::lightning-picklist or self::lightning-input][1] -> xpath: ./textarea

① Got webElement. tagName: TEXTAREA, id: 541:1284;a, type: null, class: street compoundTLRadius compoundTRRadius
compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject
%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?
count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo
%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,
'forceModal') or contains(@class,'uiModal'))][last()]/"/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide
'))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Zip/Postal
Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //
div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,
'uiModal'))][last()]/"/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide
'))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Zip/Postal
Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 562:1284;a, type: text, class: postalCode compoundBLRadius compoundBorderRight
input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject
%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field
%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2F lightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type'))/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type'))/ancestor::div[1]] -> xpath: //*[self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Property Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2F lightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]`
`[3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]] -> xpath: //*[self::a or self::input]`

- ① Got webElement. tagName: A, id: null, type: null, class: select
- ① Typing value. tagName: A, type: null, value: Residential, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Loan Amount field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection ')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection ')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]] -> xpath: ./input
- ① Got webElement. tagName: INPUT, id: 654:1284;a, type: text, class: input uiInputSmartNumber
- ① Typing value. tagName: INPUT, type: text, value: 200000, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.

● Set the Mortgage asset value field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection ')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value'))/ancestor::div[1]

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value']/ancestor::div[1]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 722:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

① Interaction: `ui:interaction?name=set`

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum']/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum']/ancestor::div[1]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 758:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]

① Find field using relative xpath: ../../self::a or self::input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]]]] -> xpath: ../../self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]

① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]]]] -> xpath: ../input]

① Got webElement. tagName: INPUT, id: 46:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Email field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]/[1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]

① Find field using relative xpath: //input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]/[1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]] -> xpath: //input]


① Got webElement. tagName: INPUT, id: 205:1284;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Click the Save button

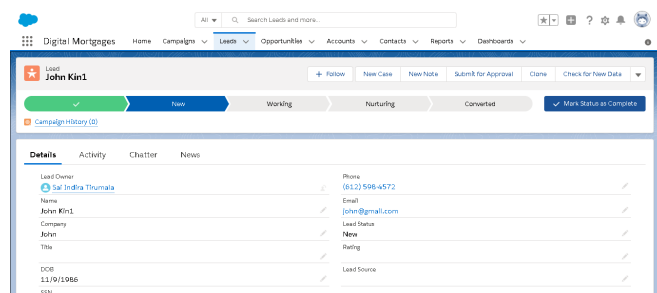

After Screenshot : 2020/08/02 23:12:30

① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1522:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1522:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=20
- ① Start of Timed Wait. Seconds: 20
- ① End of Timed Wait. Actual duration(seconds): 20.0
- ① Sending screenshot. Data length: 48723
- ① All Sub-Test Steps were successful.
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esviEAA/view
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 42
- ① Injecting script to get created object ID from aura component
- ① Fetching created Id from URL
- 📋 Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003esviEAA, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esviEAA/view
- ① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esviEAA
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esviEAA/view
- ① Reached the end of the List.
- For Each: {ExcelData}=>Row
 - ① Start of iteration 1 of 1.
 - Iteration 1
 - On SF Lead Home screen
 - ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
 - ① Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esviEAA/view
 - ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 - ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
 - ① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]
 - ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 - ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
 - ① Waited for lightning page to load. Attempts: 1, duration: 0.137
 - Click the New button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent
 - ① Interaction: ui:interaction?name=action
 - ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '708:0')])

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager')])//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '708:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.101

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: (//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')/ancestor::div[1]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 178:1284;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: 188:1284;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input
- ① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Company field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]
- ① Find field using relative xpath: ./input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')] [1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]] -> xpath: ./input]

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))]`
`[1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'slds-form-element__label')))]`

'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 430:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]]]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 466:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 551:1284;a, type: text, class: city compoundBorderBottom compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

① Find field using relative xpath: `./textarea`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea]`

① Got webElement. tagName: TEXTAREA, id: 541:1284;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code')]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 562:1284;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Dobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Dobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]

① Find field using relative xpath: /*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')] [3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]] -> xpath: /*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Property Type picklist

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]
- ① Find field using relative xpath: ../../self::a or self::input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type')]/ancestor::div[1]] -> xpath: ../../self::a or self::input
- ① Got webElement. tagName: A, id: null, type: null, class: select
- ① Typing value. tagName: A, type: null, value: Residential, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Loan Amount field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]
- ① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text()='Loan Amount')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 654:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text()='Mortgage asset value')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection')]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mortgage asset value'] or ./text()='Mortgage asset value')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 722:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum'))/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum'))/ancestor::div[1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 758:1284;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status'))/ancestor::div[1]

① Find field using relative xpath: ./*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status'))/ancestor::div[1]]]] -> xpath: ./*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')/ancestor::div[1]]]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 46:1284;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Email field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?

count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-

id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')/ancestor::div[1]] -> xpath: ./input]


① Got webElement. tagName: INPUT, id: 205:1284;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Click the Save button

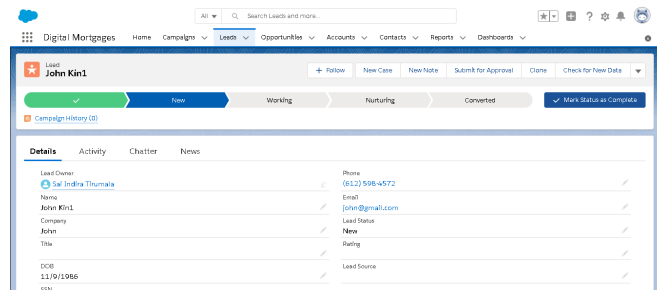

After Screenshot : 2020/08/02 23:14:07

① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1522:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[ChromeDriver: chrome on XP (3beb73b1e75117e331ca1ad3a4811f83)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1522:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.001

① Sending screenshot. Data length: 48723

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvsEAA/view

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 49

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

① Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003esvsEAA, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvsEAA/view

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esvsEAA

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003esvsEAA/view

ⓘ Reached the end of the List.

ⓘ Reached the end of the List.

Lead generation through API.testcase

Summary

Started 02 Aug 2020, 23:14:22
Ended 02 Aug 2020, 23:14:32
Duration (mm:ss) 00:09.877
Outcome  successful

Output

Digital Mortgage Stage Connection

ⓘ Opening Salesforce connection Connection name: Test1

ⓘ Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

ⓘ Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..\ANT\Results(5)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

Test

ⓘ Loading data from Parameter Value Source ...

ⓘ Loading Parameter Value Source row 1:

ⓘ ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LastName = PrimitiveValueImpl [value: Indira, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Company = PrimitiveValueImpl [value: Tirumala, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ Loading Parameter Value Source row 2:

ⓘ ==Column=> RowNumber = PrimitiveValueImpl [value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LastName = PrimitiveValueImpl [value: Deeksha, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Company = PrimitiveValueImpl [value: Manaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ Loading Parameter Value Source row 3:

ⓘ ==Column=> RowNumber = PrimitiveValueImpl [value: 4, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> LastName = PrimitiveValueImpl [value: Anaya, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Company = PrimitiveValueImpl [value: Sosha , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Status = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Mortgage_asset_value__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Income_per_Annum__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> DOB__c = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> SSN__c = PrimitiveValueImpl [value: 123456789, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Loan_Amount__c = PrimitiveValueImpl [value: 20000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 3 rows from Parameter Value Source.

● Test Data

① Start of iteration 1 of 3.

● Iteration 1

● Create Object: Lead

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11
① Setting fields:
① =Field=> Status = New
① =Field=> Loan_Amount__c = 20000
① =Field=> Company = Tirumala
① =Field=> Income_per_Annum__c = 20000
① =Field=> Loan_Type__c = Purchase
① =Field=> LastName = Indira
① =Field=> Property_Type__c = Residential
① =Field=> Salutation = Mr.
① =Field=> SSN__c = 123456789
① =Field=> Mortgage_asset_value__c = 20000
① =Field=> DOB__c = 1986-11-09
📄 Lead created successfully. Object Id: 00Q2w000003esvxEAA, Result Name: LeadId
① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esvxEAA

① Start of iteration 2 of 3.

● Iteration 2

● Create Object: Lead

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11
① Setting fields:
① =Field=> Status = New
① =Field=> Loan_Amount__c = 20000
① =Field=> Company = Manaya
① =Field=> Income_per_Annum__c = 20000
① =Field=> Loan_Type__c = Purchase
① =Field=> LastName = Deeksha
① =Field=> Property_Type__c = Residential
① =Field=> Salutation = Mr.
① =Field=> SSN__c = 123456789
① =Field=> Mortgage_asset_value__c = 20000
① =Field=> DOB__c = 1986-11-09
📄 Lead created successfully. Object Id: 00Q2w000003esw2EAA, Result Name: LeadId
① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esw2EAA

① Start of iteration 3 of 3.

● Iteration 3

● Create Object: Lead

① Creating a new Salesforce object. Connection Name: Test1, Name: Lead, field count: 11
① Setting fields:

=Field=> Status = New
 =Field=> Loan_Amount__c = 20000
 =Field=> Company = Sosha
 =Field=> Income_per_Annum__c = 20000
 =Field=> Loan_Type__c = Purchase
 =Field=> LastName = Anaya
 =Field=> Property_Type__c = Residential
 =Field=> Salutation = Mr.
 =Field=> SSN__c = 123456789
 =Field=> Mortgage_asset_value__c = 20000
 =Field=> DOB__c = 1986-11-09
 Lead created successfully. Object Id: 00Q2w000003esw7EAA, Result Name: LeadId
 Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003esw7EAA
 Reached the end of the List.

Verify wheather a Qualified Lead is created and Convert to a Closed Won opportunity2.testcase

Summary

Started	02 Aug 2020, 23:14:32
Ended	02 Aug 2020, 23:19:46
Duration (mm:ss)	05:14.490
Outcome	successful

Output

Salesforce Connect: Test1 (Test)

Opening Salesforce connection Connection name: Test1

Connection details. Connection name: Test1, urlString:
sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment:
<default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]

Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(5)\Artifacts\Test1-objectids.log

Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

Read Excel

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 1 rows from Parameter Value Source.

⚠ On SF Lead Home screen

● For Each: {ExcelData}>Row

① Start of iteration 1 of 1.

● Iteration 1

● Navigate to Lead Home Screen

- ① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
- ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
- ① Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107
- ① Added Desired Capability for chrome browser proxy: Null
- ① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
- ① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
- ① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iJqAAM
- ① Start of waitForPageToLoad. Timeout(ms): 90000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 90000
- ① End of waitForPageToLoad. Duration(ms): 795
- ① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.135
- ① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.239
- ① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
- ① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
- ① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.101
- ① Waited for lightning page to load. Attempts: 1, duration: 0.156
- ① Browser window has been opened. Name: main
- Click the New button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1127:0')]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

● Enter Lead Details

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.102

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='First Name'] or ./text() = 'First Name')/ancestor::div[1]] -> xpath: ./input]

- Got webElement. tagName: INPUT, id: 178:1285;a, type: text, class: firstName compoundBorderBottom form-element__row input
- Typing value. tagName: INPUT, type: text, value: John, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.

● Set the Last Name field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))]/ancestor::div[1]
- Find field using relative xpath: ./input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- Found element: [Chromedriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))]/ancestor::div[1]] -> xpath: ./input]
- Got webElement. tagName: INPUT, id: 188:1285;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input
- Typing value. tagName: INPUT, type: text, value: Kin1, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.

● Set the Company field

- Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany
- Interaction: ui:interaction?name=set
- Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- Interaction: ui:interaction?name=set
- Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company'))]/ancestor::div[1]
- Find field using relative xpath: ./input
- Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- Found element: [Chromedriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text() = 'Company'))]/ancestor::div[1]] -> xpath: ./input]

'forceDetailPanel') or contains(@class, 'detail-panel-root'))/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Company'] or ./text()='Company'))/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 225:1285;a, type: text, class: input

Typing value. tagName: INPUT, type: text, value: John, blur: true

Doing after wait. waitUrl: default

End of <default> wait.

Set the DOB field

Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB'))/ancestor::div[1]]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB'))/ancestor::div[1]] -> xpath: ./input]

Typing value. Element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='DOB'] or ./text()='DOB'))/ancestor::div[1]] -> xpath: ./input, value: 11/9/1986, blur: false

Clicking WebElement. WebElement [tag: span, text: 9]

Doing after wait. waitUrl: default

End of <default> wait.

Set the SSN field

Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-

container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN'))/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='SSN'] or ./text() = 'SSN'))/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 430:1285;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Mobile field

Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile'))/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile'))/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 466:1285;a, type: tel, class: input

Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the City field

Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

❗ Find field using relative xpath: `./input`

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: `[[[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='City')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input`

❗ Got webElement. tagName: INPUT, id: 551:1285;a, type: text, class: city compoundBorderBottom compoundBorderRight input

❗ Typing value. tagName: INPUT, type: text, value: PA, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Street field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: `https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent`

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='Street')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

❗ Find field using relative xpath: `./textarea`

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: `[[[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] and (./text()='Street')/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea`

❗ Got webElement. tagName: TEXTAREA, id: 541:1285;a, type: null, class: street compoundTLRadius compoundTRRadius compoundBorderBottom textarea

❗ Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Zip/Postal Code field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

❗ Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code'))/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][2]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()='Zip/Postal Code'))/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]] -> xpath: ./input`

① Got webElement. tagName: INPUT, id: 562:1285;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type'))/ancestor::div[1]`

① Find field using relative xpath: `./*[self::a or self::input]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type'))/ancestor::div[1]]] -> xpath: ./*[self::a or self::input]`

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Property Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Property Type'] or .//text() = 'Property Type')]/ancestor::div[1]

① Find field using relative xpath: ../../self::a or self::input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Property Type'] or .//text() = 'Property Type')]/ancestor::div[1]] -> xpath: ../../self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Residential, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Amount field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Loan Amount'] or .//text() = 'Loan Amount')]/ancestor::div[1]

① Find field using relative xpath: ../input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-

form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 654:1285;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 200000, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Mortgage asset value field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or (self::section or self::div) and contains(@class,'forcePageBlockSection')][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or (self::section or self::div) and contains(@class,'forcePageBlockSection')][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')/ancestor::div[1] -> xpath: ./input]

Got webElement. tagName: INPUT, id: 722:1285;a, type: text, class: input uiInputSmartNumber

Typing value. tagName: INPUT, type: text, value: 100000, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Income per Annum field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[(self::force-record-layout-section) or (self::section or self::div) and contains(@class,'forcePageBlockSection')][3]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText'))] and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')]/ancestor::div[1]] -> xpath: //input]

① Got webElement. tagName: INPUT, id: 758:1285;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]

① Find field using relative xpath: //*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')]/ancestor::div[1]] -> xpath: //*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/

[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][1]/[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text()='Phone'))/ancestor::div[1]]

Find field using relative xpath: `./input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text()='Phone'))/ancestor::div[1]]] -> xpath: `./input`

Got webElement. tagName: INPUT, id: 46:1285;a, type: tel, class: input

Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Email field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DEmail

Interaction: ui:interaction?name=set

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fighting%2Fo%2FLead%2Flist%3FilterName%3DRecent

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: `//div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text()='Email'))/ancestor::div[1]]`

Find field using relative xpath: `./input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,'uiModal'))][last()]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]/*[[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection'))][1]/*[(self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text()='Email'))/ancestor::div[1]]] -> xpath: `./input`

Got webElement. tagName: INPUT, id: 205:1285;a, type: email, class: input

Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Click the Save button

Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

Interaction: ui:interaction?name=action

- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1519:0')]]`
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 307

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

■ Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003eswCEAQ, location: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003eswCEAQ

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>

● Navigation through Lead Stages

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=PathAssistant

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.111

● Click the New stage and Mark Status as Complete button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2415:0')]/ancestor::button`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2415:0')]/ancestor::button`

'runtime_sales_pathassistantPathAssistantHeader'))/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2415:0')]/ancestor::button]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Status as Complete]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Log a Call with Lead to Re-verify his details

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=QuickAction&quickAction=LogACall

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Lead, RelatedList: null, Action: View, Page URL: /lightning/r/00Q2w000003eswCEAQ/view, Current URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view

① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/r/00Q2w000003eswCEAQ/view

① Opening page. Requested URL: /lightning/r/00Q2w000003eswCEAQ/view, Absolute URL: https://ap16.lightning.force.com/lightning/r/00Q2w000003eswCEAQ/view

① Polling for field. attempt: 1, by: By.xpath: //*[self::div and contains(@class, 'oneGlobalNav') or (@id='oneHeader')]

① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]

① Waited for lightning page to load. Attempts: 1, duration: 0.104

① Initiating Publisher Action: Log a Call

① Activating activityTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Activity, href: javascript:void(0)]

① Activating LogACall tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Log a Call, href: javascript:void(0);]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button]

● Set the Subject field to Call

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DSubject, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DSubject

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) or not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject')]/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: input-228, type: text, class: slds-input slds-combobox__input

① Typing value. tagName: INPUT, type: text, value: Call, blur: false

① Clicking WebElement. WebElement [tag: lightning-base-combobox-formatted-text, text: Call]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Set the Comments field to Call John Kin to re-verify the details

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Description&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DDescription, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Description&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26field%3DDescription

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Comments']) or ./text() = 'Comments')]/ancestor::div[1]`

① Find field using relative xpath: `./textarea`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: `[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Comments']) or ./text() = 'Comments')]/ancestor::div[1]] -> xpath: ./textarea`

① Got webElement. tagName: TEXTAREA, id: 1780:0, type: null, class: textarea textarea uiInput uiInputTextArea uiInput--default uiInput--textarea

① Typing value. tagName: TEXTAREA, type: null, value: Call John Kin to re-verify the details, blur: false

① Clicking WebElement. WebElement [tag: textarea]

① Clicking WebElement. WebElement [tag: textarea, text: Call John Kin to re-verify the details]

① Doing after wait. waitUrl: default

① End of <default>; wait.

● Click the Create button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26action%3Dpublishersharebutton, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=publishersharebutton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DTask%26action%3Dpublishersharebutton

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view

① Interaction: ui:interaction?name=action

① Find publishersharebutton using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherShareButton')]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherShareButton')]`

- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① All Sub-Test Steps were successful.
- ① Start of waitForPageToLoad. Timeout(ms): 100000
- ① Reattempting of waitForPageToLoad. Timeout(ms): 100000
- ① End of waitForPageToLoad. Duration(ms): 450
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view

● Click the Working Stage and Mark Status as Complete button


- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view
- ① Interaction: ui:interaction?name=action
- ① The Salesforce sFlexiPage could not be found. FlexiPage: null
- ① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '494:0')]/ancestor::button`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '494:0')]/ancestor::button`
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Status as Complete]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Click the Nurturing Stage and Mark Status as Complete button

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=PathAssistantStep_MarkStatusAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkStatusAsComplete
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view
- ① Interaction: ui:interaction?name=action
- ① The Salesforce sFlexiPage could not be found. FlexiPage: null
- ① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '48:2277;a')]/ancestor::button`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.

- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>

● Lead to Oppurtunity conversion

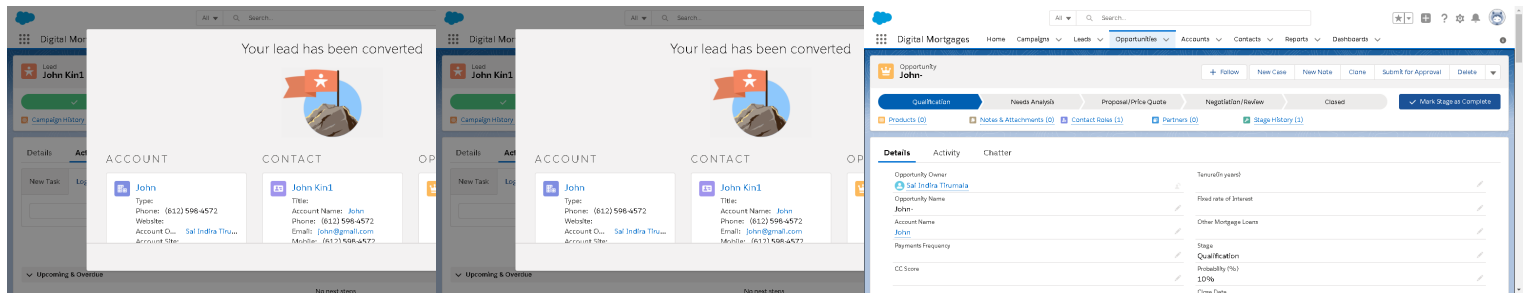

Before Screenshot : 2020/08/02 23:17:12

Before Screenshot : 2020/08/02 23:17:12

After Screenshot : 2020/08/02 23:17:34

- ① Start of With Screen. Connection Name: Test1, target: `ui:pageobject:target?pagelId=pageobjects.MyPageObject3`
- ① Sending screenshot. Data length: 49874
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Sending screenshot. Data length: 50312
- Click the Oppurtunity Name
 - ① Start of Interact. Connection: Test1, Locator: `ui:pageobject:field?field=john&pagelId=pageobjects.MyPageObject3`, before wait: default, after wait: `ui:wait:timed?seconds=20`, auto retry: default
 - ① Locator: `ui:pageobject:field?field=john&pagelId=pageobjects.MyPageObject3`
 - ① Interaction: `ui:interaction?name=action`
 - ① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswCEAQ/view>
 - ① Interaction: `ui:interaction?name=action`
 - ① Doing before wait. `waitUrl`: default
 - ① End of `<default>`; wait.
 - ① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //a[contains(@href,'/lightning/r/006')]]`
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: John-, href: <https://ap16.lightning.force.com/lightning/r/0062w000006MDL4AAO/view>]
 - ① Doing after wait. `waitUrl`: `ui:wait:timed?seconds=20`
 - ① Start of Timed Wait. Seconds: 20
 - ① End of Timed Wait. Actual duration(seconds): 20.0

- ① All Sub-Test Steps were successful.
- ① Sending screenshot. Data length: 50677
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

● Opportunity Details screen

- ① Start of With Screen. Connection Name: Test1, target: `sf:ui:target?object=Opportunity&action=View`
- ① Opening Page context. Name: screen, data: null, frame: null

● UI Assert

- ① Start of UIAssert. Connection: Test1
- ① Resolving field `CC_Score__c`
- ① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>
- ① Finding field placeholder using xpath: `(//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]`[1]

div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text())[normalize-space()='CC Score']]/following-sibling::div[1]/*[self::div and contains(@class,'dataCol') or (self::span and contains(@class,'test-id__field-value'))]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Finding field elements using relativePath: ../lightning-formatted-text

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]/)[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text())[normalize-space()='CC Score']]/following-sibling::div[1]/*[self::div and contains(@class,'dataCol') or (self::span and contains(@class,'test-id__field-value'))]] -> xpath: ../lightning-formatted-text]

ⓘ Asserting field attributes: CC_Score__c

ⓘ Reading Attribute: value

ⓘ Object read successfully. Result Name: Values

● Double Click the Payments Frequency picklist

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c

ⓘ Interaction: ui:interaction?name=doubleClick

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=doubleClick

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]/)[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text())[normalize-space()='Payments Frequency']]/following-sibling::div[1]/*[self::div and contains(@class,'dataCol') or (self::span and contains(@class,'test-id__field-value'))]

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Finding field elements using relativePath: ../lightning-formatted-text

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]/)[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text())[normalize-space()='Payments Frequency']]/following-sibling::div[1]/*[self::div and contains(@class,'dataCol') or (self::span and contains(@class,'test-id__field-value'))]] -> xpath: ../lightning-formatted-text]

ⓘ Got webElement. tagName: LIGHTNING-FORMATTED-TEXT, id: null, type: null

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Tenure(in years)

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Tenure_in_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DTenure_in_years__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Tenure_in_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DTenure_in_years__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]/)[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text())[normalize-space()='Tenure in years']]/following-sibling::div[1]/*[self::div and contains(@class,'dataCol') or (self::span and contains(@class,'test-id__field-value'))]

')))]1/*[([self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Tenure(in years)'] or ./text() = 'Tenure(in years)')/ancestor::div[1]

Find field using relative xpath: `./*[self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default>> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class,'active') and ((self::div and contains(@class,'oneContent')) or (self::section and contains(@class,'oneConsoleTab') and ancestor::div[contains(@class,'active') and contains(@class,'oneWorkspace')])]/*[contains(@class,'footer-visible') and (contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root'))]/*[([self::force-record-layout-section) or (self::div and (contains(@class,'forcePageBlockSectionView') or contains(@class,'test-id__section slds-section')))]1/*[([self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='Tenure(in years)'] or ./text() = 'Tenure(in years)')/ancestor::div[1]]] -> xpath: `./*[self::a or self::input]`

Got webElement. tagName: INPUT, id: input-466, type: text, class: slds-input slds-combobox__input

Typing value. tagName: INPUT, type: text, value: 15, blur: false

Doing after wait. waitUrl: default

End of <default>> wait.

Set the CC Score

Start of Interact. Connection: Test1, Locator: ui:locator?name=CC_Score__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCC_Score__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=CC_Score__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCC_Score__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: (//*[contains(@class,'active') and ((self::div and contains(@class,'oneContent')) or (self::section and contains(@class,'oneConsoleTab') and ancestor::div[contains(@class,'active') and contains(@class,'oneWorkspace')])]/*[contains(@class,'footer-visible') and (contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root'))]/*[([self::force-record-layout-section) or (self::div and (contains(@class,'forcePageBlockSectionView') or contains(@class,'test-id__section slds-section')))]1/*[([self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score')/ancestor::div[1]

Find field using relative xpath: `./*[self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default>> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class,'active') and ((self::div and contains(@class,'oneContent')) or (self::section and contains(@class,'oneConsoleTab') and ancestor::div[contains(@class,'active') and contains(@class,'oneWorkspace')])]/*[contains(@class,'footer-visible') and (contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root'))]/*[([self::force-record-layout-section) or (self::div and (contains(@class,'forcePageBlockSectionView') or contains(@class,'test-id__section slds-section')))]1/*[([self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide')) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')) or (self::div and contains(@class,'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,'forceTextEnumLookup')) or (self::div and contains(@class,'lightningInputRichText')) and (./text()[normalize-space()='CC Score'] or ./text() = 'CC Score')/ancestor::div[1]]] -> xpath: `./*[self::a or self::input]`

Got webElement. tagName: INPUT, id: input-507, type: text, class: slds-input slds-combobox__input

Typing value. tagName: INPUT, type: text, value: Excellent(740+), blur: false

Doing after wait. waitUrl: default

End of <default>> wait.

Set the Payments Frequency

Start of Interact. Connection: Test1, Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Payments_Frequency__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPayments_Frequency__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Payments Frequency'] or ./text() = 'Payments Frequency'))/ancestor::div[1]

① Find field using relative xpath: ../../self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>g; wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Payments Frequency'] or ./text() = 'Payments Frequency'))/ancestor::div[1]] -> xpath: ../../self::a or self::input]

① Got webElement. tagName: INPUT, id: input-492, type: text, class: slds-input slds-combobox__input

① Typing value. tagName: INPUT, type: text, value: 30 days, blur: false

① Doing after wait. waitUrl: default

① End of <default>g; wait.

● Set the Other Mortgage Loans

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Other_Mortgage_Loans__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DOther_Mortgage_Loans__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Other_Mortgage_Loans__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DOther_Mortgage_Loans__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Other Mortgage Loans'] or ./text() = 'Other Mortgage Loans'))/ancestor::div[1]

① Find field using relative xpath: ../../self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>g; wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1]//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Other Mortgage Loans'] or ./text() = 'Other Mortgage Loans'))/ancestor::div[1]] -> xpath: ../../self::a or self::input]

Got webElement. tagName: INPUT, id: input-485, type: text, class: slds-input slds-combobox__input

Typing value. tagName: INPUT, type: text, value: No, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Check the Paycheck stubs

Start of Interact. Connection: Test1, Locator: ui:locator?name=Paycheck_stubs_from_last_30_days__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPaycheck_stubs_from_last_30_days__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Paycheck_stubs_from_last_30_days__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPaycheck_stubs_from_last_30_days__c

Interaction: ui:interaction?name=check

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

Interaction: ui:interaction?name=check

Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/2/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Paycheck stubs from last 30 days.']) or .//text() = 'Paycheck stubs from last 30 days.']/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/2/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Paycheck stubs from last 30 days.']) or .//text() = 'Paycheck stubs from last 30 days.']/ancestor::div[1]]]] -> xpath: ./input]

Got webElement. tagName: INPUT, id: checkbox-516, type: checkbox

Doing after wait. waitUrl: default

End of <default> wait.

Check the Co-lateral Documents field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Co_lateral_Documents__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCo_lateral_Documents__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Co_lateral_Documents__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DCo_lateral_Documents__c

Interaction: ui:interaction?name=check

Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

Interaction: ui:interaction?name=check

Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]/2/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (.//text()[normalize-space()='Co-lateral Documents'] or .//text() = 'Co-lateral Documents')]/ancestor::div[1]

Find field using relative xpath: ./input

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

❗ Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]2//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Co-lateral Documents'] or ./text() = 'Co-lateral Documents']/ancestor::div[1]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: checkbox-526, type: checkbox

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Check the W2 or I-9 forms from past 2 years field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=W2_or_I_9_forms_from_past_2_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3Dopportunity%26field%3DW2_or_I_9_forms_from_past_2_years__c, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=W2_or_I_9_forms_from_past_2_years__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3Dopportunity%26field%3DW2_or_I_9_forms_from_past_2_years__c

❗ Interaction: ui:interaction?name=check

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

❗ Interaction: ui:interaction?name=check

❗ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]2//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='W2 or I-9 forms from past 2 years'] or ./text() = 'W2 or I-9 forms from past 2 years']/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default> wait.

❗ Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]2//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='W2 or I-9 forms from past 2 years'] or ./text() = 'W2 or I-9 forms from past 2 years']/ancestor::div[1]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: checkbox-536, type: checkbox

❗ Doing after wait. waitUrl: default

❗ End of <default> wait.

● Set the Process Documentation

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Process_Documentation__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3Dopportunity%26field%3DProcess_Documentation__c, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Process_Documentation__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3Dopportunity%26field%3DProcess_Documentation__c

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[self::force-record-layout-section or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]2//*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and

contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Process Documentation'] or ./text() = 'Process Documentation'))/ancestor::div[1]

Find field using relative xpath: `//*[@self::a or self::input]`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][2]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Process Documentation'] or ./text() = 'Process Documentation'))/ancestor::div[1]]] -> xpath: `//*[@self::a or self::input]`

Got webElement. tagName: INPUT, id: input-521, type: text, class: slds-input slds-combobox__input

Typing value. tagName: INPUT, type: text, value: Fully received, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Guarantor First Name field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_First_Name__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_First_Name__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Guarantor_First_Name__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_First_Name__c

Interaction: ui:interaction?name=set

Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

Interaction: ui:interaction?name=set

Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor First Name'] or ./text() = 'Guarantor First Name'))/ancestor::div[1]

Find field using relative xpath: `./input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: [[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor First Name'] or ./text() = 'Guarantor First Name'))/ancestor::div[1]]] -> xpath: `./input`

Got webElement. tagName: INPUT, id: input-538, type: text, class: slds-input

Typing value. tagName: INPUT, type: text, value: Vin, blur: false

Doing after wait. waitUrl: default

End of <default> wait.

Set the Guarantor Last Name field

Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_Last_Name__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Last_Name__c, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=Guarantor_Last_Name__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Last_Name__c

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]])[3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Last Name'] or ./text() = 'Guarantor Last Name'))]/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default>g; wait.

❗ Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]])[3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Last Name'] or ./text() = 'Guarantor Last Name'))]/ancestor::div[1]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: input-541, type: text, class: slds-input

❗ Typing value. tagName: INPUT, type: text, value: Mar, blur: false

❗ Doing after wait. waitUrl: default

❗ End of <default>g; wait.

● Set the Guarantor Email field

❗ Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_Email__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Email__c, before wait: default, after wait: default, auto retry: default

❗ Locator: ui:locator?name=Guarantor_Email__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Email__c

❗ Interaction: ui:interaction?name=set

❗ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

❗ Interaction: ui:interaction?name=set

❗ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]])[3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Email'] or ./text() = 'Guarantor Email'))]/ancestor::div[1]

❗ Find field using relative xpath: ./input

❗ Waiting for element to be present. Timeout(seconds): 10

❗ Doing before wait. waitUrl: default

❗ End of <default>g; wait.

❗ Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]])[3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Email'] or ./text() = 'Guarantor Email'))]/ancestor::div[1]] -> xpath: ./input]

❗ Got webElement. tagName: INPUT, id: input-547, type: text, class: slds-input

ⓘ Typing value. tagName: INPUT, type: text, value: VinMar45@em.com, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Guarantor Mobile field

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_Mobile__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3DGuarantor_Mobile__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Guarantor_Mobile__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3DGuarantor_Mobile__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Mobile'] or ./text() = 'Guarantor Mobile')]/ancestor::div[1]

ⓘ Find field using relative xpath: ./input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor Mobile'] or ./text() = 'Guarantor Mobile')]/ancestor::div[1]] -> xpath: ./input

ⓘ Got webElement. tagName: INPUT, id: input-550, type: text, class: slds-input

ⓘ Typing value. tagName: INPUT, type: text, value: 9648794848, blur: false

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Set the Guarantor SSN field

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3DGuarantor_SSN__c, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Guarantor_SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOppportunity%26field%3DGuarantor_SSN__c

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, 'oneWorkspace')])]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])/*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))]][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor SSN'] or ./text() = 'Guarantor SSN')]/ancestor::div[1]

ⓘ Find field using relative xpath: ./input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor SSN'] or ./text() = 'Guarantor SSN')/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: input-539, type: text, class: slds-input

① Typing value. tagName: INPUT, type: text, value: 984569874214, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Guarantor DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_DOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Guarantor_DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_DOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor DOB'] or ./text() = 'Guarantor DOB')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor DOB'] or ./text() = 'Guarantor DOB')/ancestor::div[1]] -> xpath: ./input]

① Typing value. Element: [][[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][3]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Guarantor DOB'] or ./text() = 'Guarantor DOB')/ancestor::div[1]] -> xpath: ./input], value: Jul 30, 1980, blur: false

① Clicking WebElement. WebElement [tag: td, text: 30]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Check the Guarantor Documents submitted field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Guarantor_Documents_submitted__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Documents_submitted__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Guarantor_Documents_submitted__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DGuarantor_Documents_submitted__c

① Interaction: ui:interaction?name=check

Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

Interaction: ui:interaction?name=check

Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))] [3]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (./text()[normalize-space()='Guarantor Documents submitted'] or ./text() = 'Guarantor Documents submitted')]/ancestor::div[1]`

Find field using relative xpath: `./input`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: `[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))// *[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::force-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section')))] [3]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (./text()[normalize-space()='Guarantor Documents submitted'] or ./text() = 'Guarantor Documents submitted')]/ancestor::div[1]] -> xpath: ./input`

Got webElement. tagName: INPUT, id: checkbox-549, type: checkbox

Doing after wait. waitUrl: default

End of <default> wait.

Click the Save button

Start of Interact. Connection: Test1, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOPportunity%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default

Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOPportunity%26action%3DSaveEdit

Interaction: ui:interaction?name=action

Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

Interaction: ui:interaction?name=action

Find action link element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))// div[contains(@class, 'footer-visible') or contains(@class, 'footer active')]/ancestor::*[name()='force-form-footer' or name()='records-base-record-form'][@records-lwcdetailpanel_lwcdetailpanel]/lightning-button[contains(@class, 'save')]/button`

Waiting for element to be present. Timeout(seconds): 10

Doing before wait. waitUrl: default

End of <default> wait.

Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))// div[contains(@class, 'footer-visible') or contains(@class, 'footer active')]/ancestor::*[name()='force-form-footer' or name()='records-base-record-form'][@records-lwcdetailpanel_lwcdetailpanel]/lightning-button[contains(@class, 'save')]/button`

Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

Doing after wait. waitUrl: default

End of <default> wait.

All Sub-Test Steps were successful.

Closing Page context. Name: screen, data: null, frame: null

Main window reselected. Window: main

Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

Navigation through Oppurtunity Stages

Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Opportunity&action=PathAssistant

Opening Page context. Name: screen, data: null, frame: null

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.106

● Click the Qualification and Mark StageName as Complete button

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete

ⓘ Interaction: ui:interaction?name=action

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=action

ⓘ The Salesforce sfFlexiPage could not be found. FlexiPage: null

ⓘ Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button`

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button`

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Stage as Complete]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Click the Need Analysis and Mark StageName as Complete button

ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete

ⓘ Interaction: ui:interaction?name=action

ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

ⓘ Interaction: ui:interaction?name=action

ⓘ The Salesforce sfFlexiPage could not be found. FlexiPage: null

ⓘ Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button`

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button`

ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Stage as Complete]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

● Sending Proposal through Email

ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Opportunity&action=QuickAction&quickAction=SendEmail

ⓘ Opening Page context. Name: screen, data: null, frame: null

ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.300

- ① Initiating Publisher Action: Email
- ① Activating activityTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Activity, href: javascript:void(0)]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.103
- ① Activating SendEmail tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Email, href: javascript:void(0);]
- ① Waited for lightning page to load. Attempts: 1, duration: 0.125
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button]

● Set the To field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=ToAddress&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DToAddress, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=ToAddress&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DToAddress
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='To'] or ./text() = 'To')]/ancestor::div[1]`
- ① Find field using relative xpath: `./input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='To'] or ./text() = 'To')]/ancestor::div[1]]]] -> xpath: ./input`
- ① Got webElement. tagName: INPUT, id: 7668:0, type: text, class: default input uiInput uiInputForAutocomplete uiInput--default uiInput--input uiInput uiAutocomplete uiPillContainerAutoComplete uiInput--default uiInput--lookup
- ① Typing value. tagName: INPUT, type: text, value: johmkim@gmail.com;saiindira.mummadi@sonata-software.com, blur: true
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Subject field to PRICE_QUOTE

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DSubject, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Subject&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DSubject
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')])])]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of `<default>`; wait.

① Found element: `[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/*[contains(@class, 'forceQuickActionLayout') or @class='bottomBar']/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label'))) or (self::div and contains(@class, 'test-id__field-label-container'))) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))) and (./text()[normalize-space()='Subject'] or ./text() = 'Subject')]/ancestor::div[1]]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 7900:0, type: text, class: standardField input

① Typing value. tagName: INPUT, type: text, value: PRICE_QUOTE, blur: false

① Clicking WebElement. WebElement [tag: input]

① Clicking WebElement. WebElement [tag: input, text: PRICE_QUOTE]

① Doing after wait. waitUrl: default

① End of `<default>`; wait.

● Set the HTML Body field to Hi, PFA Shared Price Quote Thanks, salesrep

Powered by

Salesforce <http://www.salesforce.com/>

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=HtmlBody&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DHtmlBody`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=HtmlBody&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26field%3DHtmlBody`

① Interaction: `ui:interaction?name=set`

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

① Interaction: `ui:interaction?name=set`

① Switching to iframe

① Waiting for element to be present. Timeout(seconds): 10

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of `<default>`; wait.

① Found element: `[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //body]`

① Got webElement. tagName: BODY, id: null, type: null, class: cke_editable cke_editable_themed cke_contents_itr

① Typing value. tagName: BODY, type: null, value: Hi, PFA Shared Price Quote Thanks, salesrep

www.salesforce.com/, blur: false Powered by Salesforce <http://www.salesforce.com/>

① Doing after wait. waitUrl: default

① End of `<default>`; wait.

● Click the Attach file button

① Start of Interact. Connection: Test1, Locator: `ui:locator?name=publisherAttachmentButton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26action%3DpublisherAttachmentButton`, before wait: default, after wait: default, auto retry: default

① Locator: `ui:locator?name=publisherAttachmentButton&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOutgoingEmail%26action%3DpublisherAttachmentButton`

① Interaction: `ui:interaction?name=action`

① Switched focus to main window. URL: <https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view>

① Interaction: `ui:interaction?name=action`

① Find publisherAttachmentButton using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherAttachmentButton')]`

- ⓘ Waiting for element to be present. Timeout(seconds): 10
 - ⓘ Doing before wait. waitUrl: default
 - ⓘ End of <default> wait.
 - ⓘ Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'forceActionsContainer') and contains(@class, 'uiTabset')]/section[contains(@class, 'active') and contains(@class, 'uiTab')]/div[contains(@class, 'container') and contains(@class, 'activeState')]/div[contains(@class, 'bottomBar') or contains(@class, 'slds-modal__footer')]/button[contains(@class, 'publisherAttachmentButton ')]
 - ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Attach file]
 - ⓘ Doing after wait. waitUrl: default
 - ⓘ End of <default> wait.
- ⓘ All Sub-Test Steps were successful.
- ⓘ Start of waitForPageToLoad. Timeout(ms): 100000
- ⓘ Reattempting of waitForPageToLoad. Timeout(ms): 100000
- ⓘ End of waitForPageToLoad. Duration(ms): 52
- ⓘ Closing Page context. Name: screen, data: null, frame: null
- ⓘ Main window reselected. Window: main
- ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- **Attaching a Price Quote**
 - ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Opportunity&action=attachFile
 - ⓘ Opening Page context. Name: screen, data: null, frame: null
 - **With Files rows {name = "Proposal"}**
 - ⓘ Start of With Row. Connection Name: Test1, target: sf:ui:locator:row?table=files
 - ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
 - ⓘ Applying row locator to rows. Row Count: 1, Row Locator: {name = "Proposal"}
 - ⓘ Testing row number 1
 - ⓘ Resolving EqualTo. Proposal = Proposal, result: true
 - ⓘ Row number 1 matched
 - ⓘ Matched row number 1
 - **Check the Check Box field**
 - ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=checkBox, before wait: default, after wait: default, auto retry: default
 - ⓘ Locator: ui:locator?name=checkBox
 - ⓘ Interaction: ui:interaction?name=check
 - ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
 - ⓘ Interaction: ui:interaction?name=check
 - ⓘ Doing before wait. waitUrl: default
 - ⓘ End of <default> wait.
 - ⓘ Found element: [[[[[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class,'open') and contains(@class,'active')]/div[contains(@class, 'listContent')]/ul/li]] -> xpath: //div[contains(@class,'filerow')]/div[contains(@class,'slds-checkbox')]/input[contains(@class, 'uiInput--checkbox')]]
 - ⓘ Got webElement. tagName: INPUT, id: 8684:0, type: checkbox
 - ⓘ Doing after wait. waitUrl: default
 - ⓘ End of <default> wait.
 - ⓘ All Sub-Test Steps were successful.
- **Click the Add button**
 - ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=add, before wait: default, after wait: default, auto retry: default
 - ⓘ Locator: ui:locator?name=add

- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ① Interaction: ui:interaction?name=action
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //div[contains(@class,'open') and contains(@class,'active')]/div[contains(@class,'modal-footer')]/button[contains(@class,'attach')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Add (1)]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- Click the Proposal and Mark StageName as Complete button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
 - ① Interaction: ui:interaction?name=action
 - ① The Salesforce sfFlexiPage could not be found. FlexiPage: null
 - ① Find element using xpath: /**[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: /**[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button]
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Stage as Complete]
 - ① Doing after wait. waitUrl: default
 - ① End of <default> wait.
- Click the Negotiation and Mark StageName as Complete button
 - ① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=PathAssistantStep_MarkStageNameAsComplete&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DPathAssistantStep_MarkStageNameAsComplete
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
 - ① Interaction: ui:interaction?name=action
 - ① The Salesforce sfFlexiPage could not be found. FlexiPage: null
 - ① Find element using xpath: /**[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button

- ⓘ Waiting for element to be present. Timeout(seconds): 10
- ⓘ Doing before wait. waitUrl: default
- ⓘ End of <default> wait.
- ⓘ Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span/ancestor::button]
- ⓘ Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark Stage as Complete]
- ⓘ Doing after wait. waitUrl: default
- ⓘ End of <default> wait.
- ⓘ All Sub-Test Steps were successful.
- ⓘ Closing Page context. Name: screen, data: null, frame: null
- ⓘ Main window reselected. Window: main
- ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view

● Conversion to a Closed-Won opportunity

- ⓘ Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Opportunity&action=ChangeStatus
- ⓘ Opening Page context. Name: screen, data: null, frame: null
- ⓘ Waited for lightning page to load. Attempts: 1, duration: 0.106

● Set the Stage picklist to Closed Won

- ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=stage&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DStageName, before wait: default, after wait: default, auto retry: default
- ⓘ Locator: ui:locator?name=stage&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DOpportunity%26field%3DStageName
- ⓘ Interaction: ui:interaction?name=set
- ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ⓘ Interaction: ui:interaction?name=set
- ⓘ Find stage using xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantStepClosed')]/select
- ⓘ Waiting for element to be present. Timeout(seconds): 10
- ⓘ Doing before wait. waitUrl: default
- ⓘ End of <default> wait.
- ⓘ Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: //*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantStepClosed')]/select]
- ⓘ Got webElement. tagName: SELECT, id: 9394:0, type: null, class: stepAction required-field select
- ⓘ Typing value. tagName: SELECT, type: null, value: Closed Won, blur: false
- ⓘ Doing after wait. waitUrl: default
- ⓘ End of <default> wait.

● Click the Save button

- ⓘ Start of Interact. Connection: Test1, Locator: ui:locator?name=save&path=changeStatus, before wait: default, after wait: default, auto retry: default
- ⓘ Locator: ui:locator?name=save&path=changeStatus
- ⓘ Interaction: ui:interaction?name=action
- ⓘ Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ⓘ Interaction: ui:interaction?name=action
- ⓘ Find save using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[2]
- ⓘ Waiting for element to be present. Timeout(seconds): 10

- ① Doing before wait. waitUrl: default
- ① End of <default>; wait.
- ① Found element: [[ChromeDriver: chrome on XP (f9c9dde510b2b1221509d585f405ea69)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active ') and contains(@class, ' oneWorkspace')])]//div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button[2]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default>; wait.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Opportunity/0062w000006MDL4AAO/view
- ① Reached the end of the List.

Verify whether unqualified Lead is created.testcase

Summary

Started 02 Aug 2020, 23:19:55
 Ended 02 Aug 2020, 23:22:42
 Duration (mm:ss) 02:47.203
 Outcome ● successful

Output

● Digital Mortgage Connection

- ① Opening Salesforce connection Connection name: Test1
 - ① Connection details. Connection name: Test1, urlString: sf:user=saiindira@force.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true, environment: <default>, userName: saiindira@force.com, password: [supplied], securityToken: [supplied]
 - ① Created Object ID log file. Path: C:\Users\SaiIndira\Provar1\Workspace6\Sales\ANT\..ANT\Results(5)\Artifacts\Test1-objectids.log
- Salesforce connection opened successfully. Connection name: Test1, ResultName: Test1, resultScope: Test

● Call Lead Creation

● Lead Creation

● Salesforce Connect: Test1 (Test)

- ① Opening Salesforce connection Connection name: Test1
- ① Re-using existing connection. Connection: Test1, Result Name: Test1

● Read Excel

- ① Loading data from Parameter Value Source ...
- ① Loading Parameter Value Source row 1:
- ① ==Column=> RowNumber = PrimitiveValueImpl [value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Salutation = PrimitiveValueImpl [value: Dr., valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> FirstName = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> LastName = PrimitiveValueImpl [value: Kin1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Company = PrimitiveValueImpl [value: John, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> DOB = PrimitiveValueImpl [value: 1986-11-09, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> SSN = PrimitiveValueImpl [value: 456789123, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Mobile = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> City = PrimitiveValueImpl [value: PA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Street = PrimitiveValueImpl [value: 404 American Avenue , valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ZipPostalCode = PrimitiveValueImpl [value: 19406, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LoanType = PrimitiveValueImpl [value: Purchase, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> PropertyType = PrimitiveValueImpl [value: Residential, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LoanAmount = PrimitiveValueImpl [value: 200000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> MortgageAssetValue = PrimitiveValueImpl [value: 100000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> IncomePerAnnum = PrimitiveValueImpl [value: 40000, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LeadStatus = PrimitiveValueImpl [value: New, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Phone = PrimitiveValueImpl [value: 6125984572, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Email = PrimitiveValueImpl [value: john@gmail.com, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 1 rows from Parameter Value Source.

● On SF Lead Home screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome
① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
① Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-list=localhost,127.0.0.1,192.168.100.107
① Added Desired Capability for chrome browser proxy: Null
① Using executable from UserHome Provar. executable: C:\Users\SaiIndira\Provar\chromeDriver\chromedriver.exe
① Successfully opened Chrome WebDriver to https://login.salesforce.com/.
① Opening Page context. Name: screen, data: null, frame: null
① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: chrome-search://local-ntp/local-ntp.html
① Opening page. URL: https://login.salesforce.com/?un=saiindira%40force.com&pw={password}&startURL=%2Flightning%2Fapp%2F06m2w000000iJqAAM
① Start of waitForPageToLoad. Timeout(ms): 90000
① Reattempting of waitForPageToLoad. Timeout(ms): 90000
① End of waitForPageToLoad. Duration(ms): 456
① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
① Waited for lightning page to load. Attempts: 1, duration: 0.129
① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent
① Polling for field. attempt: 1, by: By.xpath: //*((self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader'))
① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
① Polling for field. attempt: 2, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]
① Waited for lightning page to load. Attempts: 1, duration: 2.785
① Waited for lightning page to load. Attempts: 1, duration: 0.240
① Browser window has been opened. Name: main

● Click the New button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default
① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew
① Interaction: ui:interaction?name=action
① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '701:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '701:0')]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● For Each: {ExcelData}=>Row

① Start of iteration 1 of 1.

● Iteration 1

● On SF Lead Home screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=ObjectHome

① Opening Page context. Name: screen, data: null, frame: null

① Opening Salesforce page. Object: Lead, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/00Q/list?filterName=Recent, Current URL: https://ap16.lightning.force.com/lightning/o/Lead/new

① Qualified relative URL. URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent

① Opening page. Requested URL: /lightning/o/00Q/list?filterName=Recent, Absolute URL: https://ap16.lightning.force.com/lightning/o/00Q/list?filterName=Recent

① Polling for field. attempt: 1, by: By.xpath: //*[(self::div and contains(@class, 'oneGlobalNav')) or (@id='oneHeader')]

① Polling for field. attempt: 1, by: By.xpath: //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]

① Waited for lightning page to load. Attempts: 1, duration: 1.198

● Click the New button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=New&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3DNew

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/list?filterName=Recent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1125:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]/div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]) | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1125:0')]

```
(contains(@class, 'slds-table__joined') and contains(@class, 'test-listViewManager'))]/ul[contains(@class, 'oneActionsRibbon')]  
| //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]/a[contains(@data-aura-rendered-by, '1125:0')]]
```

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

● On SF Lead New screen

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=New&noOverride=true

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.107

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Lead]

● Set the First Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=FirstName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DFirstName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='First Name'] or ./text() = 'First Name'))/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 178:1265;a, type: text, class: firstName compoundBorderBottom form-element__row input

① Typing value. tagName: INPUT, type: text, value: John, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Last Name field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7) -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 188:1265;a, type: text, class: lastName compoundBLRadius compoundBRRadius form-element__row input

① Typing value. tagName: INPUT, type: text, value: Kin1, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Company field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Company&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCompany

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2FFlightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7) -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section] or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Company'] or ./text() = 'Company')/ancestor::div[1]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: 225:1265;a, type: text, class: input

① Typing value. tagName: INPUT, type: text, value: John, blur: true

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the DOB field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=DOB__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DDOB__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')/ancestor::div[1]] -> xpath: ./input

① Typing value. Element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='DOB'] or ./text()='DOB')/ancestor::div[1]] -> xpath: ./input, value: 11/9/1986, blur: false

① Clicking WebElement. WebElement [tag: span, text: 9]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the SSN field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SSN__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DSSN__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='SSN'] or ./text()='SSN')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='SSN'] or ./text() = 'SSN')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 430:1265;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 456789123, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mobile field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMobilePhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='Mobile'] or ./text() = 'Mobile')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 466:1265;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the City field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=City&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DCity

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Fflightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or (self::section or self::div and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText'))] and (./text()[normalize-space()='City'] or ./text() = 'City')/ancestor::div[1]

root')/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide
'))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='City')/
ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //
div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,
'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*((self::force-record-
layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//*((self::label and
(contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and
(contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='City')]/ancestor::*[self::div or
self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 551:1265;a, type: text, class: city compoundBorderBottom compoundBorderRight
input

① Typing value. tagName: INPUT, type: text, value: PA, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Street field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject
%3DLead%26field%3DStreet, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Street&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStreet

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?
count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo
%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class,'active') and contains(@class,'open') and (contains(@class,
'forceModal') or contains(@class,'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-
root')]]/*((self::force-record-layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//
*(((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide
'))) or (self::span and (contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Street')/
ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]]

① Find field using relative xpath: ./textarea

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //
div[contains(@class,'active') and contains(@class,'open') and (contains(@class,'forceModal') or contains(@class,
'uiModal'))][last()]]/*[contains(@class,'forceDetailPanel') or contains(@class,'detail-panel-root')]]/*((self::force-record-
layout-section) or ((self::section or self::div) and contains(@class,'forcePageBlockSection ')))][2//*((self::label and
(contains(@class,'uiLabel') or contains(@class,'slds-form-element__label')) and not(contains(@class,'hide '))) or (self::span and
(contains(@class,'inputLabel') or contains(@class,'slds-form-element__label')))) and (./text()='Street')]/ancestor::*[self::div or
self::lightning-picklist or self::lightning-input][1]] -> xpath: ./textarea]

① Got webElement. tagName: TEXTAREA, id: 541:1265;a, type: null, class: street compoundTLRadius compoundTRRadius
compoundBorderBottom textarea

① Typing value. tagName: TEXTAREA, type: null, value: 404 American Avenue , blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Zip/Postal Code field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject
%3DLead%26field%3DPostalCode, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PostalCode&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPostalCode

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?
count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo
%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()=Zip/Postal Code)]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][2]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) and (./text()=Zip/Postal Code)]/ancestor::*[self::div or self::lightning-picklist or self::lightning-input][1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 562:1265;a, type: text, class: postalCode compoundBLRadius compoundBorderRight input

① Typing value. tagName: INPUT, type: text, value: 19406, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Loan Type picklist

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Loan_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Type__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]

① Find field using relative xpath: /*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Type'] or ./text() = 'Loan Type')]/ancestor::div[1]] -> xpath: /*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: Purchase, blur: false

① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: Purchase, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Property Type picklist

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Property_Type__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DProperty_Type__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]
- ① Find field using relative xpath: ../../[self::a or self::input]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Property Type'] or ./text() = 'Property Type'))/ancestor::div[1]] -> xpath: ../../[self::a or self::input]
- ① Got webElement. tagName: A, id: null, type: null, class: select
- ① Typing value. tagName: A, type: null, value: Residential, blur: false
- ① Clicking WebElement. WebElement [tag: a, text: --None--, href: javascript:void(0);]
- ① Clicking WebElement. WebElement [tag: a, text: Residential, href: javascript:void(0);]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.

● Set the Loan Amount field

- ① Start of Interact. Connection: Test1, Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Loan_Amount__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DLoan_Amount__c
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))]/last()/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount'))/ancestor::div[1]
- ① Find field using relative xpath: ../input
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class,

```
'uiModal'))][last()]/**[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/**[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/**[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Loan Amount'] or ./text() = 'Loan Amount')]/ancestor::div[1]] -> xpath: ./input]
```

① Got webElement. tagName: INPUT, id: 654:1265;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 200000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Mortgage asset value field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Mortgage_asset_value__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DMortgage_asset_value__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/**[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/**[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/**[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)]] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/**[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/**[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/**[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')))] and (./text()[normalize-space()='Mortgage asset value'] or ./text() = 'Mortgage asset value')]/ancestor::div[1]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: 722:1265;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 100000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Income per Annum field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Income_per_Annum__c&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DIncome_per_Annum__c

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/**[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/**[(self::force-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]/**[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class,

'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Income per Annum'] or ./text() = 'Income per Annum')/ancestor::div[1]] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 758:1265;a, type: text, class: input uiInputSmartNumber

① Typing value. tagName: INPUT, type: text, value: 40000, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Lead Status picklist to New

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Status&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DStatus

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]

① Find field using relative xpath: /*[self::a or self::input]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Lead Status'] or ./text() = 'Lead Status')/ancestor::div[1]] -> xpath: /*[self::a or self::input]

① Got webElement. tagName: A, id: null, type: null, class: select

① Typing value. tagName: A, type: null, value: New, blur: false

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Phone field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Phone'] or ./text() = 'Phone')]/ancestor::div[1] -> xpath: ./input

① Got webElement. tagName: INPUT, id: 46:1265;a, type: tel, class: input

① Typing value. tagName: INPUT, type: tel, value: 6125984572, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Set the Email field

① Start of Interact. Connection: Test1, Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DEmail, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Email&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DLead%26field%3DEmail

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::force-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide'))] or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText')) and (./text()[normalize-space()='Email'] or ./text() = 'Email')]/ancestor::div[1] -> xpath: ./input


① Got webElement. tagName: INPUT, id: 205:1265;a, type: email, class: input

① Typing value. tagName: INPUT, type: email, value: john@gmail.com, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click the Save button

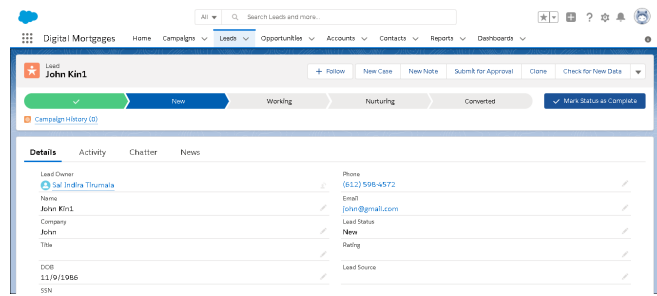

After Screenshot : 2020/08/02 23:22:05

① Start of Interact. Connection: Test1, Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/o/Lead/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=MRU_LIST&backgroundContext=%2Flightning%2Fo%2FLead%2Flist%3FfilterName%3DRecent

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1517:0')]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //div[contains(@class, 'active') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))][last()]/button[contains(@data-aura-rendered-by, '1517:0')]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.0

① Sending screenshot. Data length: 48722

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view

① Start of waitForPageToLoad. Timeout(ms): 90000

① Reattempting of waitForPageToLoad. Timeout(ms): 90000

① End of waitForPageToLoad. Duration(ms): 52

① Injecting script to get created object ID from aura component

① Fetching created Id from URL

① Storing created Salesforce Object ID. Result Name: leadId, created ID: 00Q2w000003eswWEAQ, location: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view

① Logging Salesforce Object Id for clean up. Object Name: Lead, id: 00Q2w000003eswWEAQ

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view

① Reached the end of the List.

① Not closing Salesforce Connection because it is still being used. Name: Test1

● Un-Qualify Lead

① Start of With Screen. Connection Name: Test1, target: sf:ui:target?object=Lead&action=PathAssistant

① Opening Page context. Name: screen, data: null, frame: null

① Waited for lightning page to load. Attempts: 1, duration: 0.186

● Click the Un-qualified

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified, before wait: ui:wait:timed?seconds=20, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_unqualified&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_unqualified

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Waiting for element to be present. Timeout(seconds): 10

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2525:0')]/a`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: ui:wait:timed?seconds=20

① Start of Timed Wait. Seconds: 20

① End of Timed Wait. Actual duration(seconds): 20.0

① Found element: `[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantTabSet')]/div[contains(@role, 'tablist')]/ul/li[contains(@data-aura-rendered-by, '2525:0')]/a`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: stage complete unqualified, href: javascript:void(0);]

① Doing after wait. waitUrl: default

① End of <default> wait.

● Click Mark Status as Complete button

① Start of Interact. Connection: Test1, Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=PathAssistantStep_MarkAsCurrentStatus&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DLead%26field%3DPathAssistantStep_MarkAsCurrentStatus

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view

① Interaction: ui:interaction?name=action

① The Salesforce sFlexiPage could not be found. FlexiPage: null

① Find element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2494:0')]/ancestor::button`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (d1c712bc928961d336e05f88169651d7)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace')]))]/div[contains(@class, 'runtime_sales_pathassistantPathAssistantHeader')]/button[contains(@class, 'stepAction') and contains(@class, 'uiButton')]/span[contains(@data-aura-rendered-by, '2494:0')]/ancestor::button`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Mark as Current Status]

① Doing after wait. waitUrl: default

① End of <default> wait.

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://ap16.lightning.force.com/lightning/r/Lead/00Q2w000003eswWEAQ/view