

# Predicting Daily Active Users for Match-3 Mobile Games

Neil Patrick Del Gallego  
College of Computer Studies  
De La Salle University - Manila  
neil.dg@playlab.com

Arvin Corpuz  
College of Computer Studies  
De La Salle University - Manila  
arvin\_corpuz@dlsu.edu.ph

Oliver Bob Urag  
College of Computer Studies  
De La Salle University - Manila  
oliver\_urag@dlsu.edu.ph

## ABSTRACT

We present in this paper a technique to attempt to predict the amount of daily active users for a match-3 mobile game by considering several factors that drives a game's social virality. The data was extracted from the performance of two match-3 mobile games by Playlab Inc., Jungle Cubes and Dragon Cubes. In this paper, we describe our experiments on these two games and the outcomes of the prediction model extracted.

## Keywords

Data Mining, Classification, Regression, Daily Active Users, Mobile Games, Free-to-play, Retention.

## 1. INTRODUCTION

Free-to-play mobile games follow a common business model. It is a necessity that these games have a healthy community to drive the virality of the game. One of the key measures for determining the success of a mobile game is by using Daily Active Users (DAU) as a metric. This refers to the total amount of unique users who spent considerable time in the game given a certain date. This refers to the "stickiness" of the application. A high value for DAU indicates that there is much activity and demand for the mobile game. It is essential for game development companies that develop mobile games that follows a free-to-play model, to keep the DAU value as high as possible. This paper attempts to predict DAU value for two commercial match-3 mobile games, Jungle Cubes (JNC) and Dragon Cubes (DNC) <sup>1</sup>, that are currently owned by Playlab Inc.

Companies that follow a free-to-play business model use various analytics tools to track user's behavior and events triggered in their applications. In this study, Playlab Inc., uses Flurry Analytics and Google Play Developer Console to collect user data. One of the attributes capable of being tracked

<sup>1</sup>We shall use JNC and DNC respectively as name convention on this paper

is the DAU.

In this study, we present a hypothesis that the DAU value is driven by other attributes or events that causes a user to use the application (or in this case, play for a considerable time) extensively. Such attributes considered are discussed in the succeeding sections.

Business decisions for a mobile game are executed when there is sufficient user data collected. One of the major problems encountered by companies such as Playlab Inc., is that major releases for the game don't immediately provide significant user data. It would be appropriate to provide a forecasting technique to determine if there would be a significant user activity on succeeding days. In a practical scenario, this paper aims to answer the question; given a certain day with these collected attributes, how high will the DAU value be X days after? In our experiments, we specifically attempt to predict the Daily Active Users value at Day 7.

## 2. SIGNIFICANCE OF THE STUDY

Behavioral analytics has recently emerged as a practice for commercial game development. These also relates to technological advancements brought about by mobile devices that enable developers to gather more significant data through the use of commercial analytics.

There is a significant increase on the number of games that are shifting to the free-to-play (F2P) model and this study are one of the few instances wherein commercial game dataset are used for academic research. Findings will be beneficial for game companies that strictly complies with the F2P model. In specific, those who greatly rely on high user activity for their games will strongly find this paper beneficial for their business decisions.

We present a novel approach on how analysts or developers may attempt to predict the DAU value on a practical scenario, based from the formula given by our prediction model. We also attempt to define features that are highly important based from our analysis of attributes on our dataset and as supported by other similar study as seen in [3].

In this manner, we present the following contributions in this paper: We formally define from related study, as well as our findings, the attributes that affects the DAU value. We attempt to create several prediction models for the DAU

value using machine learning techniques and explain its significance on a practical setting. We present a simple method on how one can predict the DAU value. This paper is one of the few research study that uses dataset from commercial games which is otherwise, confidential and unavailable for academic research. Despite a small number of installs for both games, Jungle Cubes have very strongly correlated attributes against DAU, which make the dataset significant. We present this in detail in the succeeding sections.

We attempt to apply our best training models for both games into real world use, which is otherwise not really presented by other studies. We discuss how this is done in the methodology section of this paper.

Related work tends to use datasets from games that are commercially successful, which already provides good prediction results since patterns can already be observed. Here in our study, we consider two games that has the same genre, but one is commercially successful, and the other one is not. We therefore see noticeable differences between training models for both games. We present this comparison in the experiments section.

## 2.1 Related Work

Using game analytics for research purposes has recently been pursued around 2012. Analysis of user behavior in digital games has become a fundamental practice for game companies. It is also open for numerous research opportunities due to its complex nature of modelling users while also taking into consideration the elements of the game. Thus, datasets concerning player behavior can be exceptionally complex like seen in World of Warcraft, a famous MMORPG (Massively Multiplayer Online Role-Playing Game), which has lead a team of researchers attempt to cluster players based from behavioral telemetry [2]. They applied numerous unsupervised learning methods to discover clusters of "player groups" based from their playtime data and their levelling pace.

### 2.1.1 Determining How Players Lose Interest

A study on action and shooter games released on Playstation 3, that uses player behavior dataset, have been used to discover how players lose interest in playing a game [1]. The dataset presented in their research paper were extracted from two single-player games (Just Cause 2, Tomb Raider: Underworld) and three multi-player games (Battlefield Bad Company 2, Medal of Honor, Crysis 2). All datasets have been sampled using simple random sampling or extraction of data on a timeline where player activities are high or the game was newly released.

The interest of playing a game cannot be measured directly but can be inferred from observable data as mentioned by [1]. In reality, a player's urge to play a game is influenced by several factors that appears as unforeseeable events to the analysts involved. This ranges from variance in playing schedules, personal satisfaction, release of new game content, or new games that competes with the player's attention. Using these consideration as mentioned by [1], they modeled the player's interest in playing a game as a random process. That is, at any given time, a player's interest is a random quantity that may or may not depend on previous values and future values cannot be predicted exactly. Thus, they

have restricted their mathematical models to random process models; the Gamma distribution, Weibull distribution, Inverse Gaussian distribution, and Log-normal distribution.

Of all five games analyzed, researchers deduced that the total playing times follows the Weibull distribution. Following the Weibull model, it gives a good benchmark for gaming companies to determine how a player's playtime even before the game has been released.

### 2.1.2 Predicting Churn Rate

There is an existing research work that is highly related to our methodology. Researchers attempted to predict the Churn Rate of commercial mobile games which also uses some attributes we use for this study [3]. In their study, they treat the churn value as a binary classification task, a player is labelled as **churned** or **returning**. Given a specified *cutoff date*, the player will be labelled as **churned** or **returning** based from two formal problems defined in their study.

They described problem **P1** to be more straightforward. Given a cutoff date, players who did not return after the cutoff date are immediately considered as churners. The green dots in 1 are considered as **churners** while the red dots are players who managed to return after the specified cutoff date. This formal definition of churn is harsh and not useful for real-world applications. Problem **P2** is more relaxed. Given a grace period after the specified cutoff date, if players return during this period, they are considered as "about to churn" wherein their engagement to the game is already low. These are the players who are likely to quit soon and knowing how much players are inside this grace period aids gaming companies on potentially rescuing these players to get back to the game. In 1, the first two green dots refer to players already churned while the third green dot inside the grace period is flagged as "about to churn." The red dot is a player who managed to return to the game after the grace period.

Figure 1 shows an illustration of formal problem **P1** and problem **P2**.

- Feature Selection

Attributes were universal and game-content independent. The following attributes stood out based from their feature selection tests and obvious observations that affect churning behavior; **Number of Sessions**, **Number of Days**, **Current Absence Time**, **Playtime per Session**, and **Average Time Between Sessions** and **Predefined Spending Category**. Some of these attributes are observed in our study.

- Experiments and Results

In their research work, the most accurate classifier is the decision tree, among other different classifiers; neural networks, logistic regression, and naive bayes. F1-score goes as high as 0.916 for the decision tree model. We will also be using decision trees for our prediction since it has achieved a high accuracy from this study.

## 3. DATASET AND INFORMATION ABOUT ATTRIBUTES

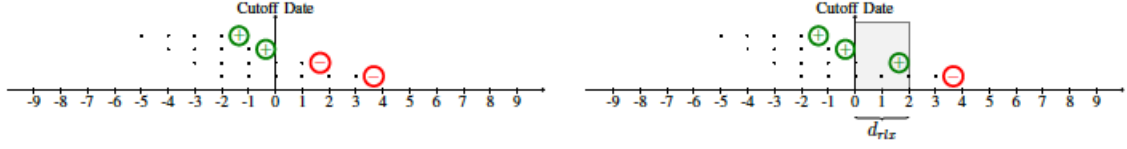


Figure 1: Formal problems defined as P1 and P2 described by [3]. P1 defines users as churners if they do not return after the specified cutoff date. In P2, players are given a grace period after the cutoff date. If players did not return after the specified grace period, they are considered as churners.

Table 1: Overview of Dataset Used

Dataset Filename	Game Title	Total Downloads	Overall Rating	Timeline of Dataset
DNC Dataset Android 0511-0911	 Dragon Cubes	50,000 - 100,000	4.2 out of 5	January 5, 2015 - September 11, 2015
JNC Dataset Android 0511-0911	 Jungle Cubes	100,000 - 500,000	4.3 out of 5	January 5, 2015 - September 11, 2015

This section contains an overview of the dataset used for this paper. The manner of extraction is also discussed in this section. Attributes are defined as well.

There are two datasets available for research and both are considered for the empirical study. The DNC Dataset and the JNC Dataset. Both datasets have been compiled and retrieved from Flurry Analytics, a commercial analytics tool used by Playlab Inc to track user’s behavior on their commercial mobile games. Some attributes were retrieved from Google Play Developer Console such as user’s ratings and daily crash reports. The DNC dataset refers to the Dragon Cubes game while the JNC dataset refers to the Jungle Cubes game. Both dataset are restricted to Android platforms only.

Table 1 shows the overview of the datasets used for the study.

Both datasets spans on a similar timeline, that is May 11 - September 11, 2015. A span of four months have been deemed sufficient for analysis and increasing the timespan no longer yields better results.

#### 4. ATTRIBUTE INFORMATION

This section discusses the attributes used for this study. These attributes have been gathered and selected from Flurry Analytics and Google Play Developer Console.

The initial selection of dataset has been manually performed by the researchers which they have deemed sufficient for analysis and have potential impact to the DAU value. On the succeeding section, we analyzed each variable and their

correlation values to determine which variables have high relationship with the DAU value.

- Install Date - Each instance in the dataset is organized by install date. This refers to the gregorian calendar date wherein an application is installed.
- Cohort Size - Refers to the total amount of users who have installed the application on the given install date.
- Day X - This represents the retention of the application given a certain date and cohort size. Installation date becomes day 0. Retention rate is the percentage of returning users on a specified install date. For example, day 1 has 40.75% retention and 1200 cohort size. Therefore, 40.75% of users have managed to return on day 1 (489 users in cohort size)
- CrashesANRDay1 - reality, crash reports come in a day after the specified install date. For example, May 11, 2015 has 3 crash reports. This means that this value was only retrieved on May 12, 2015. This counts the total number of crashes and ANRs (application not responding) reports from the application. This has a negative impact for the user experience. In reality, crash reports come in a day after the specified install date. For example, May 11, 2015 has 3 crash reports. This means that this value was only retrieved on May 12, 2015.
- DailyAverageRating - This refers to the average rating by users who choose to rate the application (1 to 5, 5 being the highest) on a given date. Rating an application is not mandatory. This is a primary determination for virality. Similar to CrashesANRDay1, the tally comes in a day after the specified install date.
- LevelPlayedEvents - Refers to the accumulated event tally that is triggered when a user plays a level on the application. This is triggered upon tap of the 'Play' button. This event is reported no matter the outcome of the level being played.
- LevelSuccessEvents - Refers to the accumulated events that are triggered if a user successfully completes a level. This is triggered when the 'Win' screen is shown to the user.
- LevelFailedEvents - Refers to the accumulated events that are triggered if a user fails a level. This is triggered when the 'Lose' screen is shown to the user.

- Session - Refers to the total amount of play sessions on a given install date. A high value for session count on a given install date means that there are a lot of playthrough activity
- MKTExpenses - This is the total amount of marketing expenses, in USD, spent to advertise the game. Given an install date, the marketing expense normally determines the cohort size. A high marketing expense means more advertising channels have been used to target more potential users to install the game.
- ActiveUsers - This refers to the total amount of unique users who spent considerable time in the game given a certain date. This refers to the "stickiness" of the application. This is one of the attributes essential for determining a game's success.
- ActiveUsersDay7 - This is similar to the ActiveUsers variable but offset 7 days after the install date. This is the variable to be predicted.

In reality, given a install date, and one would like to know how many daily active users would there be 7 days after, the following variables will be used: Cohort Size, Day 1, CrashesANRDay1, DailyAverageRating, LevelPlayedEvents, LevelSuccessEvents, LevelFailedEvents, Sessions, MKTExpenses, and ActiveUsers.

Note that some variables like DailyAverageRating and CrashesANRDay1, only becomes available a day after. In a practical scenario, one could make predictions by Day 2 since it is assumed that all variables are readily available.

## 5. EXTRACTION OF FEATURES

This section discusses how the dataset has been gathered. Flurry Analytics is a powerful commercial tool that enables developers to analyze user's behavior in mobile applications through data observations.


Jungle Cubes and Dragon Cubes have an API installed that reports events to Flurry as long as the user is connected to the internet. Playing these games on offline mode will store such events on the local file of the device which will be sent to Flurry upon connecting to the internet.

The manner of reporting events is pretty straightforward. Figure 2 shows the overview of the process of events reporting to Flurry. When an application starts, the timestamp and location (if possible to extract) is recorded and sends the data to Flurry. This means that the attribute, *Session*, is incremented. If this is a first-time launch, then the *Install Date* is reported to Flurry<sup>2</sup>.

### 5.1 Custom Events

We define custom events significant for our analysis and add various game features as needed. These user interactions report different events which are triggered on specific

<sup>2</sup>Install Date information can be found in the application settings. If for example, user installed the app on date A, and decided to play it 5 days after, the value will always be date A (not A + 5)

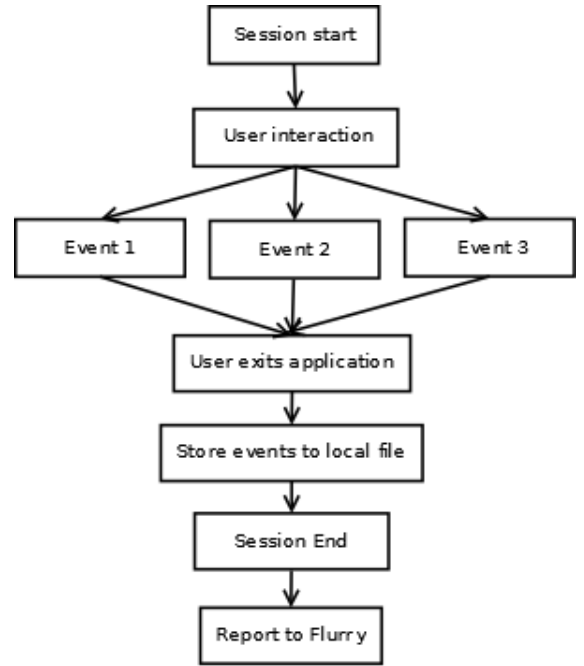

**Figure 2: Overview of how events are recorded and reported to Flurry within an application's lifecycle**

parts of the game. For this paper, we only considered 3 custom events, *LevelPlayedEvents*, *LevelSuccessEvents*, *LevelFailedEvents*. We will only consider these events and discuss points at which these events are triggered.

Refer to Figure 3 as reference. *LevelPlayedEvents* are triggered when the game results are shown to the user. This signifies that the game proper has concluded. In this figure, DNC and JNC will increment *LevelPlayedEvents*.

*LevelSuccessEvents* are triggered when the game results are shown and it has been concluded as a win result<sup>3</sup>. *LevelFailedEvents* are triggered when the game results are shown as a fail result to the user<sup>4</sup>. In Figure 3, the DNC shows a win result while JNC shows a fail result. DNC increments *LevelSuccessEvents* while JNC increments *LevelFailedEvents*.

## 6. METHODOLOGY AND CLASSIFICATION TECHNIQUES

This section contains the methodology and different classification techniques used to predict the value **DAU-Day7** from two datasets, JNC and DNC.

On the business point of view, Jungle Cubes is a fairly successful game released commercially by Playlab Inc. due to its constant revenue despite having a small amount of users playing the game. On the other hand, Dragon Cubes have

<sup>3</sup>A win for both games means that the objectives has been met by the user and can therefore proceed to the next level of the game. This is a positive event

<sup>4</sup>A fail for both games means that objectives were NOT met by the user. They have to repeat the level again. This is a negative event.

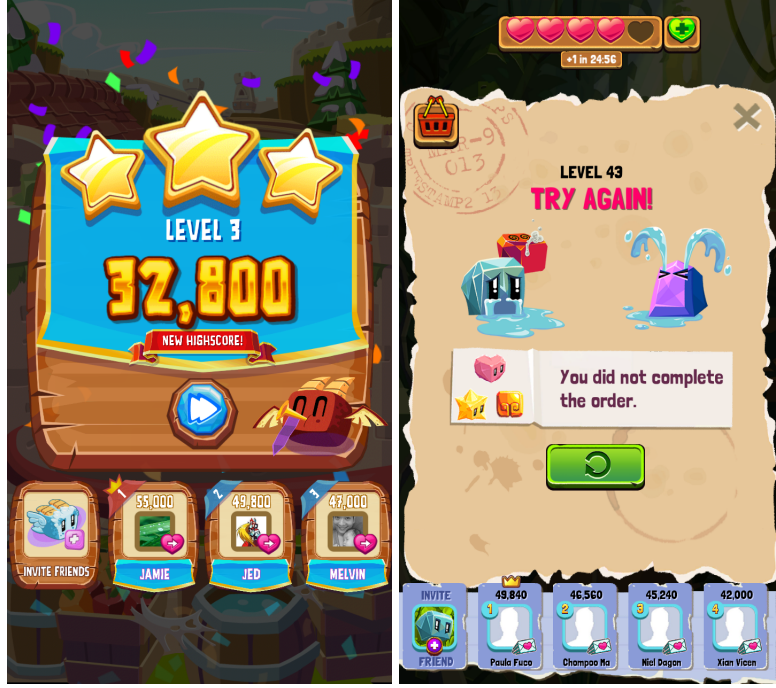


Figure 3: Custom events defined in this paper are triggered when these screens are shown. DNC (left) shows a win result while JNC (right) shows a lose result.

fairly considerable marketing expenses but did not reach the company’s overall vision for the game. It also has seemingly random patterns as described by the marketing team. Here in this section, we attempt to uncover the plausible reason for this kind of outcome based from the dataset.

## 6.1 Methodology

Using the dataset we have extracted from JNC and DNC, we attempt to use this dataset as a whole and provide several models to attempt to predict **DAU-Day7**. Several machine learning techniques via WEKA were applied. We shall only discuss the outstanding set of models that perform best for our scenario.

### 6.1.1 Discretization of dataset for nominal use

We attempted to predict **DAU-Day7** in numeric and in nominal form. Our dataset by default uses numeric values for **DAU-Day7**. However, we wanted to observe if other classification techniques that uses nominal values for prediction may also provide significant results for prediction. Thus, we discretize our dataset to identify numeric ranges and group them into proper categories<sup>5</sup>.

Therefore, we use two types of dataset for both games; the numeric type and the nominal type.

### 6.1.2 Test Procedure

<sup>5</sup>Using WEKA, we determined informally that setting the bin group to 4, contributed to increasing the accuracy of the model. This means that four categories are identified for **DAU-Day7**. This is discussed on succeeding sections of this paper

We all use cross-validation procedure  $k=10$  on all tests. After finalization of the results and evaluating the best models, we attempt to use these models on a test set that is also retrieved from Flurry to resemble actual deployment and practical use.

### 6.1.3 Applying best models for real world use

Part of this study is to also apply the best prediction models to actual use in the industry. The analytics tool continuously tracks succeeding events from users. We identified a cutoff date for our dataset and succeeding records from both games will be used as test set<sup>6</sup>.

## 6.2 Classification Techniques

Given a numeric and nominal type of datasets, we have a total of 4 datasets to test given that we have two games to consider. For numeric predictions of **DAU-Day7**, we choose to discuss the results of **M5Base**, **REPTree**, and **Multilayer Perceptron** due to their noticeable results. For the numeric type of datasets, we choose to use **decision-tree induction (J48)**, and **Naive Bayes**. We performed feature selection and modified needed parameters for each training algorithm to increase the accuracy of the model. Specific details are discussed per each training technique in this paper.

## 7. EXPERIMENTS AND RESULTS

This section contains the experiments performed and the results of the models used. As mentioned in the previous

<sup>6</sup>Our cutoff date is based on when we have finalized the attributes for the dataset. That is on September 11, 2015. We started the experiment after this date and succeeding dates in Flurry will be used as test set, which we ended collecting data on November 9, 2015.

section, we have the nominal type and the numeric type of dataset for both games. We proceed with results on using numeric values for **DAU-Day 7** followed by nominal values to represent ranges for **DAU-Day7**.

For the numeric type, we consider the following metrics for evaluation; correlation coefficient, mean absolute error (MAE), root mean squared error (RMSE), relative absolute error (RAE), and root relative squared error (RRSE). We discuss M5Base, REPTree and Multilayer Perceptron as separate subsections.

### 7.1 Correlation Analysis

We measured correlation of attributes with **DAU-Day7** to determine which attributes should we include for training different prediction models. This was our first basis for feature selection. However, we did not solely rely on correlation analysis and considered other feature selection techniques<sup>7</sup> to improve the accuracy of the models.

We primarily used correlation analysis to determine if there are strong relationships with **DAU-Day7** for both games. We observed that JNC has significantly strong relationships while DNC did not.

**Table 2: Correlation of Attributes against DAU-Day7**

	Jungle Cubes	Dragon Cubes
Cohort Size	0.6802	0.4655
Day1	-0.0054	-0.2016
Sessions	<b>0.8241</b>	0.4261
ActiveUsers	<b>0.9037</b>	0.4630
LevelPlayedEvents	0.6817	0.4226
LevelSuccessEvents	<b>0.7279</b>	0.4700
LevelFailedEvents	0.6217	0.3111
MKTExpenses	<b>0.7349</b>	0.3747
TotalPurchases	<b>0.8507</b>	0.1577
AverageRating	0.0803	0.1578
CrashesANRDay1	0.6194	0.2668
AvgSessionSeconds	-0.0595	-0.2073
MedianSessionSeconds	0.1644	-0.0938

JNC attributes yielded significantly higher positive correlation against **DAU-Day7**. There are four strong correlation values (in bold text)<sup>8</sup> while DNC do not have any. This indicates further proof that DNC do not yield any noticeable patterns due to its fair performance in the gaming market. JNC, on the other hand, already have a trend if we're going to use correlation as a measure.

### 7.2 Feature Selection

In order for our learning algorithms chosen to perform best, we filtered out the unneeded attributes primarily influenced by using established feature selection techniques. We use a wrapper scheme for feature selection for learning algorithms to perform best by removing unnecessary features. This technique is discussed in [4]. We used a best-first search

<sup>7</sup>Various search and selection techniques are available in WEKA for feature selection.

<sup>8</sup>We use 0.7 as threshold for indicating strong relationship.

method together with the selected attribute evaluator. For each learning algorithm used in our study, different set of features are selected.

Basing from the initial features "proposed" to be selected by using this scheme, we manually selected, or removed some features deemed significant by this technique. Solely relying on the wrapper scheme still induced noise on the final outcome of the model. We based our manual selection method through correlation analysis and repeated observations on how it affects the overall accuracy of the model.

### 7.3 M5Base

We attempt to use M5Base provided by WEKA which is based from [5] due to its combined nature to induce decision trees and output linear models at the leaves. This suits well for our study due to the numeric form of **DAU-Day7** and the ability to output a formula which can easily be used for marketing and business decision purposes.

Table 3 shows the selected features used for creating the model using M5Base. Notice the differences of features selected for both games.

**Table 3: Selected features for M5Base**

	Jungle Cubes	Dragon Cubes
Features	Cohort Size Day 1 LevelFailedEvents LevelSuccessEvents Sessions MKTExpenses TotalPurchases MedianSessionSeconds	CrashesANRDay1 LevelFailedEvents LevelSuccessEvents Sessions MKTExpenses AvgSessionSeconds

Applying the said features from Table 3, we attempt to use m5Base as predictor using the default configuration and resulted in the following measures seen in Table 4. JNC has significantly higher magnitude of error, referring to MAE and RMSE measures compared to DNC. However, the RAE and RRSE for JNC is significantly lower than DNC which means that the model of JNC seems to be more reliable than a simple predictor<sup>9</sup>. If we take a look into their corresponding test sets, notice the significant change of metrics for both games.

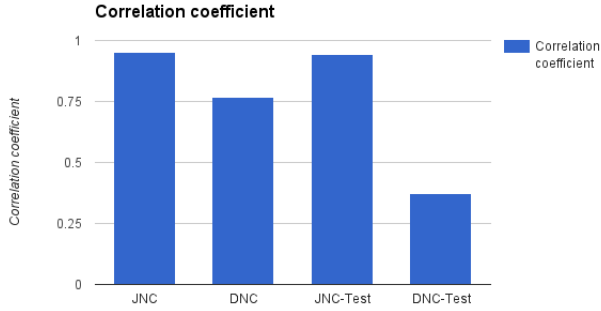
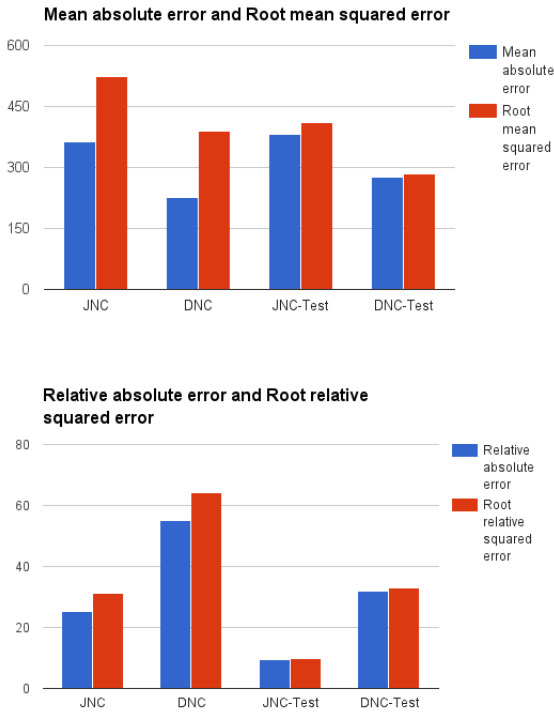
Figure 4 shows the correlation coefficient differences. Notice that JNC has high correlation. DNC has high correlation on its training set but using the test set, the correlation has dropped significantly which makes the model questionable for real world use.

Figure 5 shows the summary of error tendencies of both games using m5Base. We can see that the MAE and RMSE of JNC is somewhat higher than DNC, but looking into RAE and RRSE, we see that JNC outperforms DNC by a huge difference. The prediction model becomes more reliable than a simple predictor for JNC's case.

<sup>9</sup>Simple predictor is just using the mean as predicted value for DAU-Day7.

**Table 4: m5Base Results for JNC and DNC**

M5Base	JNC	DNC	JNC-Test	DNC-Test
Correlation coefficient	0.9499	0.7673	0.9442	0.3731
Mean absolute error	363.3713	226.1379	380.6705	276.2044
Root mean squared error	522.864	390.7313	410.3039	285.4435
Relative absolute error	25.1493%	55.0067%	9.3048%	31.9779%
Root relative squared error	31.0991%	64.3702%	9.9679%	32.966%
Total Number of Instances	250	250	28	28

**Figure 4: Correlation coefficients for m5Base****Figure 5: Error tendencies for m5Base**

- [1] C. Bauckhage, K. Kersting, R. Sifa, C. Thureau, A. Drachen, and A. Canossa. How players lose interest in playing a game: An empirical study based on distributions of total playing times. In *2012 IEEE Conference on Computational Intelligence and Games, CIG 2012, Granada, Spain, September 11-14, 2012*, pages 139–146, 2012.
- [2] A. Drachen, C. Thureau, R. Sifa, and C. Bauckhage. A comparison of methods for player clustering via behavioral telemetry. In *International Conference on the Foundations of Digital Games, Chania, Crete, Greece, May 14-17, 2013.*, pages 245–252, 2013.
- [3] F. Hadiji, R. Sifa, A. Drachen, C. Thureau, K. Kersting, and C. Bauckhage. Predicting player churn in the wild. In *2014 IEEE Conference on Computational Intelligence and Games, CIG 2014, Dortmund, Germany, August 26-29, 2014*, pages 1–8, 2014.
- [4] R. Kohavi and G. H. John. Wrappers for feature subset selection. *Artificial Intelligence*, 97(1-2):273–324, 1997. Special issue on relevance.
- [5] Y. Wang and I. H. Witten. Induction of model trees for predicting continuous classes. In *Poster papers of the 9th European Conference on Machine Learning*. Springer, 1997.

## 8. ACKNOWLEDGMENTS

## 9. REFERENCES