

WebLager® – Styleguide

Purpose

This style guide describes the visual and functional guidelines for WebLager. It is intended to be used as the foundation for a school project and ensures that design and UI elements appear consistent, recognizable, and user-friendly.

The style guide is created to help you:

- make the right design decisions
- understand how the brand should be presented digitally
- work in a structured way with web design

The style guide may be used exclusively for this project.

Brand overview

The web solution features a simple and functional UI with a strong focus on structure and consistency.

The design is minimalist and prioritizes clarity and usability over visual effects.

Characteristics

- Minimalist layout
- Hierarchy through spacing and typography
- Rounded corners

Interactions

- Hover states
- Loading states
- Standard feedback

Variants

Icon



Vertical



WebLager®

Horizontal



WebLager®

Colors

Main Blue



WebLager®



WebLager®

Darkmode Blue



WebLager®



WebLager®

Usage

All logo files are included in the provided ZIP file.

Choose the appropriate logo color depending on the background (light or dark) to ensure the logo remains clearly visible.

The logo should be displayed with the logotype (name) whenever space allows.

The icon-only version may be used in constrained spaces such as favicons, app icons, or compact navigation areas.

Use the full logo by default. Use the icon-only version only when necessary.

Surface

Background #F5F5F5	Surface/card background #FFFFFF	Card content background #f9f9f9
Primary navigation bg #2D3D4F	Primary navigation btn #415060	
Secondary navigation bg #24C79F	Secondary navigation btn #2D3D4F	

Actions

Primary actions #2D3D4F	Secondary actions #64748B	Tertiary actions #F9F9F9
Tertiary action buttons #FFFFFF	Destructive action #EF4444	

State & feedback

Placeholder #BFBFBF	Border #E2E4E8	Surface hover #F1F5F9
Disabled 60% opacity	Success color #4CD07D	Error color #FF3D32

The primary color (**#2D3D4F**) is the foundation of the visual identity and the most frequently used color in the interface. It is used for primary actions, selected states, navigation elements, and as the main text color.

The Secondary navigation bg color (**#24C79F**) is primarily used for the sidebar. Icons and interactive elements within the sidebar must use the primary color (**#2D3D4F**).

Gradients are **not** used in the interface; all colors are applied as solid fills only.

Surface

Background
#465160

Surface background
#354556

Card background
#2D3D4F

Primary navigation bg
#0094EA

Primary navigation btn
#33A9EE

Secondary navigation bg
#2D3D4F

Secondary navigation btn
#008FF7

Input background
#465160

Actions

Primary color
#008FF7

Secondary button color
#697489

Tertiary action buttons
#4B5563

Destructive action
#EF4444

State & feedback

Border
#2B3B4C

Hover
#2B3B4C

Disabled
60% opacity

Success color
#4CD07D

Error color
#FF3D32

Font family

Montserrat

Montserrat is the only font used in the application. The font is referenced directly from Google Fonts.
<https://fonts.google.com/specimen/Montserrat>

12px is used as the primary text size across the application to ensure consistency, readability, and a compact UI.
 Most text in the application is displayed using the primary color or white, depending on background contrast.


Text styles

H1	Size: 21px Weight: 700 (Bold)	H2	Size: 18px Weight: 600 (SemiBold)
H3	Size: 15px Weight: 600 (SemiBold)	Body	Size: 12px Weight: 400 (Regular)
Buttons	Size: 12px Weight: 500 (Medium)	Label Label	Size: 12px Weight: 400 (Regular) Weight: 500 (Medium)
Helper Text	Size: 10px Weight: 400 (Regular)		

Icons

PrimeNG icons are used for all icons in the application.


Icons are referenced directly from the PrimeNG icon library.
<https://primeng.org/icons>



Spacing scale

All spacing values are based on a 3px scale.

Component spacing

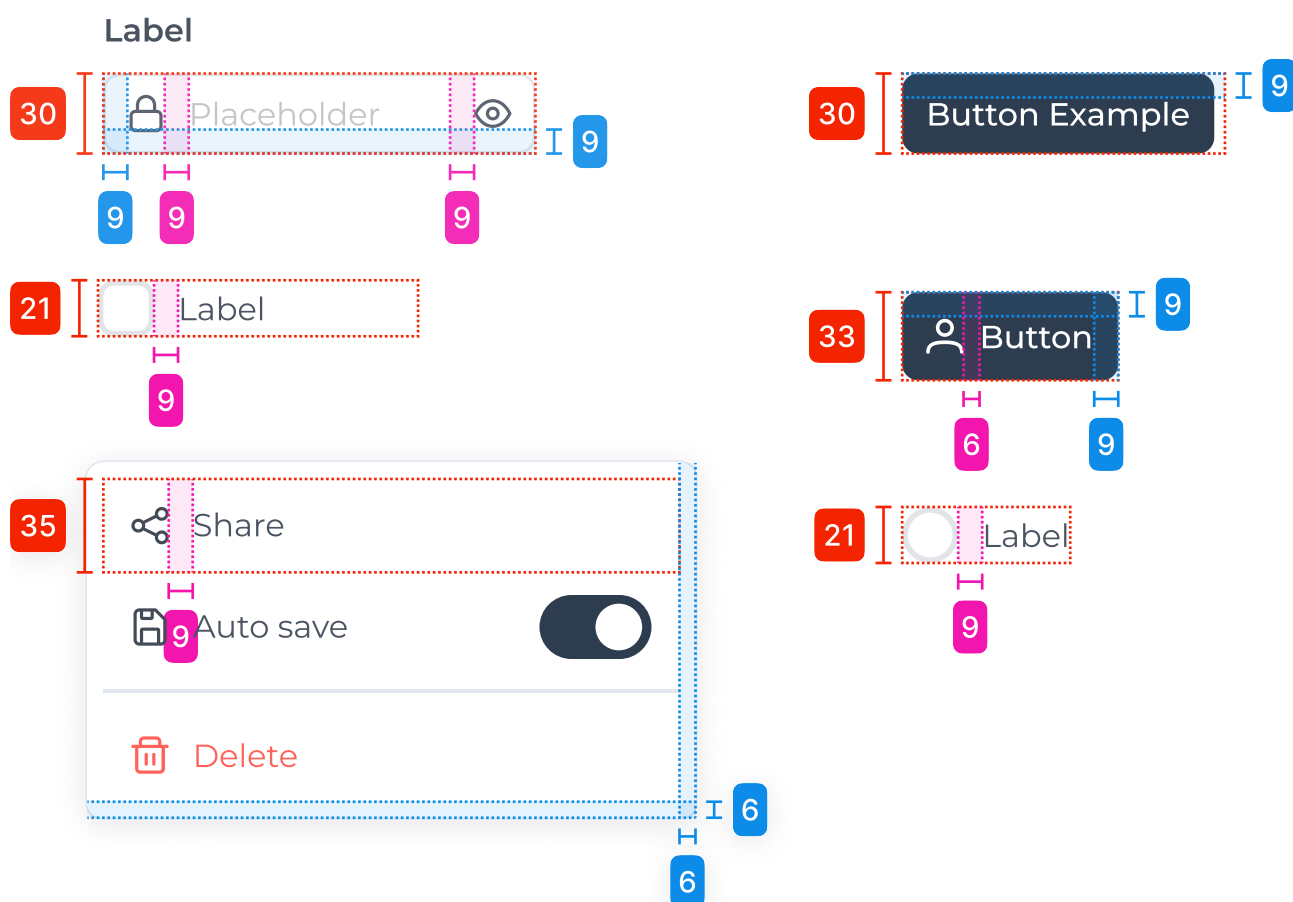

Buttons and input fields use a default height of 30px to maintain a consistent and compact interface.

A 33px height may be used for primary actions or page headers. On mobile, 33px is recommended to improve touch accessibility.

Use 30px by default. Use 33px only when needed.

Page spacing

Page padding defines the outer spacing of the page.

A fixed horizontal spacing of 24px is used between the sidebar and the main content area on web.

On tablet, a horizontal spacing of 18px is used, and on mobile, 15px is used.

The content area is structured using **cards**, which follow the same internal padding rules as **modals**.

Loading

Skeleton

Skeleton loading is used to indicate loading states while data is being fetched.

Reference: <https://primeng.org/dataview#loading>

Spinner

Spinner loading is only used where immediate feedback is required, such as when the user initiates an action and the cursor remains in place.

Effects

Shadow

0px 2px 12px rgba(0, 0, 0, 0.1)
X: 0, Y: 2, Blur: 12, Spread: 0, Color: #000000 10%

Overlay bg

rgba(0, 0, 0, 0.25)
#000000 10%

Only light shadow and overlay effects are used to indicate elevation and focus.

No additional visual effects (e.g. strong shadows, glows, or animations) are applied.

Corners

Small elements

3px

Used for compact UI elements such as chips, tags, badges, and small controls.

Standard elements

6px

Default border radius used across the interface for buttons, inputs, cards, dropdowns, accordions, and most components.

Large containers

10px

Used for large surfaces such as modals, panels, and major content containers.

The interface uses rounded corners to create a soft, calm, and approachable visual language.

Border radius is applied consistently based on component size and hierarchy.

Types

Text

Left icon

Right icon

Labelled

Label

Labelled Left icon

Label

Labelled + icons

Label

Text Area

Text Area + chips

States

Normal

Disabled (60% opacity)

Focus

Error

Success

Sizes

Height: 30px

Height: 33px

Avatar

Initial



Image



Selection Tools

Checkbox Normal



Checkbox Disabled



Checkbox Checked



Checkbox Checked + Disabled



Switch Normal



Switch Normal + Disabled



Switch Checked



Switch Checked + Disabled



Radio Normal



Radio Normal + Disabled



Radio Checked




Radio Checked + Disabled



Chips


Normal




Disabled



Color




Select option



Color + Icon



Color + Icon + Selected



Buttons

Primary – Normal

#2D3D4F

Primary – Hover

#1C252F

Primary – Disabled

60% opacity

Secondary – Normal

#64748B

Secondary – Hover

#354556

Secondary – Disabled

60% opacity

Primary – Icon

 Text

Primary – Icon

 Text 

Outline

 Clear filters (3)

Tabs

 Label 1

 Label 2

 Label 3

 Label 1

 Label 2

39

 Label 1

 Label 2

30

H
6

Tooltips

Normal

Tooltip

33

Shortcut

Undo



Z

27

Validation

Description is required

27

Information

Search Format

Supports different formats:

- A single value (1990)
- Multiple values, separated by commas (1990, 2000)
- A range (1990–2000)

Select

Normal

Open

- Option 1
- Option 2
- Option 3

Selected

- Option 1
- Option 2
- Option 3

A search field must be displayed in dropdown lists containing five or more options.

Menu

Normal

Sort ascending

Sort descending

Clear sorting

Change column >

Remove column

Auto save

Share

Auto save

Delete

Pagination

<<

<

1

2

3

>

>>

<<

<

1

2

3

...

8

>

>>

Showing 1 of 10 documents

<<

<

1

>

>>

Results per page

10

>

Text editor

Normal ▾

B

I

U

☰

🔗

↶

↷

Upload

⬆️ Drag and Drop files here or [choose file](#)

Supported files: PDFMaximum size: 5MB

Dialog

You have unsaved changes

×

Do you want to save them before closing?

Discard changesSave changes

Divider

Dividers can be used both horizontally and vertically to separate content, sections, or UI elements.

Date Picker

Normal

Open – selected

<

July 2025

>

Mo	Tu	We	Th	Fr	Sa	Su
28	30	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3

Date pickers may include optional actions such as Today or Clear, depending on the use case. Actions should only be added when they improve usability.

Toast message

Properties copied from Archive 2

Undo

×

45

Loading


Skeleton

Skeleton loading is used to indicate loading states while data is being fetched.
Reference: <https://primeng.org/dataview#loading>

Spinner


Spinner loading is only used where immediate feedback is required, such as when the user initiates an action and the cursor remains in place.

Component

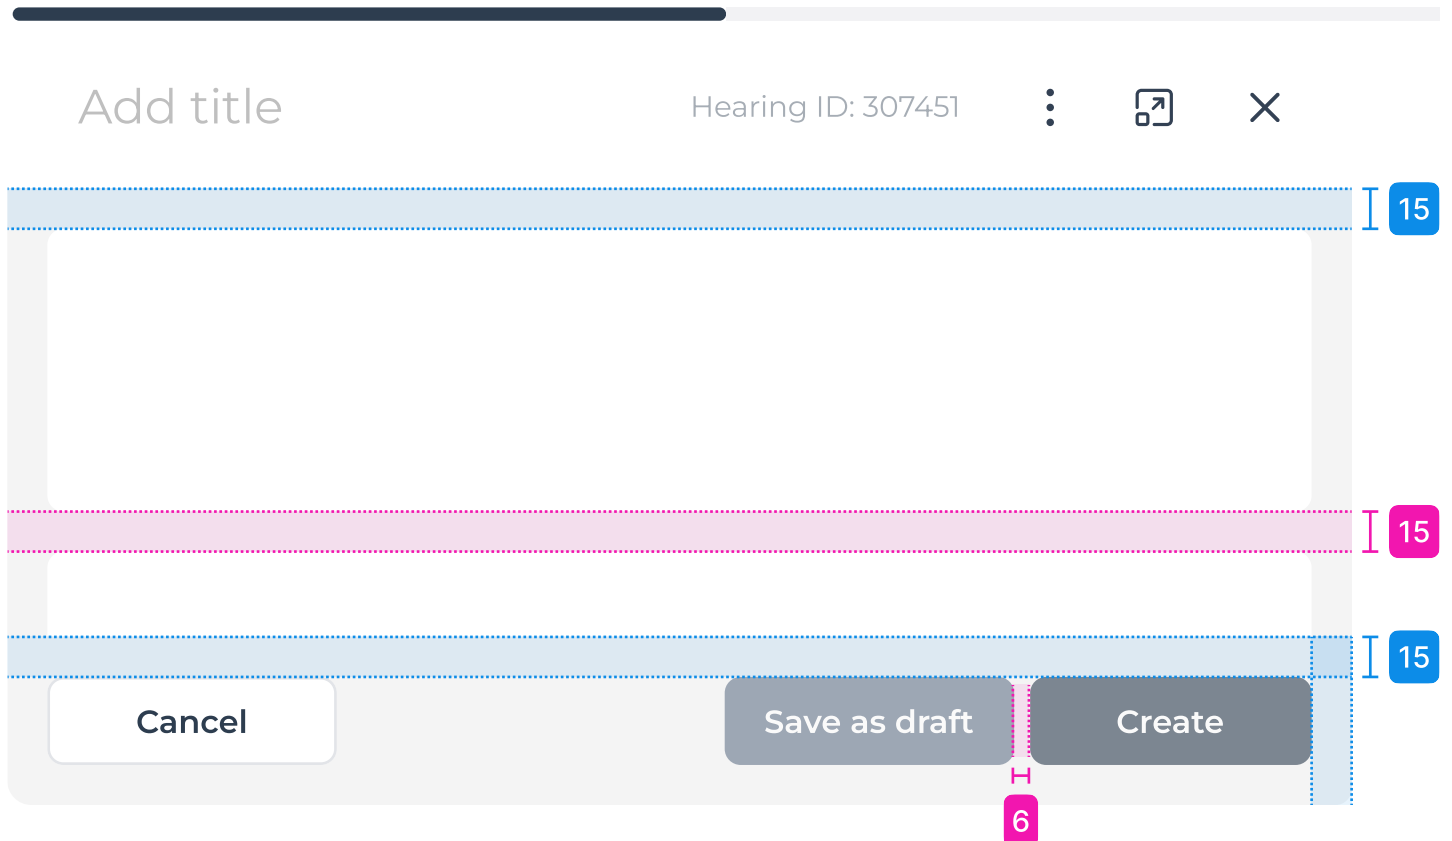

Modals support **1–3 column layouts** and are structured using **cards**. The modal header and cards use white, while the background and footer use #F5F5F5. When autosave is enabled, footer actions are hidden and the saving state is shown in the header.

Header

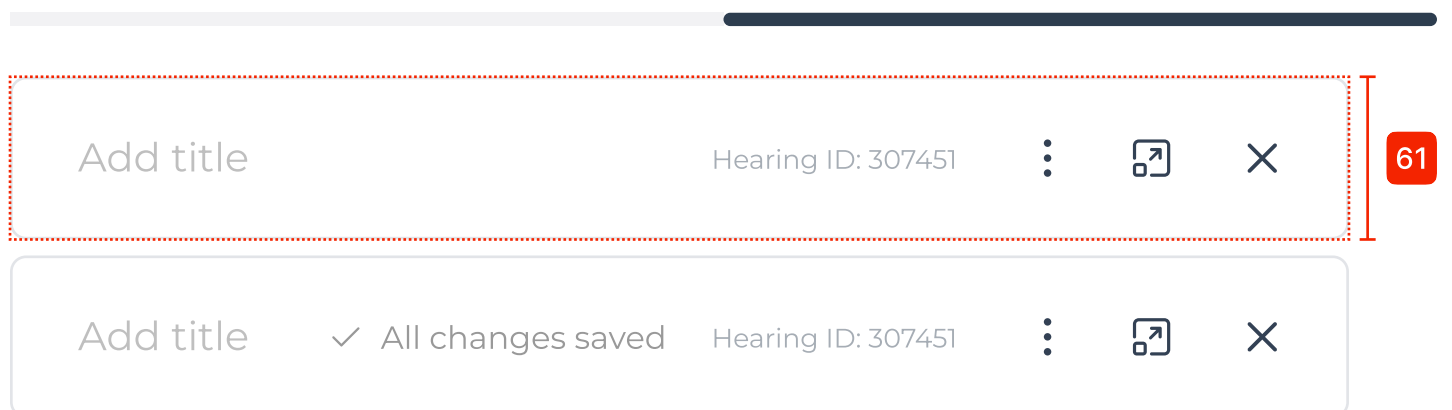

All modals must include a modal header with, at minimum, a title (either a descriptive title or “Add title”), an ID, a full screen or minimize action, and a close action.

The modal header may also contain additional actions such as a menu (e.g. delete, autosave, share, ID), share, or preview.

When autosave is enabled, the saving state is displayed centrally within the modal header.