# Axisdata Integration

# Documentation

## Contents

1 Introduction ..... 3
2 Overview ..... 4
2.1 When we talk about booking a hotel, transfer, ticket, excursion or a package of multiple services.... ..... 4
2.2 Integration models ..... 5
Notification based model (“push”) ..... 6
Transactional model (“pull“) ..... 6
2.3 Making a choice between the 2 models ..... 7
2.4 Notification concept ..... 8
2.5 Mapping concept ..... 8
2.6 Filtering concept ..... 8
2.7 When we talk about other API features ..... 8
Simple upselling opportunities ..... 8
Customer Journey Information ..... 9
Detailed Transfer Information ..... 10
On-line hotel check-in ..... 10
2.8 Documentation structure and usage ..... 11
3 Access to our systems ..... 12
3.1 Partner identification ..... 12
Access to test system for integration ..... 14
Access to Production ..... 14
3.2 ClientNet access ..... 14
3.3 Specifications and Schemas ..... 15
4 Error scenarios and troubleshooting ..... 16
4.1 Error scenarios ..... 16
4.2 Troubleshooting ..... 31
5 Versions ..... 35

# 1 Introduction

The documentation of the AxisData XML API consists of various elements:

- The main documentation set, explaining the workflow of the various message sets, detailing isolated concepts, and providing a vast amount of “how to’s”.
- The agreement annex, which specifies contractual particularities of an on-line cooperation and has to be signed before go-live.
- The Certification document and/or the GoLive review document
- The detail documentation for the different methods to be used with our real-time XML-API
- Electronic invoicing
- OTA (www.opentravel.org) based XML schemas as implemented by AxisData in the form of .xsd’s
- EDF (www.Peakwork.de ) based XML schemas as implemented by Axisdata
- OTDS (https://forum.otds.de) based schemas as implemented by Axisdata
- Examples of messages taken from the configured testcases in our integration test environment as provided in our Postman collection

The integrations department is at your disposal to clarify any question or doubt you might have after absorbing all above at integrations@axisdata.net.

Remember to request us to liberate your IP’s in our firewall to get access to our API’s.

# 2 Overview

This document defines a messaging protocol for communications between AxisData and its Business Partners for the purpose of replacing administrative tasks with automated processes. Two aspects require serious attention from both partners:

- Automation of administrative tasks means removing the human handling the work:
  - This eliminates workload (positive)
  - This eliminates human errors (positive)
  - This eliminates a human assessment (negative)
  - This requires investment and careful assessment of impact (neutral)
  - Does not replace marketing, communication about the product on-sale, etc.
- No system has exactly matching functions
  - XML/JSON/etc are only a formatted text formats to pass information
  - If that information does not fit to the receiving system, XML does not automatically resolve that
  - These “gaps” are “business problems to discuss and resolve”

## 2.1 When we talk about booking a hotel, transfer, ticket, excursion or a package of multiple services….

In order to start the implementation, a commercial agreement and non disclosure agreement has to be signed (“agreement annex”). Our partner further details the cooperation with each of the destination managers. Some aspects of the integration are important and must be signed for in the “agreement annex”:

- A complete integration workflow must be implemented. Our system does not provide ad-hoc “flat files”, nor can we allow part of the process to be conducted “off-line” (cancellations in order to liberate occupied rooms or on-line hotel bookings while maintaining transfers off-line, in order to keep the link between hotel service and transfer service,...)
- The confirmed booking value is the invoice value (“Commit”). The value in the “quote” confirms the booking value, prior to booking and our partner can decide to commit to that value prior to confirming the booking.

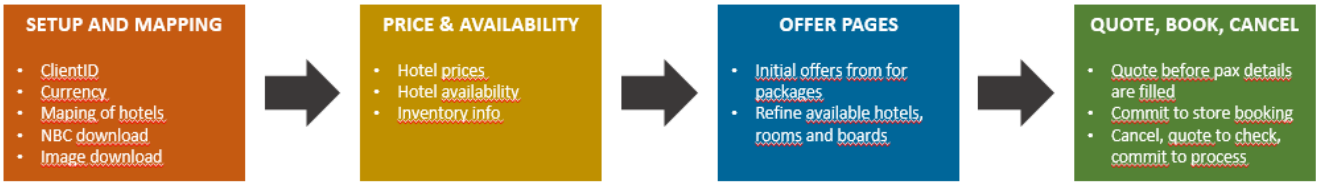

## 2.2 Integration models

**Notification based model ("push")**

Partners that package our hotels and transfers with flights need to hold the rates and availability in their system to create the packages with the available flights. To provide this functionality, the „notification based model" has to be implemented. This model consists of "pushing" the rates and availabilities to our partners system in near real-time and quote, book, cancel messages in real-time.

The partner uses the notification data to reply to customer searches. When a customer decides to book a certain product the quote and booking request is sent to our systems, which respond with a confirmation or an error code if the booking could not be accepted.

The notification based model can be implemented using three different formats:

**EDF notifications**: EDF notifications uses Peakwork's EDF format and it's a rule based format. Each hotel is communicated into two separated messages than contains inventory and rates (Hotel EDF) and availability (Stock EDF).

**OTA notifications**: OTA notifications uses Open Travel Alliance format and it's a rule based format. Each hotel is communicated into three separated messages than contains inventory (OTA inventory), rates (OTA rates) and availability (OTA stock).

**ASNF notifications:** our ASNF (Axisdata Simple Notification Format) removes all complexity and provides a rate per occupancy between adults and children for each room, rateplan and board combination with all offers and supplements applied, except the rolling early booking offer and the free-stay offer (stay 7 pay 5 nights for example). The filesize is still reasonably small compared with a fully rules based format and the complexity is very limited.

**OTDS notifications:** per demand of German clients that deliver their packages into distribution systems in the German market. The OTDS format is a highly complex rules based format.

**Flatfile notifications**: Flatfile notifications uses an OTS propertary format and it's a calculated cache file. All hotels are provided in a single file including all available combinations and price. Each offer-line is one end-price for 1 hotel, 1 room, 1 board, 1 occupancy, 1 arrivaldate and 1 number of nights.

The advantage of the FlatFile versus the EDF/OTA/OTDS rules based formats is that there is no logic to implement to compute correct rates. The disadvantage is the amount of data, often around 330 million lines.

**Transactional model ("pull")**

Partners that sell "hotel only" or have implemented a dynamic packaging model using a shopping basket with providers for different products can use the transactional model to submit customer searches to our systems. This model consists of "pulling" the rates and availabilities for each customer search and quote, book, cancel messages in real-time. When a customer decides to book a certain product the quote and booking request is sent to our systems, which respond with a confirmation or an error code if the booking could not be accepted.

One of the strong points of our XML-API are the impressive response times: searches average around 0,1 second and quotes average around 0,5 second response times.

### 2.3 Making a choice between the 2 models

As described above, the partner system and workflow largely decides which model to implement. However there are two observations:

- In the “Transactional model”, the partner has little control over the rates and availability of the product we provide. That can be achieved by sophisticated reporting on the searches, but often it is more economical to implement (part of) the notifications for product management.
- In the “Notifications based model”, the quote is designed to be a confirmation prior to booking. As this message calculates values as actually held in the database, it is not a high performance message and should not be used for anything similar to a “search”.

It is important to understand that the search is a high performance message based on pre-calculated data and the quote is a final step before booking, to reassure the hotel room is still available, since the search data was provided. The quote is calculated over the database with real-time values, while the search might lag behind – we strive the search data to be updated within 7 seconds from when the update is “on-sale”. A typical search response is provided in 100 ms, while a quote takes half a second. More important: the search does not access the database, which leaves more capacity and performance for responding in an adequate time to our partners most important message: the booking!

**Note**: For “Notifications based model” usage observations: the ratio between quote and book may never exceed 1000 to 1. We would urgently contact partners performing at these ratios, to understand what can be improved in the implementation or even consider converting the quote to a search. Partners performing at a quote/book ratio between 100 to 1 and 1000 to 1 are considered in the danger zone and we would work together to understand which part of the implementation should be improved.

**Note**: For “Transactional model” usage observations: the ratio between search and book may never exceed 20.000 to 1. We would urgently contact partners performing at these ratios, to understand what can be improved in the implementation. Target is to keep ratios below 10.000 to 1.

We foresee that partners currently exclusively working on one of the two models, will convene towards a mix of both models, using more and more elements of both models.

## 2.4 Notification concept

Notifications must be stored by partners to ensure a swift transmission process and to ensure our system is not slowed down by incidents in processing capacity. This is also recommended, in case our partner system requires a certain order to (re)load content. For example: a new hotel is being provided, but has not yet been mapped. The inventory message, rateplan and availability messages cannot be processed. Once mapping is complete, the latest inventory message, rateplan and availability notifications can be loaded and the new accommodation or room is on-sale immediately.

In case a new rateplan is received and this results to “open“ for all dates, the partner is responsible to process the last full availability notification, followed by all deltas received since the last full.

A full delivery of Inventory, Rates and Allotment is only provided once a week. Every 15 minutes continuous updates are provided, containing changes in the last 15 minutes. Allotment updates are only provided when the remaining allotment falls under 9 rooms, to avoid irrelevant notifications for each booking (i.e. a booking taken brings the allotment from 30 untits to 29 units)

## 2.5 Mapping concept

Both the pull and the push model require an understanding between systems regarding hotel codes, room codes, rateplan codes, board codes... This functionality is extremely important to enable portfolio changes rapidly. The implementation of a **daily update** using the delta OTA_HotelDescriptiveInfo message is imperative.

Examples: new rooms becoming available as part of a promotion: the “promo room” needs to be mapped immediately to ensure the turn-around time of an offer is minimal. Another example is: a hotel that discontinues a board during high-season. Or a hotel being (temporary) removed from our portfolio because of an emergency or dispute on the quality of service.

## 2.6 Filtering concept

In a multi provider situation, applicable to both models, it is important to have an open communication regarding filtering of product and the technical rules behind the filtering. We need to be sure filtering is taking place on a “like for like” basis and our superior room with all inclusive is not removed from presentation to the end customer, “filtered away” by a promo room with bed and breakfast, from a competitor. The actual filtering logic and code will be requested and analyzed to ensure a successful implementation.

## 2.7 When we talk about other API features

Just a flawless holiday booking experience only is half of the job. Providing tools to improve the end-customer experience after booking and during their stay is at least the other half of the job. If not substantially more. This section describes additional information provision and upselling opportunities, that can bring you game changing USP’s in terms of customer experience and revenue per booking.

**Simple upselling opportunities**

Our hotel, transfer and tickets/excursions can be used in a shopping basket manner, adding and removing services and extras with a new child reference under an existing master reference. A simple shuttle transfer in a holiday package can be exchanged for a speedy-shuttle or a private transfer, at any contact moment between booking and arrival.

In our hotel and transfer booking search and quote responses we already advise of the available extras that are included complementary extras (i.e. foreign distilled included in AI), form part of the price as compulsory extras (i.e. gala dinner on Christmas eve) or optional extras that can be added at an extra cost. Think of a 5 course gala dinner on Christmas eve instead of the normal gala dinner, an early check-in or a late check-out for your hotel booking. But do not forget the golfbags, bicycles and dive-gear with your transfer service. And of course, following recent times the PCR test upon arrival at the airport or shortly before departure in destination. At the nearest clinic, at the clinic with a private transport or at the hotel.

The ticket & excursion messages can be triggered at any moment in the booking flow, as a stand-alone product or at any post sales contact point.

The new OTA_ProductSearch, Avail and Book messages allow you to book any add-on service available to the booking. Consider a VIP lounge at the airport, VISA services or a fast track security and/or customs lane. Champagne, wine, fruits basket, flowers or a beach-kit for the kids in the hotel-room.

**Customer Journey Information**

Extensive destination and booking information is available via our CustomerJourney responsive website (https://myholiday.mtsglobe.com/login). This website can also be addressed through a deeplink with a lead-pax name and bookings reference provision in the url. The website can also be customized in your company color palette and with your logo instead of the MTS logo. Try it with one of your bookings that is currently being served by us!

The Customer Journey app and api provide a vast amount of information with key information on the booking, where the transfer bust is parked that will bring you to the hotel, a link to do an on-line hotel check-in (if available for the hotel), destination info book, contact details, emergency numbers, local (Covid) regulations, etc. When the end of the holiday is near, as soon as the return transfer is organized, the pick-up point and time will also be presented. Ahead and during the stay a selection of key excursions and activities that are available for this specific holiday are present under a single click.

The Customer Journey information is also available through a simple API in JSON format. A simple submission of your booking reference and the language in which you want all above information returned. Check out our documentation for the Customer Journey API (https://cj.axisdata.net/api/booking).

Customer Journey responsive website:

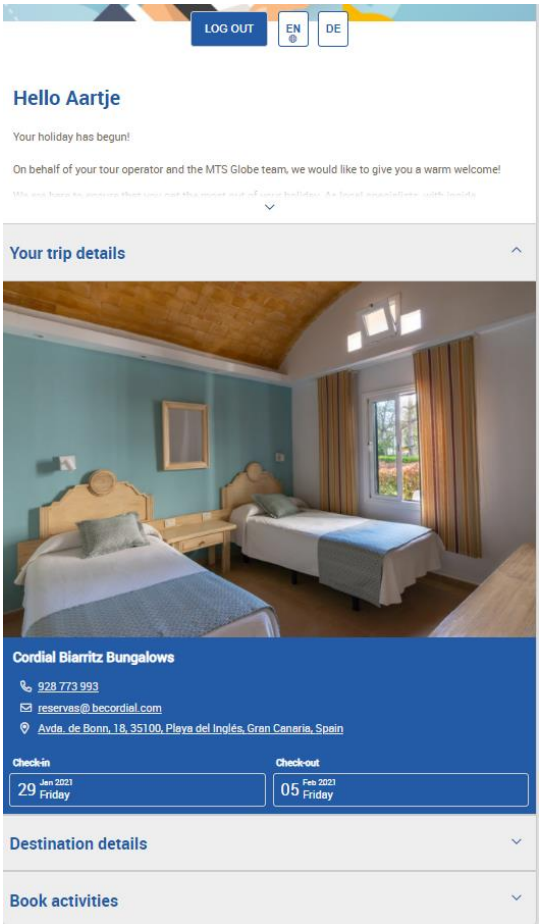


**Detailed Transfer Information**

To instantly answer the typical “where is my bus” question that is a substantial part of the queries to your call center we have developed the “Transfer Information Desk”. Your agent logs in to this website and by entering nothing more than your booking reference, the exact location of the vehicle for the return transfer is displayed and the estimated time to pick-up your guests is available. If your guests have missed their transfer, arrival at the pick-up point, waiting time and departure from the pick-up point is instantly displayed, avoiding uneccesairy complaints.

We have made available an API for real-time “where is my bus” monitoring via JSON, to implement in your applications. Transfer Tracking API (https://cj.axisdata.net/api/tracking).

**On-line hotel check-in**

In some hotels we already have on-line check-in available through our Customer Journey app. When we reach a critical mass, we will also roll-out an “on-line check-in” API, consolidating the various service providers and PMS connections into one comprehensible format.

## 2.8 Documentation structure and usage

These are the documentes provided in the technical documentation set:

**OTA Communication Model**: This document details all the real time messaging technical info. This documentation covers:

- Mapping process
- Realtime search
- Realtime book
- Realtime Booking search and retrieve
- Realtime Booking cancellation

**OTA Notification model**: This document covers the OTA based notification messages:

- Inventory notification
- Rates notification
- Stock notification

**EDF Notification Model**: This document covers the EDF based notification messages:

- EDF inventory and rates notification
- EDF Stock notification

**ASNF Notification model:** This document covers the ASNF based notification messages:

- ASNF Rates notifications
- ASNF Stock notifications

**OTDS Notification model:** This document covers the OTDS based notification messages:

- OTDS Rates_Avail_Stock notifications when a contract is updated
- OTDS Avail_Stock notifications when only the availability of a specific room-rateplan-board has changed.

**Flatfile Notification Model**: This document covers the Flatfile notification messages:

- Flatfile notification
- Portfolio notification

**ClientNet Documentation**: This document covers the ClientNet usage, common to any integration model

Documentation coverage per model and concept:

| Model / Concept | Transactional "Pull" | Notifications "Push" OTA |
|---|---|---|
| **Mapping** | OTA communication model | OTA communication model |
| **OTA Notifications** | | OTA notification model |
| **EDF Notifications** | | EDF notification model |
| **ASNF notifications** | | ASNF notification model |
| **OTDS Notifications** | | OTDS Notification model |
| **Flatfile Notifications** | | OTS Flatfile notification model |
| **Search** | OTA communication model | |
| **Book** | OTA communication model | OTA communication model |
| **Cancel** | OTA communication model | OTA communication model |
| **Retrieve** | OTA communication model | OTA communication model |

# 3 Access to our systems

The access to our test and production systems is protected by a firewall which requires our partner's external IP's to be liberated in our firewalls. This step should be executed by experienced networking IT Systems specialists in order to avoid a lengthy troubleshooting process. The following steps are to be taken in account:

1. Definition of protocol and transport
   - Which processes will be executed via FTP and WS
   - Which protocol will be used ( recommended plain XML or SOAP)
   - Which level of security will be used ( recommended HTTPS or HTTP)
2. Partner provides list of IP's to be liberated in our firewall
3. Partner enables their firewall:
   - If FTP is used, set-up of FTP accounts and enabling incoming FTP in firewall
   - Outgoing WS to the URL's provided
4. AxisData confirms liberation of IP's.
5. Testing of connectivity and sample messages (see note below)

Note: When your IT systems team can do a telnet to xml.axisdata.net and get an empty screen, your IP has been successfully enabled. If our firewall blocks your telnet session, then "Connecting to sxml.axisdata.net...Could not open connection to the host, on port 443: Connect failed". But the empty screen might also pop-up if your firewall blocks the out-going connection. That is why your IT Systems people should do these tests… Programmers in general do not master firewalls and networks.

**Partner access to our test system (INT):**

As of v1.6 we only supply connection via https to our API's. As the connection use a different port (443), it is necessary for our customers that migrate from http to https to communicate the intention of using a secure connection, as it needs a different network grant.

**HTTP**: https://sintesb.axisdata.net/apu-test/ota

**Partner access to our production system (PROD):**

This will only be enabled after successful completion of sample test cases

**HTTP**: https://sxml.axisdata.net/apu/ota

(SOAP end-points discontinued due to overhead, message size and outdated protocol)

## 3.1 Partner identification

A request message identifies the message source through the <POS> (point of sale) tag. The mandatory attributes are shown in the example below:

```
<POS>
        <Source>
                <RequestorID Type="22" ID="TEST" ID_Context="AxisData"/>
        </Source>
        <Source>
```

```
            <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
        </Source>
</POS>
```

RequestorID Type is a Unique Identifier Type, such as an obligatory main identifier:

- 22 ERSP : Your main identifier
- 29 Booking agent Your “brand” or “sales channel”
- 88 Authentication Your user and password

Usually only ID’s 22 and 88 are used. But frequently an additional identifier (29) is also used to identify sales channels, corporative brands, etc by simply repeating the <Source> element with an additional <RequestorID>. Code 29 can be the basis for special requests regarding administrative processes like invoicing etc. (to be agreed with your accountmanager)

```
<POS>
        <Source>
            <RequestorID Type="22" ID="TEST" ID_Context="AxisData"/>
        </Source>
        <Source>
            <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
        </Source>
        <Source>
            <RequestorID Type="29" ID="BRAND" ID_Context="AxisData"/>
        </Source>
</POS>
```

| | |
|---|---|
| ID: | a unique ID assigned to this client |
| ID_Context: | always “AxisData”, indicating that the ID is defined by AxisData |
| Instance: | an AxisData defined code which identifies message format details. |

Main Identifier:
The ID of the partner determines the market in which the partner is active. If a partner is active in multiple markets for which it is likely that hoteliers provide AxisData with contracts containing different seasonality, rates and offers, multiple ID’s have to be used. The main ID determines market and portfolio, as well as currency settings.

Only one of two currency settings are possible for each RequestorID:

- One selling currency: i.e. Partner agrees to a currency (like EUR) and if a hotel contracts in the system is not in EUR, the prices will be converted to EUR.
- Contract Currency=Client Currency: i.e. partner agrees that no currency conversions take place and the partner will assume this responsability. Note: one search response (OTA_HotelAvailRS) might have a mix of currencies.

The Type number is defined by OTA:
“Type A reference to the type of object defined by the UniqueID element. Refer to OpenTravel Code List Unique ID Type (UIT)”

**Access to test system for integration**

A test system is available which we internally call INT (integration acceptance test environment). The test system has a set of 400 hotels across all destinations, refreshed on a weekly basis from production.

Access to the test system is not unique. Only one „test client“ is available. Use an easily recognizable „client reference“ and pax names to filter your test bookings.

Access:

```
<POS>
        <Source>
                <RequestorID Type="22" ID="TEST" ID_Context="AxisData"/>
        </Source>
        <Source>
                <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
        </Source>
</POS>
```

It is recommended to start the integration with the http and implement the SOAP messaging, once confident with the messages.

**Access to Production**

Once all the testcases have been successfully implemented and test results have been provided a switch to „go-live“ can be prepared. This requires coordination by HQ and the destination managers.

You will be supplied with a unique ID for the <POS> element.

Take special care on not sharing your credentials in any correspondence or attachment, unless it's requested by an integration analyst, in which case you should provide the password in an encrypted email to that person only.

## 3.2 ClientNet access

An extranet is available in Production only, where partners can view their bookings and much more. The access is:
Integration:
Production: https://client.otsglobe.com/

Note: See “ClientNet documentation” manual for further details on the extensive functionality available.

## 3.3 Specifications and Schemas

### OTA

The www.opentravel.org website is extremely helpful for your integration with our systems. Every year an „A“ and „B“ update of the specifications are provided. We do not always follow immediately to keep our interface stable, but we sometimes are ahead of the next implementation, when we propose functionality as an OTA member.

We recommend:

- Download of the latest .xsd's and installation of a graphical viewing tool like XML spy
- Use of the Model Viewer provided by PilotFish, available under specifications.
- Become a registered user to use the forum – most of your questions will be listed there!

Our schemas can be downloaded from:

http://intesb.axisdata.net:54321/apu-test/ota?wsdl
https://sintesb.axisdata.net/apu-test/ota?wsdl

We recommend to use our schemas only once to generate classes to be implemented and clean obsolete messages, elements and attributes. Do not implement automatic download of our WDSL and automatic (re)generation of classes in a productive environment.

### EDF

All the details on the official Peakwork products, including the EDF format, can be found at http://www.peakwork.com .

We recommend:

- Download of the latest .xsd's and installation of a graphical viewing tool like XML spy
- Become a registered user to get proper access to the documentation (https://documentation.peakwork.com/).

### OTDS

The OTDS format is an initiative oft he „OTDS Verein“ all information, specifications and schemas can be obtained after registration on: https://www.otds.de/en/

# 4 Error scenarios and troubleshooting

## 4.1 Error scenarios

These are the most important errors and causes that can be found in our B2B interface.

**Price**

- **Price discrepancies**
  - Case: Price retrieved from the Cache file or XML interface does not match with the price received in a quote response
  - Error received: None
  - Test steps:
    - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx, get details
    - Do a following search or quote for hotel xxx, room xxx, board xxx from yyy to yyy, price will mismatch. Take time ranges from different seasons to force the error
  - Complete error response: N/A

**Availability**

- **Max number of multi-room**
  - Case: search, quote or commit has more than 5 rooms
  - Error received:
    - Type 3
    - Code 378
    - Detail Invalid - max number of rooms (5) exceeded
  - Test steps:
    - Do a search or quote for more than 5 rooms, return error and ensure proceeding to Commit is not possible
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
EchoToken="_12345_">
<Errors>
<Error Type="3" Code="378">Invalid - max number of rooms (5) exceeded</Error>
</Errors>
</OTA_HotelResRS>
```

- **Stop sales**
  - Case: Stop sales activated after cache file was generated or after a previous search result, subsequent requests fail with a stop sales error.
  - Error received:
    - Type 3
    - Code 158
    - Detail *Stop-Sale: HOTEL_CODE-HOTEL_NAME*
  - Test steps:
    - Do a quote for hotel AMTSES0008, room BUSDDXSVA0, board SC from 2017-05-11 to 2017-05-17, stop sales will apply
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
EchoToken="_12345_">
    <Errors>
        <Error Type="3" Code="158">Stop-Sale: AMTSES0008-Garden Beach</Error>
    </Errors>
</OTA_HotelResRS>
```


- **Close Out**
  - Case: Close out activated after cache file was generated or after a previous search result, subsequent requests fail with a date restriction error.
  - Error received:
    - Type 3
    - Code_1 507
    - Code_2 508
    - Detail *NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - stay start failure*
    - Detail *NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - stay end failure*
  - Test steps:
    - Very uncommon case, if test is required it needs to be forced, contact integrations.
  - Complete error response:


```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1" EchoToken="506737044">
    <Errors>
        <Error Type="3" Code="507" Tag="STORE">
        NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - stay start failure
        </Error>
        <Error Type="3" Code="508" Tag="STORE">
        NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - stay end failure
        </Error>
    </Errors>
</OTA_HotelResRS>
```


- **Not enough availability**
  - Case: Room no longer available, last room for the specified dates sold, subsequent requests fail with an availability error.
  - Error received:
    - Type 3
    - Code 5000
    - Detail *NotAvailable. Insufficient remaining allotments*
  - Test steps:
    - Do a quote for hotel AMTSES0SDK, room RMSDDBSVA0, board HB from 2017-05-11 to 2017-05-19, availability error will be returned.
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.1" EchoToken="_1
2345_">
    <Errors>
            <Error Type="3" Code="5000" Tag="STORE">NotAvailable. Insufficient remaining
        allotments</Error>
            <Error Type="3" Code="5403" Tag="STORE">
            NotAvailable. SubAllotment: insufficient remaining allotments for requested hotel
    AMTSES0FDO, room JSSD00SVA0and board code
            </Error>
            <Error Type="3" Code="5404" Tag="STORE">
            NotAvailable. SubAllotment: insufficient remaining allotments for requested hotel
        AMTSES0FDO, room JSSD00SVA0
            </Error>
    </Errors>
</OTA_HotelResRS>
```

- **Invalid hotel code**
  - Case: hotelcode not specified or wrong code element construction
  - Error received:
    - Type 3
    - Code 392
    - Detail *Invalid hotel code*
  - Test steps:
    - Do a quote for hotel xxx, room xxx, board xxx from xxx to xxx without the HotelCode element or leaving it empty
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="2016.2">
    <Errors>
            <Error Type="3" Code="392"> Invalid hotel code</Error>
    </Errors>
</OTA_HotelResRS>
```

- **Hotel no longer available**
  - Case: Hotel no longer available, hotel not assigned to the portfolio
  - Error received:
    - Type 3
    - Code 14
    - Detail *No suitable services found*
  - Test steps:
    - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx, get details for hotel not existent, service not available error will be returned.
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
    <Errors>
            <Error Type="3" Code="14">No suitable services found</Error>
    </Errors>
```

```
</OTA_HotelResRS>
```

- **Missing room code**
  - Case: Room code not specified or not following room code element structure
  - Error received:
    - Type 3
    - Code 402
    - Detail *Invalid room type*
  - Test steps:
    - Do a quote without the RoomCode element or leaving it empty
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="2016.2">
    <Errors>
            <Error Type="3" Code="402">Invalid room type</Error>
        </Errors>
</OTA_HotelResRS>
```

- **Room no longer available**
  - Case: Room no longer available, room not available for an specific hotel
  - Error received:
    - Type 3
    - Code 14
    - Detail *Invalid service unit: ROOM_CODE. Valid unit codes for HOTEL_CODE: ROOM_CODE_LIST*
  - Test steps:
    - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx, get details
    - Do a following search or quote for hotel yyy, room xxx, board xxx from xxx to xxx, room not available error returned with a list of available rooms , use a room not available in the hotel to force the error
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
    <Errors>
            <Error Type="3" Code="14">
            Invalid service unit: APSDDM00A0. Valid unit codes for AMTSES0Z7K: APSD0000A0,
APSD0000A0, APSD00SV00, APSD00SV00, APSDIN00A0, APSDIN00A0!
            </Error>
        </Errors>
</OTA_HotelResRS>
```

- **Board code missing or wrong**
  - Case: Board code not specified or not following room code element structure
  - Error received:
    - Type 3
    - Code 115

- Detail *Invalid board basis/meal plan*
- Test steps:
  - Do a quote without the Board Code element or leaving it empty
- Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="2016.2">
    <Errors>
            <Error Type="3" Code="14">Invalid board basis/meal plan</Error>
    </Errors>
</OTA_HotelResRS>
```

- **Board no longer available**
  - Case: Board no longer available, board not available for an specific hotel and/or room
  - Error received:
    - Type 3
    - Code 14
    - Detail *Invalid board: BOARD_CODE. Valid boards for product HOTEL_CODE and unit ROOM_CODE: BOARD_CODE_LIST*
  - Test steps:
    - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx, get details
    - Do a following search or quote for hotel xxx, room xxx, board yyy from xxx to xxx, board not available error returned with a list of available boards , use a board not available for that room to force the error
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
    <Errors>
            <Error Type="3" Code="14">
            Invalid board: SC. Valid boards for product AAEFJR1WHS and unit RMCSDB00B0:
    AI,BB,FB,HB, RO
            </Error>
    </Errors>
</OTA_HotelResRS>
```

- **Not available (empty response)**
  - Case: no hotels available for specified parameters
  - Error received:
    - Type N/A
    - Code N/A
    - Detail *Empty response.*
  - Test steps:
    - Do a search for hotel AMTSES0SDK, room RMSDDBSVA0, board HB from 2017-05-11 to 2017-05-19, do a search for a single hotel, no hotel is available for the specific parameters
  - Complete error response:

```
<OTA_HotelAvailRS xmlns='http://www.opentravel.org/OTA/2003/05' EchoToken='1234' Version='2008.1'>
  <Success/>
  <Warnings>
    <Warning Type='3' Code='427'>No rooms available for requested dates</Error>
  </Warnings>
</OTA_HotelAvailRS>
```


TRANSFER


```
<OTA_GroundAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="1234" Version="0.1">
  <Success/>
  <Warnings>
    <Warning Type="3" Code="427">No services available for requested dates</Error>
    <Warning Type="3" Code="427">No services available for requested dates</Error>
  </Warnings>
</OTA_GroundAvailRS>
```


EXCURSION


```
<OTA_TourActivityAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="1234" Version="2008.1">
  <Success/>
  <Warnings>
    <Warning Type="3" Code="427">No Amenities available for requested dates</Error>
  </Warnings>
</OTA_TourActivityAvailRS>
```


- **Release error**
  - Case: Release condition not accomplished. request date is too close to the booking start date, restriction defined at room or hotel level
  - Error received:
    - Type 3
    - Code_1 515
    - Code_2 415
    - Detail_1 *NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - release time failure*
    - Detail_2 *NotAvailable. Hotel Restrictions failed: Restriction 1, DateRestriction 1 - release time failure*
  - Test steps:
    - Do a quote for hotel AMTSES0F60, 1 day prior to the start date, release error will be returned
  - Complete error response:


```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
  <Errors>
      <Error Type="3" Code="515" Tag="STORE">
      NotAvailable. Room Restrictions failed: Restriction 1, DateRestriction 1 - release time
failure
      </Error>
  </Errors>
```

```
</OTA_HotelResRS>

<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.1" EchoToken="">
    <Errors>
            <Error Type="3" Code="415" Tag="STORE">
            NotAvailable. Hotel Restrictions failed: Restriction 1, DateRestriction 1 - release time
    failure
            </Error>
    </Errors>
</OTA_HotelResRS>
```


- **Unavailable, allotment status**
  - Case: allotment status is not open, allotment is set to OnRequest, StopSale or closed
  - Error received:
    - Type 3
    - Code_1 5200
    - Code_2 5100
    - Code_3 5300
    - Detail_1 *NotAvailable. Allotment Closed*
    - Detail_2 *NotAvailable. Allotment OnRequest*
    - Detail_3 *NotAvailable. Allotment StopSale*
  - Test steps:
    - Very uncommon case, if test is required it needs to be forced, contact integrations.
  - Complete error response:


```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="b36e89a7-40ca-
414c-95a2-cb10aa62c762" Version="0.1">
    <Errors>
            <Error Type="3" Code="5200" Tag="STORE">NotAvailable. Allotment Closed</Error>
            <Error Type="3" Code="5423" Tag="STORE">
            NotAvailable. SubAllotment: allotment closed for requested hotel AMTSES0S6S, room
            RMSDDB00A0and board code
            </Error>
            <Error Type="3" Code="5424" Tag="STORE">
            NotAvailable. SubAllotment: allotment closed for requested hotel AMTSES0S6S, room
        RMSDDB00A0
            </Error>
    </Errors>
</OTA_HotelResRS>

<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.1" EchoToken="0f
b632e1401ff7ad7a24813b428e74b3">
    <Errors>
            <Error Type="3" Code="5100" Tag="STORE">NotAvailable. Allotment
        OnRequest</Error>
            <Error Type="3" Code="5413" Tag="STORE">
            NotAvailable. SubAllotment: allotment on request for requested hotel AMTSBG2AXK,
    room RMSD00000Eand board code
            </Error>
```

```
    </Errors>
</OTA_HotelResRS>

<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
    <Errors>
        <Error Type="3" Code="5300" Tag="STORE">NotAvailable. Allotment StopSale</Error>
        <Error Type="3" Code="5400" Tag="STORE">
        NotAvailable. SubAllotment: insufficient remaining allotments
        </Error>
        <Error Type="3" Code="5403" Tag="STORE">
        NotAvailable. SubAllotment: insufficient remaining allotments for requested hotel
    AMTSES0F74, room RMSDDB0000and board code
        </Error>
        <Error Type="3" Code="5434" Tag="STORE">
        NotAvailable. SubAllotment: allotment stop sale for requested hotel AMTSES0F74, room
    RMSDDB0000
        </Error>
    </Errors>
</OTA_HotelResRS>
```

**Ocupancy**

- **Pax details are incomplete**
  - Case: Pax names are missing or child age is not provided for AgeQualifyingCode 7 and 8
  - Error received:
    - Type 3
    - Code 27
    - Detail_1 *Passenger details are mandatory*
  - Test steps:
    - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx and xxx adults, get details
    - Do a following search or quote for hotel xxx, room xxx, board xxx from xxx to xxx and YYY adults, without specifying first name and/or last name.
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1" EchoToken
="506714670">
    <Errors>
        <Error Type="3" Code="27">Passenger details are mandatory</Error>
    </Errors>
</OTA_HotelResRS>
```

- **Pax can't be allocated**
  - Case: pax number is over or under the limits of the room, the room cannot hold the pax requested.
  - Error received:
    - Type 3
    - Code 14

        - Detail_1 *Invalid occupancy. No. of pax (ACTUAL_PAX_NUMBER) exceeds the maximum allowed! (MAX_PAX_NUMBER)*
        - Detail_2 *Invalid occupancy. No. of pax (ACTUAL_PAX_NUMBER) falls below the minimum required! (MIN_PAX_NUMBER)*
    - Test steps:
        - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx and xxx adults, get details
        - Do a following search or quote for hotel xxx, room xxx, board xxx from xxx to xxx and YYY adults, room can't hold that number of pax, a pax error will raise. Using single use rooms with 2 adults can force the error easily.
    - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1" EchoToken
="506714670">
    <Errors>
            <Error Type="3" Code="14">
            Invalid occupancy. No. of pax (4) exceeds the maximum allowed! (3)
            </Error>
    </Errors>
</OTA_HotelResRS>

<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1">
    <Errors>
            <Error Type="3" Code="14">
            Invalid occupancy. No. of pax (1) falls below the minimum required! (2)
            </Error>
    </Errors>
</OTA_HotelResRS>
```

- **Pax type can't be allocated**
    - Case: pax type is over or under the limits of the room, the room cannot hold the pax type requested.
    - Error received:
        - Type 3
        - Code 14
        - Detail_1 *Invalid occupancy. No. of PAX_TYPE (PAX_TYPE_NUMBER) exceeds the maximum allowed! (MAX_PAX_TYPE_NUMBER)*
        - Detail_2 *Invalid occupancy. No. of PAX_TYPE (PAX_TYPE_NUMBER) falls below the minimum required! (MIN_PAX_TYPE_NUMBER)*
    - Test steps:
        - Do a search for hotel xxx, room xxx, board xxx from xxx to xxx with xxx child, get details
        - Do a following search or quote for hotel xxx, room xxx, board xxx from xxx to xxx and YYY children, room can't hold that number of childs, a pax type error will raise. Including 2-3 childs in a room should force the error easily.
    - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.1" EchoToken="c8
db3cf6421fdbd97d6e41e1c9decda5">
    <Errors>
            <Error Type="3" Code="14">
            Invalid occupancy. No. of children (1) exceeds the maximum allowed! (0)
```

```
            </Error>
        </Errors>
    </OTA_HotelResRS>

    <OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.1" EchoToken="1c
    a197dc0962383c5b66acc0f9cf3b05">
        <Errors>
            <Error Type="3" Code="14">
            Invalid occupancy. No. of adults (1) falls below the minimum required! (2)
            </Error>
        </Errors>
    </OTA_HotelResRS>
```

- **Invalid occupancy**
  - Case: a restriction for an specific occupancy has been set, quote for that specific occupation will fail
  - Error received:
    - Type 3
    - Code 209
    - Detail *NotAvailable. Invalid Occupancy: combination of adults+children not allowed*
  - Test steps:
    - Very uncommon case, if test is required it needs to be forced, contact integrations.
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1" EchoToken
="506740574">
    <Errors>
        <Error Type="3" Code="209" Tag="STORE">
        NotAvailable. Invalid Occupancy: combination of adults+children not allowed
        </Error>
        <Error Type="3" Code="142">
        Invalid Occupancy: 3 Adult/s + 1 Child/ren are not allowed!
        </Error>
    </Errors>
</OTA_HotelResRS>
```

**Stay**

- **Searches above the máximum stay**
  - Case: stay requested in the search is over the maximum that can be provided (28 days)
  - Error received:
    - Type 3
    - Code 356
    - Detail *Searches over 99 days are not permitted*
  - Test steps:
    - Do a search for hotel xxx, room xxx, board yyy from xxx to xxx, stay is over maximum value, search will be responded with error
  - Complete error response:

```
<OTA_HotelAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="" Version="0.1"
>
    <Errors>
        <Error Type="3" Code="356">Searches over 99 days are not permitted</Error>
    </Errors>
</OTA_HotelAvailRS>
```

Note: booking is possible up to 180 nights for push clients

- **Min stay errors**
  - Case: Minimum stay condition not met, stay is lower than the minimum specified.
  - Error received:
    - Type 3
    - Code 517
    - Detail *NotAvailable. Room Restrictions failed: Restriction A_NUMBER, StayRestriction A_NUMBER - duration min. failure*
  - Test steps:
    - Do a quote for hotel AMTSES0F60, room xxx, board yyy from xxx to xxx, stay 1 night, it will be responded with error
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1" EchoToken
="107311225">
    <Errors>
        <Error Type="3" Code="517" Tag="STORE">
        NotAvailable. Room Restrictions failed: Restriction 3, StayRestriction 1 - duration min.
    failure
        </Error>
    </Errors>
</OTA_HotelResRS>
```

- **Invalid stay**
  - Case: Stay includes days not available, contract does not cover all the stay
  - Error received:
    - Type 3
    - Code 145
    - Detail *Duration period or dates incorrect*
  - Test steps:
    - Do a search or quote without start and/or end dates, leaving them empty, use a wrong format or with a start date in the past.
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="2016.2">
    <Errors>
        <Error Type="3" Code="145">Duration period or dates incorrect</Error>
    </Errors>
</OTA_HotelResRS>
```

**References**

- **Booking reference not found**
  - Case: A booking cancellation or retrieve is requested using a non-existing reference, booking cannot be found in the system.
  - Error received:
    - Type 3
    - Code 127
    - Detail *Booking reference not found*
  - Test steps:
    - Do a cancellation for a booking with an inexistent reference, booking won't be found in the system and an error will be returned
  - Complete error response:

```
<OTA_CancelRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
CancelType="Commit">
    <Errors>
            <Error Type="3" Code="127">Booking reference not found</Error>
<  /Errors>
</OTA_CancelRS>
```

- **Booking ítem not found**
  - Case: A booking cancellation or retrieve is requested using a non-existing item reference in a booking, booking item cannot be found in the system.
  - Error received:
    - Type 3
    - Code 150
    - Detail *FATAL BOOKING ERROR! Contact Support!*
  - Test steps:
    - Do a cancellation for a booking item with an inexistent reference, booking item won't be found in the system and an error will be returned
  - Complete error response:

```
<OTA_CancelRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1">
    <Errors>
            <Error Type="3" Code="150">FATAL BOOKING ERROR! Contact Support!</Error>
    </Errors>
</OTA_CancelRS>
```

  - NOTE: this specific error is raised as a FATAL error, as it means a possible mismatch between the status of the items of a booking. An immediate communication with our customer support is required.

**Credentials**

- **User authentication error**
  - Case: A request with wrong or inexistent authentication is sent, user and password validation fails and the message is rejected
  - Error received:
    - Type 3
    - Code_1 175
    - Code_2 182
    - Detail_1 *Username or Password invalid*
    - Detail_2 *Username and Password required*
  - Test steps:
    - Do a request using either an invalid user + password values or without the authentication section, an error response will be returned according to the case
  - Complete error response:

```
<OTA_HotelAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1">
<Errors>
<Error Code="175" Type="3">Username or Password invalid</Error>
</Errors>
</OTA_HotelAvailRS>

<OTA_HotelAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1">
<Errors>
<Error Type="3" Code="182">Username and Password required</Error>
</Errors>
</OTA_HotelAvailRS>
```

- **Invalid ClientID**
  - Case: A request with wrong credential (ClientID) is sent, system rejects the message as partner is not configured in the system
  - Error received:
    - Type 3
    - Code 305
    - Detail *Invalid client code*
  - Test steps:
    - Do a request using either an invalid user + password values or without the authentication section, an error response will be returned according to the case
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="0.10"
EchoToken="_12345_">
    <Errors>
            <Error Type="3" Code="305">Invalid client code</Error>
    </Errors>
</OTA_HotelResRS>
```

**Miscellaneous**

- **Room no longer in contract during contract update**
  - Case: Room no longer available for the contract, room not available for an specific hotel but was previously included
  - Error received:
    - Type Internal-Error
    - Code 7001
    - Detail *NotAvailable. Hotel EDF not found*
  - Test steps:
    - Not applicable, internal error occurring in between contract updates
  - Complete error response:

```
<OTA_HotelResRS xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="_12345_" Versio
n="0.10">
    <Errors>
            <Error Type="Internal-Error" Code="7001" Tag="STORE">NotAvailable. Hotel EDF not
        found</Error>
    </Errors>
</OTA_HotelResRS>
```

- **Data structure**
  - Case: Request XML is not well-formed
  - Error received:
    - Type N/A
    - Code N/A
    - Detail *OTA request validation failed. ERROR_DETAIL_DESCRIPTION*
  - Test steps:
    - N/A, general validation errors should be here.
  - Complete error response:

```
<OTA_HotelAvailRS xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="0-
0/0" Target="Production" Version="2006">
    <Success>false</Success>
    <Error>OTA request validation failed. No guests found.</Error>
    <RoomStays/>
</OTA_HotelAvailRS>
```

## 4.2 Troubleshooting

**Product related issues**

Product and mapping related scenarios. This section includes details of properties, areas and mapping.

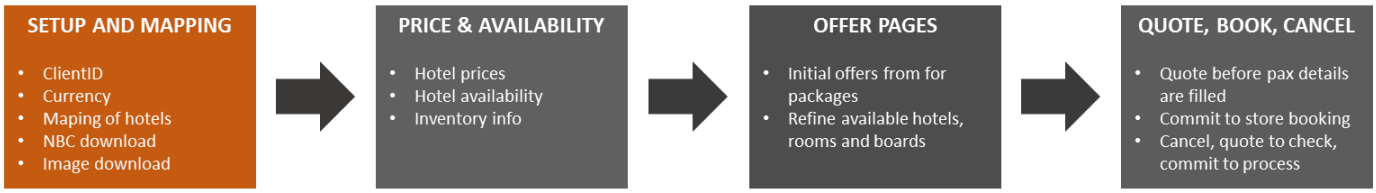


- I can't see a property in our system
    - Cause: Property is not assigned to this feed but to another feed
    - Action: Check you are using the correct feed for that market
    - Cause: Property is not mapped in your system
    - Action: Contact with your product manager to map it
    - Cause: Property is not assigned to your feed
    - Action: Contact with your account manager in OTS
- I can't find details of a property in our system (images, descriptions)
    - Cause: Property was not fully mapped or had a mapping error
    - Action: Contact your product manager/IT
    - Cause: Some concepts are not included in the NBC message
    - Action: Contact Axisdata Integrations
    - Cause: property is on sale but NBC was not mapped yet
    - Action: Contact your product manager/IT

- Some details of a property are incorrect or different from what I got via other systems
    - Cause: Property was incorrectly mapped
    - Action: Check the property to ensure it was correctly identified
    - Cause: Property has outdated data in OTS
    - Action: Contact OTS NBC
    - Cause: Property has outdated data in your/other systems
    - Action: Contact your product manager
- I can’t find an specific area in our system
    - Cause: Area was incorrectly mapped
    - Action: Check the area to property mapping to ensure it was correctly identified
    - Cause: Area name has changed in OTS, property-area mapping failed
    - Action: Contact OTS NBC
- I can’t find a property under an specific area
    - Cause: Property was incorrectly mapped
    - Action: Check the property to ensure it was correctly identified
    - Cause: Property has outdated data in OTS
    - Action: Contact OTS NBC
    - Cause: Property has outdated data in your/other systems
    - Action: Contact your product manager
- I have a property located in a wrong area
    - Cause: Area was incorrectly mapped
    - Action: Check the area to property mapping to ensure it was correctly identified

**Search related isues**

Search related scenarios. This sections covers issues when a search is performed for both data retrieved from our cache and live requests.

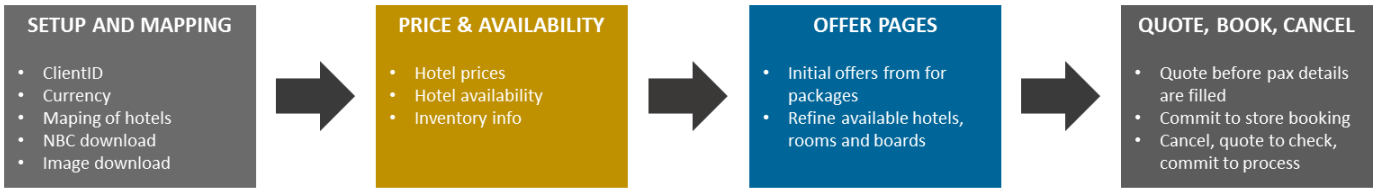


- I can't get results for an specific property
    - Cause: Property does not have enough allotment or it's in Stop sales
    - Action: Select another property or dates
    - Cause: Property is not assigned to this feed but to another feed
    - Action: Check you are using the correct feed for that market
    - Cause: Requested stay is over the maximum defined by OTS (55 days)
    - Action: This request can't be processed
- I get an specific property in a search response but it fails when I try a quotation
    - Causes:
        - Pax ages are different in the search request than in the quote request. Children might be considered as adults, this causes occupancy error
        - Allotment was consuming during the search to quote step
        - Property/room/board was closed/stop sales during the search to quote step
    - Action: Property not available for the requested parameters, start a new search
    - Causes:
        - Allotment was consuming since the cache file delivery (old cache)
        - Property/room/board was closed/stop sales since the cache file delivery (old cache)
    - Action: Property not available for the requested parameters, choose a different option
- I get results only for high occupancies (bypassing the cache file)
    - Cause: Property was included recently, a cache file was not delivered yet
    - Action: Wait for the cache file to be delivered

**Booking related scenarios**

Quote, book and cancellation related scenarios. This section covers all issues related to the booking process

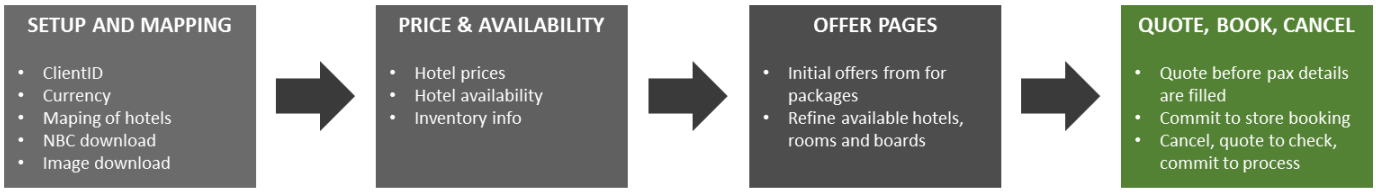


- I can't book a property from which I got a favorable quotation (initial quotes)
    - Causes
        - Allotment was consuming during the quote to book step
        - Property/room/board was closed/stop sales during the quote to book step
    - Action: verify data with a new quotation. If a quote is returned ok and an immediate book do fail contact integrations
    - Cause: A network issue prevented the request or the response to reach destination in time
    - Action: verify the status of the booking in the ClientNet

- I can't cancel a booking, I got an error indicating the reference does not exist
    - Causes
        - Reference is incorrect
        - Booking was not stored
    - Action: Contact customer support

- I get a price difference between my search result and my quotation result
    - Causes:
        - Price may have been changed in the last minutes
        - Pax ages are different in the search request than in the quote request. Children might be considered as adults
    - Action: Property not available for the requested parameters, choose a different option

# 5 Versions

| Date | Version | Name | Revision |
|---|---|---|---|
| 20/10/2015 | 1.0 | Alberto Palmer, Sam Jaarsma | • Initial version<br>• Added B2B secure endpoints<br>• Added HTTPS support in client extranet |
| | 1.1 | Alberto Palmer, Sam Jaarsma | • Authentication added |
| 11/10/2017 | 1.2 | Alberto Palmer | • WSDL endpoint updated<br>• Added error scenarios and troubleshooting<br>• ACCT environment replaced with INT environment<br>• Extranet replaced with ClientNet |
| 15/01/2019 | 1.3 | Alberto Palmer | • Troubleshooting scenarios reviewed |
| 27/04/2021 | 1.4 | Alberto Palmer and Sam Jaarsma | • Adding warning message for empty result |
| 26/09/2022 | 1.5 | Sam Jaarsma | • Added some additional error codes in error scenarios. |
| 28/02/2023 | 1.6 | Sam Jaarsma<br>Alberto Palmer | • Removed http end-points, only https remain<br>• Sunset SOAP protocol (remains available for backwards compatibility)<br>• Added phrase for passwords via email only with encryption<br>• Added OTDS reference |