OTA Communication Model

Contents

1 Introduction 9
2 Mapping, Basic data, content and amenities 10
2.1 OTA_HotelDescriptiveInfoRQ/RS 10
Standard approach 11
Obtaining full product list via web service („HotelList“) 11
Information included in the response 12
Obtain data for multiple Client IDs 12
Setting the language 13
Include a list or all languages 15
Search by GeoCodes 16
Delta communications 16
Some detail on OTA_HotelDescriptiveInfoRS 17
Hygiene facts 21
Incidents and Errata 24
Restrictions 24
Geographical location information 25
Image download 25
use HEAD to get metadata for images before the GET 27
DRV codes 28
Templates 29
STOCK Template 29
SUMMARY Template 31
2.2 OTA_HotelDescriptiveInfo push 36
3 Real-time messages 37
3.1 Languages 37
3.2 Currencies 37
3.3 Searching 38
3.4 Booking 38
3.1 InSeries 39
3.2 Cancelling 39
3.3 Master and Child references 40
3.4 Non Refundable rooms 45
3.5 Offer Tags and Extras 45
3.6 Vendor messages 45
3.7 Message compression 47
3.8 Incorrect message 47
3.9 Invalid or non processable information 47

3.10 Provider Identification ... 48
3.11 Transaction control ... 48
3.12 Ghost bookings ... 48
3.13 Packaging ... 49
Pre Package ... 49
Dynamic Package ... 50
3.14 Price Breakdown ... 50
3.15 Payment identification ... 53
3.16 Date/time formats ... 54
4 Hotel search and book messages ... 55
4.1 Rateplan options ... 55
Rateplan options for multi-contracting and simple packages ... 57
4.2 OTA_HotelAvailRQ – basic content ... 58
4.3 Search response room-board-rateplan inclusions options ... 60
OTA_HotelAvailRQ/RS MF0x2 – cheapest Room/Board/Rateplan combination per hotel 60
OTA_HotelAvailRQ/RS MF0x1 – All available Room/Board/Rateplan combinations per hotel ... 61
OTA_HotelAvailRQ/RS MF0x3 – All available Room/Board with only 4 refund Rateplan combinations per hotel ... 61
OTA_HotelAvailRQ/RS MF0x4 – All available Room/Board with only 2 refund Rateplan combinations per hotel ... 62
4.4 OTA_HotelAvailRQ – hotel list or geographical definition ... 64
OTA_HotelAvailRQ – hotel list ... 66
OTA_HotelAvailRQ – geographical list ... 67
OTA_HotelAvailRQ – geographical definition ... 67
4.5 Flexible search options ... 69
Search up to 3 months, for a stay of 7 nights ... 69
Search up to 3 months, for a stay of 5, 6 and 7 nights ... 70
Search up to 3 months, with DOW restriction ... 71
Calendarview ... 71
Calendar view, DOW restriction ... 72
Best price for one property across a whole year ... 72
Calendar view and best price logic for multiple room requests ... 73
4.6 Number of bookable options in Search response ... 75
4.7 Search by hotel name ... 75
4.8 Upfront filtering features ... 76
4.9 Multiple room searches ... 77
4.10 OTA_HotelAvailRS ... 81
4.11 Search response enrichment ... 83
Segmentation ... 88
Free cancellation up to tags in search results ... 89
4.12 Response times and proceeding to the reservation ... 90
4.13 On Request availability and bookings – planned Q4/2021 ... 90
4.14 Reservation OTA_HotelResRQ/RS – Services ... 93

4.15 Reservation OTA_HotelResRQ/RS - Quote request 93
Cancellation policies 96
4.16 Booking Request 96
Customer details 96
Partner reference 98
Handling Office 98
Comments 99
Expected booking value 99
Early booking discount – due date and pre-payment value 100
Price and cancellation Breakdown 100
Multiple room bookings 102
Transfer (old model) 103
Flight times, numbers and date changes 103
Car Package 109
4.17 Optional Extras 109
4.18 Booking Modifications 111
Minor changes 112
Major changes 115
5 Transfer search and book messages 118
Simple transfer search 119
Multiple legs and overnight flights 119
Transfer portfolio 119
5.1 OTA_GroundAvailRQ 121
Services and locations 123
Geo codes 125
Passengers and ages 127
Vehicles 127
Examples 128
5.2 OTA_GroundAvailRS 130
Services and vehicles 132
Rates and fees 133
Cancellation fees 133
Per resort searches 134
Extras 134
Examples 134
5.3 OTA_GroundBookRQ 137
Quote and commit 137
Locations 138
Service 138
Passengers and ages 139

Partner reference 140
Default service 140
Extras 140
Flight Info 141
Examples 141
5.4 OTA_GroundBookRS 143
Service and pricing 144
Partner and Axisdata references 144
Meet and greet 144
Cancellation rules 145
Extras 146
Examples 146
6 Excursion search and book messages 148
6.1 OTA_TourActivitySearchRQ 148
Location 149
Rate Delimiter 150
Date and Time Preferences 150
Category Preferences 150
Language preferences 150
Availability Notification 150
Example 151
6.2 OTA_TourActivitySearchRS 151
Service ID 152
Schedule 154
Categories 154
Description 154
Facts 154
Location 155
Cancellation rules 155
Participant rules 155
Expected Rates 155
Example 155
6.3 OTA_TourActivityAvailRQ 158
All services and cheapest service 158
Location 159
Schedule 159
Participants and ages 159
Rate Delimiter 159
Maximum responses inclusion 159

Examples 160
6.4 OTA_TourActivityAvailRS 162
Service ID 163
Schedule 163
Categories 163
Description 164
Location 164
Rates 164
Pickup and dropoff 164
Extras 166
Examples Cheapest service per ticket/excursion response (MF002) 166
6.5 OTA_TourActivityBookRQ 170
Quote and Commit 171
Service ID 172
Participants and ages 172
Schedule 173
Expected Rates 173
Partner reference 173
Extras 173
Examples 174
6.6 OTA_TourActivityBookRS 174
Service ID and Location 176
Participants 176
Rates 176
Partner and Axisdata references 176
Cancel penalties 177
Extras 177
Examples 178
7 Product search and book messages 180
7.1 OTA_ProductSearchRQ 181
Location 181
Example 182
7.2 OTA_ProductSearchRS 183
Basic Info 183
Schedule 184
Categories 184
Description 184
Multimedia 185
Location 186

PickUp time 187
Participant rules 187
Rates 187
Example 187
7.3 OTA_ProductAvailRQ 191
Location 191
Schedule 192
Participants and ages 192
Example 192
Example 193
7.4 OTA_ProductAvailRS 194
Basic Info 195
Schedule 195
Categories 195
Description 195
Location 195
Rates 196
Pickup and dropoff 196
Example 196
7.5 OTA_ProductBookRQ 197
Quote and Commit 197
Service ID 198
Participants and ages 198
Schedule 198
Partner reference 198
Examples 199
7.6 OTA_ProductBookRS 200
Service ID 201
Participants 201
Location and Pickup and Dropoff 201
Rates 201
Partner and Axisdata references 202
Example 202
8 Booking cancellations 204
Cancellation Quote Request 205
9 Booking search and retrieve 207
9.1 Search bookings 207
9.2 Retrieve booking list 210
9.3 Retrieve booking details 211
9.4 Retrieve enrichment 214

10 Checking connectivity 219
11 Appendix A Hotel codes 221
12 Appendix B Hotel Rating codes 221
13 Appendix C Hotel Room codes 222
14 Appendix D Hotel Board code 235
15 Appendix E Vehicle codes 236
16 Appendix F Car codes 237
17 Appendix G Excursion Category codes 239
18 Appendix H Excursion Type codes 240
19 Appendix I Excursion Service codes 241
20 Excursion SupplierProductCode 242
21 Appendix J Price Breakdown codes 243
22 Appendix K RatePlan Codes 243
23 Appendix L Hotel segmentation 244
24 Appendix M Activity codes 245
25 Appendix N Custom Type code definition 247
26 Appendix M Stock Types 248
27 Versions 250

1 Introduction

This document covers all the real time messages needed for the Mapping, searching and booking flow. It covers all the realtime messages needed for both push and pull models.

All the basic definitions of the push-pull models as well as the OTA definitions (XSD and WSDL) can be found in the Axisdata Integration Documentation.

The OTA format is defined and maintained by the Open Travel Alliance and it was updated twice a year with an "A" and "B" revision, until 2017. The OTA specification can be downloaded from their website which also contains several very useful utilities like the OpenTravel Model Viewer (https://opentravel.org/).

This document should be used together with our generic "Axisdata Integration Documentation" and our Postman collection of message examples.

Take special care on not sharing your credentials in any correspondence or attachment, unless it's requested by an integration analyst, in which case you should provide the password in an encrypted email to that person only.

TravelKiss architecture and distribution – high-level

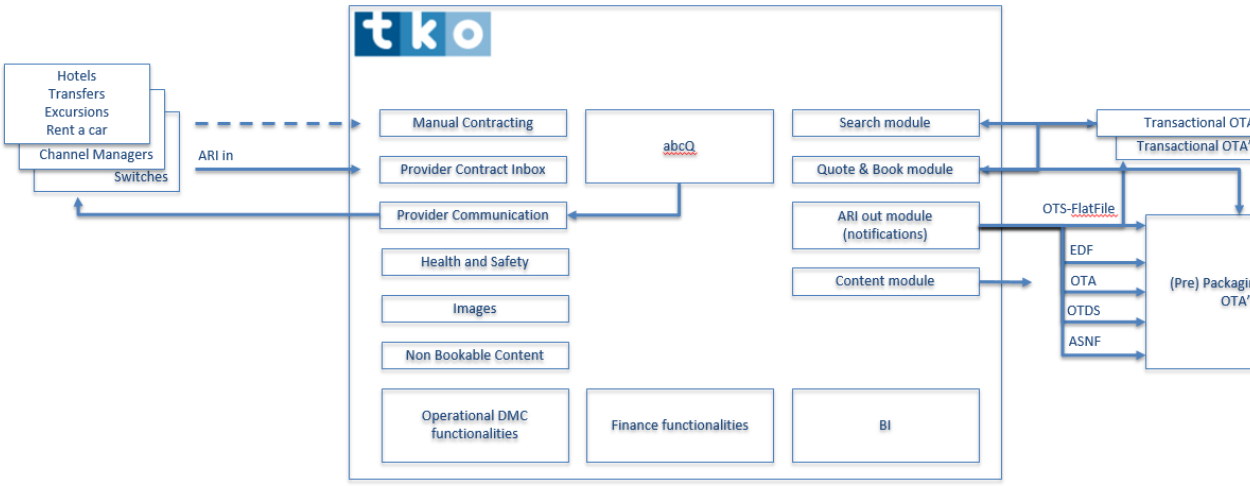

2 Mapping, Basic data, content and amenities

The mapping process requires an interactive and highly automated „matching application“ on the partner side to quickly turn-around product changes.

The following steps are envisaged:

- Display portfolio changes and decide whether to incorporate the new hotel/room/service - map the rooms and services: OTA_HotelInvNotifRQ/RS “HotelList” and “Delta”
    - Hotel codes (see appendix)
    - Room codes (see appendix)
    - Board codes (see appendix)
    - Car codes (see appendix)
    - Extras and other services
    - Amenities
    - Date ranges and rules
- Map the hotel: OTA_HotelDescriptiveInfoRQ/RS with various switches
    - With Address, GIATA code only
    - With location codes (Country, Destination, Region, Resort, Touristic destination)
    - With factsheets
    - With multimedia (image location)

- See also OTA_HotelDescriptiveInfo Summary option
- Either rates and availability is loaded to facilitate packaging and searches (Notification based model)
- Or the search module is enabled to pass searches to AxisData systems (Transactional model)

NOTE: The OTA_HotelDescriptiveInfo message with switch ContactInfo SendData="true" replaces the downloadable “portfolio.csv”, in use up to now to obtain basic hotel data. The provision of portfolio, CSV via FTP will not be stopped for current implementations.

2.1 OTA_HotelDescriptiveInfoRQ/RS

The OTA_HotelDescriptiveInfoRQ/RS can be requested by partners to update their database with the most recent data. Several switches are available to include specific elements.
Its purpose is to provide all required information about the property in order to map adequately to customer object information. Provide descriptive information regarding features as contracted, to avoid end-customer claims regarding location, services, features and amenities. To facilitate hotel mapping, allocation of hotels to location trees, mapping of rooms and boards. Provide a download once, display many times image base.

NBC stands for “Non Bookable Content” and includes all static data, facts, descriptive texts and images the destinations sign with the hotel. The OTA_HotelDescriptiveInfoRQ/RS can be

requested with different switches to download this information. Please refer to the sample RS included to this documentation to see the results (they are quite extensive)

Standard approach

The standard procedure is to download the list of hotels assigned to your feed(s) and then download the details and descriptions in the languages required for each hotel in an individual request. There is a delta mechanism to only get the list of changed properties on your feed, since the last download. This allows for a short time to market – i.e. turn-around of new/changed properties on a daily basis. New hotels quickly on-sale and content error corrections or updates resolved the next day.

If you want to correctly assign different portfolios of hotels to specific feeds, we recommend:

- Run hotel-list for all feeds in one RQ specifying all feeds in the BrandCode element, separated by pipes.
- Run the detail for each hotel in all languages required
- Run the hotel-list for each feed separately with just the one BrandCode specified and allocate the returned hotels to the specific feed.

The TravelKISS platform allows the destination offices to register descriptive information in a structured manner and maintain the updates on a seasonal frequency. The HotelDescriptiveInfo has several switches to provide partners with exactly that information, which is required for the actual process in their workflow and the display of selected/mapped elements according to the structure of the distribution channel.

Obtaining full product list via web service („HotelList“)

Retrieving the full product list is supported, but you have to request this without any details (SendData=”false”, …). As the enabled switches increase the cost of processing, this will only work with all switches set to false. Depending on the number of hotels available for a partner, only 100 hotels will be returned, unless all switches are set to „false“. NB: there is one exception, it is also allowed to set all the values to “false”, except AffiliationInfo = “true”. Example of message to retrieve full hotel list in one response:

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2009.1"
PrimaryLangID = "EN" AltLangID = "EN">
 <POS>
  <Source>
   <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
 </POS>
 <HotelDescriptiveInfos>
  <HotelDescriptiveInfo BrandCode = "TEST">
   <ContactInfo SendData = "false"/>
   <HotelInfo SendData = "false"/>
   <AreaInfo SendRefPoints = "false"/>
   <AffiliationInfo SendAwards = "false"/>
   <MultimediaObjects SendData = "false"/>
  </HotelDescriptiveInfo>
```

```
 </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ>
```

The client portfolio example - contains only basic hotel data:

```
<OTA_HotelDescriptiveInfoRS
   xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-881/881"
Version="2009.1">
   <Success></Success>
   <HotelDescriptiveContents>
      <HotelDescriptiveContent HotelCode="AGRKLXAZ02" HotelCodeContext="40435"
HotelName="Nafplia Palace Hotel and Villas" LanguageCode="EN" RPH="1"></HotelDescriptiveContent>
      <HotelDescriptiveContent HotelCode="AUSNYCB6D4" HotelCodeContext="21489"
HotelName="Shelburne Hotel &amp; Suites by Affinia" LanguageCode="EN"
RPH="2"></HotelDescriptiveContent>
      <HotelDescriptiveContent ChainName="Accor" HotelCode="ACAYQBBGOY"
HotelCodeContext="16048" HotelName="Fairmont Le Chateau Frontenac" LanguageCode="EN"
RPH="3"></HotelDescriptiveContent>
…
   </HotelDescriptiveContents>
</OTA_HotelDescriptiveInfoRS>
```

Note: Giata code is provided in the element: HotelCodeContext = "1000001". A Giata/TTI license is required to make use of these codes.

Information included in the response

Following enrichment filters have effects. If any of those exists or is not ‘false’, the default value ’true’ is applied according to the following logic:

- HotelInfo – The elements “descriptions” and “services” with @SendData= “false”
- ContactInfo – the address information of hotel is omitted if @SendData=“false”
- AreaInfo – The geographical location information is omitted if @SendRefPoints=“false”
- AffiliationInfo – The start rating is ommited if @SendAwards=“false”
- MultimediaObjects – Image information is omitted if @SendData=“false”

Obtain data for multiple Client IDs

Clients with multiple client ID’s can request product of several clients using one request. To create a multi client request, the attribute BrandCode must contain all the Client ID’s split with | character. Any hotel assigned to at least one of the Client Id’s requested, will be returned in the response.

Example RQ:

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version =
"2009.1" PrimaryLangID = "EN" AltLangID = "EN">
 <POS>
  <Source>
   <RequestorID Type = "22" ID = "TST1" ID_Context = "AxisData"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TST1" MessagePassword = "testpass"/>
```

```
  </Source>
 </POS>
 <HotelDescriptiveInfos>
  <HotelDescriptiveInfo BrandCode = "TEST|TST1">
   <ContactInfo SendData = "false"/>
   <HotelInfo SendData = "false"/>
   <AreaInfo SendRefPoints = "false"/>
   <AffiliationInfo SendAwards = "false"/>
   <MultimediaObjects SendData = "false"/>
  </HotelDescriptiveInfo>
 </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ>
```

Setting the language

Example message to provide all information available for one hotel in Portuguese language, always keep the AltLangID attribute to EN, to receive non-translated concepts in the English language.

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2009.1"
PrimaryLangID = "EN" AltLangID = "EN">
 <POS>
  <Source>
   <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
 </POS>
 <HotelDescriptiveInfos>
  <HotelDescriptiveInfo HotelCode = "AGRKLXAZ02" BrandCode = "TEST"/>
 </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ>
```

Which would return (note Raw text and encoding):

```
<OTA_HotelDescriptiveInfoRS
  xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-1/1" Version="2009.1">
  <Success></Success>
  <HotelDescriptiveContents>
    <HotelDescriptiveContent HotelCode="AGRKLXAZ02" HotelCodeContext="40435"
HotelName="Nafplia Palace Hotel and Villas" LanguageCode="PT" RPH="1">
      <HotelInfo>
        <CategoryCodes>
          <SegmentCategory Code="20" CodeDetail="Hotel"></SegmentCategory>
          <GuestRoomInfo Code="42" CodeDetail="BUDL0000Q0">
            <DescriptiveText>Deluxe Bungalow (Piscina-Terraço Compartilhado)</DescriptiveText>
          </GuestRoomInfo>
          <GuestRoomInfo Code="42" CodeDetail="BUDL00SV00">
            <DescriptiveText>Deluxe Bungalow (Vista Mar)</DescriptiveText>
          </GuestRoomInfo>
          <GuestRoomInfo Code="42" CodeDetail="RM00DBSV00">
            <DescriptiveText>Double Quarto (Vista Mar)</DescriptiveText>
```

```
        </GuestRoomInfo>
        <GuestRoomInfo Code="42" CodeDetail="RMLX00SV00">
          <DescriptiveText>Luxury Quarto (Vista Mar)</DescriptiveText>
        </GuestRoomInfo>
        <GuestRoomInfo Code="42" CodeDetail="VI000000P0">
          <DescriptiveText>Villa (Piscina-Terraço Privado)</DescriptiveText>
        </GuestRoomInfo>
        <GuestRoomInfo Code="42" CodeDetail="VIPM00SV00">
          <DescriptiveText>Premium Villa (Vista Mar)</DescriptiveText>
        </GuestRoomInfo>
        <GuestRoomInfo Code="42" CodeDetail="VIPM00SVP0">
          <DescriptiveText>Premium Villa (Vista Mar, Piscina-Terraço Privado)</DescriptiveText>
        </GuestRoomInfo>
      </CategoryCodes>
      <Descriptions>
        <DescriptiveText>Descrição geral:
```


O hotel Nafplia Palace Hotel and Villas está situado a cerca de 1 km de Nafplio. A praia mais próxima fica nas proximidades do hotel. Existe um supermercado a cerca de 500 m. O hotel também se encontra a cerca de 500 m dos bares e restaurantes mais próximos. As seguintes atrações turísticas são acessíveis a partir do hotel: Palamidi Fortress e Bourtzi. Para uma maior mobilidade durante as férias, existe um serviço de aluguer de viaturas e uma praça de táxis e uma paragem de autocarros a cerca de 500 m. O Aeroporto (KLX) fica a cerca de 139 km. Existe um serviço de transporte entre o hotel e o aeroporto (taxa extra).

Equipamento:
O hotel boutique de 5 estrelas com 2 andares composto por um edifício principal e um edifício anexo e dispõe de 84 quartos. Os hóspedes dispõem de uma receção aberta 24 horas (check-in a partir das 14:00 horas, check-out até às 12:00 horas), um lobby com bar, um elevador, ar condicionado, um cofre (gratuito), uma loja e um parque de estacionamento (gratuito). Usufrua dos serviços de 2 restaurantes buffet focados no seu conforto e bem-estar físico. Confraternize num dos 3 bares em funcionamento e inicie a noite num ambiente descontraído. Os hóspedes podem usar gratuitamente a rede sem fios. O Hotel oferece ainda uma sala de conferência com um total de 150 lugares sentados. A limpeza de quartos e o serviço de concierge são gratuitos. O serviço de quartos, de lavandaria e de engomadoria estão disponíveis por uma taxa. A pedido, disponibilizamos serviços de despertar matinal a cargo do pessoal do hotel.

Piscina:
Na área exterior, o hotel dispõe de uma piscina de água doce. No local, são disponibilizados espreguiçadeiras e chapéus-de-sol gratuitamente. Relaxe no bar da piscina com uma bebida refrescante.

Comida:
Pequeno-almoço (07:30 - 10:00 horas) no buffet.

Informações adicionais:
Os serviços adicionais ao nível de comodidades ou atividades, podem ser sujeitos ao pagamento de taxas. A prestação de alguns serviços depende das condições climáticas locais e da época do ano. Idiomas de serviço: Alemão e Inglês. Cartões de crédito: Euro/MasterCard e Visa.

Deluxe Bungalow (SeaView):
Os quartos são equipados com cama dupla, sofá-cama como cama extra, berço de bebé (gratuito), varanda ou terraço, minibar (event. sujeito ao pagamento de uma taxa), internet (gratuita), cofre (gratuito), TV de ecrã plano via satélite, ar condicionado controlado individualmente.

Double Room (SeaView):
Os quartos são equipados com cama dupla, sofá-cama como cama extra, berço de bebé (gratuito), varanda ou terraço, minibar (event. sujeito ao pagamento de uma taxa), internet (gratuita), cofre (gratuito), TV de ecrã plano via satélite, ar condicionado controlado individualmente.

Premium Villa (SeaView):
Os quartos são equipados com cama dupla, sofá-cama como cama extra, berço de bebé (gratuito), varanda ou terraço, minibar (event. sujeito ao pagamento de uma taxa), internet (gratuita), cofre (gratuito), TV de ecrã plano via satélite, ar condicionado controlado individualmente.

Premium Villa (SeaView, Private-PoolTerrace):
Os quartos são equipados com cama dupla, sofá-cama como cama extra, berço de bebé (gratuito), varanda ou terraço, minibar (event. sujeito ao pagamento de uma taxa), internet (gratuita), cofre (gratuito), TV de ecrã plano via satélite, ar condicionado controlado individualmente.

```
</DescriptiveText>
        </Descriptions>
        <Position Latitude="37.56453" Longitude="22.794558"></Position>
        <Services>
          <Service CodeDetail="Board" ID="BB">
            <DescriptiveText>Pequeño-Almoço</DescriptiveText>
          </Service>
…
        </Services>
…
    </HotelDescriptiveContent>
  </HotelDescriptiveContents>
</OTA_HotelDescriptiveInfoRS>
```

Include a list or all languages

To include all available languages (currently 20) a “*” can be set for the PrimaryLangID attribute. This will result in a repetition of HotelDescriptiveContent element for each language with all the information where, in fact, only the description, the room name and the board name are relevant.

Example RQ and RS snippets:

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2009.1"
PrimaryLangID = "*" AltLangID = "EN">
…

<OTA_HotelDescriptiveInfoRS
  xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-1/1" Version="2009.1">
  <Success></Success>
  <HotelDescriptiveContents>
    <HotelDescriptiveContent HotelCode="AESPMIBVD2" HotelName="Ca n'Alexandre"
LanguageCode="EN" RPH="1">
…
    <HotelDescriptiveContent HotelCode="AESPMIBVD2" HotelName="Ca n'Alexandre"
LanguageCode="DE" RPH="1">
..
    <HotelDescriptiveContent HotelCode="AESPMIBVD2" HotelName="Ca n'Alexandre"
LanguageCode="ES" RPH="1">
..
```

It is also possible to include a specific list of languages to be included:

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version =
"2009.1" PrimaryLangID = "EN|DE|FR|IT" AltLangID = "EN">
```

Search by GeoCodes

The search by GeoCodes functionality provides a way to retrieve a collection of hotels located in the area specified in the request.

To indicate the desired area, latitude and longitude must be provided in the request as well as the radius. Latitude and longitude must meet ISO 6709 standard (http://en.wikipedia.org/wiki/ISO_6709), radius is expressed in meters. In case radius is not provided, a default of 200m will be used. MaxResponses attribute can be used to define the maximum number of hotels to be retrieved in the response; a value of 10 will be used as default value. The sorting in the response is by distance from the requested location. Conclusively, if the MaxResponses limits the number of included results, these are the closest results.

Example RQ for max 3 results in 200 mtrs radius:

```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" MaxResponses = "3"
PrimaryLangID = "EN" AltLangID = "EN">
 <POS>
  <Source>
   <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
 </POS>
 <HotelDescriptiveInfos>
  <HotelDescriptiveInfo BrandCode = "TEST">
   <HotelInfo SendData = "false"/>
   <AreaInfo SendRefPoints = "false"/>
   <ContactInfo SendData = "false"/>
   <MultimediaObjects SendData = "false"/>
   <ContentInfos>
    <ContentInfo Code = "GeoLatitude" Name = "40.4157"/>
    <ContentInfo Code = "GeoLongitude" Name = "-3.7002"/>
    <ContentInfo Code = "GeoRadius" Name = "200"/>
   </ContentInfos>
  </HotelDescriptiveInfo>
 </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ>
```

Delta communications

OTA_HotelDescriptiveInfoRQ can be requested to provide hotels that have been modified since a specified timestamp. To request last modified hotels, message must include a timestamp value in the LastUpdateTime attribute. This timestamp will filter hotels to retrieve the ones with any modification post the provided date. It is recommended to provide a timestamp value with 3 hours less than last update to ensure no time zones and unsynchronized time systems affect the filter. Hotels that did not suffer a static data update, but had a related contract update for any market, will also be included as it is possible rooms, board or occupancies were updated.

```
<OTA_HotelDescriptiveInfoRQ LastUpdateDate="2019-08-08T18:00:00" Version="2009.1"
xmlns="http://www.opentravel.org/OTA/2003/05">
```

HotelDescriptiveInfoRS will include only the filtered hotels. Last modification date time of the hotel can be found in the HotelDescriptiveContent element. Last modification date time is returned even if a delta communication is not requested, a full communication will include the last modification date time of each hotel.

```
<HotelDescriptiveContent HotelCode=" AAUTO1BCW " HotelName="Auto Test Hotel"
HotelCodeContext="880881" LastModifiedDate="2019-08-08T18:59:51">
```

Some detail on OTA_HotelDescriptiveInfoRS

The number of hotels included in the response is mentioned in the TransactionIdentifier attribute.

```
<OTA_HotelDescriptiveInfoRS
  xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-881/881"
Version="2009.1">
```

The data is stored in a hierarchy in below example, grouped to “Location”, “Airport”, the first airport specific to this hotel “LD_AIRPORT1”. Each service is specified separately, so customers are not required to match our structure. The hierarchy is provided in codes and texts, separated by pipes (“|”).

```
<Service CodeDetail="LOCATION|AIRPORT|LD_AIRPORT1|AIRPORT">
                <Features>
                        <Feature CodeDetail="Airport:">
                                <DecriptiveText>FAO</DecriptiveText>
                        </Feature>
                </Features>
                <DecriptiveText>Locations &amp; Distances|Airport|Airport
1:|Airport:</DecriptiveText>
        </Service>
        <Service CodeDetail="LOCATION|AIRPORT|LD_AIRPORT1|DISTANCE">
                <Features>
                        <Feature CodeDetail="Distance (ca.):">
                                <DecriptiveText>40 km</DecriptiveText>
                        </Feature>
                </Features>
                <DecriptiveText>Locations &amp; Distances|Airport|Airport 1:|Distance
(ca.):</DecriptiveText>
        </Service>
        <Service CodeDetail="LOCATION|AIRPORT|LD_AIRPORT1|TRFTIME">
                <Features>
                        <Feature CodeDetail="Transfer Time (ca.):">
                                <DecriptiveText>45 min</DecriptiveText>
                        </Feature>
                </Features>
                <DecriptiveText>Locations &amp; Distances|Airport|Airport 1:|Transfer Time
(ca.):</DecriptiveText>
</Service>
```

Another example regarding the beach and pool under the chapters “Bathing Facilities”, “Beach” or “Swimming Pool”:


```
<Services>
	<Service CodeDetail="HOTELTYPE|GENERAL|BEACH_HOTEL|">
		<DescriptiveText>Hotel Type|General|Beach Hotel|</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|BEACH|BF_BEACH|BEACHNATURE">
		<Features>
			<Feature CodeDetail="Beach Type:">
				<DescriptiveText>sand</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Bathing Facilities|Beach|Beach Type:|Beach
Type:</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_CLUBHOUSE|">
		<DescriptiveText>Bathing Facilities|Swimming Pool|Clubhouse at
Pool|</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_DECKCHAIRPOOL|ISONCHARGE">
		<Features>
			<Feature CodeDetail="Charge Type:">
				<DescriptiveText>free of charge</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Bathing Facilities|Swimming Pool|Deckchairs at Pool|Charge
Type:</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_LANDSCAPE|">
		<DescriptiveText>Bathing Facilities|Swimming Pool|Pool
Landscape|</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_MATTRESSPOOL|ISONCHARGE">
		<Features>
			<Feature CodeDetail="Charge Type:">
				<DescriptiveText>free of charge</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Bathing Facilities|Swimming Pool|Mattresses at Pool|Charge
Type:</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_POOL|POOLCHD">
		<Features>
			<Feature CodeDetail="Pool Child Basin:">
				<DescriptiveText>Integrated</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Bathing Facilities|Swimming Pool|Outdoor Pool|Pool Child
Basin:</DescriptiveText>
	</Service>
	<Service CodeDetail="BATH|SWIMPOOL|BF_POOL|POOLWATER">
		<Features>
			<Feature CodeDetail="Pool Water:">
				<DescriptiveText>Freshwater</DescriptiveText>
			</Feature>
```

```
                </Features>
                <DescriptiveText>Bathing Facilities|Swimming Pool|Outdoor Pool|Pool
Water:</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|SWIMPOOL|BF_POOL|QUANTITY_NUMBER">
                <Features>
                        <Feature CodeDetail="Number:">
                                <DescriptiveText>1</DescriptiveText>
                        </Feature>
                </Features>
                <DescriptiveText>Bathing Facilities|Swimming Pool|Outdoor
Pool|Number:</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|BEACH|BF_PRIVBEACH|">
                <DescriptiveText>Bathing Facilities|Beach|Hotel Private Beach|</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|BEACH|BF_ROUTE|ROUTE">
                <Features>
                        <Feature CodeDetail="Route:">
                                <DescriptiveText>footpath</DescriptiveText>
                        </Feature>
                </Features>
                <DescriptiveText>Bathing Facilities|Beach|Route to Beach:|Route:</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|SWIMPOOL|BF_SUNSHADEPOOL|ISONCHARGE">
                <Features>
                        <Feature CodeDetail="Charge Type:">
                                <DescriptiveText>free of charge</DescriptiveText>
                        </Feature>
                </Features>
                <DescriptiveText>Bathing Facilities|Swimming Pool|Sunshades at Pool|Charge
Type:</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|SWIMPOOL|BF_SUNTERRACE|">
                <DescriptiveText>Bathing Facilities|Swimming Pool|Sun Terrace|</DescriptiveText>
        </Service>
        <Service CodeDetail="BATH|SWIMPOOL|BF_TOWELPOOL|ISONCHARGE">
                <Features>
                        <Feature CodeDetail="Charge Type:">
                                <DescriptiveText>free of charge</DescriptiveText>
                        </Feature>
                </Features>
                <DescriptiveText>Bathing Facilities|Swimming Pool|Towels at Pool|Charge
Type:</DescriptiveText>
        </Service>
</Services>
```


Mapping of services to icons is a common use of diplaying hotel amenities or room amenities. Avoids translations and bulky texts…

A couple of examples:

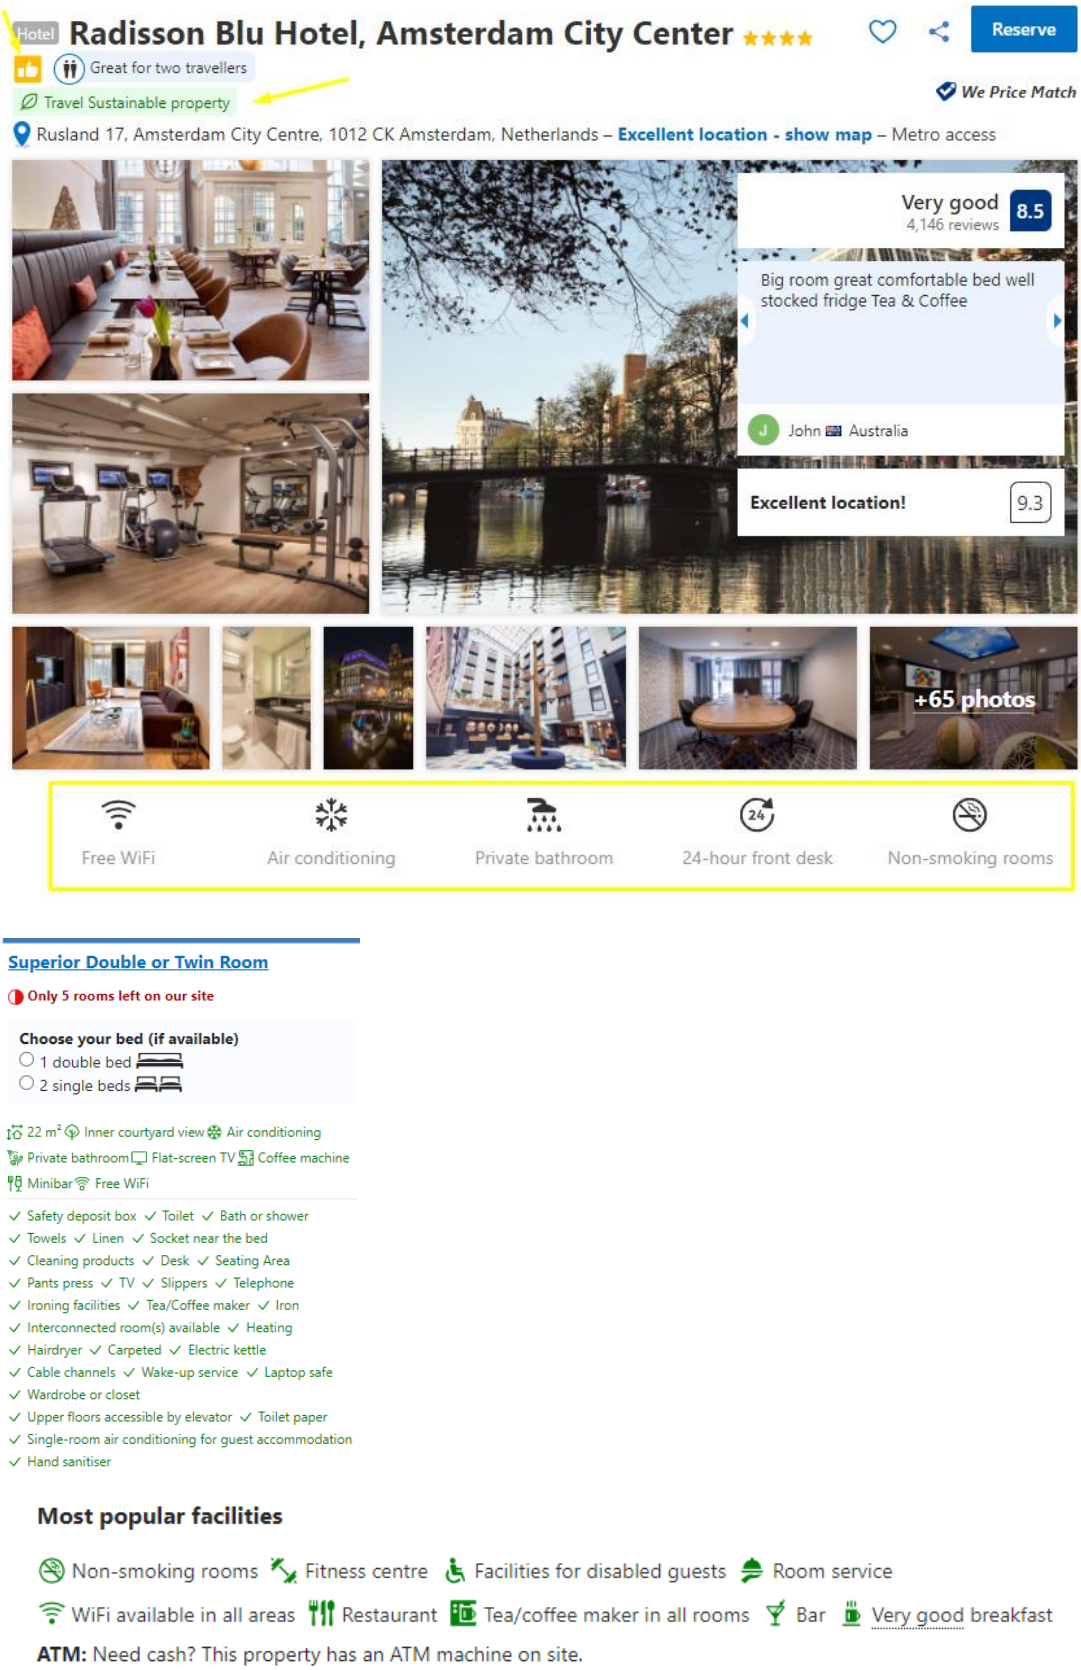
Hotel
Radisson Blu Hotel, Amsterdam City Center
Reserve
Great for two travellers
Travel Sustainable property
We Price Match
Rusland 17, Amsterdam City Centre, 1012 CK Amsterdam, Netherlands – Excellent location - show map – Metro access
Very good
4,146 reviews
8.5
Big room great comfortable bed well stocked fridge Tea & Coffee
John Australia
Excellent location!
9.3
+65 photos
Free WiFi
Air conditioning
Private bathroom
24-hour front desk
Non-smoking rooms
Superior Double or Twin Room
Only 5 rooms left on our site
Choose your bed (if available)
1 double bed
2 single beds
22 m² Inner courtyard view Air conditioning
Private bathroom Flat-screen TV Coffee machine
Minibar Free WiFi
Safety deposit box Toilet Bath or shower
Towels Linen Socket near the bed
Cleaning products Desk Seating Area
Pants press TV Slippers Telephone
Ironing facilities Tea/Coffee maker Iron
Interconnected room(s) available Heating
Hairdryer Carpeted Electric kettle
Cable channels Wake-up service Laptop safe
Wardrobe or closet
Upper floors accessible by elevator Toilet paper
Single-room air conditioning for guest accommodation
Hand sanitiser
Most popular facilities
Non-smoking rooms
Fitness centre
Facilities for disabled guests
Room service
WiFi available in all areas
Restaurant
Tea/coffee maker in all rooms
Bar
Very good breakfast
ATM: Need cash? This property has an ATM machine on site.

Hygiene facts

Following the pandemic, we have implemented improved our health and safety factsheet. Some examples:


```
<Service CodeDetail="NHSP|NHSP_1|NHSP_01|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene
Protocols|Compliance of the&amp;#160;WHO recommendations and local laws|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_02|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Safe
access with&amp;#160;sanitary controls&amp;#160;to suppliers and employees|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_05|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|In-house
Medical Services|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_06|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Staff
Replacement Policy|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_07|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Trained
and equipped&amp;#160;staff with hygiene and protection measures|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_08|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Intense
cleaning and disinfection protocols for all areas|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_09|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Elevator
occupancy control measures|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_10|">
        <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Adapted
capacities and flows in common areas to ensure social distancing|</DescriptiveText>
      </Service>
      <Service CodeDetail="NHSP|NHSP_1|NHSP_11|">
```

```
            <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Hand
Sanitizer Available  in all areas|</DescriptiveText>
          </Service>
          <Service CodeDetail="NHSP|NHSP_1|NHSP_12|">
            <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Luggage
Disinfection|</DescriptiveText>
          </Service>
          <Service CodeDetail="NHSP|NHSP_1|NHSP_13|">
            <DescriptiveText>New Hygiene and Service Protocols|General Hygiene
Protocols|Disinfection of carpets at main door|</DescriptiveText>
          </Service>
          <Service CodeDetail="NHSP|NHSP_1|NHSP_14|NHSP_LUGCARRY">
            <Features>
              <Feature CodeDetail="luggage transport options">
                <DescriptiveText>Guest</DescriptiveText>
              </Feature>
              <Feature CodeDetail="luggage transport options">
                <DescriptiveText>Staff</DescriptiveText>
              </Feature>
            </Features>
            <DescriptiveText>New Hygiene and Service Protocols|General Hygiene Protocols|Luggage
transportation|NHSP_LUGCARRY</DescriptiveText>
          </Service>
```

Provision of geocodes and transfer time/distance.


```
<Services>
	<Service CodeDetail="OBJECT|GENERAL|OI_GPS|LATITUD">
		<Features>
			<Feature CodeDetail="Latitude:">
				<DescriptiveText>25.0802156</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Object Information|General|GPS-
Coordinates:|Latitude:</DescriptiveText>
	</Service>
	<Service CodeDetail="OBJECT|GENERAL|OI_GPS|LONGITUD">
		<Features>
			<Feature CodeDetail="Longitude:">
				<DescriptiveText>55.1370871</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Object Information|General|GPS-
Coordinates:|Longitude:</DescriptiveText>
	</Service>
	<Service CodeDetail="OBJECT|GENERAL|OI_GPS_VERIFIED|YESNO">
		<Features>
			<Feature CodeDetail="Yes or No:">
				<DescriptiveText>Yes</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Object Information|General|GPS-Coordinates Verified?|Yes or
No:</DescriptiveText>
	</Service>
	  .......
	  <Service CodeDetail="LOCATION|AIRPORT|LD_AIRPORT1|DISTANCE">
		<Features>
			<Feature CodeDetail="Distance:">
				<DescriptiveText>5 km</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Locations &amp; Distances|Airport|Airport
1:|Distance:</DescriptiveText>
	</Service>
	<Service CodeDetail="LOCATION|AIRPORT|LD_AIRPORT1|TRFTIME">
		<Features>
			<Feature CodeDetail="Transfer Time:">
				<DescriptiveText>5 min</DescriptiveText>
			</Feature>
		</Features>
		<DescriptiveText>Locations &amp; Distances|Airport|Airport 1:|Transfer
Time:</DescriptiveText>
	</Service>
</Services>
```

Incidents and Errata

See also the same chapter in “Real Time messages”. Any possible issue and errata will be communicated as a special fact. These facts will be returned in the first place on the facts section and will provide information regarding the type of incidence, and duration. This information will be provided until the duration of the issue expires and is included in the Quote and Commit messages as well.

```
<Service CodeDetail = "IE-1|GENERAL|IE-1-3|COMMENT">
  <DescriptiveText>Incidents|General|Renovations - Swimming Pool|Comment: Improvements in the
cleaning system</DescriptiveText>
 </Service>
 <Service CodeDetail = "IE-1|GENERAL|IE-1-3|DURATION">
  <OperationSchedules>
    <OperationSchedule Start = "2013-07-15" End = "2013-07-30"/>
  </OperationSchedules>
  <DescriptiveText>Incidents|General|Renovations - Swimming Pool|Duration of the
incident</DescriptiveText>
 </Service>
 <Service CodeDetail = "IE-1|GENERAL|IE-1-3|IE_C_1-1">
  <DescriptiveText>Incidents|General|Renovations - Swimming
Pool|Consequence:Closed</DescriptiveText>
 </Service>
 <Service CodeDetail = "IE-1|GENERAL|IE-1-3|IE_C_1-2">
  <DescriptiveText>Incidents|General|Renovations - Swimming Pool|Solution:Complimentary
Service</DescriptiveText>
 </Service>
```

Restrictions

Due to the pandemic situation hotels are restricing capacity, require a reservation or close some of the services they normally deliver. This is included in the “Incidents and Errata”, and as usual included in the NBC and Quote/Book operations.

Example:

```
<Service CodeDetail = "IE-1|GENERAL|IE-1-3|IE_C_1-1">
  <DescriptiveText>Incidents|General|Renovations - Swimming
Pool|Consequence:Closed</DescriptiveText>
 </Service>
```

Incidences

Restrictions	Reception
Restrictions	Rooms
Restrictions	Cleaning Room
Restrictions	Restaurants
Restrictions	Bars
Restrictions	Chill zones
Restrictions	Adult Entertainment
Restrictions	Terrace
Restrictions	Swiming Pools
Restrictions	Gardens
Restrictions	Spa
Restrictions	Fitness Center
Restrictions	Hotel Sports Club

Restrictions Mini Club
Restrictions Kids Club

Consequences:

Occupancy max 25%
Occupancy max 30%
Occupancy max 40%
Occupancy max 50%
Occupancy max 75%
Limited capacity
Only with pre-reservation
No group activities
No indoor activities
Some facilities/activities cannot be offered

Geographical location information

Geographical information is provided for mapping and search functions. Main airport is indicated as PrimaryIndicator ="true". Distance in kilometers is specified as Distance. Travel time, in minutes, required from the airport is specified as Proximity.

```
<AreaInfo>
        <RefPoints>
                <RefPoint RefPointName="Country" Name="Turkey"/>
                <RefPoint RefPointName="Destination" Name="Turkish Aegean Coast"/>
                <RefPoint RefPointName="Region" Name="Bodrum"/>
                <RefPoint RefPointName="Resort" Name="Bodrum"/>
                <RefPoint RefPointName="TravelDestination" Name="BJV"/>
                <RefPoint RefPointName="Airport" Name="AYT " Nearest="false" Distance="60"
                UnitOfMeasureCode="2" PrimaryIndicator="false" Proximity="120"/>
                <RefPoint RefPointName="Airport" Name="BJV " Nearest="true" Distance="5"
                UnitOfMeasureCode="2" PrimaryIndicator="true" Proximity="10"/>
                <RefPoint RefPointName="Airport" Name="ADB " Nearest="false" Distance="35"
                UnitOfMeasureCode="2" PrimaryIndicator="false" Proximity="70"/>
                <RefPoint RefPointName="Airport" Name="DLM " Nearest="false" Distance="18"
                UnitOfMeasureCode="2" PrimaryIndicator="false" Proximity="36"/>
        </RefPoints>
</AreaInfo>
```

We will be discontinuing “TravelDestination” and “Destination” in Q4/2021

The hotel geo location position is now located in the Hotel info section

```
<Position Latitude="25.0802156" Longitude="55.1370871"/>
```

Note: See also: OTA_HotelAvailRQ with type “AreaList”

Image download

The TravelKISS platform includes maintenance of images in standardized sizes and qualities. Images can be downloaded upon change and stored in the partner system. Our image server is not suitable for serving images for every display of search results or hotel-info.

There are 4 image sizes. If the original image has of sufficient quality, the images will be converted to the following standard sizes, quality 1 and 2 are for catalog production, where images 3 and 4 are for internet use:

1. 2400 pix width or height, classified as “print_lead” (circa 2,5 MB)
2. 1200 pix width or height, classified as “print” (circa 1 MB)
3. 450 pix width or height, classified as “display” (circa 130 KB)
4. 200 pix width or height, classified as “thumbnail” (circa 40 KB)

Aspect ratio of the original image is maintained, no automatic cropping or manipulation is applied. A mild compression is implemented.

Any number of images can be uploaded for one property. The images need to be classified in the following categories:
Hotel, Pool, Reception, Restaurant, Garden, Beach, Room, Lobby, Spa, Miscelaneous,Not classified.
There are also possibilities to enter a textual short description and long description.

ID’s follow OTA PIC (Picture Category Code) values, so ID attribute contains a PIC value following the table below. Please confirm the status of the functionality before using it. This is a minor deviation to keep backwards compatibility, as the PIC code should be in the Category attribute.

Actual code	OTA PIC code	OTA PIC description
HOTEL	1	Exterior view
RECEPTION , LOBBY	2	Lobby view
POOL	3	Pool view
RESTAURANT	4	Restaurant
GYM	5	Gym
ROOM	6	Guest room
BEACH	11	Beach
SPA	12	Spa
BAR	13	Bar
RECREATIONAL	14	Recreational facility
MISCELLANEOUS , UNKOWN	20	Miscellaneous
GARDEN	22	Property amenity
CONFERENCE	23	Conference facility

Images must be shown based on the Sort value, lower value indicates the image is more important to show.

NOTE: If a property only supplies a limited number of low quality images, not all categories and quality levels can be created.

NOTE: Different image sizes might be available than specified in above 4 categories, if the original image was not meeting the minimum “Display” requirements (i.e. “ImageFormat Width = "102" Height = "386"”).

In the OTA_HotelDescriptiveInfoRS, only the filename is mentioned. The full path has to be created. Images may not be downloaded for each display from our servers (hotlinking). Images must be stored by the customer to serve their applications. (image download not available on test systems – only from production)

How to construct an image download request:

HotelCode Hotel code, retrieved from the HotelCode attribute in the HotelDescriptiveContent section
DimensionCategory Base quality, retrieved from DimensionCategory attribute in ImageFormat section
URL File name, retrieved from URL node in ImageFormat section
Height Height in pixels, image will be stretched to this size

http://tkimages.axisdata.net/ImageConverter.php?size=DimensionCategory&height=Height&hotel=HotelCode
&filename=URL

Full example:

http://tkimages.axisdata.net/ImageConverter.php?size=print&height=1200&hotel=AMTSBG1V1C&filename=01.jpg

use HEAD to get metadata for images before the GET

Each property shows a LastModified date/time in the OTA_HotelDescriptiveInfo response. This is set by either a static data update for the property, any contract update and any image change. In most cases images are not updated. Conclusively instead of downloading, updating and reviewing images for all properties that have been updated since you last visited our static data download, it makes a lot of sense to first send an http HEAD request to get the image's metadata and check whether the "last modified date/time" that we return in the header of both the HEAD and GET response, is also within the time you last visited our static data download.

For example a GET or HEAD for:
http://tkimages.axisdata.net/ImageConverter.php?size=display&hotel=AMTSES0M1C&filename=AMTSES0M1C_835734.jpg
returns a field "LastModifyDate" in the header

In Q2/2023, we will introduce an additional LastModifiedDate for each image, so that clients do not need to check the image header to avoid downloading and processing unchanged images:

```
<MultimediaDescriptions>
  <MultimediaDescription>
    <ImageItems>
      <ImageItem ID="1" Category="HOTELEXTERIOR" LastModifyDateTime="2023-02-14T10:36:25">
```

```
<ImageFormat Format="6" FileName="amtses0zag_968908_1.jpg"
DimensionCategory="original" Sort="1" Title="Hotel exterior" RecordID="1" UnitOfMeasureCode="9"
Width="3100" Height="2066">
<URL>AMTSES0ZAG_968908.jpg</URL>
</ImageFormat>
```


DRV codes

DRV codes for Hotel, room and board levels are provided in the response in the TPA extension section under the CodeConvertions node. A DRV license is required to make use of these codes and the "Has DRV license" must be enabled in our system to include the codes. Please find additional details and the full code lists in https://globaltypecenter.de/index.php

Hotel:


```
<CodeConversion Type="DRV" CodeContext="Hotel" Code="AMTSGR2H1C">
	<DRVGlobalTypes>
		<DRVGlobalType Type="DRV">
			<GTAttribute GT="GT03-YECO">
				<Description Language="EN">Construction Year: Year:
2009</Description>
			</GTAttribute>
…
			<GTAttribute GT="GT03-GOLF">
				<Description Language="EN">Golf Course</Description>
			</GTAttribute>
		</DRVGlobalType>
	</DRVGlobalTypes>
</CodeConversion>

<CodeConversion Code="AAEDXB0GLZ" CodeContext="Hotel" Type="DRV">
	<DRVGlobalTypes>
		<DRVGlobalType Type="DRV">
			<GTAttribute GT="GT03-SPAA">
				<Description Language="EN">SPA</Description>
			</GTAttribute>
			<GTAttribute GT="GT03-DICI" ST="ST03-D20KM">
				<Description Language="EN">Town Centre : 20 km</Description>
			</GTAttribute>
			<GTAttribute GT="GT03-ROSE">
				<Description Language="EN">Room Service : extra fee</Description>
			</GTAttribute>
			<GTAttribute GT="GT03-BASE">
				<Description Language="EN">Babysitting</Description>
			</GTAttribute>
		</DRVGlobalType>
	</DRVGlobalTypes>
</CodeConversion>
```

Room:

```
<CodeConversion Type="DRV" CodeContext="Room" Code="RMSDDB0000">
        <DRVGlobalTypes>
                <DRVGlobalType Type="DRV">
                        <GTAttribute GT="GT04-RO"/>
                        <GTAttribute AT="AT04-STAN" GT="GT04-RO"/>
                        <GTAttribute GT="GT04-RO" ST="ST04-DO"/>
                </DRVGlobalType>
        </DRVGlobalTypes>
</CodeConversion>
```

Board:

```
<CodeConversion Type="DRV" CodeContext="Board" Code="AI">
        <DRVGlobalTypes>
                <DRVGlobalType Type="DRV">
                        <GTAttribute GT="GT06-AI"/>
                </DRVGlobalType>
        </DRVGlobalTypes>
</CodeConversion>
```

Segmentation:

```
<DRVGlobalTypes>
 <DRVGlobalType>
  <GTAttribute GT="GT03" CT="Environmentally Committed Hotel"/>
  <GTAttribute GT="GT03" CT="Extra Care"/>
  <GTAttribute GT="GT03" CT="Gay friendly"/>
 </DRVGlobalType>
</DRVGlobalTypes>
```

Templates

There is a special content info code to get structured data based of a specific type, it only returns data when amenities are set and is not compatible with any other enrichment switch. When this content info code is used, any other switch will be ignored. Structured data follows this format:

CodeDetail ="SERVICE_TYPE_CODE | SERVICE_TYPE_CHILD_CODE | SERVICE_CODE | SERVICE_PROPERTY_CODE | VALUE | MEASURE_UNIT_CODE"
< DescriptiveText **>** SERVICE_TYPE_NAME | SERVICE_TYPE_CHILD_NAME | SERVICE_NAME | SERVICE_PROPERTY_NAME | VALUE | MEASURE_UNIT_NAME**<** DescriptiveText **>**

STOCK Template

The template functionality allows requesting our system all possible values in the response; it returns all hotel specific services for mapping of facts and values. This method is not hotel nor client specific, it just returns all “services” that you can expect in our OTA_HotelDescriptiveInfoRS and their values. We recommend to (manually) execute this method periodically to make use of new fields and values that we release continuously to improve our static data delivery.

Example:


```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2009.1"
PrimaryLangID = "EN" AltLangID = "EN">
  <POS>
    <Source>
      <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "XXXX"/>
    </Source>
  </POS>
  <HotelDescriptiveInfos>
    <HotelDescriptiveInfo>
      <ContentInfos>
        <ContentInfo Code = "Template" Name = "STOCK"/>
      </ContentInfos>
    </HotelDescriptiveInfo>
  </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ>
```


Example fact-field and values:


```
        <Service CodeDetail = "POLICIES|GENERAL|OI_SMOKING" ID = "MAIN">
          <Features>
            <Feature CodeDetail = "Property:">
              <DescriptiveText>Yes</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Property:">
              <DescriptiveText>In Signed Areas</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Property:">
              <DescriptiveText>No</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Rooms:">
              <DescriptiveText>No</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Rooms:">
              <DescriptiveText>Yes - subject to availabilty</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Rooms:">
              <DescriptiveText>Balcony/Terrace only</DescriptiveText>
            </Feature>
          </Features>
          <DescriptiveText>Policies|general|Smoking Allowed:</DescriptiveText>
        </Service>
…
        <Service CodeDetail = "ECO_HOTEL|GENERAL|EF_PACKAGING" ID = "MAIN">
          <Features>
            <Feature CodeDetail = "Bio packaging">
              <DescriptiveText>Bottles</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Bio packaging">
              <DescriptiveText>Organic straws</DescriptiveText>
            </Feature>
            <Feature CodeDetail = "Bio packaging">
```

```
                <DescriptiveText>Glasses</DescriptiveText>
              </Feature>
            </Features>
            <DescriptiveText>Hotel|general|Bio Packaging</DescriptiveText>
          </Service>
..
          <Service CodeDetail = "NHSP_1|GENERAL|NHSP_16" ID = "MAIN">
            <DescriptiveText>General Hygiene Protocols|general|Non-Contact check-
in</DescriptiveText>
          </Service>
          <Service CodeDetail = "NHSP_1|GENERAL|NHSP_17" ID = "MAIN">
            <DescriptiveText>General Hygiene Protocols|general|Non-Contact check-
out</DescriptiveText>
          </Service>
```


Note the field structure includes the hierarchy, which makes it easy to for example find all the Eco friendly facts and values under “ECO_HOTEL”:


```
<Service CodeDetail = "ECO_HOTEL|GENERAL|EF_PACKAGING" ID = "MAIN">
```


SUMMARY Template

The SUMMARY template allows requesting our system for all possible values for room + board + occupancy services for specific hotel

Example template function, summary template has to be requested per hotel:


```
<OTA_HotelDescriptiveInfoRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2009.1"
PrimaryLangID = "EN" AltLangID = "EN">
 <POS>
  <Source>
   <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
 </POS>
 <HotelDescriptiveInfos>
  <HotelDescriptiveInfo BrandCode = "TEST" HotelCode = "AESMADBC28">
   <ContentInfos>
    <ContentInfo Code = "Template" Name = "SUMMARY"/>
   </ContentInfos>
  </HotelDescriptiveInfo>
 </HotelDescriptiveInfos>
</OTA_HotelDescriptiveInfoRQ></OTA_HotelDescriptiveInfoRQ>


<OTA_HotelDescriptiveInfoRS
  xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-2/2" Version="2009.1">
  <Success></Success>
  <HotelDescriptiveContents>
```

```
<HotelDescriptiveContent HotelCode="AESMADBC28" HotelCodeContext="104086"
HotelName="11th Principe by Splendom Suites" RPH="2">
  <HotelInfo>
    <CategoryCodes>
      <GuestRoomInfo CodeDetail="JSSD00000N">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="JSSD0000F0">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="STSDTP000N">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="STSDTP00B0">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="FS000000E0">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="FS00000000">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="STSDDB00BN">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
      <GuestRoomInfo CodeDetail="STSDDB00B0">
        <RateRanges>
          <RateRange End="2019-10-31" Start="2019-04-01"></RateRange>
        </RateRanges>
      </GuestRoomInfo>
    </CategoryCodes>
    <Services>
      <Service CodeDetail="Board" ID="SC">
        <OperationSchedules>
          <OperationSchedule End="2019-10-31" Start="2019-04-01"></OperationSchedule>
```

```
            </OperationSchedules>
            <DescriptiveText>Self Catering</DescriptiveText>
          </Service>
        </Services>
      </HotelInfo>
      <FacilityInfo>
        <GuestRooms>
          <GuestRoom ID="FS00000000" MaxAdultOccupancy="6" MaxChildOccupancy="4"
MaxInfantOccupancy="1" MaxOccupancy="6" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="6">
            <TypeRoom StandardOccupancy="2"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="FS000000E0" MaxAdultOccupancy="5" MaxChildOccupancy="3"
MaxInfantOccupancy="1" MaxOccupancy="5" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="5">
            <TypeRoom StandardOccupancy="5"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="JSSD00000N" MaxAdultOccupancy="4" MaxChildOccupancy="2"
MaxInfantOccupancy="0" MaxOccupancy="4" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="4">
            <TypeRoom StandardOccupancy="4"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="JSSD0000F0" MaxAdultOccupancy="4" MaxChildOccupancy="2"
MaxInfantOccupancy="1" MaxOccupancy="4" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="4">
            <TypeRoom StandardOccupancy="2"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="STSDDB00B0" MaxAdultOccupancy="2" MaxChildOccupancy="0"
MaxInfantOccupancy="1" MaxOccupancy="2" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="2">
            <TypeRoom StandardOccupancy="2"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="STSDDB00BN" MaxAdultOccupancy="2" MaxChildOccupancy="0"
MaxInfantOccupancy="1" MaxOccupancy="2" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="2">
            <TypeRoom StandardOccupancy="2"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="STSDTP000N" MaxAdultOccupancy="3" MaxChildOccupancy="1"
MaxInfantOccupancy="1" MaxOccupancy="3" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="3">
            <TypeRoom StandardOccupancy="3"></TypeRoom>
          </GuestRoom>
          <GuestRoom ID="STSDTP00B0" MaxAdultOccupancy="3" MaxChildOccupancy="1"
MaxInfantOccupancy="1" MaxOccupancy="3" MinAdultOccupancy="2" MinChildOccupancy="0"
MinOccupancy="3">
            <TypeRoom StandardOccupancy="3"></TypeRoom>
          </GuestRoom>
        </GuestRooms>
      </FacilityInfo>
```

```
<Policies>
  <Policy>
    <PolicyInfo MaxChildAge="11" MaxInfantAge="2"></PolicyInfo>
  </Policy>
</Policies>
<TPA_Extensions>
  <CodeConversions>
    <CodeConversion Code="BB" CodeContext="Board" Type="DRV">
      <DRVGlobalTypes>
        <DRVGlobalType Type="DRV">
          <GTAttribute GT="GT06-BR"></GTAttribute>
        </DRVGlobalType>
      </DRVGlobalTypes>
    </CodeConversion>
    <CodeConversion Code="RO" CodeContext="Board" Type="DRV">
      <DRVGlobalTypes>
        <DRVGlobalType Type="DRV">
          <GTAttribute GT="GT06-AO"></GTAttribute>
        </DRVGlobalType>
      </DRVGlobalTypes>
    </CodeConversion>
    <CodeConversion Code="SC" CodeContext="Board" Type="DRV">
      <DRVGlobalTypes>
        <DRVGlobalType Type="DRV">
          <GTAttribute GT="GT06-AO"></GTAttribute>
        </DRVGlobalType>
      </DRVGlobalTypes>
    </CodeConversion>
    <CodeConversion Code="AESMADBC28" CodeContext="Hotel" Type="DRV">
      <DRVGlobalTypes>
        <DRVGlobalType Type="DRV">
          <GTAttribute GT="GT03-NUBU" ST="ST03-N1">
            <Description Language="EN">No. Buildings: 1</Description>
          </GTAttribute>
          <GTAttribute GT="GT05-KETT">
            <Description Language="EN">Kettle Tea-Coffee</Description>
          </GTAttribute>
          <GTAttribute GT="GT03-NURO" ST="ST03-N35">
            <Description Language="EN">Total Units/Rooms: 35</Description>
          </GTAttribute>
          <GTAttribute GT="GT05-COTT">
            <Description Language="EN">Baby Cot</Description>
          </GTAttribute>
        </DRVGlobalType>
      </DRVGlobalTypes>
    </CodeConversion>
  </CodeConversions>
</TPA_Extensions>
</HotelDescriptiveContent>
```

```
  </HotelDescriptiveContents>
</OTA_HotelDescriptiveInfoRS>
```

No more than one template may be requested at a time. STOCKUNIT and SUBSERVICE templates have been deprecated, and substituted with SUMMARY, which provides all main mapping data.

2.2 OTA_HotelDescriptiveInfo push

Clients have the option to pull NBC (NonBookableContent) using the OTA_HotelDescriptiveInfoRQ (see Chapter 2 of OTA Based Communication Model V6.1.pdf).

The OTA_HotelDescriptiveInfoRS can also be “pushed” to an FTP location. A full delivery in agreed languages can be scheduled for example on a monthly basis or may be requested to the integrations team upon demand.

A daily schedule with all information for hotels that have changed the day before (delta) will be installed when this option is chosen.

3 Real-time messages

3.1 Languages

A language may be specified for any descriptive texts returned in our realtime responses. All realtime messages support the inclusion of a requested language. This includes NBC, Hotel, transfer and excursion messaging.
Example for German:

```
<OTA_HotelDescriptiveInfoRQ PrimaryLangID="DE" AltLangID=”EN”..>
<OTA_HotelAvailRQ PrimaryLangID = "DE" AltLangID = "EN"..>
<OTA_GroundAvailRQ PrimaryLangID = "DE" AltLangID = "EN"..>
<OTA_TourActivitySearchRQ PrimaryLangID = "DE" AltLangID = "EN"..>
```

- If PrimaryLangID is not specified, default PrimaryLangID=‘EN’ is set; if AltLangID is not specified, default AltLangID =‘EN’ is set
- If the description for PrimaryLangID exists, it is used; if it does not exist, then AltLangID is used
- If the description for AltLangID exists, it is used; otherwise, no description is returned

This switch only applies to texts stored in various languages, which currently only include the „descriptions“ and service descriptions (rooms, services, etc). Available languages and coverage is constantly increasing, so this information will be discussed at the start of the integration.

Language coverage (ISO 639-1):

Hotel main description: CS, DA, DE, EN, ES, FI, FR, HU, IT, NB, NL, NO, PL, PT, SV, CS, RU, SV, TR, IS, CZ, ZH
Room descriptions: DE, DA, EN, ES, FI, FR, HU, IT, NL, NO, PL, PT, SV, RU, TR
Facts: EN

3.2 Currencies

Your ClientID can be set to deliver all price in one currency or in the original currency of the agreement with the hotel, transport provider or excursion provider.

Supported currencies are (ISO 4217): EUR, USD, AED, BGN, BRL, CAD, CHF, CVE, DKK, DOP, EGP, GBP, HRK, MAD, MXN

3.3 Searching

Before trying to book a product, availability and pricing information will typically be requested by the booking source for all available accommodations matching search criteria.

To be able to respond such a massive calculation in sub-second system response time, our Search Module is loaded with the rates and availabilities as specified in the contract. It processes the information to a precalculated storage. When a search for many hotels is received, the Search Module only finds and combines the correct price elements to respond. Average response times are below 200 ms for 1 hotel and also for all the hotels in a region or country, through parallel processing.

The search module is updated in real-time for each individual contract update. Contract updates are generally available within 7 minutes. An update affecting many products or many modifications from destinations executed at the same time can result to a queue of updates being processed. Delays in updates of the Search Module are always under 30 minutes.

- The only valid availability and invoicing amount is the amount returned in the booking messages (OTA_HotelResRS, OTA_GroundBookRS, OTA_VehResRS, etc)
- For this reason, partners must never commit to fixed bookings at fixed selling prices, based on Searches.
- Partners must never commit to fixed bookings at fixed selling prices, based on Notifications.

Your Agreement Annex specifically mentions this aspect and before go-live, the signed annex must be in possession of our HQ. Without a signed Agreement Annex, your IP's will not be liberated to access our production environment.

Different users may have different requirements regarding the format and detail of this information. The <POS> element is used to identify the requesting client. The "Instance" attribute of the <RequestorID> element determines the exact format of the information returned in the OTA_HotelAvailRS.

3.4 Booking

A service is booked online using the OTA_HotelResRQ for Hotel based bookings, OTA_GroundResRQ for transfer ones and OTA_VehResRQ for rent a car. A consultation whether the specific hotel, room and board are still available for the travelling occupancy can be executed with the OTA_HotelResRQ and ResStatus="Quote"; same applies for OTA_GroundResRQ and OTA_VehResRQ.

A definitive reservation is requested through the OTA_HotelResRQ , OTA_GroundResRQ or OTA_VehResRQ message with a "Commit" value for ResStatus. This is necessary to trigger a response with a ResID_Value, which confirms and uniquely identifies the reservation (our reference).

The ResID_Value type "client" is mandatory to register the partner reference. This reference is passed to the hotel as the voucher number. An additional "external reference" can be included.

On the navigation towards “please provide pax names”, the OTA_HotelResRQ, OTA_GroundResRQ and OTA_VehResRQ of the type “**Quote**” is highly recommended to be implemented. This message verifies price and availability against the database and provides cancellation conditions. This prevents disappointment before providing all the participants data, in case the product is not available anymore or the rate bookable is different.

The OTA_HotelResRQ/RS, OTA_GroundResRQ/RS and OTA_VehResRQ/RS message sets are designed to be used with “quote” and “commit” status, at the very last steps of the booking process and require specific customer names etc. The Quote and Book messages are not high performance messages and are calculated in real-time on the database. Response times for the quote are mostly below 1 second, but the commit can take up to 6 seconds.

If early in the booking process, when customer names are not available, price and availability in our systems must be checked and compared to stored data, the OTA_HotelAvailRQ/RS (for a single hotel, room and board) , OTA_GroundAvailRQ/RS and OTA_VehAvailRateRQ should be used. Response times for both RQs are sub-second. Alternatively, all conditions (rooms and/or boards, locations) for the specific dates can be requested in order to offer the customer more options and achieve up-selling objectives.

3.1 InSeries

In situationes where two or more message commits (Hotel, transfer, excursion booking or cancels) needs to be executed within less than 5 seconds, all messages should include the property *TransactionStatusCode="InSeries"* in the root element. This property enables a synchronous processing of the message, so it is necessary to wait until the response before sending a related commit message.

Typical case is a hotel + transfer booking using master and child references. When a hotel booking is made at 18:00:00, we respond with the OTA_HotelResRS in about 1 second, after we have computed the booking (18:00:01). However, we have not yet saved the booking to database, which is done in a post-process after the response is sent. Including the “InSeries” in the header of the booking message will delay sending the response when this process has finished and the booking is ready to receive the Transfer booking item. In general this will add around 1 second to the Commit response times (18:00:02). Complex multi-room bookings might take a bit longer. If the transfer booking is made in two steps, one for the inbound and one for the outbound leg, then not only the hotel booking, but also the first transfer leg must be done with “InSeries” activated.

Example:

```
<OTA_HotelResRQ xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="1" ResStatus="C
ommit" Version="2016.2" TransactionStatusCode="InSeries">
```

It is obvious that InSeries is only valid for the “Commit” messages and not for the “Quote” messages as there is no need to save data.

3.2 Cancelling

A service can be cancelled via the XML interface using the OTA_Cancel message. This message covers the cancellation of any service and supports full cancellations as well as partial cancellations, see following section for details.

Cancellation fees may apply in the cancellation service if a non refundable room was booked or there's a cancellation policy applicable.

Cancellation offset is calculated based on the service start date 00:00 CET time. Service date is considered offset 0, so 24 hours prio to service start date is offset 1 and so on.

This is a graphical visualization of how the cancellation rules stack to understand how to process them:

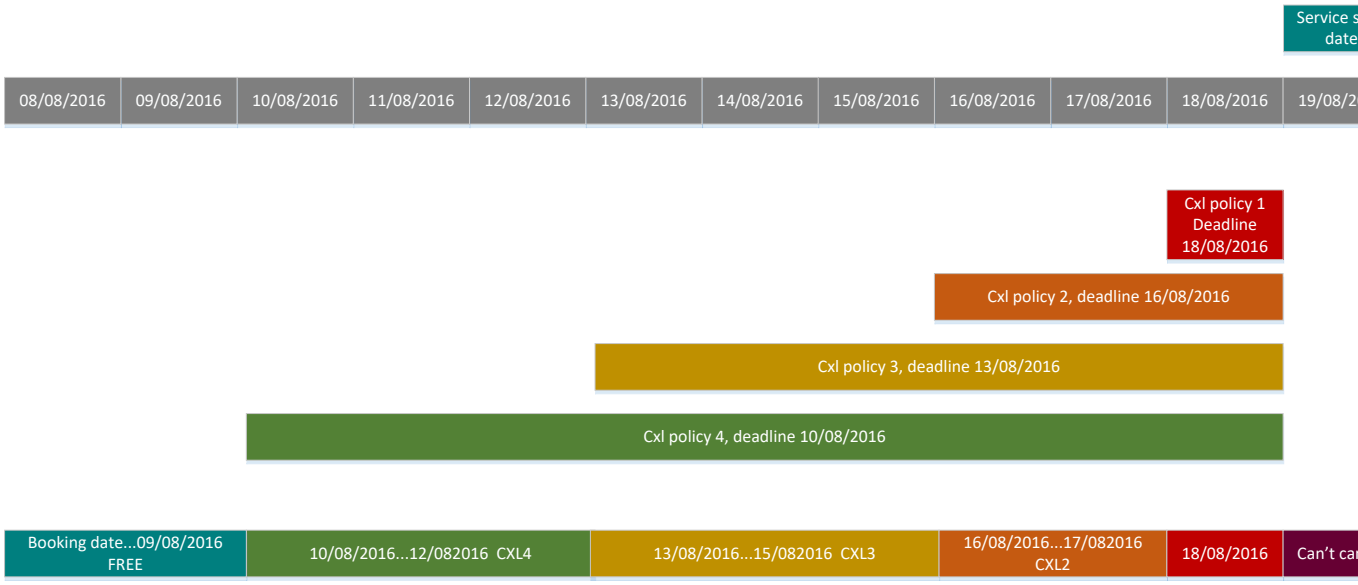

Most cancellation conditions relate to the arrival in the hotel. In the XML, this is expressed as OffsetDropTime="BeforeArrival". However, with the introduction of the "semi-flexible non-refundable" to allow option bookings on non-refundable rooms for an x hrs grace period, we see an increase in cancellation conditions that relate to the moment of booking. Conclusively, for rooms with strickt non-refundable rateplans and several grace period rateplans (i.e. 12, 24, 48 or 72 hours), these cancellation conditions are expressed in our XML as OffsetDropTime="AfterBooking"

3.3 Master and Child references

Master and child reference functionality is designed to provide a better booking management and packaging services at booking level. Each booking contains a single master reference and as many child references as booking items contained.

Master reference (super PNR) links to the booking as a whole, packaging any contained item (Hotel, transfer, excursion, etc) to it. Any action executed over this reference affects all the items (booking retrieve, booking cancel, etc). Master reference is identified by the Type = 36, OTA UIT code (Unique Id Type)

```
<UniqueID Type="36" ID_Context="Client" ID="AAA"/>
```

Child reference refers to an element of a booking, I.E a room or a transfer service, the relation between child references and items are implemented using RPH values. Details of RPH location

is detailed for each message in their sections of the documentation. Child reference is identified by the Type = 37, OTA UIT code (Unique Id Type)

```
<UniqueID Type="37" ID_Context="Client" ID="aaa1"/>
```

In this example, a 2 rooms booking is sent specifying a reference per room and master refence

RQ:

```
<RoomStay RPH="1">
…
<RoomStay RPH="2">
…
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="36" ResID_Value="AAA"/>                Client
master reference
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="37" ResID_Value="aaa1" Item_RPH="1"/>    Client
Child reference 1
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="37" ResID_Value="aaa2" Item_RPH="2"/>    Client
Child reference 2
```

RS:

```
<UniqueID Type="36" ID_Context="Client" ID="AAA"/>                                                     master
reference
<UniqueID Type="36" ID_Context="Internal" ID="TK1234567890"/>                                          master
reference
<UniqueID Type="37" ID_Context="Client" ID="aaa1"/>                                                    child
reference 1
<UniqueID Type="37" ID_Context="Internal" ID="1234_1234"/>                                             child
reference 1
<UniqueID Type="37" ID_Context="Client" ID="aaa2"/>                                                    child
reference 2
<UniqueID Type="37" ID_Context="Internal" ID="1234_1235"/>                                             child
reference 2
```

This functionality is extended to separate messages of a single booking. Any further booking message using the same master reference will be accepted and the child items added to the master booking.

OTA_HotelResRQ:

```
<RoomStay RPH="1">
…
<RoomStay RPH="2">
…
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="36" ResID_Value="AAA"/>                Client
master reference
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="37" ResID_Value="aaa1" Item_RPH="1"/>    room1
<HotelReservationID  ResID_SourceContext="Client" ResID_Type="37" ResID_Value="aaa2" Item_RPH="2"/>    room2
```

OTA_HotelResRS:

```
<UniqueID Type="36" ID_Context="Client" ID="AAA"/>                                                     master
reference
<UniqueID Type="36" ID_Context="Internal" ID="TK1234567890"/>                                          master
reference
<UniqueID Type="37" ID_Context="Client" ID="aaa1"/>                                                    room1
<UniqueID Type="37" ID_Context="Internal" ID="1234_1234"/>                                             room 1
<UniqueID Type="37" ID_Context="Client" ID="aaa2"/>                                                    room 2
<UniqueID Type="37" ID_Context="Internal" ID="1234_1235"/>                                             room 2
```

OTA_GroundBookRQ:

```
<Location RPH="1">
..
<Location RPH="2">
..
```

<UniqueID Type="36" ID_Context="Client" ID="AAA"/> master reference
<UniqueID Type="37" ID_Context="Client" ID="aaa3" Item_RPH="1"/>
transfer1
<UniqueID Type="37" ID_Context="Client" ID="aaa4" Item_RPH="2"/>
transfer2

OTA_GroundBookRS:

<UniqueID Type="36" ID_Context="Client" ID="AAA"/> master reference
<UniqueID Type="36" ID_Context="Internal" ID="TK1234567890"/> master reference
<UniqueID Type="37" ID_Context="Client" ID="aaa3"/>
transfer1
<UniqueID Type="37" ID_Context="Internal" ID="1234_1236"/>
transfer1
<UniqueID Type="37" ID_Context="Client" ID="aaa4"/>
transfer2
<UniqueID Type="37" ID_Context="Internal" ID="1234_1237"/>
transfer2

OTA_ReadRQ:

<UniqueID Type="36" ID_Context="Client" ID="AAA"/> master reference

OTA_ResRetrieveRS

<UniqueID Type="36" ID_Context="Client" ID="AAA"/> master reference
<UniqueID Type="36" ID_Context="Internal" ID="TK1234567890"/> master reference
<UniqueID Type="37" ID_Context="Client" ID="aaa1"/> room1
<UniqueID Type="37" ID_Context="Internal" ID="1234_1234"/> room 1
<UniqueID Type="37" ID_Context="Client" ID="aaa2"/> room 2
<UniqueID Type="37" ID_Context="Internal" ID="1234_1235"/> room 2
<UniqueID Type="37" ID_Context="Client" ID="aaa3"/>
transfer1
<UniqueID Type="37" ID_Context="Internal" ID="1234_1236"/>
transfer1
<UniqueID Type="37" ID_Context="Client" ID="aaa4"/>
transfer2
<UniqueID Type="37" ID_Context="Internal" ID="1234_1237"/>
transfer2

Any duplicated child reference for the same master reference will be returned as an error.

In case a master reference is provided in the request but no child references, automated child client references will be returned in the response. These child references will be returned in the response the same way as they were provided in the request and we will also add an internal child reference.

The RPH values in the different messages under the same booking cannot be repeated. I.E. if the hotel booking has RPH 1 and RPH 2, they cannot be re used in the transfer booking message.

Both master and child references are limited to a maximum of 20 characters, not 64 as specified by OTA.
Caracters allowed:

- From 0-9
- From A to Z

- Non HTTP/XML restricted Symbols: ~, -

3.4 Non Refundable rooms

Non refundable rooms are rooms with a full 100% cancellation penalty applied since the moment of the booking. These rooms will not be refundable even if the whole booking is cancelled immediately after confirming the booking.

These rooms can be identified in multiple ways:

Room code will have promo code N (see Appendix D)
Room description will include the concept “Non-Refundable”
Room DRV codes will include AT04-NRF (Available for DRV licensed partners)
Cancellation policies for this room will always be 100% of the whole stay since the selling date.

It is reccommended to identify these rooms via the room code (Promo code N)

```
<RoomType RoomTypeCode="RMSD00000N" >
        <RoomDescription>
                <Text Language = "EN">Room_Standard/Non-Refundable</Text>
        </RoomDescription >
```

Semi-non-refundable rooms and rateplans have been introduced and their usage becomes more popular in situations where a grace period is required for option bookings or for a cool-off period after booking. These typically do not have an OffsetDropTime="BeforeArrival", but a OffsetDropTime="AfterBooking" condition.

3.5 Offer Tags and Extras

Both, searches and booking responses, can be enriched with offer tags for promotional purposes. These tags include offers applied to the specific search result and/or booking request and extras to indicate the additional services included. This information is returned in the responses as vendor messages, using InfoType code 3 for Offers and InfoType 5 for extras. See Vendor messages sections for further details and examples.

The offer and extra codes of the CodeContext=”DRV” use GlobalTypes from the “Deutscher Reiseverband”. For more info see www.drv.de.

3.6 Vendor messages

Vendor messages are important information provided in the search/quote/commit responses that shall be processed and/or shown to the end consumer. This information is available per room, as some messages are valid for specific rooms only and/or have different values and meaning per room.

This section can be found under RoomStay/BasicPropertyInfo section in the Search response. This section can be found in ResGlobalInfo section in the booking message.

These messages include concepts like Non refundable rooms, offer tags, incidents and erratas, complimentary extras, etc. Each type of message is identified using the InfoType property, an OTA INF (Information Type) code. Typical code values:

2: Policy
3: Marketing
5: Other
12: Facilities

Example


```
<VendorMessages>
    <VendorMessage Title="ComplimentaryExtras" InfoType="5">
        <SubSection>
            <Paragraph>
                <Text>Gala Dinner</Text>
            </Paragraph>
        </SubSection>
        <SubSection SubTitle = "XMS1" SubCode = "OTS"/>
        <SubSection SubTitle = "GT08-XXOT" SubCode = "DRV"/>
    </VendorMessage>
    <VendorMessage Title="CancellationConditions" InfoType="2">
        <SubSection>
            <Paragraph>
                <Text>Non refundable room</Text>
            </Paragraph>
        </SubSection>
    </VendorMessage>
    <VendorMessage Title="IncidentsAndErrata" InfoType="12">
        <SubSection>
            <Paragraph>
                <Text>Mandatory Deposit</Text>
            </Paragraph>
        </SubSection>
    </VendorMessage>
    <VendorMessage Title="IncidentsAndErrata" InfoType="12">
        <SubSection>
            <Paragraph>
                <Text>No Restaurant, Comment: Only main restaurant
at annex open during winter, Distance: 500 m, Action: at nearby restaurant</Text>
            </Paragraph>
        </SubSection>
    </VendorMessage>
    <VendorMessage Title="Early Booking" InfoType="3">
        <SubSection SubCode="Value" SubTitle="20%">
            <Paragraph>
                <Text>Early Booking 20%</Text>
            </Paragraph>
        </SubSection>
        <SubSection SubCode="OTS" SubTitle="EBR1"/>
        <SubSection SubCode="DRV" SubTitle="GT07-EB"/>
    </VendorMessage>
</VendorMessages>
```

Custom Types implementation:

<GTAttribute CT="DPO-1000"/> this means Date Offer of 10.00 (eur, if the price is in eur)
<GTAttribute CT="EBR-1000P"/> this means Rolling Early Booking Offer of 10%

3.7 Message compression

Message compression is mandatory for any communication with our webservices and must be implemented and working to certify an integration.

Message compression is based on standard HTTP compression and supports gzip compression format, described in RFC2616 and RFC1952. Compression can be switched on in the HTTP header of the message using *Accept-Encoding: gzip* parameter.

3.8 Incorrect message

If a message is rejected during parsing or validation, an OTA_ErrorRS is sent to the originator:

```
<prefix_0:OTA_ErrorRS xmlns:prefix_0="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" ErrorCode="Unknown"
ErrorMessage="Internal error" Version="0">
</prefix_0:OTA_ErrorRS>
```

Or

```
<?xml version="1.0" encoding="UTF-8"?>
<OTA_HotelAvailRS
   xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="0-0/0"
Target="Production" Version="2006" EchoToken="123322344">
   <Success>false</Success>
   <Error>OTA request validation failed. No RoomStayCandidates found.</Error>
   <RoomStays/>
</OTA_HotelAvailRS>
```

3.9 Invalid or non processable information

Other errors caused by the message contents are communicated through <Error> and <Warning> elements in the corresponding response message (see the OTA_HotelResRS examples further down in this document).

We do not support “byte order marks” in our messages. For more info see: http://en.wikipedia.org/wiki/Byte_Order_Mark

3.10 Provider Identification

Mapping, notification and realtime messaging are now including the provider information in all the messages. This section will be included in a TPA_extensions element under proper element for each message. I.E. OTA_HotelDescriptiveInfoRQ remains under each HotelDescriptiveContent. This extra information can be used for mapping purposes and future multi provider products.

```
<POS>
        <Source>
                <RequestorID ID_Context="AxisData" Type="47">
                        <CompanyName Code="OTS" CompanyShortName="Open Travel
Service AG"/>
                </RequestorID>
        </Source>
</POS>
```

3.11 Transaction control

In order to identify all messages related to a specific transaction, all messages within the same transaction (searches, quote, commit) should use the same EchoToken identification. Each response will include the EchoToken attribute with a value identical to the one in the request.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05"
EchoToken="807e760a7257422c8313f1b19651e112">
```

3.12 Ghost bookings

When an XML message to confirm a booking is sent but no response is received (time-out), there are various places a problem can occur:

- while sending: in the Distributor systems, booking request never gets sent. In the internet, message gets lost/corrupted. In our systems, message does not get processed
- while responding: in our systems, booking response never gets sent. In the internet, message gets lost/corrupted. In Distributor systems, message does not get processed

It is technically only possible to detect these cases by the sender of the request. Conclusively, we require a “failed booking process” during certification of every integration. This process requires the client to take action when a booking request is not responded in an agreed time (in general 10 seconds). Options are:

- if the booking is not confirmed to the end customer (and no flights are reserved), send automatic cancellation after 5 minutes of detection. Keep logs for trouble shooting and disputes.
- If the booking is confirmed to the end customer or flights are booked, send automatic re-booking message ***with the exact same reference*** after 5 minutes of detection. If the booking was not processed it will then be automatically confirmed. If the bookings was

already made with the first request “Booking already exist” error will be returned. An OTA_Read message can be implemented to obtain our booking references and response details like price and price breakdown.

- If none of the above technical solutions can be put in place, some clients opt for sending an email to their support department to review and resolve the situation on ClientNet

If a booking request is received and the client does not receive a booking response, the booking remains payable, if not cancelled.

3.13 Packaging

The interface supports two main package models, pre package and dynamic package.

Pre Package

With the prepackage model, 2 or more services are offered together. Services are grouped in two ways:

- A combination of two products (for example hotel and rent-a-car). Two different products are combined to a new room with an inventory code. But also different hotels can be combined to a round-trip package this way. Hotel code includes a 2 character extension, I.E. AR for Accomodation RentACar, AG for Accomodation Golf, etc

Car packages are notified as an additional Inventory Code at room level. These car codes follow ACRISS estandart (http://www.acriss.org/car-codes.asp). Car codes can be found in the Appendix H.

Car codes per hotel can be retrieved from the services section of the OTA_HotelDescriptiveInfo message using SUMMARY template. Prices and availability for these room + car packages are available inside the notification messaging for the notification model and in the search results in the transactional model.

But we have also other Packages on sale like the Schlagersterne festival in Mallorca, Island hopping packages in Greece, Fly&Drive packages in the Algarve, Blue Cruises in Turkey or Nile Cruises in Egypt and many more.

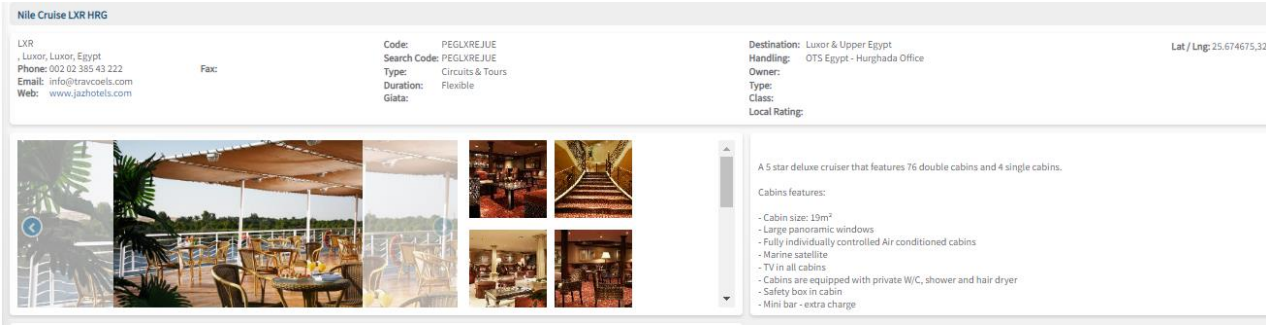

- Hotel supplied extras are often offered as a different room code containing a compulsory extra. This is most commonly used for offers that are provided by the

hotel and include for example spa treatments. Disadvantage is poor visibility of room descriptions in the German market and dependency on room descriptions in the search results in other markets.

Packages that include an optional service like a ski pass, ski lessons or renting of ski equipment are often included as a Rateplan, so that the same (dynamic) pricing and allotment of the normal hotel contract is used for the package.

Dynamic Package

With dynamic packing, any service offered within the interface (Hotel, Transfer, Rent a car, Excursion) can be booked into a single booking creating a package. Dynamic packaging uses master and child references to group the services and allows the different services to be added and/or cancelled individually.

3.14 Price Breakdown

Booking quote and booking commit messages can be requested to receive a complete price breakdown in the response. In the OTA_HotelResRQ, the Instance="PriceBreakdown" is added to POS|Source|RequestorID of Type="22".

<RequestorID ID_Context="AxisData" Instance="PriceBreakdown" Type="22" ID="TEST"/>

The Price section is located in the TPA extension and called RateDetails. The structure of the section can be found in the WSDL and it is defined as a proper schema for the TPA extension.

Price breakdown includes all the concepts applied per pax and per day for the booking, a code list of the concepts can be found in the Appendix section, new codes offers may be added after the release of this document, be aware of new codes returned in the response. Ex:

```
<RateDetails>
        <GuestDetails ResGuestRPH="0" TotalAmount="22.74" CurrencyCode="EUR" RateCode="Price">
                <RateComponents StayDay="1" ResGuestRPH="0" Code="AA" Edition="1.00" Rate="16.24"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="0" Code="AI" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="0" Code="AP" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="0" Code="EX" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="0" Code="EBO2" Edition="1.00" Rate="-4.87"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="0" Code="AA" Edition="1.00" Rate="16.24"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="0" Code="AI" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="0" Code="AP" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="0" Code="EX" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="0" Code="EBO2" Edition="1.00" Rate="-4.87"
CurrencyCode="EUR"/>
        </GuestDetails>
        <GuestDetails ResGuestRPH="1" TotalAmount="22.74" CurrencyCode="EUR" RateCode="Price">
```

```
                <RateComponents StayDay="1" ResGuestRPH="1" Code="AA" Edition="1.00" Rate="16.24"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="1" Code="AI" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="1" Code="AP" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="1" Code="EX" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="1" ResGuestRPH="1" Code="EBO2" Edition="1.00" Rate="-4.87"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="1" Code="AA" Edition="1.00" Rate="16.24"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="1" Code="AI" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="1" Code="AP" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="1" Code="EX" Edition="1.00" Rate="0.00"
CurrencyCode="EUR"/>
                <RateComponents StayDay="2" ResGuestRPH="1" Code="EBO2" Edition="1.00" Rate="-4.87"
CurrencyCode="EUR"/>
        </GuestDetails>
        <Totals>
                <Total Override="false" TotalType="Price" CurrencyType="Price" CurrencyCode="EUR"
AmountAfterTax="45.48"/>
        </Totals>
</RateDetails>
```


Similar to OTA_HotelResRS, in the OTA_Ground Book messages, if Instance="PriceBreakdown" is included, at the end of the of the RS, the price breakdown is returned in RateDetails.


```
<TPA_Extensions>
    <RateDetails>
      <GuestDetails ResGuestRPH="1" TotalAmount="18.00" CurrencyCode="EUR"
RateCode="Price">
        <RateComponents StayDay="1" ResGuestRPH="1" Code="TBR174" Edition="0"
Rate="9.00" CurrencyCode="EUR" CodeType="STDRATE"/>
        <RateComponents StayDay="1" ResGuestRPH="1" Code="TBR174" Edition="0"
Rate="9.00" CurrencyCode="EUR" CodeType="STDRATE"/>
      </GuestDetails>
      <GuestDetails ResGuestRPH="2" TotalAmount="18.00" CurrencyCode="EUR"
RateCode="Price">
        <RateComponents StayDay="1" ResGuestRPH="2" Code="TBR174" Edition="0"
Rate="9.00" CurrencyCode="EUR" CodeType="STDRATE"/>
        <RateComponents StayDay="1" ResGuestRPH="2" Code="TBR174" Edition="0"
Rate="9.00" CurrencyCode="EUR" CodeType="STDRATE"/>
      </GuestDetails>
      <Totals>
        <Total Override="false" TotalType="Price" CurrencyType="Price"
CurrencyCode="EUR" AmountAfterTax="18.00"/>
        <Total Override="false" TotalType="Price" CurrencyType="Price"
CurrencyCode="EUR" AmountAfterTax="18.00"/>
      </Totals>
    </RateDetails>
```

```
    <UniqueID Type="36" ID_Context="Client" ID="MTS_A240286"/>
    <UniqueID Item_RPH="2" ID="MTS_A240286_2" Type="37" ID_Context="Client"/>
    <UniqueID Item_RPH="2" ID="1" Type="37" ID_Context="Internal"/>
    <UniqueID Item_RPH="3" ID="MTS_A240286_3" Type="37" ID_Context="Client"/>
    <UniqueID Item_RPH="3" ID="2" Type="37" ID_Context="Internal"/>
</TPA_Extensions>
```

3.15 Payment identification

Payment Id is added to the booking request in the booking commit post process, by adding BillingInstructionCode structures that covers all the payments scenarios:

- 1 single payment for all pax in the booking: a single payment that covers the whole booking and its items

```
<BillingInstructionCode BillingCode="xxxxx" AuthorizationCode="yyyyyy1"
AccountNumber="WireCard">
        <ResGuestRPH RPH="1"/>
        <ResGuestRPH RPH="2"/>
        <ResGuestRPH RPH="3"/>
        <ResGuestRPH RPH="4"/>
</BillingInstructionCode>
```

- 4 payments taken: 1 payment per pax in the booking, the payment covers all the items the pax is assigned to. The BillingCode is covering all items:

```
<BillingInstructionCode BillingCode="xxxxx" AuthorizationCode="yyyyyy1"
AccountNumber="WireCard">
        <ResGuestRPH RPH="1"/>
</BillingInstructionCode>
<BillingInstructionCode BillingCode="xxxxx" AuthorizationCode="yyyyyy2"
AccountNumber="WireCard">
        <ResGuestRPH RPH="2"/>
</BillingInstructionCode>
<BillingInstructionCode BillingCode="xxxxx" AuthorizationCode="yyyyyy3"
AccountNumber="WireCard">
        <ResGuestRPH RPH="3"/>
</BillingInstructionCode>
<BillingInstructionCode BillingCode="xxxxx" AuthorizationCode="yyyyyy4"
AccountNumber="WireCard">
        <ResGuestRPH RPH="4"/>
</BillingInstructionCode>
```

- 2 Payments for 2 rooms: 1 payment for a group of paxes and payment splitted for groups of paxes. I.E. each couple does a payment for its room:

```
<BillingInstructionCode BillingCode="xxxxx1"
AuthorizationCode="yyyyyy1"AccountNumber="WireCard">
        <ResGuestRPH RPH="1"/>
        <ResGuestRPH RPH="2"/>
</BillingInstructionCode>
<BillingInstructionCode BillingCode="xxxxx2" AuthorizationCode="yyyyyy2"
AccountNumber="WireCard">
        <ResGuestRPH RPH="3"/>
        <ResGuestRPH RPH="4"/>
</BillingInstructionCode>
```

As the pax is linked to a specific item, the payment for a pax gets a direct relation to the item to be paid.
Partner must use master/child references logic. Please contact integrations department before implementing this concept.

3.16 Date/time formats

In various places do we specify deadlines for specific concepts. For example the absolute deadline in cancellation policies or early booking discount prepayment. All these concepts are current the local system time of our servers hosted on premises in ZRH and in our ZRH based AWS cloud. All Date/Time fields are in CET.

Example booking confirmation in OTA_HotelResRS:

```
…
  <HotelReservation CreateDateTime="2023-02-17T17:33:33">
…
            <CancelPenalty Item_RPH="0">
              <Deadline OffsetUnitMultiplier="3" OffsetTimeUnit="Day"
OffsetDropTime="BeforeArrival" AbsoluteDeadline="2023-03-31T00:00:00"/>
              <AmountPercent Amount="73.33" CurrencyCode="EUR" NmbrOfNights="1"
Percent="100"/>
            </CancelPenalty>
```

It is important to consider this also for making a booking when release is concerned: making a booking at 7PM PST for arrival today, means for our system that you specify yesterday as in CET it is already 4AM the next day and conclusively our system will not allow a booking for arrival “yesterday”.

4 Hotel search and book messages

4.1 Rateplan options

Our system provides different options to deal with multiple prices for the same room, expressed in RatePlans. With these options, we target to cater for need of simplicity, best-price logic (in general preferred by B2C partners) or provide all options (in general preferred by B2B partners).

RatePlanCode consists of five alphanumeric characters where each position provides an information regarding other factor affecting the rate. From these five elements, first two elements are shown just for the Distributor's product management purposes (TO/OTA), only the last three are visible and form part of the room description for the final client to explain why the same room is bookable with different prices.

The components, descriptions and Explications are listed in Appendix K.
A RatePlan code is constructed from below RatePlan code elements:
Rate Type(1)|Rate Group(1)|Rate Refund(1)|Rate Sub Type(2)
Example: BHSP2 – BAR Rates - Hotel only - Semi-flexible – Promotional Rate 2

There is also a possibility of duplicating RatePlan which already exists in the contract. In this case the "." character, and a number starting with 1, and then subsecuently every iteration.
Example: BHSP2.1

Where in **Rate Type** column the elements mean:
0 → If the character is 0 would say that the value has been not defined – the rate stays unchanged like in the basic contract edition.
B → Bar - best available rates (changing due to rate updates)
S → Static – unchanged contract rate till the time of a promotion or an offer introduction
F → FIT - free individual traveller rates
R → Retail – advised end-price

Rate Group:
H → Hotel only - rates valid when booking contains only hotel
P → Packaging - rates valid when booking contains hotel + another product
O → Opaque - hotel rates must not be visible for end consumer
R → Rack - walk-in hotel rates for end consumer

Rate Refund:
N→Non refundable - immediately after booking; Nonrefundable rooms can be also still communicated within the RoomCode as a last character like it used to was (RMSD00000N)
S→ Semi-flexible – cancellation without fees up to 12 hours after booking
F→ Flexible – cancellation without fees up to 24 hours after booking

And in **Rate Sub Type**:
A→ Advanced Purchase - booking has to be paid before confirming
P→ Promotion rate

RatePlan Codes can be expressed by two following options:

- ***Concatenated codes:*** as a "RMSD000000;0PNA0" adding to the RoomCode the

RatePlanCode, this is not required any development and all RatePlans are simply expressed in different code attributes. However existing room mapping has to be amended for all hotels where we deliver rate plans. If Best Price logic is implemented on the mapped code, then only the cheapest option across all rate plans can be shown. Be aware that non refundable rate plans may exist in normal rooms without an "N" on the tenth position of the room code.

```
<RoomType RoomTypeCode = "APAX000000;BHSP2">
<RoomDescription>
<Text Language = "EN">Annex Apartment - Semi-flexible - Promotional Rate 2</Text>
</RoomDescription>
```

In combination with search results filtering MF004, clients can benefit of best abailability and the best refundable and non-refundable rates in a room without any development.

- ***Separate codes:*** as a separate room code attribute "RMSD000000" and an attribute RoomKey "0PNA0". This requires the implementation of the RoomKey attribute but has the benefit that mapping does not change.

```
<RoomType RoomTypeCode = "APAX000000" RoomKey = "BHSP2">
<RoomDescription>
<Text Language = "EN">Annex Apartment - Semi-flexible - Promotional Rate 2</Text>
</RoomDescription>
```

The option chosen by the client has to be setup in our system. In the INT environment distributor ID TEST is setup as the one with RatePlan in separate code and distributor ID TST1 as concatenated room code and rateplan code.

Example of the concatenated room code OTA_HotelAvailRS:

```
<RoomStays>
  <RoomStay RoomStayCandidateRPH="0" RPH="0" ResponseType="PropertyList">
    <RoomTypes>
      <RoomType RoomTypeCode="RMSD000000;P0N0">
        <RoomDescription>
          <Text Language="EN">Standard Room - promotion rates non-refundable</Text>
        </RoomDescription>
      </RoomType>
    </RoomTypes>
    <RoomRates>
      <RoomRate RoomTypeCode="RMSD000000;P0N0" NumberOfUnits="20">
        <Rates>
          <Rate>
            <Base AmountAfterTax="787.50" CurrencyCode="EUR"/>
            <Total AmountAfterTax="787.50" CurrencyCode="EUR"/>
          </Rate>
        </Rates>
        <Features>
          <Feature>
```

```
                <Description>
                  <Text>BB</Text>
                </Description>
              </Feature>
            </Features>
          </RoomRate>
        </RoomRates>
        <GuestCounts>
          <GuestCount AgeQualifyingCode="10" Age="30" Count="1"/>
          <GuestCount AgeQualifyingCode="10" Age="30" Count="1"/>
        </GuestCounts>
        <TimeSpan Start="2021-07-02" End="2021-07-09"/>
        <BasicPropertyInfo HotelCode="AESSVQ4GKU"/>
      </RoomStay>
    </RoomStays>
```


Rateplan options for multi-contracting and simple packages

There is a substantial business requirement to have integrated and manual contracts compete for best availability and best rates for different arrival windows or low/high seasons. With this project we will deliver various contracts for the same hotel as Rateplans in the push notifications or in the search results. Please see the section 4.3 on switches available to de-dupe the search results.

Another aspect is the inclusion of simple packages that are combined with other products, like a hotel+rent-a-car packages, hotel+ski packages, hotel+golf packages, hotel+spa packages, hotel+yoga workshops packages, hotel+cooking classes packages, etc. etc.

In Q2/2023 the rateplan codes will be extended from a 1 concept with 5 characters to 3 concepts. The 5 characters in the original Rateplan will remain. Two additional fields will be added: “simple package code” and “contract code”. The entire rateplan code will conclusively consist of “simple package code”-“contract code”-“rateplan code”. For example: “SP1-OWN1-S0000". If we have just one manual contract without any packages nor different rateplans for each room, the Rateplan code will be for example “-OWN1-“.

Examples:
HotelCode: AESPMI1234
RoomCode: RMSDDB0000

RateplanCode="-SUP1-0P0A0"
integrated contract identified by “SUPx” and a Packaging Advanced Purchase rateplan is provided by the hotel

RateplanCode="-OWN1-S0N00"
Manual contract identified by “OWNx” and a Static, Non refundable rate is provided by the hotel

RateplanCode="-OWN1-"
Manual contract identified by “OWNx” and no rateplans in the contract.

SubProduct “Ski Package”
RateplanCode=“SP1-OWN1-S0000"

Ski package created by the destination office consuming allotment and rates from a manual contract identified by “OWNx” and a Static rate is provided by the hotel

SubProduct RentaCar also to be migrated:
RateplanCode="CR1-OWN1-S0000"
Rent-a-car package created by the destination office consuming allotment and rates from a manual contract identified by “OWNx” and a Static rate is provided by the hotel
RoomCode="RMSDDB0000-ECMR"
Existing functionality to identify and offer various options of cars included in the package (see appendix F, Car codes)

There is no impact to clients that use our API in the “pull” model and “push” model, other than that the Rateplan codes are slightly larger. If logic has been implemented to identify the different non refundable options, please review that the 3rd character from the end of the Rateplan code is identified and not the 3rd character from start of the code. The same for distribution of Packaging rates or Opaque rates that should be excluded from hotel-only websites.

For clients using our Flatfile we have extended the size of the room code field (in case you opted for Rateplans in concatenated codes) and the rateplan code in our Version 3 definition of the fields.

We also have included 2 new filters in our real-time search request to include just those search results that you require and to avoid showing a magnitude of prices for the same room. Please see chapter 4.3.

4.2 OTA_HotelAvailRQ – basic content

Each room type is requested in a separate <RoomStayCandidate> element followed by the GuestCounts of Adults (AgeQualifyingCode="10") and Children (AgeQualifyingCode="8"). Children age has to be specified for each child. If the child age is exceeding the maximum child age for a specific hotel, the child is converted to an adult and the correct price is given for the specified stay and occupancy for that property. Regarding infants, the client has the possibility to search with a child specified with an age of 0 or 1 year old and, similar to children exceeding the max child age, the child is converted to an infant in the calculation.
This is the preferred method, as the start-age of children can vary. Alternatively, an infant can be specified (AgeQualifyingCode="7") and again, if the age specified exceeds the min child age, the calculation will convert the infant to a child and return the correct rates. This behaviour is exactly the same in the HotelResRQ/RS.
The room type is essentially defined by the occupancy data.

It is strongly recommended to use search by list of hotelcodes, instead of location. As no two geotrees are the same, location mappings have proven to be error prone and maintenance sensitive. This results to loss of sales where hotels do not show in search results.

Typical OTA_HotelAvailRQ structure:

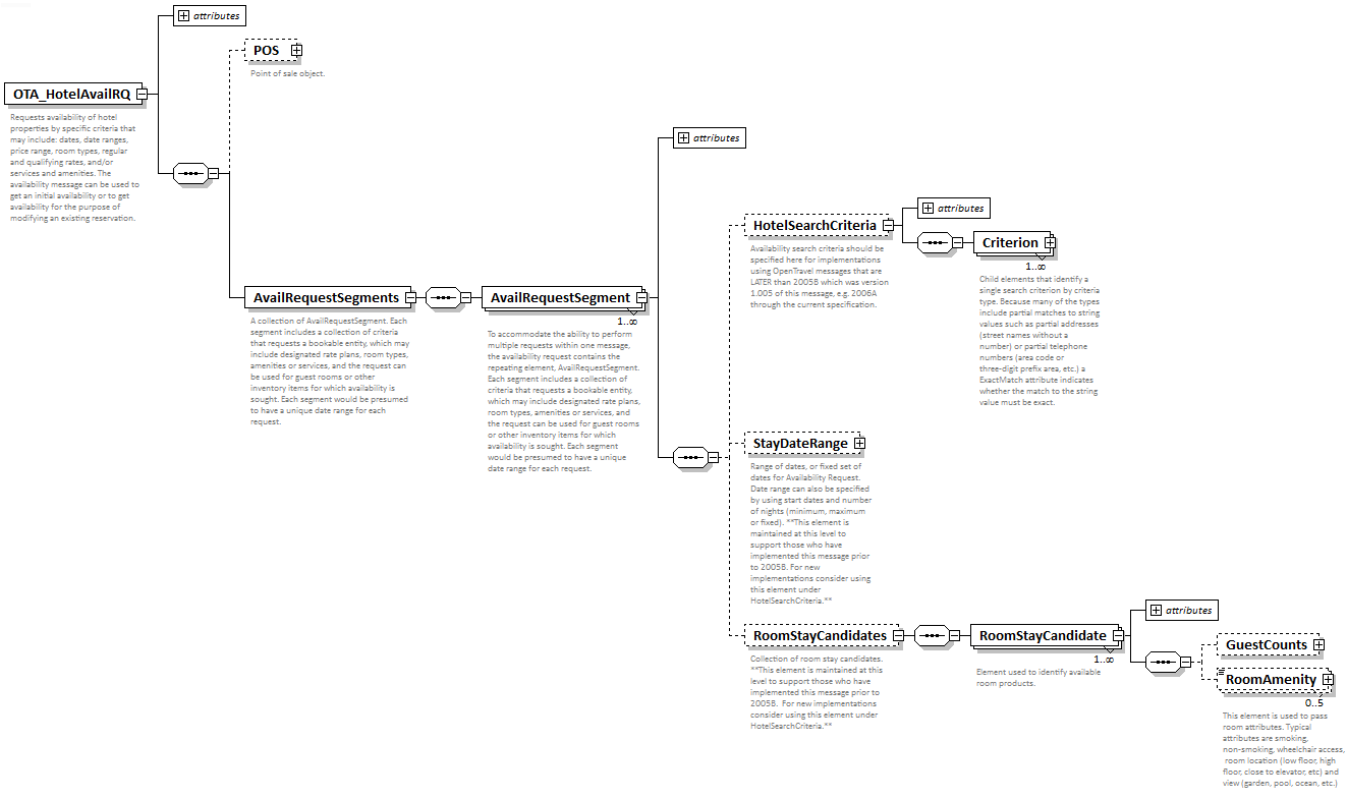
attributes
POS
Point of sale object.
OTA_HotelAvailRQ
Requests availability of hotel properties by specific criteria that may include: dates, date ranges, price range, room types, regular and qualifying rates, and/or services and amenities. The availability message can be used to get an initial availability or to get availability for the purpose of modifying an existing reservation.
AvailRequestSegments
A collection of AvailRequestSegment. Each segment includes a collection of criteria that requests a bookable entity, which may include designated rate plans, room types, amenities or services, and the request can be used for guest rooms or other inventory items for which availability is sought. Each segment would be presumed to have a unique date range for each request.
AvailRequestSegment
1..∞
To accommodate the ability to perform multiple requests within one message, the availability request contains the repeating element, AvailRequestSegment. Each segment includes a collection of criteria that requests a bookable entity, which may include designated rate plans, room types, amenities or services, and the request can be used for guest rooms or other inventory items for which availability is sought. Each segment would be presumed to have a unique date range for each request.
attributes
HotelSearchCriteria
Availability search criteria should be specified here for implementations using OpenTravel messages that are LATER than 2005B which was version 1.005 of this message, e.g. 2006A through the current specification.
attributes
Criterion
1..∞
Child elements that identify a single search criterion by criteria type. Because many of the types include partial matches to string values such as partial addresses (street names without a number) or partial telephone numbers (area code or three-digit prefix area, etc.) a ExactMatch attribute indicates whether the match to the string value must be exact.
StayDateRange
Range of dates, or fixed set of dates for Availability Request. Date range can also be specified by using start dates and number of nights (minimum, maximum or fixed). **This element is maintained at this level to support those who have implemented this message prior to 2005B. For new implementations consider using this element under HotelSearchCriteria.**
RoomStayCandidates
Collection of room stay candidates. **This element is maintained at this level to support those who have implemented this message prior to 2005B. For new implementations consider using this element under HotelSearchCriteria.**
RoomStayCandidate
1..∞
Element used to identify available room products.
attributes
GuestCounts
RoomAmenity
0..5
This element is used to pass room attributes. Typical attributes are smoking, non-smoking, wheelchair access, room location (low floor, high floor, close to elevator, etc) and view (garden, pool, ocean, etc.)

Example AvailRequestSegment for 2 adults and 2 children (3 and 11) by hotel code:

```
....
<AvailRequestSegments>
  <AvailRequestSegment>
    <StayDateRange End="2010-10-30" Start="2010-10-23"></StayDateRange>
    <RoomStayCandidates>
      <RoomStayCandidate RPH="0">
        <GuestCounts>
          <GuestCount Age="30" AgeQualifyingCode="10" Count="2"></GuestCount>
          <GuestCount Age="3" AgeQualifyingCode="8" Count="1"></GuestCount>
          <GuestCount Age="11" AgeQualifyingCode="8" Count="1"></GuestCount>
        </GuestCounts>
      </RoomStayCandidate>
    </RoomStayCandidates>
    <HotelSearchCriteria>
      <Criterion ExactMatch="true">
        <HotelRef HotelCode="AESPMI1234"></HotelRef>
      </Criterion>
    </HotelSearchCriteria>
  </AvailRequestSegment>
....
```

4.3 Search response room-board-rateplan inclusions options

To facilitate applications where the workflow is oriented to an initial search results display of just one room and board combination, the option to just display the cheapest combination is offered. A next step specifying the HotelCode in the search request, allows the end user to make a choice of superior room types and boards. This is an efficient approach in terms of data volume. When displaying all rooms and boards, there are two more filters to reduce the number of rateplans in the search results

OTA_HotelAvailRQ/RS MF0x2 – cheapest Room/Board/Rateplan combination per hotel

A value of 2 in the third number of the instance attribute MF0x**2**, requests only the cheapest combination of room and board for a given booking for one or more hotels. Although more rooms and boards might be available, only one option per hotel will be included in the OTA_HotelAvailRS.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" SequenceNmbr="1"
MaxResponses="10" Version="2016.2">
        <POS>
                <Source>
                        <RequestorID Instance="MF002" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
        </POS>
```

This switch is fully compatible with the values used for multi room searches, specified in multiple room searches section, so both MF002 and MF012 are valid.

OTA_HotelAvailRQ/RS MF0x1 – All available Room/Board/Rateplan combinations per hotel

Using a value of 1 in the third number of the instance attribute MF0x**1**, requests all available combinations of room and board for a given search for one or more hotels. The pax composition and booking dates must be sent as part of the request, in combination with a list of hotel codes or geographical definition.
The message response lists all available room/board combinations for the given booking parameters along with the price totals. Only available combinations are returned.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" SequenceNmbr="1"
MaxResponses="10" Version="2016.2">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
```

The OTA_HotelAvailRS uses a separate <RoomStay> element for each room in every combination of rooms we return.
Each <RoomStay> element refers to a room stay candidate from the request through the RoomStayCandidateRPH attribute.
The RPH attribute is used to number bookable combinations. Different combinations may consist of different room types (which support the requested guest count, of course) or combine a previous room combination with a different board type.
The RoomStays in the response can therefore be regarded as a matrix with columns representing the requested room types indexed through the RoomStayCandidateRPH value, and rows representing bookable combinations of rooms satisfying the requested criteria (indexed through the RPH value).

This switch is fully compatible with the values used for multi room searches, specified in multiple room searches section, so both MF001 and MF011 are valid.

OTA_HotelAvailRQ/RS MF0x3 – All available Room/Board with only 4 refund Rateplan combinations per hotel

The same as per above, using a value of 1 in the third number of the instance attribute MF0x**1**, requests all available combinations of room and board for a given search for one or more hotels. The pax composition and booking dates must be sent as part of the request, in combination with a list of hotel codes or geographical definition.
The message response lists all available room/board combinations for the given booking parameters along with the price totals. Only available combinations are returned.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" SequenceNmbr="1"
MaxResponses="4" Version="2016.2">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
```

The OTA_HotelAvailRS uses a separate <RoomStay> element for each room in every combination of rooms we return.
Each <RoomStay> element refers to a room stay candidate from the request through the RoomStayCandidateRPH attribute.
The RPH attribute is used to number bookable combinations. Different combinations may consist of different room types (which support the requested guest count, of course) or combine a previous room combination with a different board type.
The RoomStays in the response can therefore be regarded as a matrix with columns representing the requested room types indexed through the RoomStayCandidateRPH value, and rows representing bookable combinations of rooms satisfying the requested criteria (indexed through the RPH value).

This switch is fully compatible with the values used for multi room searches, specified in multiple room searches section, so both MF001 and MF011 are valid.

OTA_HotelAvailRQ/RS MF0x4 – All available Room/Board with only 2 refund Rateplan combinations per hotel

The same as per above, using a value of 1 in the third number of the instance attribute MF0x**1**, requests all available combinations of room and board for a given search for one or more hotels. The pax composition and booking dates must be sent as part of the request, in combination with a list of hotel codes or geographical definition.
The message response lists all available room/board combinations for the given booking parameters along with the price totals. Only available combinations are returned.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" SequenceNmbr="1"
MaxResponses="2" Version="2016.2">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
```

The OTA_HotelAvailRS uses a separate <RoomStay> element for each room in every combination of rooms we return.

Each <RoomStay> element refers to a room stay candidate from the request through the RoomStayCandidateRPH attribute.
The RPH attribute is used to number bookable combinations. Different combinations may consist of different room types (which support the requested guest count, of course) or combine a previous room combination with a different board type.
The RoomStays in the response can therefore be regarded as a matrix with columns representing the requested room types indexed through the RoomStayCandidateRPH value, and rows representing bookable combinations of rooms satisfying the requested criteria (indexed through the RPH value).

This switch is fully compatible with the values used for multi room searches, specified in multiple room searches section, so both MF001 and MF011 are valid.

4.4 OTA_HotelAvailRQ – hotel list or geographical definition

The search can be executed either providing a list of hotels or by specifying a geographical definition.

Geographical searches are often quite laborious due to different geographical structures between partner and supplier. For example, the supplier has separated Tenerife in North and South, where the partner has Tenerife as destination and then the different resorts.

Implementation of search by hotel list seems to be the current tendency, where an automated mapping procedure largely assigns hotels to the geographical definition of the distribution channel.

Another aspect is the increasing use of “search by map” functionality. The search is defined by geo coordinates and the extremities of the map that an end-user has selected as search criteria. The partner has stored the hotelcodes and geocodes of each hotel and converts the coordinates to a corresponding list of hotel codes, where the geo codes are inside the exteremties of the map. The list of hotels is included in the OTA_HotelAvailRQ submitted to MTS systems.

Search by geocodes example from booking.com using “show prices and availability for displayed hotels” function:

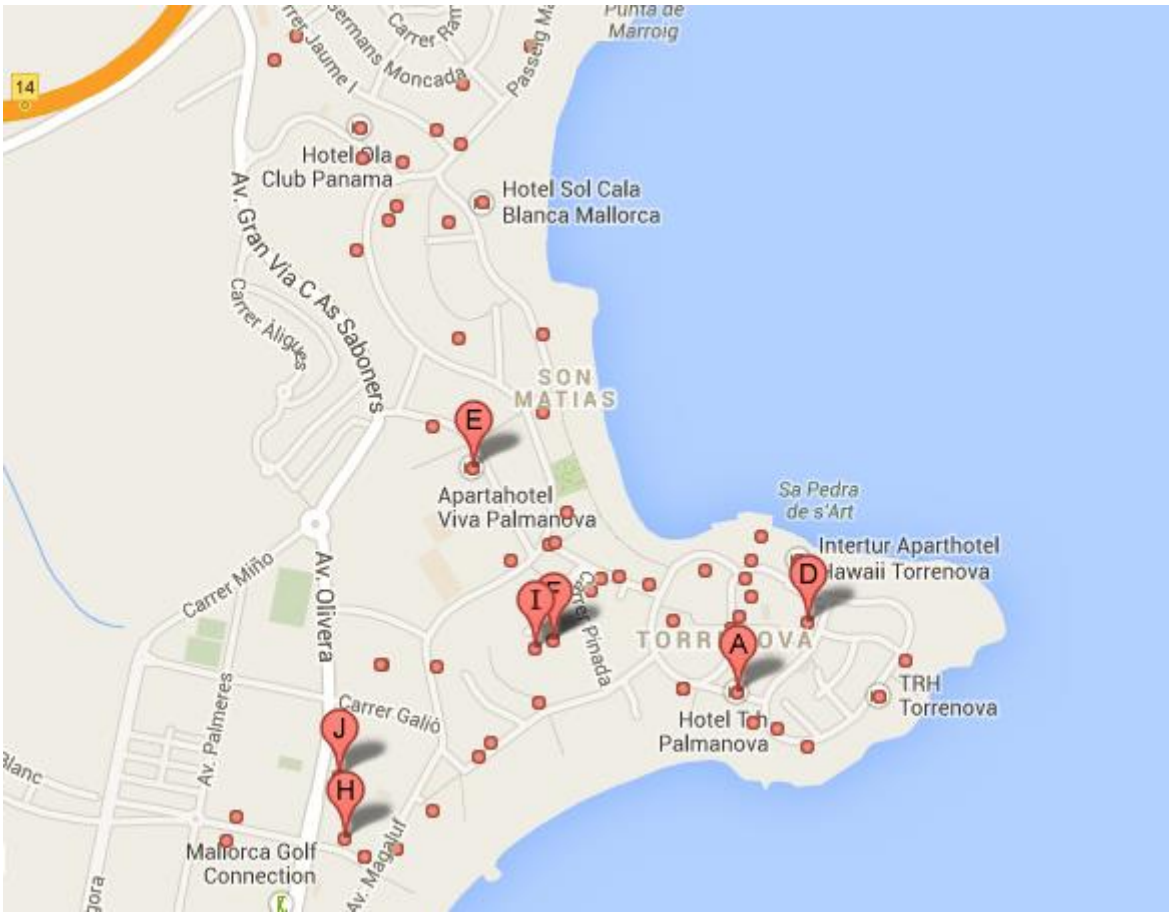

OTA_HotelAvailRQ – hotel list

Mapped hotels can be linked to the partners search functionalities and the OTA_HotelAvailRQ can be created using the hotel list function. A highly automated mapping process is Important to cater for additions, modifications and deletions in the portfolio. An unattended manual mapping process leads to non productive searches for hotels no longer in the portfolio. It also omits the inclusion of new properties or corrections (see OTA_HotelDescriptiveInfo and OTA_HotelInvNotif).

There are no limitations to the number of hotels included in one single search, other than that one search may not include hotel codes of more than one country.

OTA_HotelAvailRQ hotel list:

```
.....
<AvailRequestSegments>
  <AvailRequestSegment>
    <StayDateRange End="2010-10-17" Start="2010-10-15"></StayDateRange>
    <RoomStayCandidates>
      <RoomStayCandidate RPH="0">
        <GuestCounts>
          <GuestCount Age="30" AgeQualifyingCode="10" Count="2"></GuestCount>
        </GuestCounts>
      </RoomStayCandidate>
    </RoomStayCandidates>
    <HotelSearchCriteria>
      <Criterion ExactMatch="true">
        <HotelRef HotelCode="AESPMI1234"></HotelRef>
      </Criterion>
    </HotelSearchCriteria>
  </AvailRequestSegment>
  <AvailRequestSegment>
    <StayDateRange End="2010-10-17" Start="2010-10-15"></StayDateRange>
    <RoomStayCandidates>
      <RoomStayCandidate RPH="1">
        <GuestCounts>
          <GuestCount Age="30" AgeQualifyingCode="10" Count="2"></GuestCount>
        </GuestCounts>
      </RoomStayCandidate>
    </RoomStayCandidates>
    <HotelSearchCriteria>
      <Criterion ExactMatch="true">
        <HotelRef HotelCode="AESPMI5678"></HotelRef>
      </Criterion>
    </HotelSearchCriteria>
  </AvailRequestSegment>
....
```

OTA_HotelAvailRQ – geographical list

The <AvailRequestSegment ResponseType="AreaList"> element in the OTA_HotelAvailRQ allows the customer to refresh the available geographical locations. This RQ depends on the portfolio configured for the ID and only returns locations in which hotels are available in the portfolio.

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2016.2">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <AvailRequestSegments>
                <AvailRequestSegment ResponseType="AreaList">
    </AvailRequestSegment>
        </AvailRequestSegments>
</OTA_HotelAvailRQ>
```

OTA_HotelAvailRQ – geographical definition

Searches can also be executed using our 3-tier geographical segmentation tree of Country, Region or Resort, by specifying the destination airport code according to IATA. This information is provided in the AreaInfo element of the OTA_HotelDescriptiveInfo. Searches based on geographical criteria must contain a tier more specific than country. A search based on country only, will be rejected by our system.

All available hotels for one Region:

```
...
<AvailRequestSegments>
        <AvailRequestSegment>
                <StayDateRange End="2010-10-09" Start="2010-10-02"/>
                <RoomStayCandidates>
                        <RoomStayCandidate>
                                <GuestCounts>
                                        <GuestCount Count="2" AgeQualifyingCode="10"/>
                                </GuestCounts>
                        </RoomStayCandidate>
                </RoomStayCandidates>
                <HotelSearchCriteria>
                        <Criterion>
                                <RefPoint CodeContext="Country">Portugal</RefPoint>
                                <RefPoint CodeContext="Region">Algarve</RefPoint>
                        </Criterion>
                </HotelSearchCriteria>
        </AvailRequestSegment>
```

```
</AvailRequestSegments>
...
```

Complete drill-down to a specific resort:

```
    ....
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
                <RefPoint CodeContext="Region">Albufeira</RefPoint>
                <RefPoint CodeContext="Resort">Balaia</RefPoint>
        </Criterion>
</HotelSearchCriteria>
 .....
```

All hotels associated to an airport:

```
.....
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
                <RefPoint CodeContext="Airport">FAO</RefPoint>
        </Criterion>
</HotelSearchCriteria>
....
```

Multiple Region Resorts or regions in a single request:

```
....
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
                <RefPoint CodeContext="Region">Albufeira</RefPoint>
                <RefPoint CodeContext="Resort">Balaia</RefPoint>
                <RefPoint CodeContext="Resort">Salgados</RefPoint>
        </Criterion>
</HotelSearchCriteria>
 .....
```

When a Region is requested, the Country should be specified.
When a Resort is requested, both Country and Region should be specified

Example:
Resort “Santa Cruz” can be found in:
Portugal, Madeira
Spain, La Palma
Spain, Tenerife

If only Resort would be requested, without Country and Region, the results would contain hotels from all 3 locations.

Discontinuing Destination and TravelDestination

We are still providing Destination and TravelDestination in the detailed OTA_HotelDescriptiveInfoRS in the AreaInfo element, but these will be removed as soon as our last integration stops using these concepts, expected Q4/2021.

4.5 Flexible search options

In addition to the classical fixed start to end date searches, we have introduced 4 options to do flexible searches. As most of our clients will have travel preferences for arrival and departure around the weekends and other are desperate to avoid the busy dates, we think that the most efficient approach will be to allow “arrival week day specification” to reduce the inmense number of search results a flexible search may return.

Search up to 3 months, for a stay of 7 nights

If a search result is required over a period of x time and we want the cheapest price for a y night stay in one Region, Resort or list of hotels - only the cheapest price: I.e Mallorca, from 1 June to 30 Sept for 7 nights
this is requested with **Instance="MF2xx".** The Start and End dates are extended to cover the entire period and the stay is indicated in an additional **“Duration”** attribute. All hotels with each hotel listed with the lowest price will be returned in the search results. Note that the start date and the departure date will have to fall within the sart-end date selection.

```
<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" MaxResponses
 = "100" EchoToken = "1" Version = "0.1">
    <POS>
        <Source>
            <RequestorID Instance = "MF201" ID_Context = "AxisData" ID = "TEST
" Type = "22"/>
        </Source>
        <Source>
            <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/
>
        </Source>
    </POS>
    <AvailRequestSegments>
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-09-30" Start = "2023-06-
01" Duration="P7D"/>
            <RoomStayCandidates>
                <RoomStayCandidate>
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
            </RoomStayCandidates>
            <HotelSearchCriteria>
                <Criterion>
                    <RefPoint CodeContext = "Country">Jamaica</RefPoint>
                    <RefPoint CodeContext = "Region">Negril</RefPoint>
```

```
                </Criterion>
            </HotelSearchCriteria>
        </AvailRequestSegment>
    </AvailRequestSegments>
</OTA_HotelAvailRQ>
```

This search will result only 7 RoomStays for the 7 hotels available in Negril, where 90 arrivaldates times the available room+board combinations would easily have exceeded 3000 Roomstays (which would be possible if the Instance was set to "MF201"), imagine a destination or hotellist search with several hundred hotels…

The same request can be executed with a list of hotels

```
…
            <HotelSearchCriteria>
                <Criterion ExactMatch = "true">
                    <HotelRef HotelCode = "AJMJAMBXAE"/>
                    <HotelRef HotelCode = "AJMJAMC0GG"/>
                    <HotelRef HotelCode = "AJMJAMC0GC"/>
                    <HotelRef HotelCode = "AJMJAMB4LS"/>
                    <HotelRef HotelCode = "AJMJAMFE3G"/>
                    <HotelRef HotelCode = "AJMJAMDVE4"/>
                    <HotelRef HotelCode = "AJMJAMEWBO"/>
                </Criterion>
            </HotelSearchCriteria>
…
```

Destination or hotellist searches can only be excuted with “cheapest”

```
<Error Type="3" Code="378">Flexible search can only be used in combination wit
h the list or calendar view parameter (MF1x2 or MF2x2)</Error>
```

Search results can still be limited to only show the x cheapest options by setting the MaxResponses parameter:

```
<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" MaxResponses
 = "10" EchoToken = "1" Version = "2016.2" PrimaryLangID = "DE" AltLangID = "E
N">
```

Search up to 3 months, for a stay of 5, 6 and 7 nights

If a search result is required over a period of x time and we want the cheapest of multiple lengths of stays to avoid MinStay issues and benefit from 7x6 or 7x5 offers it can be be requested with multiple StayDateRange elements:

```
  <AvailRequestSegments>
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration="P5D"/>
…
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration="P6D"/>
```

…

```
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration="P7D"/>
```

Maximum nr of Durations
Explain cheapest logic price per night

Search up to 3 months, with DOW restriction

By adding a DayOfWeek restriction, the number of results can be reduced to the specific arrival days in the interest of the end-customer who for example only can travel during weekends or at the contrary desires to avoid the crowds by travelling during weekdays.

```
    <AvailRequestSegments>
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration="P7D">
                <StartDateWindow DOW="112"/>
            </StayDateRange>
```

the intention is to express Friday, Saturday and Sunday, which is binary 1110000, which computes to DOW=112, like just fri+sat is 110000 which computes to DOW=48 or Monday and Tuesday which computes to DOW=3

DOW logic

DOW	Sunday	Saturday	Friday	Thursday	Wednesday	Tuesday	Monday
binary	1000000	0100000	0010000	0001000	0000100	0000010	0000001
exponent	2*6	2*5	2*4	2*3	2*2	2*1	2*0
result	64	32	16	8	4	2	1

Calendarview

Search one hotel for one stay for 3 months and get the cheapest price for each arrival date to display a price calendar like this:

The switch for the calendarview is Instance = "MF1xx". Note that if there is no availability for example from 1 to 8 August, instead of the 29 arrival dates requested in below request (remember that the arrival and departure must fall between start and end-date), we will return 20 RoomStays for arrival 9 to 29 August

```
    <POS>
        <Source>
            <RequestorID Instance = "MF102" ID_Context = "AxisData" ID = "TEST
" Type = "22"/>
…
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration="P7D"/>
```

Calendar view, DOW restriction

The calendar view can of course be restricted to only display arrivals on Friday:

```
            <RequestorID Instance = "MF102" ID_Context = "AxisData" ID = "TEST
" Type = "22"/>
…
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration = "P7D">
                <StartDateWindow DOW = "16"/>
```

Best price for one property across a whole year

Flexible search across multiple hotels is restricted to 99 days per request to protect response times. For one hotel a best price search for a longer period is possible upto one year. It is also possible to indicate (multiple) stay conditions. The system will compute the best offer across all stays firstly for each stay during the indicated period of max 365 nights and then determine which of the stays has the cheapest price per night. A maximum of 8 durations can be requested in one message.

Firstly this is useful in case different MinStay conditions are valid for different periods and secondly this is useful in case a Free-Stay-Offer is computed and for example the cheapest 5 nights price is 500€ (100€/night), the cheapest 6 nights stay is 600€ (100€/night) and the cheapest 7 nights stay is also 600€ (100€/night and the last night is free, due to a stay 7, pay 6 nights offer, results to a computed 85,71€/night). **In this case we would only display the 7 nights as the cheapest option**.

```
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-12-31" Start = "2023-01-
01" Duration="P5D"/>
            <RoomStayCandidates>
                <RoomStayCandidate>
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
            </RoomStayCandidates>
            <HotelSearchCriteria>
                <Criterion ExactMatch="true">
                    <HotelRef HotelCode="AJMJAMBXAE"></HotelRef>
                </Criterion>
            </HotelSearchCriteria>
```

```
        </AvailRequestSegment>
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-12-31" Start = "2023-01-
01" Duration="P6D"/>
            <RoomStayCandidates>
                <RoomStayCandidate>
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
            </RoomStayCandidates>
            <HotelSearchCriteria>
                <Criterion ExactMatch="true">
                    <HotelRef HotelCode="AJMJAMBXAE"></HotelRef>
                </Criterion>
            </HotelSearchCriteria>
        </AvailRequestSegment>
        <AvailRequestSegment InfoSource = "12">
            <StayDateRange End = "2023-12-31" Start = "2023-01-
01" Duration="P7D"/>
            <RoomStayCandidates>
                <RoomStayCandidate>
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
            </RoomStayCandidates>
            <HotelSearchCriteria>
                <Criterion ExactMatch="true">
                    <HotelRef HotelCode="AJMJAMBXAE"></HotelRef>
                </Criterion>
            </HotelSearchCriteria>
        </AvailRequestSegment>
    </AvailRequestSegments>
```

Calendar view and best price logic for multiple room requests

It is possible to do a Calendar view search for multiple rooms (always single hotel). However, this should be carefully thought through in terms of performance. Imagine a 3 months calendar, you want to request a duration of 7 nights and you allow a maximum of 5 rooms in your multi-room booking request.
To find the cheapest offer for each room occupancy we need to compute all rooms and boards (on average 3x3=9) for 5 rooms and 99 arrival dates. That would be 4,455 prices to be calculated.
If we would reduce the requested period and display a calendar of two months per request, we will already reduce the number of prices to compute to 2,790.
Imagine that you would additionally set a WeekDay filter to maybe your most popular Friday and Saturday arrivals (just 16 in 2 months), you would reduce the number of prices to compute to 720 and the number of results to 80 RoomStays to combine and sum for display.
We do not recommend to display multiple durations in one calendar view as this will increase the number of computations and our response time substantially. Instead we recommend the

client to allow to set the required duration, and if multiple, have them consciously select the multiple durations.

The search response will hold the cheapest option for each of the requested RoomStayCandidates and display the remaining units. The combinations and the sum of the selected rooms have to be computed while rendering the search result (i.e. single room=100€, double room is 150€ and triple room is 175€, the total is to be computed in the front-end as 425 for every arrival date.
In the total price calculation the remaining rooms need to be sufficient to cover all the RoomStayCandidates where the specific room is used (i.e. if the double room sleeps 1 to 3 persons, the double room would be offered for all 3 single occupancy, double occupancy and triple occupancy RoomStayCandidates, but if only 2 remaining are available, this combination should not be offered by the front-end.
If there were 2 remaining double rooms for the single occupancy, double occupancy and 1 remaining triple room for the triple occupancy, then that combination can be offered by the frontend.

The best price logic for the same parameters requires the same amount of calculations, but just returns the requested rooms for the single cheapest date in the period.

Example:

```
<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" MaxResponses
 = "100" EchoToken = "1" Version = "2016.2">
    <POS>
        <Source>
            <RequestorID Instance = "MF102" ID_Context = "AxisData" ID = "TEST
" Type = "22"/>
        </Source>
        <Source>
            <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/
>
        </Source>
    </POS>
    <AvailRequestSegments>
        <AvailRequestSegment InfoSource = "0">
            <StayDateRange End = "2023-09-05" Start = "2023-08-
01" Duration = "P7D">
                <StartDateWindow DOW = "48"/>
            </StayDateRange>
            <RoomStayCandidates>
                <RoomStayCandidate RPH = "1">
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
                <RoomStayCandidate RPH = "2">
                    <GuestCounts>
                        <GuestCount Count = "2" AgeQualifyingCode = "10"/>
                    </GuestCounts>
                </RoomStayCandidate>
```

```
            </RoomStayCandidates>
            <HotelSearchCriteria>
                <Criterion ExactMatch = "true">
                    <HotelRef HotelCode = "AJMJAMFE3G"></HotelRef>
                </Criterion>
            </HotelSearchCriteria>
        </AvailRequestSegment>
    </AvailRequestSegments>
</OTA_HotelAvailRQ>
```

Finally, it is possible that in a multi-room Calendar View request for various durations, one RoomStay is returned with a different duration than the other and conclusively should not be combined and shown. As we expect a) that few clients will develop a calendar view for multiple durations and b) that stay related offers are valid for all rooms in a property, we have decided that we will not implement further logic to for example group by product+rph+duration and decide which duration should be returned.

4.6 Number of bookable options in Search response

By specifying MaxResponses in the search request, customers are able to limit or extend the number of bookable options included in a search response. For searches using MF002 (only include the cheapest room/board combination), the count is number of hotels. For searches using MF001, the count is not by hotel, but by hotel, room and board combinations. The default value is 1500, which, depending on each region, might average to an inclusion of circa 300 hotels if we see around 3 rooms and 2 boards returned for each hotel. The default value can be increased or decreased from the default value of 1500 search results.

```
<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "0.1"
EchoToken = "123456789" MaxResponses="5000">
```

4.7 Search by hotel name

Customers familiar with a certain hotel or who compare various distribution channels, often search by hotel name. Although partners might have implemented this feature based on the stored Basic Hotel Data, we provide a feature to return all hotels which contain the specified (part of) the name. *A minimum of 3 chars is required*

```
.....
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
                <HotelRef HotelName="club"/>
        </Criterion>
</HotelSearchCriteria>
....
```

Which would return:

```
....
```

```
<HotelStays>
    <HotelStay>
      <BasicPropertyInfo HotelCodeContext = "46643" AreaID = "8" HotelName = "Clube Maria
Luisa" HotelCode = "AMTSPT0041">
…
    <HotelStay>
      <BasicPropertyInfo HotelCodeContext = "41054" AreaID = "1" HotelName = "Turim Rural
Clube D'Azeitao" HotelCode = "AMTSPT168S">
….
    <HotelStay>
      <BasicPropertyInfo HotelCodeContext = "2117" AreaID = "2" HotelName = "Dom Pedro
Meia Praia Beach Club" HotelCode = "AMTSPT0100">
….
```

(Message enriched with GIATA code, AreaID and HotelName – see appropriate section).

4.8 Upfront filtering features

Although most searches are generic and filtering is usually applied on the search results, a search can be limited to only include specific criteria.

A typical search might limit the responses to a certain board or room type:

```
 ….
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
                <RefPoint CodeContext="Region">Albufeira</RefPoint>
                <RefPoint CodeContext="Resort">Balaia</RefPoint>
                <Award Rating="4 Star"/>
                <RatePlanCandidates>
                        <RatePlanCandidate>
                                <MealsIncluded MealPlanCodes="HB"/>
                        </RatePlanCandidate>
                </RatePlanCandidates>
                <RoomStayCandidates>
                        <RoomStayCandidate RoomClassificationCode="ST"/>
                </RoomStayCandidates>
        </Criterion>
</HotelSearchCriteria>
…..
```

This search only returns 4 star properties as defined in the „Award“ element, board type Half Board as defined in the „RatePlanCandidates“ and room type Studio as defined in the „RoomStayCandidates“ element.

A specific room code can be requested as well:

```
….
<HotelSearchCriteria>
        <Criterion>
                <RefPoint CodeContext="Country">Portugal</RefPoint>
```

```
                <RefPoint CodeContext="Region">Albufeira</RefPoint>
                <RefPoint CodeContext="Resort">Balaia</RefPoint>
                <Award Rating="3 Star"/>
                <RoomStayCandidates>
                        <RoomStayCandidate RoomType="APSD000000"/>
                </RoomStayCandidates>
        </Criterion>
</HotelSearchCriteria>
 …..
```

This search only returns 3 star properties as defined in the „Award“ element with room code APSD000000 as defined in the „RoomStayCandidates“ element.

4.9 Multiple room searches

A multi-room booking search allows doing an availability search of multiple rooms in a single request. The response format will include the remaining units for each room candidate.

Old “search by available combinations” model has been deprecated.

A maximum of 5 rooms may be requested for a single booking. Bookings containing more than 6 rooms are considered “Group Bookings” for which different conditions may apply.

Each returned room in the list of candidate rooms will specify number of units available. Valid combinations should be built in client side taking into account the NumberOfUnits and RoomStayCandidateRPH.

This format uses a 0 in the second number of the instance attribute MF0**0**x. This switch is fully compatible with the values used for room/board combinations, specified in previous sections, so both MF001 and MF002 are valid.

```
<POS>
        <Source>
                <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
        </Source>
</POS>
```

For each room stay candidate specified in the request, response will contain a list of room stays, one per each room where the room candidate fits. If two room stay candidates fit in the same room, and there is only one remaining unit, it cannot be offered twice.
Each room stay will contain number of remaining units in attribute “NumberOfUnits” in element <RoomRate>, this attribute is not returned in case room has free sales.
Each <RoomStay> element has a unique RPH value.
If two or more room stay candidates fit in the same room, same amount of room stays for the same room will be returned, one for each room stay candidate.

We want to execute a simple search for hotel AMTSXX0000, for one day (from 1st of December to 2nd of December). This hotel has three rooms with following occupancy conditions and rates:

Room	MinPax	MaxPax	MinAdt	MaxAdt	MinChd	MaxChd	Price per pax
SGL – Single Room	1	1	1	1	0	0	50
DBL – Double Room	1	3	1	2	0	2	100
APT – Apartment	2	2	2	2	0	0	200

The current availability in the system is (remaining units):

	29/11/2012	30/11/2012	01/12/2012	02/12/2012	03/12/2012	04/12/2012
SGL	10	10	10	10	9	8
DBL	1	1	1	1	1	1
APT	2	2	2	2	2	2

In this case, the only board available is **BB**, i.e. there will be only one room&board combination for each room.
A customer wants to search available rooms (all combinations room and board) for hotel AMTSXX0000, for 2 rooms, with the following pax distribution: 1ADT and 2ADT. According to hotel room characteristics, 1 ADT fits in SGL and DBL rooms, and 2ADT fit in DBL and APT.

Request

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="OTA_HotelAvailRQ.xsd" Version="2016.2" EchoToken="123322344">
	<POS>
		<Source>
			<RequestorID Instance="MF001" ID_Context="AxisData" ID="CLIC"
Type="22"/>
		</Source>
	</POS>
	<AvailRequestSegments>
		<AvailRequestSegment>
			<StayDateRange End="2020-02-01" Start="2020-01-23"/>
			<RoomStayCandidates>
				<RoomStayCandidate Quantity="1" RPH="111">
					<GuestCounts>
						<GuestCount AgeQualifyingCode="10"
Count="1"/>
					</GuestCounts>
				</RoomStayCandidate>
				<RoomStayCandidate Quantity="1" RPH="222">
					<GuestCounts>
						<GuestCount AgeQualifyingCode="10"
Count="2"/>
					</GuestCounts>
				</RoomStayCandidate>
			</RoomStayCandidates>
			<HotelSearchCriteria>
				<Criterion ExactMatch="true">
```

```
                                        <HotelRef HotelCode="AMTSMT22EI"/>
                                    </Criterion>
                                </HotelSearchCriteria>
                            </AvailRequestSegment>
                        </AvailRequestSegments>
</OTA_HotelAvailRQ>
```


Response will contain a room stay for each room available (room and board combination, but in the example, only BB is offered) for each room stay candidate, i.e., 4 room stays:

- SGL and DBL for 1ADT
- DBL and APT for 2ADT

Response


```
<?xml version="1.0" encoding="UTF-8"?>
<OTA_HotelAvailRS
   xmlns="http://www.opentravel.org/OTA/2003/05" TransactionIdentifier="1-1/1"
Target="Production" Version="2006" EchoToken="123322344">
   <Success/>
   <HotelStays>
      <HotelStay>
         <BasicPropertyInfo HotelCodeContext="1849" AreaID="12254" HotelName="115 The
Strand Hotel and Apartments" HotelCode="AMTSMT22EI">
            <VendorMessages>
               <VendorMessage Title="Images">
                  <SubSection>
                     <Paragraph>
                        <Image>AMTSMT22EI_806738.jpg</Image>
                     </Paragraph>
                  </SubSection>
               </VendorMessage>
            <VendorMessages></VendorMessages>
         </BasicPropertyInfo>
      </RoomStay>
      <RoomStay RoomStayCandidateRPH="222" RPH="0" ResponseType="PropertyList">
         <RoomTypes>
            <RoomType RoomTypeCode="RMSD000000">
               <RoomDescription>
                  <Text Language="EN">Standard Room</Text>
               </RoomDescription>
               <Amenities>
                  <Amenity>Additional Beds</Amenity>
                  <Amenity>Air-Conditioning: Central</Amenity>
                  <Amenity>Bathroom</Amenity>
                  <Amenity>Bathtub or Shower</Amenity>
                  <Amenity>Desktop</Amenity>
                  <Amenity>Double Bed</Amenity>
                  <Amenity>Fire Alarm</Amenity>
                  <Amenity>Floor-Type: Tiled</Amenity>
                  <Amenity>Hairdryer</Amenity>
                  <Amenity>Internet: extra fee</Amenity>
```

```
            <Amenity>Kettle Tea-Coffee: extra fee</Amenity>
            <Amenity>Mini Fridge: extra fee</Amenity>
            <Amenity>No.Bathrooms:: 1</Amenity>
            <Amenity>Phone</Amenity>
            <Amenity>Radio</Amenity>
            <Amenity>Safe: extra fee</Amenity>
            <Amenity>TV</Amenity>
            <Amenity>Twin Bed</Amenity>
          </Amenities>
        </RoomType>
      </RoomTypes>
      <RoomRates>
        <RoomRate RoomTypeCode="RMSD000000" NumberOfUnits="5">
          <Rates>
            <Rate>
              <Base AmountAfterTax="281.34" CurrencyCode="EUR"/>
              <Total AmountAfterTax="281.34" CurrencyCode="EUR"/>
            </Rate>
          </Rates>
          <Features>
            <Feature>
              <Description>
                <Text>BB</Text>
              </Description>
            </Feature>
          </Features>
        </RoomRate>
      </RoomRates>
      <GuestCounts>
        <GuestCount AgeQualifyingCode="10" Count="2"/>
      </GuestCounts>
      <TimeSpan Start="2020-01-23" End="2020-02-01"/>
      <Reference Type="22" ID="CLIC" ID_Context="CLIC"/>
      <BasicPropertyInfo HotelCode="AMTSMT22EI">
        <VendorMessages></VendorMessages>
      …
```


According to information received, Standard room has 5 units remaining and it is available for both room stay candidates (both pax distributions fit in the DBL room), so 1ADT and 2ADT cannot book two Standard rooms.

It is possible that we cannot offer options for all the rooms requested. Imagine that 3 rooms are requested for the following occupancies, but the contract does not have a single-use room, only double rooms and family rooms:

1st room 2 adults+ 2 children
2nd room 1 adult
3rd room 2 adults

We will respond with all possible options for the 1st and 3rd room, but not offer any option for the 2nd room and include a warning:

```
<Warnings>
  <Warning Code = "14">Not all rooms in the request do have a suitable candidate</Warning>
</Warnings>
```

4.10 OTA_HotelAvailRS

An OTA_HotelAvailRS message is received in response to the request. The presence of the <Success/> element indicates successful processing of the request; otherwise, a list of errors is returned. A List of the most common errors can be found in Appendix G.

The available rooms are returned in repeated <RoomStay> elements detailing the room codes (actual booking codes), the total price for the room, the guest counts and the hotel code. Each different hotel returned has a unique RPH, multiple room and/or board combinations for the same hotel, share the same RPH for grouping purposes. The remaining amount for each room is expressed as NumberOfUnits at RoomRate level.

An RPH specified is echoed in the RS (i.e if the RQ specifies RoomStayCandidateRPH = "0", you will find this same value in the RS).

The lowest RPH indicates the cheapest hotel according to our sorting.
The Rate|ChargeType attribute specifies the type of the original contract rate according to OTA Codelist CHG, 7=PerPerson, 12=PerStay, 31=PerUnit

```
......
<RoomStays>
 <RoomStay ResponseType = "PropertyList" RPH = "11" RoomStayCandidateRPH = "0">
  <RoomTypes>
   <RoomType RoomTypeCode = "APSDDB0000"/>
  </RoomTypes>
  <RoomRates>
   <RoomRate RoomTypeCode = "APSDDB0000" NumberOfUnits = "10">
    <Rates>
       <Rate ChargeType="31">
          <Base AmountAfterTax="909.77" CurrencyCode="EUR"/>
          <Total AmountAfterTax="909.77" CurrencyCode="EUR"/>
      </Rate>
    </Rates>
    <Features>
     <Feature>
      <Description>
       <Text>SC</Text>
      </Description>
     </Feature>
    </Features>
   </RoomRate>
  </RoomRates>
  <GuestCounts>
   <GuestCount Count = "3" Age = "30" AgeQualifyingCode = "10"/>
  </GuestCounts>
  <TimeSpan End = "2019-10-13" Start = "2019-10-08"/>
  <BasicPropertyInfo HotelCode = "HOTEL1"/>
```

```
  </RoomStay>
  <RoomStay ResponseType = "PropertyList" RPH = "12" RoomStayCandidateRPH = "0">
    <RoomTypes>
      <RoomType RoomTypeCode = "RMSD00000E"/>
    </RoomTypes>
    <RoomRates>
      <RoomRate RoomTypeCode = "RMSD00000E" NumberOfUnits = "7">
        <Rates>
          <Rate>
            <Base CurrencyCode = "EUR" AmountAfterTax = "134.78"/>
            <Total CurrencyCode = "EUR" AmountAfterTax = "134.78"/>
          </Rate>
        </Rates>
        <Features>
          <Feature>
            <Description>
              <Text>SC</Text>
            </Description>
          </Feature>
        </Features>
      </RoomRate>
    </RoomRates>
    <GuestCounts>
      <GuestCount Count = "3" Age = "30" AgeQualifyingCode = "10"/>
    </GuestCounts>
    <TimeSpan End = "2019-10-13" Start = "2019-10-08"/>
    <BasicPropertyInfo HotelCode = "HOTEL2"/>
  </RoomStay>
</RoomStays>
```

4.11 Search response enrichment

By default, all search responses are enriched with additional information. Filters should be implemented to switch-off groups of elements, which allow faster and smaller responses. The response time will decrease and the user experience will improve (see also zipped responses).

Enrichment of search responses is only slightly enlarging our system response times, as through caching the repetitively generated information can be included at little expense. However, the additional information has to be transmitted via internet and has to be processed by partners from the XML every time the hotel is displayed. Repetitive transmission and processing of the same data is inefficient.

The "**InfoSource**" attribute in the OTA_HotelAvailRQ has been developed as the indicator for response details level. This will give our clients the possibility to choose the amount of data they need/want to receive in the OTA_HotelAvailRS, since the response data size and the transportation time is the main factor in overall performance.

Inclusion of InfoSource with any value other than 0, results in the inclusion of the "HotelStays" and "Areas" elements:

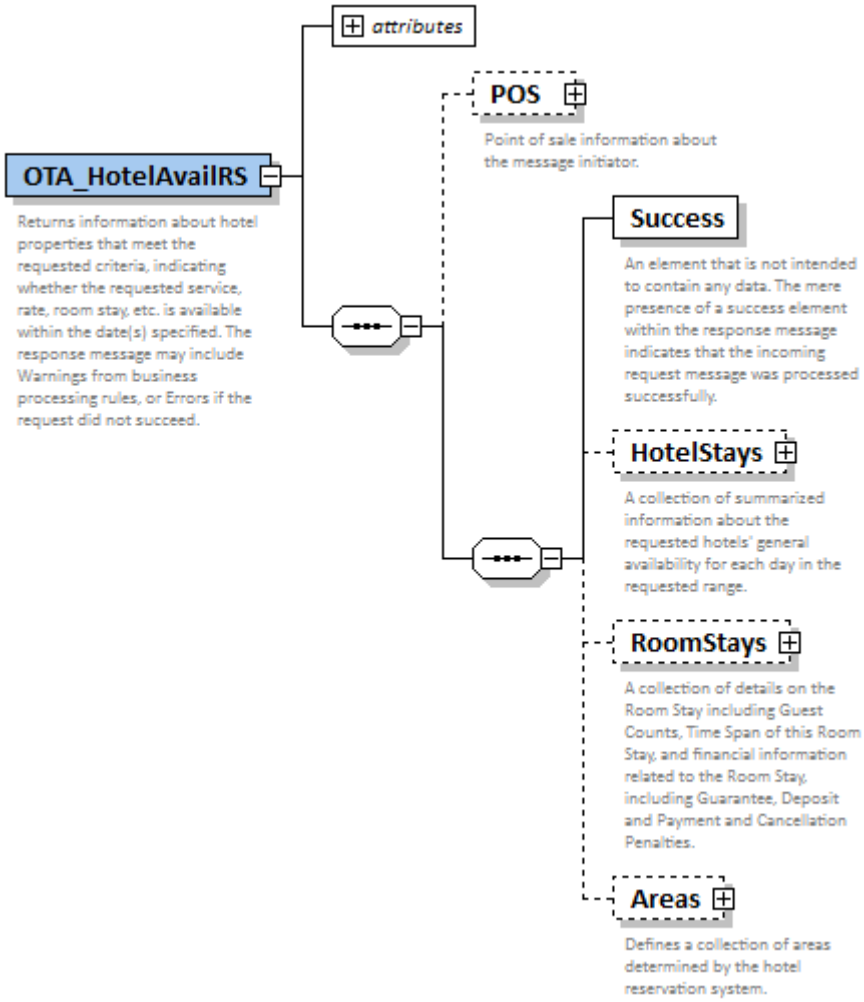

Whereas the “InfoSource=0” would only include the “RoomStays” element:

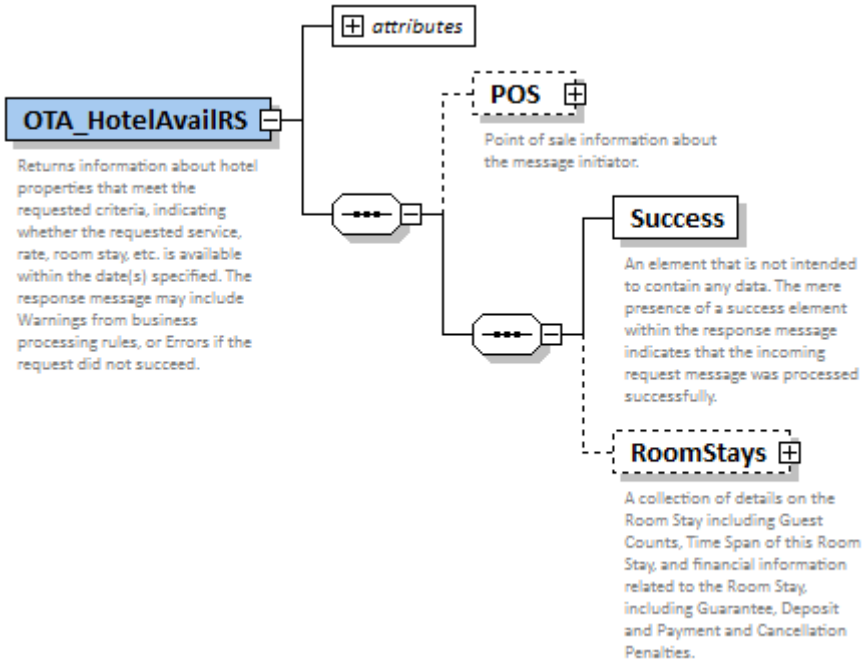

Additional hotel information

As an example, the HotelStay element can be enriched with GIATA ID, HotelName, thumbnail image name, rating...

```
.....
<HotelStay>
        <BasicPropertyInfo HotelCodeContext="49243" AreaID="5" HotelName="Solmonte
Apartments" HotelCode="AMTSPT0YHI">
                <VendorMessages>
                        <VendorMessage>
                                <SubSection>
                                        <Paragraph>
                                                <Image>hotel.jpg</Image>
                                        </Paragraph>
                                </SubSection>
                        </VendorMessage>
                </VendorMessages>
                <Award Rating="3 Key"/>
        </BasicPropertyInfo>
</HotelStay>
....
```

These can include geographical information:

```
<Area AreaID="5">
        <AreaDescription Name="Country">
                <Text>Portugal</Text>
        </AreaDescription>
        <AreaDescription Name="Region">
                <Text>Potimao</Text>
        </AreaDescription>
        <AreaDescription Name="Resort">
                <Text>Praia da Rocha</Text>
        </AreaDescription>
        <AreaDescription Name="StateProvince">
                <Text>SP07</Text>
        </AreaDescription>
</Area>
```

Additional room information featuring amenities:

```
<RoomStay RoomStayCandidateRPH = "0" RPH = "53" ResponseType = "PropertyList">
      <RoomTypes>
        <RoomType RoomTypeCode = "APSD000000">
          <RoomDescription>
            <Text>Apartment_Standard</Text>
          </RoomDescription>
          <Amenities>
            <Amenity>Shower</Amenity>
            <Amenity>Kitchenette</Amenity>
            <Amenity>Bathtub</Amenity>
            <Amenity>Bathroom</Amenity>
            <Amenity>Balcony</Amenity>
            <Amenity>TV</Amenity>
            <Amenity>Safe</Amenity>
            <Amenity>Phone</Amenity>
            <Amenity>Mini Fridge</Amenity>
            <Amenity>Heating</Amenity>
            <Amenity>Hairdryer</Amenity>
          </Amenities>
        </RoomType>
      </RoomTypes>
```

The possible values for the InfoSource attribute are:

Not defined - full enrichment
0 - No enrichment
1 - HotelStays only enrichment
2 - Areas only enrichment
3 - Amenities only enrichment
4 - RoomDescription only enrichment
5 - BoardDescription only enrichment
~~6 – Notes~~ – Depricated mid 2019 for no usage

~~7 - Issues and Errata~~ – Depricated mid 2019 for no usage
~~8 - Extended descriptions, Free wifi and air conditioning included in the room description~~ – Depricated end 2020

Default Value if no InfoSource is specified is "1234"

Combination of more than one infosource is completely supported, I.E. InfoSource="12" specifies HotelStays + Areas

Example request:

```
<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" MaxResponses = "1000"
EchoToken = "1" Version = "2016.2" PrimaryLangID="FR" AltLangID="EN">
  <POS>
    <Source>
      <RequestorID Instance = "MF002" ID_Context = "AxisData" ID = "TEST" Type = "22"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
<AvailRequestSegments>
    <AvailRequestSegment InfoSource = "234">
      <StayDateRange End = "2022-08-11" Start = "2022-08-04"/>
      <RoomStayCandidates>
        <RoomStayCandidate RPH = "1">
          <GuestCounts>
            <GuestCount AgeQualifyingCode = "10" Count = "1"/>
            <GuestCount AgeQualifyingCode = "10" Count = "1"/>
          </GuestCounts>
        </RoomStayCandidate>
      </RoomStayCandidates>
      <HotelSearchCriteria>
        <Criterion ExactMatch = "true">
          <HotelRef HotelCode = "AMTSES0S5C"/>
          <HotelRef HotelCode = "AMTSES1FYU"/>
          <HotelRef HotelCode = "AMTSES0LYO"/>
          <HotelRef HotelCode = "AMTSES1FZU"/>
          <HotelRef HotelCode = "AMTSES0LXO"/>
        </Criterion>
      </HotelSearchCriteria>
    </AvailRequestSegment>
  </AvailRequestSegments>
</OTA_HotelAvailRQ>
```

Response:

```
....
<RoomStays>
    <RoomStay RoomStayCandidateRPH="1" RPH="0" ResponseType="PropertyList">
      <RoomTypes>
        <RoomType RoomTypeCode="RMSDDB00A0">
          <RoomDescription>
            <Text Language="FR">Double Standard Chambre (Balcon ou terrasse)</Text>
          </RoomDescription>
          <Amenities>
```

```
            <Amenity>Air-Conditioning: Central</Amenity>
            <Amenity>Balcony</Amenity>
            <Amenity>Balcony or Terrace</Amenity>
            <Amenity>Bathroom</Amenity>
            <Amenity>Bathtub or Shower</Amenity>
            <Amenity>Desktop</Amenity>
            <Amenity>Floor-Type: Laminate</Amenity>
            <Amenity>Hairdryer</Amenity>
            <Amenity>Heating: Central</Amenity>
            <Amenity>Internet: free of charge</Amenity>
            <Amenity>Mini Fridge: extra fee</Amenity>
            <Amenity>Phone</Amenity>
            <Amenity>Room Size: 20 m2</Amenity>
            <Amenity>Safe: extra fee</Amenity>
            <Amenity>Shower</Amenity>
            <Amenity>TV: SAT TV</Amenity>
            <Amenity>Twin Bed</Amenity>
            <Amenity>Wheelchair Accessibility</Amenity>
          </Amenities>
        </RoomType>
      </RoomTypes>
....
```

Request with just one enrichment:

```
    <AvailRequestSegment InfoSource = "1">
```

Response:

```
....
        <HotelStay>
          <BasicPropertyInfo HotelCodeContext="97452" AreaID="939" HotelName="Verdemar Apart"
        HotelCode="AMTSES0SCK">
            <Award Rating="3 Key"/>
            <Service BusinessServiceCode="Segmentation">Environmentally Committed
        Hotel</Service>
            <Service BusinessServiceCode="Segmentation">Extra Care</Service>
            <Service BusinessServiceCode="Segmentation">Gay friendly</Service>
          </BasicPropertyInfo>
        </HotelStay>
....
```

Segmentation

As per below example, Destinations may classify a hotel in a certain segment based on the periodical factsheet or health and safety questionnaires and inspections.

```
<HotelStay>
  <BasicPropertyInfo HotelCodeContext="97452" AreaID="939" HotelName="Verdemar Apart"
HotelCode="AMTSES0SCK">
    <Award Rating="3 Key"/>
    <Service BusinessServiceCode="Segmentation">Extra Care</Service>
    <Service BusinessServiceCode="Segmentation">Adults Only</Service>
    <Service BusinessServiceCode="Segmentation">Gay Friendly</Service>
    <Service BusinessServiceCode="Segmentation">Family Hotel</Service>
    <Service BusinessServiceCode="Segmentation">Cyclist Hotel</Service>
    <Service BusinessServiceCode="Segmentation">Environmentally Committed Hotel</Service>
```

```
    <Service BusinessServiceCode="Segmentation">Welcome Ready</Service>
  </BasicPropertyInfo>
</HotelStay>
```

Free cancellation up to tags in search results

On demand, we can set a feed to include a **free cancellation up to x days before arrival** or **after booking** (semi-non-refundable rooms/rateplans can have a cancellation option like 12, 24 or 48 hours after booking). This is to replace inclusion of full cancellation policies, which have no use at the search results display. At this stage of the booking, an end-customer will only be interested in whether the product can be cancelled free of charge and up to which date. Inclusion of many cancellation conditions for each bookable option is contradictory to speed and smallest message footprint possible (cost).

```
<VendorMessage InfoType = "2" Title = "FreeCancellationConditions">
  <SubSection SubTitle = "FCP-RATE"/>
  <SubSection SubTitle = "FCP-P15D"/>
</VendorMessage>
```

- FreeCancellationPolicy: FCP-P5D means 5 days before arrival cancellation is free of charge, 4 days and less before arrival cancellation fees apply – local time
- FreeCancellationafterBooking: "FCB-P1D" (means 1 day after booking) or "FCB-P1H" (means 1 hour after booking) – system time
- Free cancellation after booking cannot co-exist with free cancellation before arrival for 1 room/rateplan.
- FCP and FCB is not included in combination with InfoSource=0

4.12 Response times and proceeding to the reservation

Searches are responded from the same in-memory container as our Quote and Book messages. This provides our partner with a search response time of circa 50 ms plus internet transport time, for the OTA_HotelAvailRQ message with hotel list and the OTA_HotelAvailRQ/RS message that is not enriched. Also the data and the logic applied is the same between these messages, so a very high price and availability consistency across the workflow can be expected.

The number of hotels requested is irrelevant as each hotel in the list is calculated in parallel. The occupancy, number of rooms/boards available and offers applicable affects only slightly the processing time.

Customers dwelling on “search results” displays, analysing “hotel information” and images and comparing offers of interest, could be affected by a contract update, which results to a updated price or availability in the next step.

Conclusively, partners are recommended to execute a search for a single hotel, when end customers navigate through pages following an initial search.

Customers using the **notification-based model**, are recommended to implement the single hotel search for navigation, until one specific room+board combination is selected and an OTA_HotelResRQ of type quote (BA-B) can be transmitted.

On the navigation towards “please provide pax names”, the **OTA_HotelResRQ** of the type “**Quote**” must be implemented. This message verifies price and availability against the database and provides cancellation conditions. This prevents disappointment before providing all the participants data, in case the room is not available anymore or the bookable rate is different.

We also integrate directly with hotels and hotel chains, mostly through channel managers or switches and some of these require a real-time integration to their system for the Quote and Book messages. This may increase response times compared to confirming the Quote and Book upon data held in our own system. Especially when a VCC has to be created ahead of the booking message. If the data pushed to our system does not match the real bookability, price-jumps between Search and Quote/Book or non-bookability can be expected. Price and Availability consistency throughout the workflow is substantially lower in case of real-time integrations.

In case the quote differs from the search response, partners must correct the price towards the end-customer, or partners advertising up-front final pricing must accept differences. Under no circumstance, AxisData accepts prices differences originated from searches or notifications, also in case of technical errors (see agreement annex).

4.13 On Request availability and bookings – planned Q4/2021

Clients will be allowed to request non-bookable results to be included in the OTA_HotelAvailRS. In order to include onRequest availability offers, the request must include the attribute OnRequestInd with a true value.

Offers available on request will be identified by its availabilityStatus OnRequest which means Room available on request, cannot be confirmed in real time

OTA_HotelAvail Request:

<OTA_HotelAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" PrimaryLangID = "EN" AltLangID = "EN" EchoToken = "1234" Version = "2016.2" OnRequestInd = "true">

OTA_HotelAvail Response:

<RoomStay RoomStayCandidateRPH = "1" RPH = "0" ResponseType = "PropertyList" AvailabilityStatus="OnRequest">

For the OTA_HotelResRQ the same attribute is included in the header for both the Quote and the Commit:

OTA_HotelRes Request:

<OTA_HotelResRQ xmlns = http://www.opentravel.org/OTA/2003/05 ResStatus = "Quote" PrimaryLangID = "EN" AltLangID = "EN" EchoToken = "1234" Version = "2016.2" OnRequestInd = "true">

OTA_HotelRes Response:

<ns1:BookingStatus xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns1:BookingStatusType" ReservationStatusType="OnRequest"/>

Once an OnRequest Booking is made via the OTA_HotelResRQ, Commit message, the destination is confirming the requested option asap with the hotel. The distributor has to be polling our system with an OTA_ReadRQ, detail request for the submitted MasterReference or Internal reference received, to view whether the booking is confirmed or denied. We recommend to poll our system at least once an hour.

Upon submitting the OTA_ReadRQ, the reservation status in the OTA_ResRetrieveRS will continue to show OnRequest until the destination changes the booking status after contacting the hotel:

Pending:
<ns1:BookingStatus xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns1:BookingStatusType" ReservationStatusType="OnRequest"/>

Confirmed:
<ns1:BookingStatus xmlns:ns1=http://www.opentravel.org/OTA/2003/05/tpa xmlns:xsi=http://www.w3.org/2001/XMLSchema-instance xsi:type="ns1:BookingStatusType" ReservationStatusType="Reserved"/>

Denied:
<ns1:BookingStatus xmlns:ns1=http://www.opentravel.org/OTA/2003/05/tpa xmlns:xsi=http://www.w3.org/2001/XMLSchema-instance xsi:type="ns1:BookingStatusType" ReservationStatusType="Refused"/>

Please, contact us if you wish to implement these, in order to confirm current status.

4.14 Reservation OTA_HotelResRQ/RS – Services

Each subservice such as a room stay, board and transfer is detailed in the request. Rooms are defined in the <RoomStays> element, all other services in the <Services> element. Pax details are specified in the <ResGuests> section.
Each non-room service and each pax is assigned a reference place holder (RPH) by means of which it can be linked to another element. Each room receives a list of pax RPHs in <ResGuestRPHs> the first of which should be the adult responsible for the room. If there are other services associated with the room stay, s.a. board or extras, their RPHs go into the <ServiceRPHs> container.
Services not directly associated with a room stay, s.a. transfer are linked to pax RPHs in their respective <ResGuestRPHs> section.

4.15 Reservation OTA_HotelResRQ/RS - Quote request

The OTA_HotelResRQ can also be used to make an inquiry whether a particular reservation is possible, requesting the availability and total price for the booking.
This is done by using the value “Quote” in the ResStatus attribute in <OTA_HotelResRQ>.
The pax profiles (name details) may be omitted. If no client reservation ID is specified, the <ResGlobalInfo> element may be omitted. The following is a “Quote” request for a room stay, transfer.
Note: no actual booking is requested, just the confirmation of the price and availability!

Structure of an OTA_HotelResRQ:

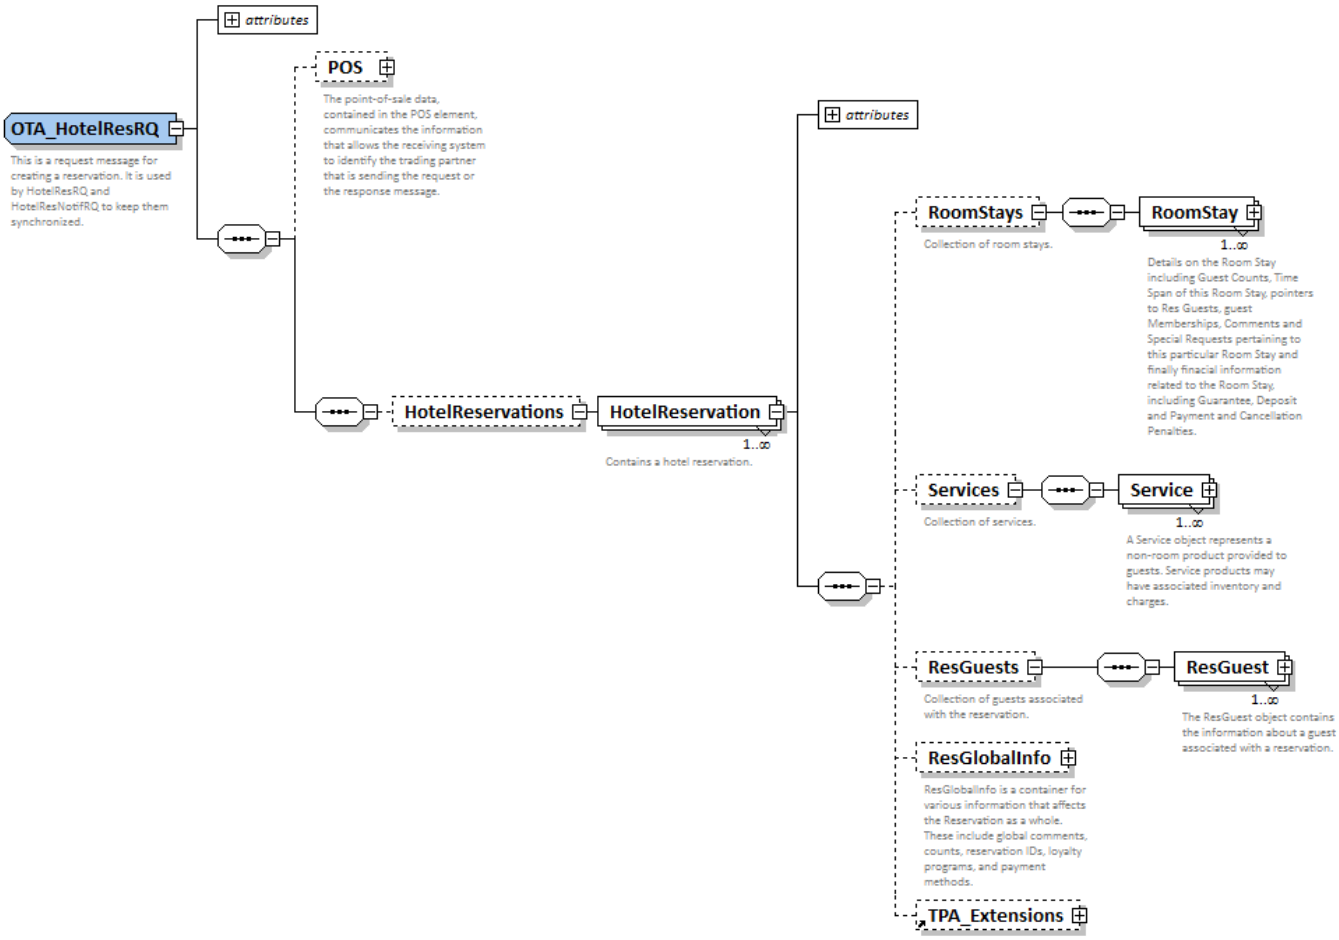
attributes
OTA_HotelResRQ
This is a request message for creating a reservation. It is used by HotelResRQ and HotelResNotifRQ to keep them synchronized.
POS
The point-of-sale data, contained in the POS element, communicates the information that allows the receiving system to identify the trading partner that is sending the request or the response message.
HotelReservations
HotelReservation
1..∞
Contains a hotel reservation.
attributes
RoomStays
Collection of room stays.
RoomStay
1..∞
Details on the Room Stay including Guest Counts, Time Span of this Room Stay, pointers to Res Guests, guest Memberships, Comments and Special Requests pertaining to this particular Room Stay and finally finacial information related to the Room Stay, including Guarantee, Deposit and Payment and Cancellation Penalties.
Services
Collection of services.
Service
1..∞
A Service object represents a non-room product provided to guests. Service products may have associated inventory and charges.
ResGuests
Collection of guests associated with the reservation.
ResGuest
1..∞
The ResGuest object contains the information about a guest associated with a reservation.
ResGlobalInfo
ResGlobalInfo is a container for various information that affects the Reservation as a whole. These include global comments, counts, reservation IDs, loyalty programs, and payment methods.
TPA_Extensions

If the requested services can be booked, an OTA_HotelResRS with a ReservationStatusType of "Available" is received.

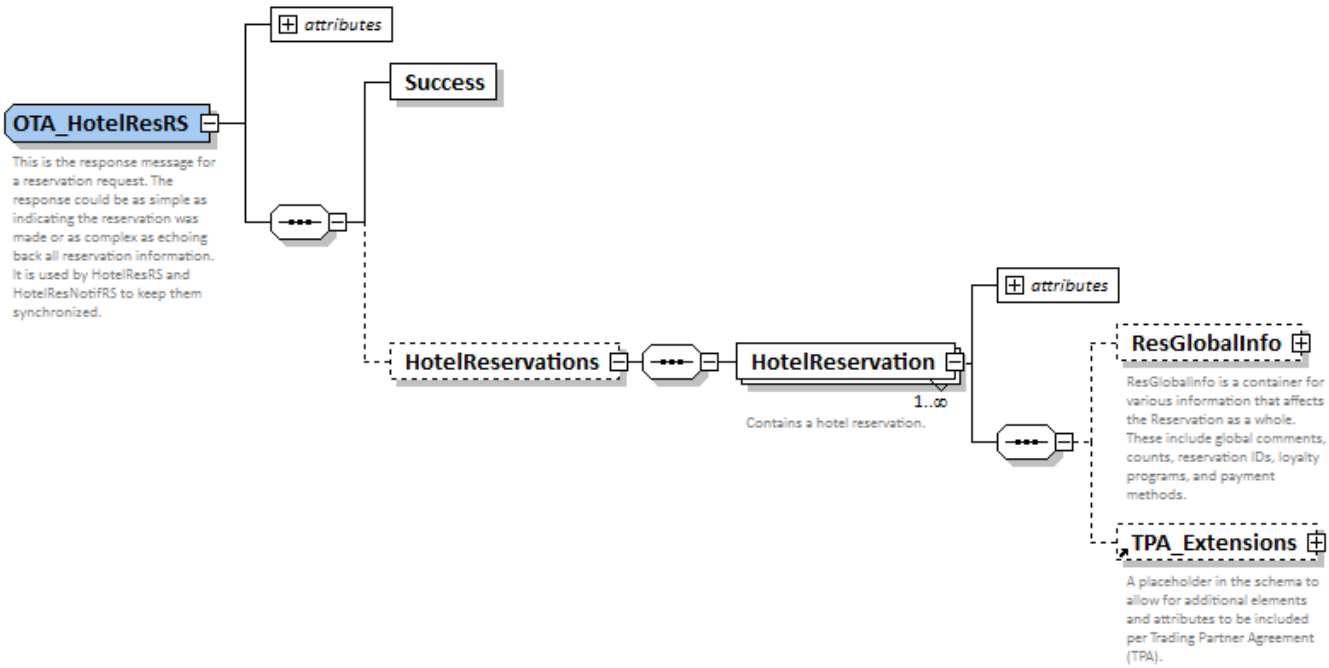

Note: No actual booking has been created and no reservation ID assigned. The client reservation ID specified is echoed in the response.

If the booking is not possible or if there was an error processing the request, an OTA_HotelResRS with no <Success/> element is sent and the error message will detail the problem that occurred in <Errors>.

Note that more than one <Error Tag> can exist inside <Errors>. In some cases, alternative available options are suggested in the error response like alternative boards and rooms.

Please see the error list in our "Axisdata Integration Documentation V1.3" document.

Cancellation policies

For each OTA_HotelResRQ (both of the type “quote” and the type “commit”) the cancellation policy is included in the OTA_HotelResRS. The OTA_HotelResRS holds the “Cancel Penalties” element under ResGlobalInfo.

Cancellation fees are specified per room, linked with the room’s RPH used in the Request.

```
<CancelPenalty Item_RPH="1">
<Deadline OffsetUnitMultiplier="3" OffsetTimeUnit="Day" OffsetDropTime="BeforeArrival"
AbsoluteDeadline="2020-06-26T00:00:00"/>
<AmountPercent Amount="36.87" CurrencyCode="EUR" BasisType="WholeStay" Percent="100"/>
</CancelPenalty>
```

Note: Apart from OffsetDropTime="AfterBooking" and OffsetTimeUnit="Day", other values are also possible like OffsetDropTime="BeforeArrival" and OffsetTimeUnit="Hours".

4.16 Booking Request

This is a definite booking request with a ResStatus=”Commit”. If accepted by the reservation system, this is a binding commitment with possible penalties in the case of cancellations or modifications. The booking request is the exact same message as the quote request and technically the exact same modules are used, where in case of a booking the transaction is committed, whereas in the “quote” the transaction is rolled-back.

The RequestorID identifies the booking source with implications for the exact message formats.
AxisData requires a separate RoomStay declaration for each room. This must include all ResGuestRPHs assigned to the room. The adult with the lowest order RPH is considered the person responsible for the room. The person responsible for the first room becomes also the one responsible for the entire booking. This can be overruled by specifying the RPH of another guest in HotelReservationID. A NamePrefix (Mr., Mrs., etc.) is mandatory for all adult pax in a booking. HotelReservationID assigns a booking code (voucher no.) to a booking identifying the origin of the code (AxisData, client, intermediary or external).

Customer details

The ResGuest element holds the customer details and specifies Adults (AgeQualifyingCode="10"), Children (AgeQualifyingCode="8") and Infants (AgeQualifyingCode="7"). Children age has to be specified for each child and infant, but the exact birthdate is preferred.
If the child age is exceeding the maximum child age for a specific hotel, the child is converted to an adult and the correct price is given for the specified stay and occupancy for that property. Regarding infants, the client has the possibility to specify a child specified with an age of 0 or 1 year old and similar to children exceeding the max child age, the child is converted to an infant in the calculation. Alternatively, an infant can be specified (AgeQualifyingCode="7") and again, if the age or birthdate specified exceeds the min child age, the calculation will convert the infant to a child and return the correct rates.

Note that the start-age of children can vary and is not 2 years across all hotels. Age is important to determine the applicable rate. The detail available at reservation time depends on the booking source: **age at the time of arrival or true birth date**.
Birthdate should only be used if the true birthdate is supplied, that will match the passport of the customer upon check-in at the hotel. It is not allowed to compute a fake birthdate from the arrival date.

Changing from an initial search which is always performed with "Age", to a "Birthdate" at Quote or Book step, might cause price-jumps. Conclusively, if age is provided and no true Birthdate is requested from the customer, the booking must be made with "Age". The Customer must be made aware that the age specified, should be the age at arrival.

During the booking process, the customer should have the option to change the child ages, after being made aware that the age at arrival is required, as it is very natural to consider the age of your children now, while searching. Not realizing that one of the children might have birthday between booking and arrival and conclusively is one year older when the holiday starts.

Especially when on-line check-in is used, it is most awkward when a fake birthdate is computed from the arrival date by the TO or OTA. At check-in the birthdate will have to be changed to the true value. On-line check-in will fail due to a birthdate mismatch. This does not improve the check-in experience of the guests.

AxisData needs to identify a responsible pax for each room of a hotel reservation, who is defined in the OTA <RoomStay> element as the adult pax with the lowest RPH for a room.
If no pax responsible for the booking is specified in <HotelReservationId>, the room responsible with the lowest RPH is assumed to be responsible for the entire booking. The leadpax name cannot be modified in most hotels.

Details to be provided for a guest:

- Name and surname, mandatory.
- NamePrefix (Mr., Mrs., etc.) is mandatory for all adult pax in a booking.
- Age or **true** date of birth, mandatory for children and infants. Never both!
- Contact info (Telephone and email), optional.
- AgequalifyingCode, mandatory
- ResGuestRPH, mandatory

Example

```
<ResGuest AgeQualifyingCode="10" ResGuestRPH="1">
        <Profiles>
                <ProfileInfo>
                        <Profile>
                                <Customer BirthDate="1983-01-27">
                                        <PersonName>
                                                <NamePrefix>Mr</NamePrefix>
                                                <GivenName>Michael</GivenName>
                                                <Surname>Smith</Surname>
```

```
                                        </PersonName>
                                        <Telephone PhoneNumber="+34625625625"/>
                                        <Email>michael.smith@provider.com</Email>
                                    </Customer>
                                </Profile>
                            </ProfileInfo>
                        </Profiles>
                        <GuestCounts>
                            <GuestCount Count="1" Age="36"/>
                        </GuestCounts>
</ResGuest>
```

Customer details must be consistent across all services being booked inside one booking. This is valid for the order of the customers specified to ensure that the lead-pax remains the lead-pax for all the services. Also when child age or birthdate is used, the same concept must be used in each message. Finally the age or birthdate must be the same between hotel, transfer, excursion or other services being booked, if not all services will be recalculated, which might lead to price differences from the original booking response.

Partner reference

The partner reference is an obligatory element not only for obvious reasons regarding voucher numbers and arrival at the hotel, but also to enable:

- Implementation of the cancel/RS with partner references
- Avoid double bookings (if a partner tries to make two bookings with the same partner reference, the system will respond „booking already exists“.
- This reference must be printed on the voucher
- This reference will be passed as voucher number to the hotel

Please see section 3.5 “Master and child references” for additional details and examples.

Handling Office

The information of the local handling office will be included on the RS with the details of the handling office as a company name. This will be needed in each booking to control invoicing and operational issues.

This information section is under ResGlobalInfo, Profiles/ProfileInfo/Profile/CompanyInfo/CompanyName.

- Example of the “Handling Office” element:

```
<Profiles>
            <ProfileInfo>
              <Profile>
                <CompanyInfo>
                  <CompanyName Code="AYT" CountryCode="TR"
CompanyShortName="Open Turizm Seyahat - Antalya Office"/>
                </CompanyInfo>
              </Profile>
```

Comments

Comments can be added to the booking; they will be transmitted to the hotel with the booking.

- Comments can be repeated up to max 10 comments per booking
- The max length of a comment is 250 characters
- <Comment Name = "Applicant Notice"> is obligatory if comments are added and the only type of comments that will be processed.

Example of the “comments” element:

```
<ResGlobalInfo>
        <Comments>
                <Comment Name="Applicant Notice">
                        <Text>CLIENTE HABITUAIS DE MUITOS ANOS DO ALGARVE GARDENS,
....</Text>
                </Comment>
        </Comments>
```

Comments can be included at Booking level (ResGlobalInfo), room level (RoomStay) or pax level (ResGuest)

Expected booking value

For customers who desire to control price consistency between search and quote or between their calculated values from the notifications, we offer the possibility to add the “expected price” for each booking. An example of expected value in the OTA_HotelResRQ is:

```
.....
<HotelReservation>
      <RoomStays>
        <RoomStay>
          <RoomTypes>
            <RoomType RoomTypeCode = "RMSDDB0000"></RoomType>
          </RoomTypes>
          <TimeSpan End = "2019-11-20" Start = "2019-11-09"></TimeSpan>
          <Total AmountAfterTax = "614.12" CurrencyCode = "EUR"></Total>
          <BasicPropertyInfo HotelCode = "AMTSPT003X"></BasicPropertyInfo>
          <ResGuestRPHs>
.....
```

The expected booking value can detect inconsistencies or undesired complications in contract conditions. In any case, it helps the partnership to create full transparency of higher or lower expected booking value, *at the booking moment*.

- When the expected value is lower than the booking value, the partner and the destination can discuss causes and avoid publication of low rates that are not bookable.
- When the expected value is higher than the booking value, the partner and destination can work together to match functionality or understand for example certain complex contract conditions that are hard to manage in distribution and lead to in competitiveness.

There is no other functionality other than storing the expected booking value as part of the booking details.

Early booking discount – due date and pre-payment value

In case an early booking offer with prepayment conditions is applied, the response will include the early booking payment conditions as agreed within the contract with the hotel.The "EBPrepayment Amount" and "PaymentDueDate" attributes are included in the TPA Extension of the OTA_HotelResRS.

Example:

```
…
        <TPA_Extensions>
          <EBPrepayment IndexNumber = "1" PaymentDueDate = "2020-01-20" CurrencyCode
= "EUR" Amount = "607.50"/>
          <ns1:BookingStatus xmlns:ns1 = "http://www.opentravel.org/OTA/2003/05/tpa"
xmlns:xsi = "http://www.w3.org/2001/XMLSchema-instance" xsi:type =
"ns1:BookingStatusType" ReservationStatusType = "Available"/>
        </TPA_Extensions>
…
```

Price and cancellation Breakdown

The booking quote/commit response includes the price per room as well as the cancellation policies applicable. Each room is identified by an RPH value, auto generated in case it is not provided in the request. The cancellation conditions are linked to the room using the same RPH concept, ItemRPH in this case. This functionality is especially important for multi room bookings, where price and cancellation fees must be calculated per room.

```
…
<RoomStays>
        <RoomStay IndexNumber="1" RPH="1">
                <Total AmountAfterTax="379.28" CurrencyCode="EUR"/>
        </RoomStay>
        <RoomStay IndexNumber="1" RPH="2">
                <Total AmountAfterTax="256.81" CurrencyCode="EUR"/>
        </RoomStay>
</RoomStays>
…
<CancelPenalties>
        <CancelPenalty Item_RPH="1">
                <Deadline OffsetDropTime="BeforeArrival" OffsetTimeUnit="Day"
OffsetUnitMultiplier="3"/>
                <AmountPercent NmbrOfNights="1" Percent="100"/>
        </CancelPenalty>
        <CancelPenalty Item_RPH="2">
                <Deadline OffsetDropTime="BeforeArrival" OffsetTimeUnit="Day"
OffsetUnitMultiplier="5"/>
                <AmountPercent NmbrOfNights="1" Percent="50"/>
        </CancelPenalty>
```

```
</CancelPenalties>
```

Multiple room bookings

Through duplicating the <RoomStay> element inside <RoomStays>, partners can cater for the typical 4 adults in two rooms request while checking availability for both rooms (i.e. remaining quantity of the total nr of rooms is validated) in one request under one booking reference. This is obligatory for requests where the same room type is requested multiple times as multiple requests would only check for 1 unit.

A maximum of 5 rooms may be included in one booking. 6 rooms and above are considered "Group Bookings" for which different conditions may apply.

The same logic can be applied for bookings with varying lengths of stays, by varying the dates of each RoomStay element. RoundTrips can be booked applying the same logic, by specification of subsequential dateranges and different hotelcodes for each RoomStay element.
Complex example extract (see OTA_HotelRes folder):

```
.....
<RoomStays>
        <RoomStay RPH="1" >
          <RoomTypes>
            <RoomType RoomTypeCode = "RMSD000000"></RoomType>
          </RoomTypes>
          <TimeSpan Start = "2020-05-15" End = "2020-05-24"></TimeSpan>
          <Total AmountAfterTax = "500.00" CurrencyCode = "EUR"></Total>62764
          <BasicPropertyInfo HotelCode = "AAUTO14TC"></BasicPropertyInfo>
        ....
        <RoomStay RPH="2" >
          <RoomTypes>
            <RoomType RoomTypeCode = "RMSD000000"></RoomType>
          </RoomTypes>
          <TimeSpan Start = "2020-05-24" End = "2020-05-31"></TimeSpan>
          <Total AmountAfterTax = "500.00" CurrencyCode = "EUR"></Total>
          <BasicPropertyInfo HotelCode = "AAUTO14TK"></BasicPropertyInfo>
        ....
      <ResGlobalInfo>
        <HotelReservationIDs>
              <HotelReservationID  ResID_SourceContext="Client" ResID_Type="36"
        ResID_Value="1234"/>
              <HotelReservationID  ResID_SourceContext="Client" ResID_Type="37"
        ResID_Value="1234_1" Item_RPH="1"/>
        </HotelReservationIDs>
      </ResGlobalInfo>
....
```

Transfer (old model)

With new transfer real-time messaging (OTA_Ground pack), this model will be deprecated in the near future.
Transfers, normally between the airport and the hotel, constitute a service that requires additional information in order to be created at the operational level. Therefore, the reservation request needs to include details about the arriving and departing flights respectively. Since OTA does not provide an element for transfers, AxisData has designed a TransferInfoType TPA Extension.
To identify a transfer service, the transfer origin (e.g. airport code), destination (e.g. hotel code), date and time of the transfer and the transportation type (bus, taxi, etc.) would be sufficient. However, in order to create the transfer service, additional information is required:

- Airline and flight no. (one string)
- remote airport code and date/time:

- For a transfer-in this is the departure airport and date/time of the arriving flight.
- For a transfer out this is the destination airport and arrival date/time of the departing flight.

A special case arises when the arriving or departing flight consists of multiple legs. In this case, the required information depends on the direction of the flight:

- on arrival:
    - arrival airport
    - arriving flight (no. and company) and date/time – last leg
    - origin airport and date/time - last leg

- on departure:
    - departure airport
    - departing flight (no. and company) and date/time – first leg
    - destination airport and date/time – first leg

NOTE: the arrival and departure flights and times are required to register new flights, including arrival and departure airports (flights for which we do not have bookings).

Flight times, numbers and date changes

Flight arrival ***time*** or flight departure ***time*** changes are irrelevant and do not require notification from our partners. Flight ***time*** information is automatically obtained from third party systems and updated in our systems. **Partners should not pass us flight time changes**, we ignore them.

Flight ***date*** changes MUST be communicated and could require a cancel and re-book for the accommodation.

Flight ***number*** changes MUST be communicated as the clients must be re-grouped to a different transfer.

Transfer portfolio

For integrations where not only OTS hotels are sold, it is important to periodically provide all hotel across own direct contracting and all providers to the destinations to review whether:

- all hotels on-sale are in our system
- all these hotels are covered by a transfer agreement
- the transfer agreement runs until the last possible selling date a booking is possible with the integrated partner.
- all these hotels have a GiataID, in case the non-MTS hotels are booked with GiataID

For master and child reference functionality, every Transfer leg must be identified with an RPH value and then referenced in the <HotelReservationId> section:

```
…
<RoomStay RPH="1" >
…
<TransferInfoType>
                <TransferLeg RPH="2" >
…
                 <TransferLeg RPH="3" >
...
<HotelReservationID>
        <HotelReservationID ResID_Type="36" ResID_Value="1234aa567"
ResID_SourceContext="Client"/>
        <HotelReservationID ResID_Type="37" ResID_Value="1234aa567_1"
ResID_SourceContext="Client" Item_RPH="1"/>
        <HotelReservationID ResID_Type="37" ResID_Value="1234aa567_2"
ResID_SourceContext="Client" Item_RPH="2"/>
        <HotelReservationID ResID_Type="37" ResID_Value="1234aa567_3"
ResID_SourceContext="Client" Item_RPH="3"/>
</HotelReservationID>
```

Vehicle specification:

Transfer vehicle can be included in the booking request to indicate the desired service type. Service type follows vehicle codes as defined in the Appendix section (vehicle codes). If the vehicle is not indicated, standard shuttle service will be used. Attribute ServiceCategoryCode="S0000" holds the vehicle code.

```
<Service ServiceRPH="2" ServiceInventoryCode="TRF-IN+OUT ALC"
ServiceCategoryCode="S000" Inclusive="false>
```

Transfer rate calculation:

Transfer rates can be requested as fully uncalculated or calculated and included in the total booking price. To specify the calculation mode, attribute Inclusive="true/false" has to be included in the Service node. In case the attribute is not included, default value is false, uncalculated.

```
<Service ServiceRPH="2" ServiceInventoryCode="TRF-IN+OUT ALC"
ServiceCategoryCode="S000" Inclusive="false">
```

Uncalculated: Transfers are not calculated at the time of booking and the total price only includes the hotel reservation. Transfer rates are expected to be stored and calculated at the partner side. For this purpose, a uniform transfer rate export is available from each destination office.

Calculated: Transfer service is calculated and included in the booking response. Transfer service will be included as a service element and amount will be added to the booking total amount.

```
<RoomStays>
        <RoomStay RPH="1" IndexNumber="1">
                <Total CurrencyCode="EUR" AmountAfterTax="250.00"/>
        </RoomStay>
</RoomStays>
<Services>
        <Service ServiceCategoryCode="S0000" ServiceRPH="2">
                <Price>
                        <Total CurrencyCode="EUR" AmountAfterTax="50.00"/>
                </Price>
        </Service>
        </Services>
<ResGlobalInfo>
        <Total CurrencyCode="EUR" AmountAfterTax="300.00"/>
```

Typical transfer specification

```
.....
 <Services>
        <Service ServiceInventoryCode = "TRF-IN+OUT AYT" ServiceRPH = "1"
ServiceCategoryCode="S000" Inclusive="true">
.....
<TPA_Extensions>
                <TransferInfoType>
                  <TransferLeg RPH="1" >
                    <TransferOrigin>
                      <ConnectingTransport ArrivalDateTime = "2020-09-21T23:40:00"
DepartureDateTime = "2020-09-21T19:35:00">
                        <DepartureAirport LocationCode = "FMM"></DepartureAirport>
                        <ArrivalAirport LocationCode = "AYT"></ArrivalAirport>
                        <OperatingAirline FlightNumber = "XQ287"></OperatingAirline>
                      </ConnectingTransport>
                    </TransferOrigin>
                    <TransferDestination>
                      <Hotel HotelCode = "AYTEURO"></Hotel>
                    </TransferDestination>
                  </TransferLeg>
```

```
                <TransferLeg RPH="2" >
                  <TransferOrigin>
                    <Hotel HotelCode = "AYTEURO"></Hotel>
                  </TransferOrigin>
                  <TransferDestination>
                    <ConnectingTransport ArrivalDateTime = "2020-10-02T08:20:00"
DepartureDateTime = "2020-10-02T06:00:00">
                      <DepartureAirport LocationCode = "AYT"></DepartureAirport>
                      <ArrivalAirport LocationCode = "FMM"></ArrivalAirport>
                      <OperatingAirline FlightNumber = "KK305"></OperatingAirline>
                    </ConnectingTransport>
                  </TransferDestination>
                </TransferLeg>
              </TransferInfoType>
            </TPA_Extensions>
```

Uncalculated transfer - service and price

It is possible to obtain a transfer price in the OTA_HotelResRS message added on the total amount of the booking or separately, just in the Services section.
To get the price, a new attribute “Inclusive" has been added to the Service note in the request. Setting it as true or false will indicate if transfer price should be shown or not.
The response contains the service and its price, which is also added to the total amount of the booking.

```
<RoomStays>
                    <RoomStay RPH="1" IndexNumber="1">
                        <Total CurrencyCode="EUR"
AmountAfterTax="250.00"/>
                    </RoomStay>
            </RoomStays>
            <Services>
                    <Service ServiceCategoryCode="S0000" ServiceRPH="2">
                        <Price>
                            <Total CurrencyCode="EUR"
AmountAfterTax="50.00"/>
                        </Price>
                    </Service>
            </Services>
            <ResGlobalInfo>
                    <Total CurrencyCode="EUR" AmountAfterTax="300.00"/>
```

There is also a possibility to specify transfer service added to the booking by indicating a service code as S0000 or P0000 etc in "ServiceCategoryCode".

```
<Service ServiceRPH="2" ServiceInventoryCode="TRF-IN+OUT ALC"
ServiceCategoryCode="S0000" Inclusive="true">
```

Here, if the attribute “inclusive” is set as false, only the service category will be given in the response with no price calculated.

Special transfers

In case of round trips (arrival flight, multiple hotel stays and departure flight), city hopping (arrival flight, hotel stay, connection flight, hotel stay, departure flight) or combinations with other types of holidays like cruise and hotel, a more extensive transfer specification is required. For these cases and for inclusion of extras like bycycles, golfbags, etc, the OTA_Ground pack messages must be used.

Transfer-Only

A transfer-only booking can be made by simply omitting the specification of the hotelstay and only include the transfer service. As a special feature, transfer-only bookings can be made by specifying the GIATA code, in case the AxisData hotelcode is not available at the time of booking.

The GIATA code can simply replace the AxisData hotel code:

```
<TransferDestination>
        <Hotel HotelCode="75856"/>
</TransferDestination>
```

The schema of a transfer only booking would be similar to:

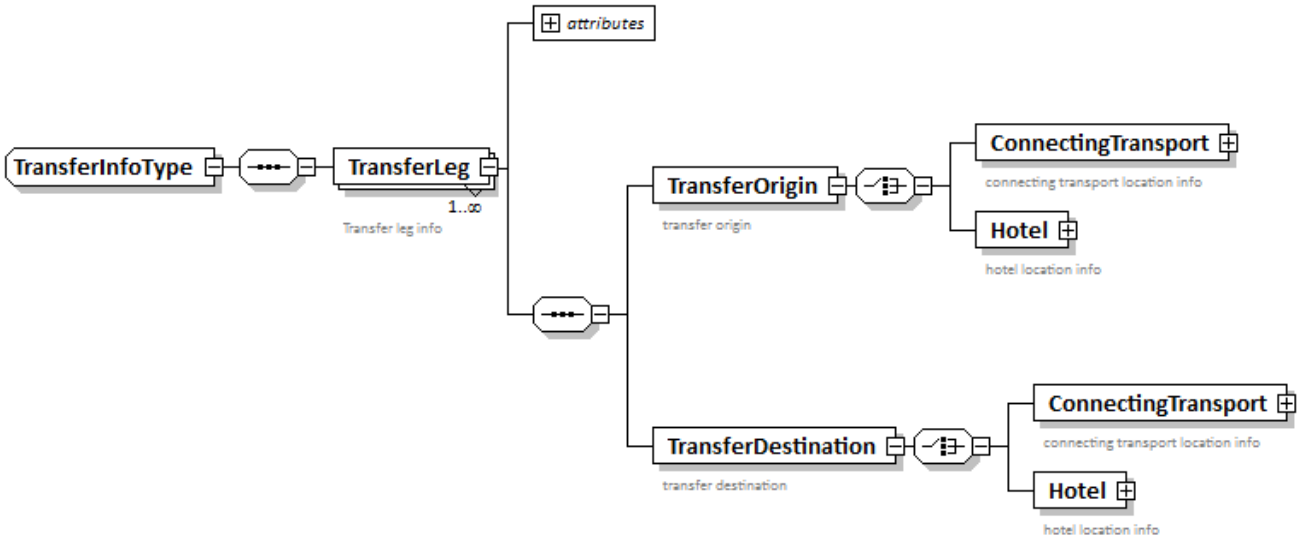

Flight booking tour operator and flight booking reference

In case a return flight must be confirmed with the organization where the flight was purchased, the vendor and the flight purchase reference must be included in the OTA_HotelResRQ. Most airlines do not accept re-confirmations, in case the flight was not purchased through them. Conclusively, the vendor can be different from the airline.

Inside ExtensionGlobalInfo, FlightReservationIDs, the elements ResID_Source can be used to specify the vendor and ResID_Value can be used to specify the flight purchase reference to be confirmed.

Below example might apply to an AirBerlin flight, purchased through any vendor:

```
<TPA_Extensions>
        <ExtensionGlobalInfo>
                <FlightReservationIDs>
                        <FlightReservationID ResID_Type="14" ResID_Value="873625"
ResID_Source="TOxxxx" ResID_SourceContext="Client" ResGuestRPH="0"/>
                </FlightReservationIDs>
        </ExtensionGlobalInfo>
```

Car Package

To book a room including a car package, the car code has to be included in the request as an InvBlockCode. Description for each code can be found in both Appendix H and using SUMMARY template in OTA_HotelDescriptiveInfo message.

```
<HotelReservation>
        <RoomStays>
                <RoomStay>
                        <RoomTypes>
                                <RoomType RoomTypeCode="RMSDIN0000"
InvBlockCode="ACAR"/>
                        </RoomTypes>
```

4.17 Optional Extras

Optional extras are included in search, quote and book steps. They are calculated and returned in the response in the TPA extension section with a structure based on OTA Fee type, extended to cover the requirements.

Example of **OTA_HotelAvailRS:**

```
        <TPA_Extensions>
          <Extras>
            <Extra CurrencyCode="EUR" Code="087" Description="Upgraded Lunch"
RequiredInd="true" IncludedInRate="true" Applicability="PerPaxPerDay" Amount="7.50"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="1"/>
            <Extra CurrencyCode="EUR" Code="087" Description="Upgraded Lunch"
RequiredInd="true" IncludedInRate="true" Applicability="PerPaxPerDay" Amount="7.50"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="2"/>
            <Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks"
RequiredInd="false" IncludedInRate="false" Applicability="PerPaxPerDay" Amount="7.50"
Quantity="1" Start="2021-07-02" End="2021-07-08" ResGuestRPH="1"/>
            <Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks"
RequiredInd="false" IncludedInRate="false" Applicability="PerPaxPerDay" Amount="7.50"
Quantity="1" Start="2021-07-02" End="2021-07-08" ResGuestRPH="2"/>
          </Extras>
        </TPA_Extensions>
```

The name of the extra is displayed in the "Code" attribute. It is set in the contract and expresses with alphanumeric combination of the characters, for example "ALC" for alcoholic drinks. All codes should be mapped on the client's side.

Optional extras are not mandatory so the "RequiredInd" attribute is always false.
As they are not included in the price on the search step, "IncludedInRate" is false:

```
            <Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks"
RequiredInd="false" IncludedInRate="false" Applicability="PerPaxPerDay" Amount="7.50"
Quantity="1" Start="2021-07-02" End="2021-07-08" ResGuestRPH="2"/>
```

```
</Extras>
```

If the client does not want to add any extra in the booking, no additional extra need to be added to the Quote request.

Once the clients wish to add them in the booking, in quote and book steps, the extra needs to be added to the OTA_HotelResRQ type Quote:

```
<TPA_Extensions>
<Extras>
<Extra Code="ALC" Start="2021-07-02" End="2021-07-08" ResGuestRPH="0" Quantity="1"/>
<Extra Code="ALC" Start="2021-07-02" End="2021-07-08"  ResGuestRPH="1" Quantity="1"/>
</Extras>
</TPA_Extensions>
```

In the OTA_HotelResRS we now see the booked extras with the "IncludedInRate" attribute expressed as true. These optional extras are now calculated in the price:

```
<TPA_Extensions>
<Extras>
…
<Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks" RequiredInd="false"
IncludedInRate="true" Applicability="PerPaxPerDay" Amount="7.50" Quantity="1"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="0"/>
<Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks" RequiredInd="false"
IncludedInRate="true" Applicability="PerPaxPerDay" Amount="7.50" Quantity="1"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="1"/>
</Extras>
…
<TPA_Extensions>
```

In the first omitted section (…) you will find the originally included extras (upgraded lunch in above example).
In the second omitted section (…) you might find further optional extras that have not yet been booked, for example if additional Spa treatment was offered but not chosen to be included in the Quote request.

When the booking is committed only the complementary, compulsory and booked optional extras are included in the booking response and price breakdown.

Attribute explanation:

Applicability in optional extra informs in which cycle the extra is added to the booking. There are four variants:

- "PerPaxPerDay" – extra is added for a specified pax and day (ex. alcoholic drinks)
- "PerPaxPerStay" – extra is added for a specified pax and just once in the entire stay (ex. Spa entrance)
- "PerUnitPerDay"- every day of the stay the extra is added for all paxes allocated in the room to share (ex. basket of the fresh fruits)
- "PerUnitPerStay" – once per stay the extra is added paxes allocated (ex. bottle of wine)

"Amount" attribute indicates the unitary price of the extra and "Quantity" - how many of the extras is to be added.

"Start" and "End" attributes, depending on the Applicability chosen, indicate a period or a specified day of the stay when the extra should be added.

"ResGuestRPH" informes to which pax of the booking the optional extra should be assigned. In case if the extra is applied for every each pax, it is going to be repeated for every of them:

```
<Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks" RequiredInd="false"
IncludedInRate="false" Applicability="PerPaxPerDay" Amount="7.50" Quantity="1"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="1"/>
<Extra CurrencyCode="EUR" Code="ALC" Description="Alcoholic Drinks" RequiredInd="false"
IncludedInRate="false" Applicability="PerPaxPerDay" Amount="7.50" Quantity="1"
Start="2021-07-02" End="2021-07-08" ResGuestRPH="2"/>
</Extras>
```

4.18 Booking Modifications

Booking modifications are possible using the **OTA_HotelResModifyRQ/RS** messages. Not all Channel Managers/PMS/Switches through which we have hotels connected support booking modifications. In this case an error “modification not possible” and a cancel-rebook under the same Distributor reference with a new Child reference should be executed.
In case the booking is changed from one hotel to another hotel, the bookings should be cancelled and rebooked as well.

Adding rooms can be easily done by a new OTA_HotelResRQ with the same Distributor reference with a new Child reference. No modification request is neccesairy.

Start with an OTA_ReadRQ

Any modification should be preceded by an OTA_ReadRQ to retrieve the actual status of the booking and ensure both systems are aligned before performing the modification, this message is described in the “Booking search and retrieve” section. The logical check of booking reference, lead-pax first name, lead-pax last-name, ClientID and HotelCode must be consistent with the original reservation and cannot be changed.

Proceed with OTA_HotelResModifyRQ ResStatus=Quote

The OTA_HotelResModifyRQ/RS do have the ResStatus=Quote and Commit options. We recommend that after the OTA_ReadRQ and processing the OTA_ResRetriveRS, an OTA_HotelResModifyRQ with ResStatus=Quote is executed to check the implications of the change requested.

The message format of the original OTA_HotelResRQ, the OTA_ResRetrieveRS and the OTA_HotelResModifyRQ is very similar, which makes the modification implementation very straight forward.

Once the OTA_HotelResModifyRQ has been processed our system will reply with an OTA_HotelResModifyRS which, just like the OTA_HotelResRS, will include a <Success/> element if the modification has been accepted:

```
<OTA_HotelResModifyRS xmlns = "http://www.opentravel.org/OTA/2003/05" xmlns =
"http://www.w3.org/2001/XMLSchema-instance" Version = "2017.2" EchoToken = "54589">
  <Success/>
  <HotelResModifies>
    <HotelResModify>
      <ResGlobalInfo>
        <HotelReservationID>
          <!--internal, client, or both reservation IDs identify the booking -->
          <HotelReservationID ResID_Value = "02377548" ResID_SourceContext = "Internal"
ResID_Type = "36 />
          <HotelReservationID ResID_Value = "282143" ResID_SourceContext = "Client" ResID_Type =
"36 />
        </HotelReservationID>
      </ResGlobalInfo>
    </HotelResModify>
  </HotelResModifies>
</OTA_HotelResModifyRS>
```

An OTA_HotelResModifyRS without the <Success/> element will contain an <Error> tag indicating the reason why the modification was rejected:

```
<OTA_HotelResModifyRS xmlns = "http://www.opentravel.org/OTA/2003/05" xmlns =
"http://www.w3.org/2001/XMLSchema-instance" Version = "2017.1" EchoToken = "54589">
  <Errors>
    <Error Type = "3" Code = "520">Booking not changed</Error>
  </Errors>
</OTA_HotelResModifyRS>
```

OTA error 520 Booking not changed - data received differs from stored data will be returned if a part of the booking which is not allowed to be modified through this message differs from the original booking.

Minor changes

Some modifications can be processed without recalculation of the booking. We call the “minor changes”. Examples are adding a booking comment, change the name of a non-lead-pax and changing contact details like email address and mobile phone number.

All other changes cause recalculation of the entire booking. These we call “major changes”.

The new attribute RateOverrideIndicator indicates whether a booking item(s) and the entire booking has been recalculated or not.

In this example, room 1 had a minor change, all items and total set as false:

```
<HotelResModify CreateDateTime = "2022-06-28T01:01:20" LastUpdateDateTime = "2022-08-
09T15:27:59">
  <RoomStays>
    <RoomStay RPH = "1" IndexNumber = "1">
      <Total CurrencyCode = "EUR" AmountAfterTax = "600.00" RateOverrideIndicator = "false"/>
    </RoomStay>
    <RoomStay RPH = "2" IndexNumber = "2">
      <Total CurrencyCode = "EUR" AmountAfterTax = "450.00" RateOverrideIndicator = "false"/>
    </RoomStay>
  </RoomStays>
```

```
  <ResGlobalInfo>
    <Total CurrencyCode = "EUR" AmountAfterTax = "1050.00" RateOverrideIndicator = "false"/>
```

In the first example we will be changing the original booking with mealplan SC to add a comment. The HotelReservation element is exactly the same as the original booking and the OTA_ResRetrieveRS from the OTA_Read. To execute the change we add the Comments section highlighted in bold. For complete messages see our Postman collection.

```
<OTA_HotelResModifyRQ xmlns = "http://www.opentravel.org/OTA/2003/05" ResStatus = "Quote"
Version = "2017.2">
…
          <RoomStay RPH = "1">
            <RoomTypes>
              <RoomType RoomTypeCode = "APSDT10000"/>
            </RoomTypes>
            <TimeSpan Start = "2022-09-28" End = "2022-10-05"/>
            <BasicPropertyInfo HotelCode = "AESMAH41FG"/>
            <ResGuestRPHs>
              <ResGuestRPH RPH = "1"/>
              <ResGuestRPH RPH = "2"/>
            </ResGuestRPHs>
            <ServiceRPHs>
              <ServiceRPH RPH = "1"/>
            </ServiceRPHs>
          </RoomStay>
        </RoomStays>
        <Services>
          <Service ServiceInventoryCode = "SC" ServiceRPH = "1"/>
        </Services>
        <ResGuests>
…
         </ResGuests>
        <ResGlobalInfo>
          <Comments>
            <Comment Name = "Applicant Notice">
              <Text>late arrival - flight lands at 22:55 local time</Text>
            </Comment>
            <Comment Name = "Applicant Notice">
              <Text>Silent top floor non-smoking room please</Text>
            </Comment>
          </Comments>
          <HotelReservationIDs>
            <HotelReservationID ResID_SourceContext = "Client" ResID_Type = "36" ResID_Value =
"MinorMayorChange"/>
            <HotelReservationID Item_RPH = "1" ResID_SourceContext = "Client" ResID_Type = "37"
ResID_Value = "MinorMayorChange_1"/>
          </HotelReservationIDs>
        </ResGlobalInfo>
      </HotelReservation>
  </HotelReservations>
</OTA_HotelResModifyRQ>
```

Response:

```
<OTA_HotelResModifyRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2017.2">
  <Success/>
```

```
  <HotelResModifies>
    <HotelResModify CreateDateTime="2022-09-21T09:54:23">
      <RoomStays>
        <RoomStay RPH="1" IndexNumber="1">
          <Total CurrencyCode="EUR" AmountAfterTax="385.19" RateOverrideIndicator="false"/>
        </RoomStay>
      </RoomStays>
      <ResGlobalInfo>
        <Total CurrencyCode="EUR" AmountAfterTax="385.19" RateOverrideIndicator="false"/>
        <Comments>
          <Comment Name="Applicant Notice" CommentOriginatorCode="DISTRIBUTOR">
            <Text>late arrival - flight lands at 22:55 local time</Text>
          </Comment>
          <Comment Name="Applicant Notice" CommentOriginatorCode="DISTRIBUTOR">
            <Text>Silent top floor non-smoking room please</Text>
          </Comment>
        </Comments>
…
```


Offering optional Extras

Note that in the TPA Extensions you will be offered Optional Extras in the exact same way as they are offered in the normal booking flow:


```
      <TPA_Extensions>
        <ns1:BookingStatus xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns1:BookingStatusType"
ReservationStatusType="Available"/>
        <Extras>
          <Extra Code="185" Description="Bottle of Spanish Cava" RPH="1" IncludedInRate="false"
Applicability="PerUnitPerStay" Amount="27.30" CurrencyCode="EUR" RequiredInd="false"/>
        </Extras>
      </TPA_Extensions>
```


Offering room and board upgrades

When a modify request is submitted, we will offer also higher mealplans according tot he order oft he mealplan appendix and room+board combinations that are more expensive than the room+board combination booked/requested in the modify request.

For example if we have booked the RMSD000000 and RO, the modification is for RMSD00SV00 and AI - then we do not need to offer these rooms, nor lower boards than AI. So if AI+ would be available and we also have an RMDL000000 and RMDL00SV00 that are more expensive, these will be offered. If the modify request is for the same room+board, then all superior boards and more expensive room+board combinations will be offered.

Complex example offering various rooms and boards with Rateplans from multiple contracts and an AutoPackage:


```
<TPA_Extensions>
  <ns1:BookingStatus xmlns:ns1 = "http://www.opentravel.org/OTA/2003/05/tpa" xmlns:xsi =
"http://www.w3.org/2001/XMLSchema-instance" xsi:type = "ns1:BookingStatusType"
ReservationStatusType = "Available"/>
  <Extras>
```

```
      <Extra Code = "150" Description = "Bottle of Water in the Room" RPH = "1" IncludedInRate = "true"
Applicability = "PerPaxPerDay" Start = "2023-09-29" End = "2023-10-05" ResGuestRPH = "0" Amount =
"31.50" CurrencyCode = "EUR" RateComponentCode = "XBO1" RequiredInd = "false"/>
      <Extra Code = "150" Description = "Bottle of Water in the Room" RPH = "1" IncludedInRate = "true"
Applicability = "PerPaxPerDay" Start = "2023-09-29" End = "2023-10-05" ResGuestRPH = "1" Amount =
"31.50" CurrencyCode = "EUR" RateComponentCode = "XBO1" RequiredInd = "false"/>
      <Extra Code = "150" Description = "Bottle of Water in the Room" RPH = "1" IncludedInRate = "false"
Applicability = "PerPaxPerDay" Start = "2023-09-29" End = "2023-10-05" Amount = "63.00"
CurrencyCode = "EUR" RateComponentCode = "XBO1" RequiredInd = "false"/>
   </Extras>
   <Upgrades>
      <Upgrade RoomTypeCode = "RMSDDB0000" RatePlanCode = "-OWN1-FPNA1" RoomDescription =
"Double Standard Room - Non Refundable  Advance Purchase" ServiceInventoryCode = "AI" Description
= "All Inclusive" Item_RPH = "1" IncludedInRate = "false" Applicability = "PerPersonPerStay" Amount =
"100.00" CurrencyCode = "EUR" RequiredInd = "false"/>
      <Upgrade RoomTypeCode = "RMDLDB0000" RatePlanCode = "-OWN1-FPNA1" RoomDescription =
"Double Deluxe Room - Non Refundable  Advance Purchase" ServiceInventoryCode = "BB" Description =
"Bed and Breakfast" Item_RPH = "1" IncludedInRate = "false" Applicability = "PerPersonPerStay" Amount
= "200.00" CurrencyCode = "EUR" RequiredInd = "false"/>
      <Upgrade RoomTypeCode = "RMDLDB0000" RatePlanCode = "-OWN1-FPNA1" RoomDescription =
"Double Deluxe Room - Non Refundable  Advance Purchase" ServiceInventoryCode = "AI" Description =
"All Inclusive" Item_RPH = "1" IncludedInRate = "false" Applicability = "PerPersonPerStay" Amount =
"300.00" CurrencyCode = "EUR" RequiredInd = "false"/>
      <Upgrade RoomTypeCode = "RMSDDB0000" RatePlanCode = "AP-OWN1-FPNA1" RoomDescription
= "Double Standard Room - Auto Package - Non Refundable  Advance Purchase" ServiceInventoryCode =
"BB" Description = "Bed and Breakfast" Item_RPH = "1" IncludedInRate = "false" Applicability =
"PerPersonPerStay" Amount = "1200.00" CurrencyCode = "EUR" RequiredInd = "false"/>
      <Upgrade RoomTypeCode = "RMDLDB0000" RatePlanCode = "AP-OWN1-FPNA1" RoomDescription
= "Double Deluxe Room - Auto Package - Non Refundable  Advance Purchase" ServiceInventoryCode =
"BB" Description = "Bed and Breakfast" Item_RPH = "1" IncludedInRate = "false" Applicability =
"PerPersonPerStay" Amount = "1400.00" CurrencyCode = "EUR" RequiredInd = "false"/>
      <Upgrade RoomTypeCode = "RMDLDB0000" RatePlanCode = "AP-OWN1-FPNA1" RoomDescription
= "Double Deluxe Room - Auto Package - Non Refundable  Advance Purchase" ServiceInventoryCode =
"AI" Description = "Bed and Breakfast" Item_RPH = "1" IncludedInRate = "false" Applicability =
"PerPersonPerStay" Amount = "1500.00" CurrencyCode = "EUR" RequiredInd = "false"/>
   </Upgrades>
</TPA_Extensions>
```


Major changes

In the next operation we will execute an upgrade from mealplan SC to BB, by simply taking the HotelReservations element and changing the ServiceInventoryCode. An upgrade to another room can be done in the same way, but for the time being a separate OTA_HotelAvailRQ has to be done to discover which rooms and boards are available in the hotel. This will be enhanced in the future by offering all “upgrades” in the modify response.


```
<OTA_HotelResModifyRQ xmlns = "http://www.opentravel.org/OTA/2003/05" ResStatus = "Quote"
Version = "2017.2">
…
   <HotelReservations>
      <HotelReservation>
         <RoomStays>
            <RoomStay RPH = "1">
               <RoomTypes>
                  <RoomType RoomTypeCode = "APSDT10000"/>
               </RoomTypes>
```

```
            <TimeSpan Start = "2022-09-28" End = "2022-10-05"/>
            <BasicPropertyInfo HotelCode = "AESMAH41FG"/>
            <ResGuestRPHs>
              <ResGuestRPH RPH = "1"/>
              <ResGuestRPH RPH = "2"/>
            </ResGuestRPHs>
            <ServiceRPHs>
              <ServiceRPH RPH = "1"/>
            </ServiceRPHs>
          </RoomStay>
        </RoomStays>
        <Services>
          <Service ServiceInventoryCode = "BB" ServiceRPH = "1"/>
        </Services>
```

This results to a response in which the price has changed from 385.19€ to 576.27€

```
<OTA_HotelResModifyRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2017.2">
  <Success/>
  <HotelResModifies>
    <HotelResModify CreateDateTime="2022-09-21T09:54:23">
      <RoomStays>
        <RoomStay RPH="1" IndexNumber="1">
          <Total CurrencyCode="EUR" AmountAfterTax="576.27" RateOverrideIndicator="true"/>
        </RoomStay>
      </RoomStays>
      <ResGlobalInfo>
        <Total CurrencyCode="EUR" AmountAfterTax="576.27" RateOverrideIndicator="true"/>
        <Comments>
          <Comment Name="GENERAL" CommentOriginatorCode="DISTRIBUTOR">
            <Text>late arrival - flight lands at 22:55 local time</Text>
          </Comment>
          <Comment Name="GENERAL" CommentOriginatorCode="DISTRIBUTOR">
            <Text>Silent top floor non-smoking room please</Text>
          </Comment>
```

Finally, we will be adding the **Optional Extra**

```
<OTA_HotelResModifyRQ xmlns = "http://www.opentravel.org/OTA/2003/05" ResStatus = "Quote"
Version = "2017.2">
…
      </ResGuests>
      <TPA_Extensions>
        <Extras>
          <Extra CurrencyCode="EUR" Code="185" Description="Bottle of Spanish Cava"
RequiredInd="false" IncludedInRate="false" Applicability="PerUnitPerStay" Amount="27.30"
Quantity="1"/>
        </Extras>
      </TPA_Extensions>
      <ResGlobalInfo>
…
```

Which then will lead to a response with the new price of 603.57€ and the IncludedInRate="true"

```
<OTA_HotelResModifyRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2017.2">
```

```
  <Success/>
  <HotelResModifies>
    <HotelResModify CreateDateTime="2022-09-21T09:54:23" LastUpdateDateTime="2022-09-
21T10:28:36">
      <RoomStays>
        <RoomStay RPH="1" IndexNumber="1">
          <Total CurrencyCode="EUR" AmountAfterTax="603.57" RateOverrideIndicator="true"/>
        </RoomStay>
      </RoomStays>
      <ResGlobalInfo>
        <Total CurrencyCode="EUR" AmountAfterTax="603.57" RateOverrideIndicator="true"/>
        <Comments>
          <Comment Name="GENERAL" CommentOriginatorCode="DISTRIBUTOR">
            <Text>late arrival - flight lands at 22:55 local time</Text>
          </Comment>
          <Comment Name="GENERAL" CommentOriginatorCode="DISTRIBUTOR">
            <Text>Silent top floor non-smoking room please</Text>
          </Comment>
…
      <TPA_Extensions>
        <ns1:BookingStatus xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns1:BookingStatusType"
ReservationStatusType="Available"/>
        <Extras>
          <Extra Code="185" Description="Bottle of Spanish Cava" RPH="1" IncludedInRate="true"
Applicability="PerUnitPerStay" Amount="27.30" CurrencyCode="EUR" RateComponentCode="XBO1"
RequiredInd="false"/>
        </Extras>
      </TPA_Extensions>
…
```


Adding or modifying a transfer (limited old model hotel and transfer method – depreciated 2011)

Flight details in the <TransferInfoType> of a transfer reservation may be modified using the OTA_HotelResModifyRQ. This caters to situations where complete flight details are not available at the time of booking, and cases where the flight on which the booked transfer is based is subsequently replaced by another flight.

NOTE: the arrival and departure times are required to register new flights (flights for which we do not have bookings). Flight arrival ***time*** or flight departure ***time*** changes are irrelevant and do not require notification from our partners. Flight ***time*** information is automatically obtained and updated in our systems .

Flight ***date*** changes MUST be communicated and could require a cancel and re-book for the accommodation.

Flight ***number*** changes MUST be communicated as the clients must be re-grouped to a different transfer.

The OTA_HotelResModifyRQ works by sending a full overlay of the original reservation to which the modifications are applied. In our current implementation this means that a client who wants to update flight information for a transfer booking resends the full reservation data of the original booking request, the only modified data being in the <ConnectingTransport> element and its children.

Example: In the following transfer leg the arriving flight no. (and therefore also departure and arrival times) are unknown.

```
<TPA_Extensions>
  <TransferInfoType>
    <TransferLeg>
      <TransferOrigin>
        <ConnectingTransport DepartureDateTime = "2006-01-15T00:00:00" ArrivalDateTime = "2006-
01-15T00:00:00">
          <DepartureAirport LocationCode = "MUC"/>
          <ArrivalAirport LocationCode = "AYT"/>
          <OperatingAirline FlightNumber = "XX9999"/>
        </ConnectingTransport>
      </TransferOrigin>
      <TransferDestination>
        <Hotel HotelCode = "ATRAYT4321"/>
      </TransferDestination>
    </TransferLeg>
  </TransferInfoType>
</TPA_Extensions>
```

A flight code of "**XX9999**" indicates that the flight is unknown. This should be accompanied by arrival and departure times of "**T00:00:00**". The dates should of course contain valid information. The Arrival Airport in the Inbound Transfer Leg and the Departure Airport in the Outbound Transfer Leg must hold one of the airports from which this hotel can be served.
At a later stage a specific flight for this reservation is booked and the full reservation overlay in the OTA_HotelResModifyRQ will contain the new <ConnectingTransport> information. At this stage missing airport info or incorrect airport info can also be corrected, similar to a complete flight change.

```
<TPA_Extensions>
  <TransferInfoType>
    <TransferLeg>
      <TransferOrigin>
        <ConnectingTransport DepartureDateTime = "2006-01-15T10:15:00" ArrivalDateTime = "2006-
01-15T14:25:00">
          <DepartureAirport LocationCode = "MUC"/>
          <ArrivalAirport LocationCode = "AYT"/>
          <OperatingAirline FlightNumber = "XY3214"/>
        </ConnectingTransport>
      </TransferOrigin>
      <TransferDestination>
        <Hotel HotelCode = "ATRAYT4321"/>
      </TransferDestination>
    </TransferLeg>
  </TransferInfoType>
</TPA_Extensions>
```

5 Transfer search and book messages

The use of the OTA_Groundxxx messages returns pricing in the response, based on transfer agreements available to the client in our TravelKISS plaform. For un-priced transfer inclusion (in case the client system holds the transfer price), a TPA extension in the OTA_HotelRes message can be used. Un-priced transfer inclusion is maintained for backwards compatibility but, for new integrations, the use of the OTA_Groundxxx messages is strongly recommended.

Simple transfer search

To identify a transfer service, the transfer origin (e.g. airport code), destination (e.g. hotel code), date of the transfer and the transportation type (bus, taxi, etc.) would be sufficient. However, in order to create and operate the transfer service, additional information is required:

- Airline and flight no.
- Arrival and departure airport code
- Arrival and departure time

- For a transfer-in this is the departure airport and date of the arriving flight.
- For a transfer out this is the destination airport and arrival date of the departing flight.

See the “minimal information search” in the examples section.

Multiple legs and overnight flights

A special case arises when the arriving or departing flight consists of multiple legs. In this case, the required information depends on the direction of the flight:

- on arrival:
    - arrival airport
    - arriving flight (no. and company) and date/time – last leg
    - origin airport and date/time - last leg

- on departure:
    - departure airport
    - departing flight (no. and company) and date/time – first leg
    - destination airport and date/time – first leg

NOTE: the arrival and departure flights and times are required to register new flights in the OTA_GroundBookRQ, Commit (flights which we do not in our system).

Flight arrival ***time*** or flight departure ***time*** changes are irrelevant and do not require notification from our partners. Flight ***time*** information is automatically obtained and updated in our systems.

Flight ***date*** changes MUST be communicated and could require a cancel and re-book for the accommodation.

Flight ***number*** changes MUST be communicated as the clients must be re-grouped to a different transfer.

Transfer portfolio

For integrations where not only OTS hotels are sold, it is important to periodically provide all hotels across own direct contracting and all providers to the destinations, to review whether:

- all hotels on-sale are in our system
- all these hotels are covered by a transfer agreement
- the transfer agreement runs until the last possible selling date a booking is possible with the integrated partner.
- all these hotels have a GiataID, in case the non MTS hotels are booked with GiataID

An innovative and well considered decision has been taken to only allow drop-off/pick-up points of registered locations (today, properties in our system, in the future, additional POI's). A transfer to an undefined textual location like "Hotel Horizonte resort in Arenal" leads to manual revision of the booking, which does not contribute to efficient handling and a competitive transfer pricing. Conclusively, transfer bookings must be made with a property code that exists in our system.

Transfer rates can be defined per Brand, so both, clientID and brands, should be included in the requestor section. See "Axisdata Integration Documentation", section 3.2 for further details on the brand ID.

In case the transfer booking forms part of a hotel and transfer booking, both provided by OTS, the hotelcode is known and, when the transfer booking is made with the same Client Reference, it will be added to the same booking that will hold 2 booking items. This is important in case the booking is changed; both elements are related and changed at the same time.

In case the transfer booking forms part of a hotel and transfer booking, where the hotel is not provided by OTS, the hotelcode must be mapped to make the transferbooking with the OTS code. To achieve transfer availability by OTS for all non-OTS hotels, it is important to provide regular updates on non-OTS hotel portfolio to your account manager.

To detect the available properties and to be able to choose the correct property for the transfer destination in case of a transfer-only booking, an additional step is required in the workflow. The below schema explains the possibilities.

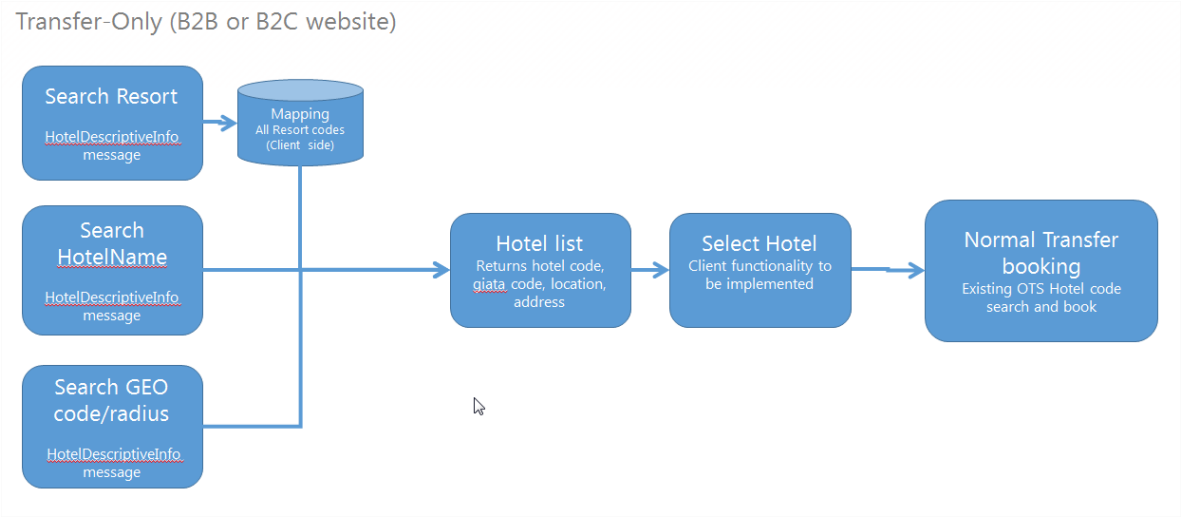

For hotels that are not included in client's portfolio, we offer a locations search by GeoCodes. The latitude and longitude must be inserted in a Location section together with a radius expressed in metrs <Address Latitude="X.XXXXX" Longitude="Y.YYYYY" Radius="100"
Such a request returns a list of candidate hotels and their relative distances to the GeoCode. This can be used only for such transfer combinations as airport/seaport to hotel and hotel to airport/seaport. Intertransfer within a resort or various resorts using GeoCodes is not available.

There exists the possibility of getting OnRequest products in the search response together with on sale valid products. For that, Instance="MF0001", instead of Instance="MF0000", should be indicated.

```
<POS>
  <Source>
    <RequestorID Instance = "MF0001" ID_Context = "AxisData" ID = "TEST" Type = "22"/>
  </Source>
  <Source>
    <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
</POS> >
```

A Warning element in the response is added then, indicating services are OnRequest:

```
<Warnings>
  <Warning Type = "3" Code = "507">Service S0000/S0000 is OnRequest</Warning>
  <Warning Type = "3" Code = "507">Service P0000/P0000 is OnRequest</Warning>
</Warnings>
```

Services returned will have the same type combinations like P0000/P0000 or S0000/S0000. Combinations between different services are not available.

5.1 OTA_GroundAvailRQ

OTA Ground messaging pack is available since 2012B specification, so version for all OTA ground messages is Version="2012.2". Some elements have been introduced like <Locations> in OTA_GroundAvailRQ. These modifications are a work in progress standardization proposal to OTA in order to allow a better structured transfer descriptions.

Typical OTA_GroundAvailRQ structure:

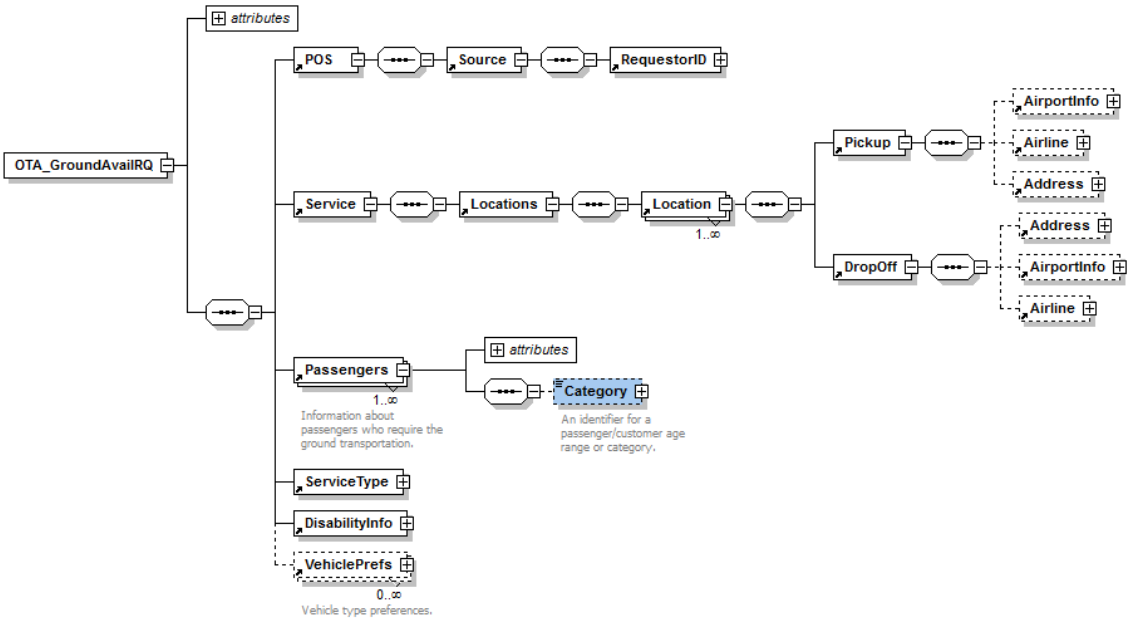
attributes
OTA_GroundAvailRQ
POS
Source
RequestorID
Service
Locations
Location
1..∞
Pickup
AirportInfo
Airline
Address
DropOff
Address
AirportInfo
Airline
Passengers
1..∞
Information about passengers who require the ground transportation.
attributes
Category
An identifier for a passenger/customer age range or category.
ServiceType
DisabilityInfo
VehiclePrefs
0..∞
Vehicle type preferences.

Services and locations

A location is a simple transfer service between 2 points and contains a pickup and a dropoff point. A hotel pickup/dropoff point is specified by its hotel code in the <LocationType> section. Code follows OTA IPC (Index Point Code). An airport pickup/dropoff point is identified by the flight information and the airport IATA code in Arrival/departure section, depending if it is pickup or dropoff. A seaport pickup/dropoff point is identified by its IATA code (5 characters code).

LocationType codes are based on OTA IPC code (Index Point code). Typical values are:

5	City (Resort)
7	Rail station
11	Hotel
18	Car Rental location
25	Port

```
<Location>
  <Pickup>
    <AirportInfo>
      <Departure CodeContext = "IATA" LocationCode = "FAO" DateTime = "2022-06-
29T8:00"/>
      <Arrival CodeContext = "IATA" LocationCode = "DUB" DateTime = "2022-06-29T10:00"/>
    </AirportInfo>
    <Airline FlightNumber = "123" Code = "IE"/>
  </Pickup>
  <DropOff>
    <Address>
      <LocationType Code = "11" UniqueId = "AMTSESxxxx"/>
    </Address>
  </DropOff>
</Location>
```

A service defines a complete transfer service and has 1 or 2 locations. In the typical airport – hotel transfer services, a single location would define a one way service and 2 locations would define a roundtrip service. Any combination of airport – seaport – hotel services are supported.

```
<Service>
        <Locations>
                <Location>
...
                </Location>
                <Location>
...
                </Location>
        </Locations>
</Service>
```

Geo codes

In the case that in a search the LocationType Code of one of the locations, like pickup or dropoff point, is unknown, a GeoCode can be used in search. There is a Location section where Address element is used to host the GeoCode and radius:

```
<Location>
  <Pickup DateTime = "2022-06-30T00:00:00">
    <AirportInfo>
      <Arrival CodeContext = "IATA" LocationCode = "FAO" DateTime = "2022-06-30T10:00"/>
      <Departure CodeContext = "IATA" LocationCode = "DUB" DateTime = "2022-06-
30T8:00"/>
    </AirportInfo>
    <Airline FlightNumber = "123" Code = "IE"/>
  </Pickup>
  <DropOff>
    <Address Latitude = "6.12345" Longitude = "8.12345" Radius = "100" MaxServiceLocations
= "15">
      <LocationType Code = "11"/>
    </Address>
  </DropOff>
</Location>
<Location>
  <Pickup DateTime = "2022-07-07T00:00:00">
    <Address Latitude = "6.12345" Longitude = "8.12345" Radius = "100" MaxServiceLocations
= "15">
      <LocationType Code = "11"/>
    </Address>
  </Pickup>
    <DropOff>
     <AirportInfo>
      <Departure CodeContext = "IATA" LocationCode = "FAO" DateTime = "2022-06-
29T8:00"/>
      <Arrival CodeContext = "IATA" LocationCode = "DUB" DateTime = "2022-06-29T10:00"/>
     </AirportInfo>
     <Airline FlightNumber = "123" Code = "IE”/>
    </DropOff>
</Location>
```

LocationType specifies the type of locations expected to be retrieved, type = 11 -> Hotels. Any other type is not supported at the moment.

Full RQ Example:


```
<OTA_GroundAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "0.1"
EchoToken = "">
 <POS>
  <Source>
   <RequestorID ID = "TEST" ID_Context = "AxisData" Instance = "MF001" Type = "22"/>
  </Source>
  <Source>
   <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
  </Source>
 </POS>
 <Service>
  <Locations>
   <Location>
    <Pickup DateTime = "2022-06-22T00:00:00">
     <AirportInfo>
      <Arrival CodeContext = "IATA" LocationCode = "FAO" DateTime = "2022-06-22T10:00"/>
      <Departure CodeContext = "IATA" LocationCode = "DUB" DateTime = "2022-06-
22T8:00"/>
     </AirportInfo>
     <Airline FlightNumber = "123" Code = "IE"/>
    </Pickup>
    <DropOff>
     <Address Latitude = "6.12345" Longitude = "8.12345" Radius = "100"
MaxServiceLocations = "15">
      <LocationType Code = "11"/>
     </Address>
    </DropOff>
   </Location>
   <Location>
    <Pickup DateTime = "2022-06-29T00:00:00">
     <Address Latitude = "6.12345" Longitude = "8.12345" Radius = "100"
MaxServiceLocations = "15">
      <LocationType Code = "11"/>
     </Address>
    </Pickup>
    <DropOff>
     <AirportInfo>
      <Departure CodeContext = "IATA" LocationCode = "FAO" DateTime = "2022-06-
29T8:00"/>
      <Arrival CodeContext = "IATA" LocationCode = "DUB" DateTime = "2022-06-29T10:00"/>
     </AirportInfo>
     <Airline FlightNumber = "123" Code = "IE”/>
    </DropOff>
```

```
    </Location>
   </Locations>
  </Service>
  <Passengers Quantity = "1" Age = "30">
   <Category Code = "10"/>
  </Passengers>
  <Passengers Quantity = "1" Age = "30">
   <Category Code = "10"/>
 </Passengers>
  <Passengers Quantity = "1" Age = "16">
   <Category Code = "8"/>
  </Passengers>
  <Passengers Quantity = "1" Age = "13">
   <Category Code = "8"/>
  </Passengers>
  <ServiceType Code = "TRANSFER"/>
  <DisabilityInfo RequiredInd = "false"/>
</OTA_GroundAvailRQ>
```

Passengers and ages

Passengers of the service must be specified as <Passengers> elements. Each element defines the number, type and age of a pax or group of paxes. Code attribute in the category section uses an OTA AQC code (Age Qualification Code) to indicate if it is an Adult (10), child (8) or infant (7). Age is mandatory for any passenger as the calculation is based on the age, not on the pax type. Passengers of the same type and age can be grouped indicating the quantity.

```
<Passengers Quantity="2" Age="30">
        <Category Code="10"/>
</Passengers>
```

In case of a disabled person present in the pax group, it must be indicated in the <DisabilityInfo> section with RequiredInd as true.

```
<DisabilityInfo RequiredInd="false"/>
```

Vehicles

Vehicles can be specified in the request to indicate a preference; otherwise, all possible vehicles will be returned. Vehicle preference is indicated in VehiclePrefs section. Vehicle codes can be found in Appendix section at the end of the documentation.

```
<VehiclePrefs>
        <ServiceLevel Code="P0000"/>
</VehiclePrefs>
```

Examples

Example request of return transfer for 2 adults and 1 child specifying a private transport.


```
<OTA_GroundAvailRQ EchoToken = "" Version = "0.1" xmlns =
"http://www.opentravel.org/OTA/2003/05">
<POS>
<Source>
<RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST" Type="22"/>
</Source>
<Source>
<RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
</Source>
</POS>
 <Service>
  <Locations>
   <Location RPH = "1">
    <Pickup DateTime = "2020-05-02T00:00:00">
     <AirportInfo>
      <Arrival CodeContext = "IATA" LocationCode = "PMI" DateTime = "2020-05-02T20:55:00"/>
      <Departure CodeContext = "IATA" LocationCode = "MAN" DateTime = "2020-05-02T17:15:00"/>
     </AirportInfo>
     <Airline FlightNumber = "3445" Code = "FR"/>
    </Pickup>
    <DropOff>
     <Address>
      <LocationType Code = "11" UniqueId = "AMTSES1D7I"/>
     </Address>
    </DropOff>
   </Location>
   <Location RPH = "2">
    <Pickup DateTime = "2020-05-09T00:00:00">
     <Address>
      <LocationType Code = "11" UniqueId = "AMTSES1D7I"/>
     </Address>
    </Pickup>
    <DropOff>
     <AirportInfo>
      <Arrival CodeContext = "IATA" LocationCode = "MAN" DateTime = "2020-05-09T23:10:00"/>
      <Departure CodeContext = "IATA" LocationCode = "PMI" DateTime = "2020-05-09T21:30:00"/>
     </AirportInfo>
     <Airline FlightNumber = "3446" Code = "FR"/>
    </DropOff>
   </Location>
  </Locations>
 </Service>
 <Passengers Quantity = "2">
  <Category Code = "10"/>
 </Passengers>
 <Passengers Age = "2" Quantity = "1">
  <Category Code = "8"/>
 </Passengers>
 <ServiceType Code = "TRANSFER"/>
 <DisabilityInfo RequiredInd = "false"/>
 <VehiclePrefs>
  <ServiceLevel Code = "P0000"/>
 </VehiclePrefs>
```

```
</OTA_GroundAvailRQ>
```

A simple airport to hotel return for 2 adults and any vehicle:

```
<OTA_GroundAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05">
	<POS>
		<Source>
			<RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
		</Source>
		<Source>
			<RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
		</Source>
	</POS>
	<Service>
		<Locations>
			<Location>
				<Pickup DateTime="2020-01-28T09:00:00">
					<AirportInfo>
						<Arrival CodeContext="IATA"
LocationCode="DXB"/>
					</AirportInfo>
				</Pickup>
				<DropOff>
					<Address>
						<LocationType Code="11" UniqueId="240784"/>
					</Address>
				</DropOff>
			</Location>
			<Location>
				<Pickup DateTime="2020-01-31T10:20:00">
					<Address>
						<LocationType Code="11" UniqueId="240784"/>
					</Address>
				</Pickup>
				<DropOff>
					<AirportInfo>
						<Departure CodeContext="IATA"
LocationCode="DXB"/>
					</AirportInfo>
				</DropOff>
			</Location>
		</Locations>
	</Service>
	<Passengers Age="30" Quantity="2">
		<Category Code="10"/>
	</Passengers>
	<ServiceType Code="TRANSFER"/>
</OTA_GroundAvailRQ>
```

Another option of a simple request for search:

```
<OTA_GroundAvailRQ EchoToken="1907GBYTZHPG" Version="2016.2"
xmlns="http://www.opentravel.org/OTA/2003/05">
  <POS>
    <Source>
```

```
        <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
      </Source>
      <Source>
        <RequestorID ID = "TEST" Type = "88" MessagePassword = "testpass"/>
      </Source>
    </POS>
    <Service>
      <Locations>
        <Location RPH="1">
          <Pickup>
            <AirportInfo>
              <Arrival CodeContext="IATA" LocationCode="PMI" DateTime="2020-08-08T12:00:00"/>
            </AirportInfo>
            <Airline FlightNumber="UNKNOWN" Code="UNKNOWN"/>
          </Pickup>
          <DropOff>
            <Address>
              <LocationType Code="11" UniqueId="AESPMICGVO"/>
            </Address>
          </DropOff>
        </Location>
        <Location RPH="2">
          <Pickup>
            <Address>
              <LocationType Code="11" UniqueId="AESPMICGVO"/>
            </Address>
          </Pickup>
          <DropOff>
            <AirportInfo>
              <Departure CodeContext="IATA" LocationCode="PMI" DateTime="2020-08-
16T12:00:00"/>
            </AirportInfo>
            <Airline FlightNumber="UNKNOWN" Code="UNKNOWN"/>
          </DropOff>
        </Location>
      </Locations>
    </Service>
    <Passengers Quantity="3">
      <Category Code="10"/>
    </Passengers>
    <Passengers Age="10" Quantity="1">
      <Category Code="8"/>
    </Passengers>
    <Passengers Age="9" Quantity="1">
      <Category Code="8"/>
    </Passengers>
    <ServiceType Code="TRANSFER"/>
    <DisabilityInfo RequiredInd="false"/>
</OTA_GroundAvailRQ>
```


5.2 OTA_GroundAvailRS

An OTA_GroundAvailRS message is received in response to the request. The presence of the <Success/> element indicates successful processing of the request; otherwise, a list of errors is

returned. In case no services are available for the requested parametes, the result will have an error message indicating no available services were found:

```
<OTA_GroundAvailRS
  xmlns="http://www.opentravel.org/OTA/2003/05" EchoToken="1912GBEZGBQ9"
Version="2016.2">
  <GroundServices/>
  <Errors>
    <Error ShortText="calculation error" Code="14">No suitable services found</Error>
    <Error ShortText="calculation error" Code="14">No suitable services found</Error>
  </Errors>
</OTA_GroundAvailRS>
```

Typical OTA_GroundAvailRS structure:

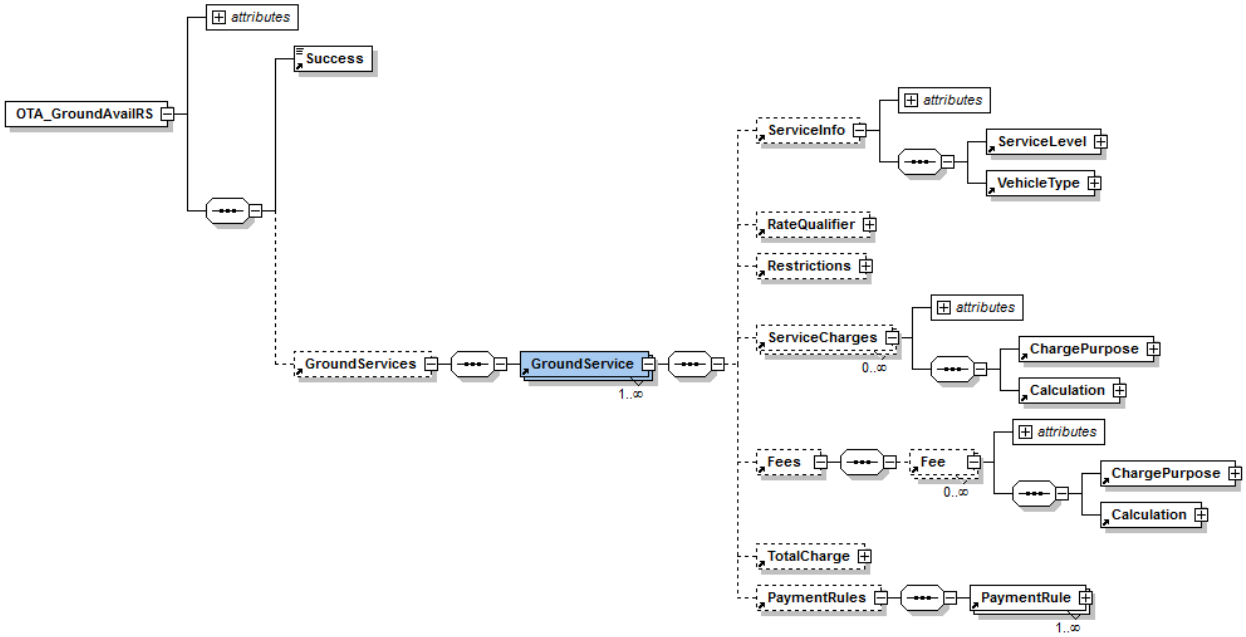

Services and vehicles

The available services are returned in repeated <GroundService> elements detailing the vehicle type code, the total price for the service, the service conditions and occupancy.

```
<GroundServices>
        <GroundService>
…
        </GroundService>
        <GroundService>
…
        </GroundService>
</GroundServices>
```

Vehicle type can be found in the <ServiceLevel> element and uses the vehicle codes specified in Apendix F.

```
<ServiceLevel Code="SD000"/>
```

Response for a request made with GeoCode search contains a new Shuttle section where, if PickupInd is true, GroundService includes a TRF OUT, and Return services and false if not:

```
<ServiceLocation PickupInd = "true" Sequence = "1">
  <Address Latitude = "3.12345" Longitude = "6.12345" Distance = "5">
    <LocationType Code = "11" UniqueId = "AMTSES1234" ResourceName = "54123"
DescriptionDetail = "Hotel Happy"/>
  </Address>
</ServiceLocation>
```

Hotel candidates with their GeoCode are included and sorted by distance to the provided GeoCode, from closest to farthest. In case a distributor who has made the request has Giata Licence, hotel Giata code is also added in ResourceName.

```
<ServiceInfo DisabilityVehicleInd="false" ServiceType="AirportTransfer"
MaximumPassengers="99" ShortDescription="Airport PMI to Resorts PMI/Shared">
        <ServiceLevel Code="S0000"/>
        <VehicleType Code="3" Description="Bus"/>
</ServiceInfo>
<Shuttle>
        <ServiceLocation PickupInd="true" Sequence="1">
                <Address Latitude="3.12345" Longitude="6.12345" Distance="8">
                        <LocationType Code="11" UniqueId="AMTSES1234"
ResourceName="54123" DescriptionDetail="Hotel Happy 1"/>
                </Address>
        </ServiceLocation>
        <ServiceLocation PickupInd="true" Sequence="2">
                <Address Latitude="3.12366" Longitude="6.565" Distance="34">
                        <LocationType Code="11" UniqueId="AMTSES1235"
ResourceName="54163" DescriptionDetail="Hotel Happy 2"/>
                </Address>
        </ServiceLocation>
```

```
</Shuttle>
<RateQualifier RateQualifier = "TRESPMIPMI" PromotionCode = "IN/OT"/>
```

Rates and fees

Service rates are shown in the section <TotalCharge>. The total amount is provided in this step, no further details of the calculation are provided.

Cancellation fees

CalculationPenaltyInd in <Restrictions> section indicates that a penalty can be applied in case of the cancellation of the service. The amount and conditions are indicated in the <PaymentRules> section as a cancel rule. RuleType value is an OTA RULE code (Rule Type), typical value is:

1 : Cancel

In case more than one cancellation rule applies, the nearest to the service start date applies. I.E.: A service with start date 2020-07-10, cancelled on 2020-07-09, would have a 20€ cancellation fee.

```
<PaymentRules>
        <PaymentRule RuleType="1" Amount="10.00" CurrencyCode="EUR"
AbsoluteDeadline="2020-07-06T00:00:00"/>
        <PaymentRule RuleType="1" Amount="20.00" CurrencyCode="EUR"
AbsoluteDeadline="2020-07-09T00:00:00"/>
</PaymentRules>
```

Per resort searches

When a per resort search is requested, the response will include the hotels available in the resort. The hotel code can be used in the booking process to specify the exact pickup/droppoff point.

```
<TPA_Extensions>
        <Properties>
                <Property HotelCode="AMTSES0M1C" HotelName="Central Park"
HotelCodeContext="35252"/>
                <Property HotelCode="AMTSES2EWO" HotelName="Anibal Hostal"
HotelCodeContext="47988"/>
                <Property HotelCode="AMTSES1GSC" HotelName="Arenal"
HotelCodeContext="2883"/>
                <Property HotelCode="AMTSES0M08" HotelName="Azuline Galfi"
HotelCodeContext="49062"/>
        </Properties>
</TPA_Extensions>
```

Extras

If the service does offer an optional extra or includes a mandatory extra, it will be included in the search response. Optional extras can be included in the booking by adding them in the booking request (see OTA_GroundBookRQ). Compulsory extras are already included in the booking and calculated. There is no need to add them in the booking request.

Extras can be found under the Fees section and are identified via the attribute RequiredInd. A false value indicates the extra is optional, and a true value sets the extra as mandatory.

Description attribute holds the code of the extra and the direction it applies. T,his code is used in the booking request to add the extra to the booking.

```
<Fees>
        <Fee RequiredInd="false" Description="Golf Clubs/IN" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
        <Fee RequiredInd="false" Description="Surf Board/IN" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
        <Fee RequiredInd="false" Description="Bicycle/IN" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
        <Fee RequiredInd="false" Description="Golf Clubs/OT" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
        <Fee RequiredInd="false" Description="Surf Board/OT" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
        <Fee RequiredInd="false" Description="Bicycle/OT" IncludedInRate="false"
CurrencyCode="EUR" Amount="12.50"/>
      </Fees>
```

Examples

Example response of a full return transfer service, with cancellation fees:

```
<OTA_GroundAvailRS xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2012.2">
```

```
        <Success/>
        <GroundServices>
                <GroundService>
                        <ServiceInfo MaximumPassengers="15" ServiceType="AirportTransfer"
DisabilityVehicleInd="false" ShortDescription="Airport Transfer_Ibiza/Formentera/Menorca-PMI ">
                                <ServiceLevel Code="SS000" Description="Shuttle"/>
                        </ServiceInfo>
                        <RateQualifier RateQualifier="TRESIBZPMI" PromotionCode="RT/RT"/>
                        <Restrictions CancellationPenaltyInd="true"/>
                        <Fees>
                                <Fee Amount="12.00" Description="Bicycle/OT" Currency="EUR"
IncludedRate="false" RequiredInd="false"/>
                                <Fee Amount="12.00" Description="Bicycle/IN" Currency="EUR"
IncludedRate="false" RequiredInd="false"/>
                                <Fee Amount="44.00" Description="Large Pet/IN" Currency="EUR"
IncludedRate="false" RequiredInd="false"/>
                                <Fee Amount="44.00" Description="Large Pet/OT" Currency="EUR"
IncludedRate="false" RequiredInd="false"/>
                        </Fees>
                        <TotalCharge EstimatedTotalAmount="44.00" CurrencyCode="EUR"/>
                        <PaymentRules>
                                <PaymentRule RuleType="1" Amount="9.00" CurrencyCode="EUR"
AbsoluteDeadline="2020-07-08T00:00:00"/>
                        </PaymentRules>
                </GroundService>
        </GroundServices>
</OTA_GroundAvailRS>
```

Example response of a full return transfer service, available for private transport and shuttle:


```
<OTA_GroundAvailRS xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2012.2">
	<Success/>
	<GroundServices>
		<GroundService>
			<ServiceInfo MaximumPassengers="5" ServiceType="AirportTransfer"
DisabilityVehicleInd="false" ShortDescription="Airport Transfer_Ibiza/Formentera/Menorca-PMI ">
				<ServiceLevel Code="P0000" Description="Private Transport"/>
			</ServiceInfo>
			<RateQualifier RateQualifier="TRESIBZPMI" PromotionCode="RT/RT"/>
			<Restrictions CancellationPenaltyInd="false"/>
			<Fees/>
			<TotalCharge EstimatedTotalAmount="22.00" CurrencyCode="EUR"/>
		</GroundService>
		<GroundService>
			<ServiceInfo MaximumPassengers="15" ServiceType="AirportTransfer"
DisabilityVehicleInd="false" ShortDescription="Airport Transfer_Ibiza/Formentera/Menorca-PMI ">
				<ServiceLevel Code="SS000" Description="Shuttle"/>
			</ServiceInfo>
			<RateQualifier RateQualifier="TRESIBZPMI" PromotionCode="RT/RT"/>
			<Restrictions CancellationPenaltyInd="false"/>
			<Fees/>
			<TotalCharge EstimatedTotalAmount="44.00" CurrencyCode="EUR"/>
		</GroundService>
	</GroundServices>
</OTA_GroundAvailRS>
```

5.3 OTA_GroundBookRQ

,

Typical OTA_GroundBookRQ structure:

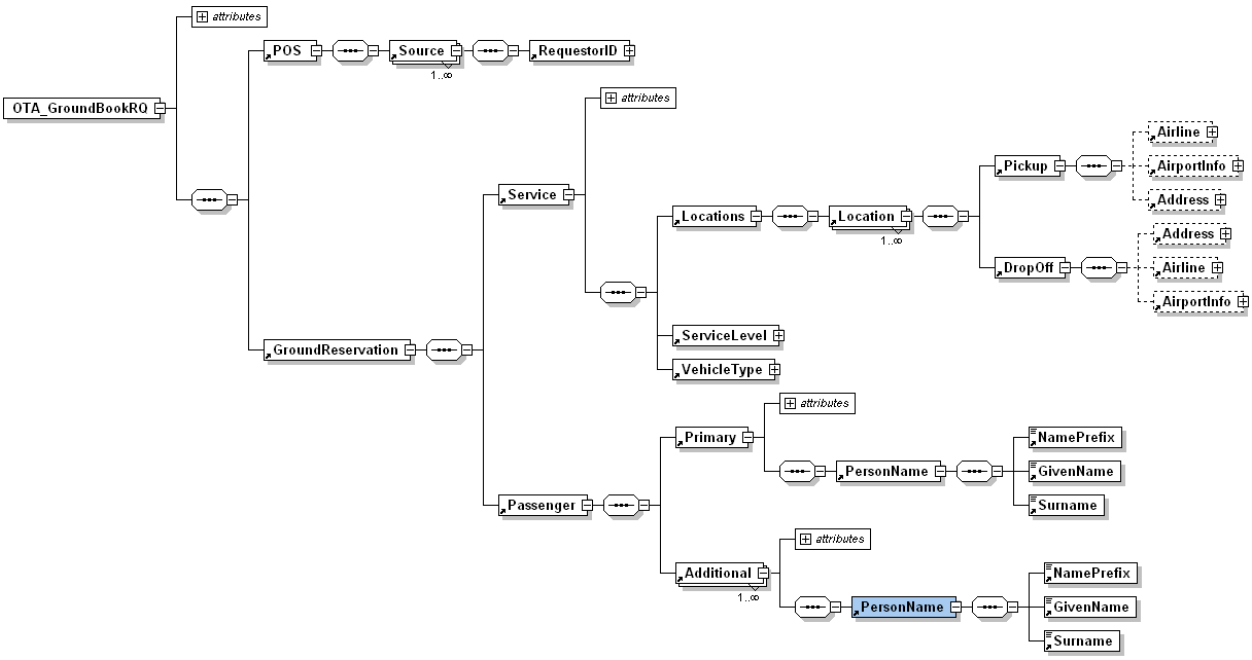

Quote and commit

The OTA_GroundBookRQ can also be used to make an inquiry whether a particular reservation is possible, requesting the availability and total price for the booking. The quote is requested the same way as OTA_HotelResRQ, using ResStatus attribute with “Quote” value. The behavior is similar to OTA_HotelResRQ, no actual booking is requested, just the confirmation of the price and availability.

The definite booking request is sent using ResStatus with value “Commit”. If accepted by the reservation system, this is a binding commitment with possible penalties in the case of cancellations or modifications. The booking request is the exact same message as the quote request and technically the exact same modules are used, where in case of a booking the transaction is committed, in the “quote” the transaction is rolled-back.

```
<OTA_GroundBookRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2012.2"
EchoToken="1234" ResStatus="Quote">
```

Locations

Every transfer service requested is expressed as a <Location> element. This section contains the pickup and dropoff details needed for the transfer service and must contain:

- OTS Hotel code in Address/Name section for any Hotel pickup/dropoff
- Flight and airport information for airport pickup/dropoff: Flight number, flight company, **complete date time and airport for both arrival and departure**
- Seaport IATA code for any seaport pickup/dropoff

LocationType codes are based on OTA IPC code (Index Point code) typical values are:

5	*City (Resort)* – **Not supported in booking, a specific location must be provided**
7	Rail station
11	Hotel
18	Car Rental location
25	Port

```
<Pickup>
        <Address>
                <LocationType Code="11" UniqueId="AMTSES0000"/>
        </Address>
</Pickup>
<DropOff>
        <Airline FlightNumber="2415" Code="AB"/>
        <AirportInfo>
                <Arrival CodeContext="IATA" LocationCode="PMI" DateTime="2020-07-
18T14:00:00"/>
                <Departure CodeContext="IATA" LocationCode="FAO" DateTime="2020-07-
        18T10:00:00"/>
        </AirportInfo>
</DropOff>
```

Service

The service to be booked is expressed using the ServiceLevel and rate qualifier data retrieved from the OTA_GroundAvailRS:

OTA_GroundAvailRS:

```
  <ServiceLevel Code="SD000"/>
          <VehicleType Code="26" Description="Shared Direct Shuttle"/>
        </ServiceInfo>
        <RateQualifier RateQualifier="TRMTMLAMLA" PromotionCode="IN/OT"/>
```

OTA_GroundBookRQ:

```
  <ServiceLevel Code="S0000">Shuttle</ServiceLevel>
            <VehicleType Code="3" Description="Shared"/>
            <RateQualifier PromotionCode="IN/OT" RateQualifier="TREGHRGHRG"/>
```

Passengers and ages

In the Passenger details section, Pax name and age must be indicated. Age is important to determine the applicable rate. The detail available at reservation time depends on the booking source: **age at the time of <u>the service.</u>**

```
<Primary RPH="1" Age="30">
```

Passenger's details should be specified per assigned service, but if an RPH is assigned to them, they can be reused in another ground reservation within the same message without specifying the details again. Primary passenger is considered the leading pax of the reservation.

```
...
Passengers>
        <Primary RPH="1" Age="25">
          <PersonName>
            <NamePrefix>Mr</NamePrefix>
            <GivenName>firstname</GivenName>
            <Surname>lastname</Surname>
          </PersonName>
        </Primary>
        <Additional RPH="2" Age="25">
          <PersonName>
            <NamePrefix>Mr</NamePrefix>
            <GivenName>firstname</GivenName>
            <Surname>lastname</Surname>
          </PersonName>
        </Additional>
        <Additional RPH="3" Age="13">
          <PersonName>
            <NamePrefix>Mr</NamePrefix>
            <GivenName>firstname</GivenName>
            <Surname>lastname</Surname>
          </PersonName>
        </Additional>
      </Passengers>>
...
```

Partner reference

The partner reference is a mandatory element not only for obvious reasons regarding voucher numbers, but also to enable:

- Implementation of the cancel/RS with partner references
- Avoid double bookings (if a partner tries to make two bookings with the same partner reference, the system will respond „booking already exists“.
- This reference must be printed on the voucher

Please see section 3.5 “Master and child references” for details.

Every Location must be identified with an RPH value and then referenced in the <UniqueID> section:

```
<Locations>
        <Location RPH="1" >
…
        <Location RPH="2" >
…
<TPA_Extensions>
        <UniqueID Type="36" ID_Context="Client" ID="1234567890"/>
        <UniqueID Type="37" ID_Context="Client" ID="1234567890_1" Item_RPH="1"/>
        <UniqueID Type="37" ID_Context="Client" ID="1234567890_2" Item_RPH="2"/>
</TPA_Extensions>
```

Default service

A booking quote or booking commit can be performed without including the ratequalifier and service code. If the quote/commit request does not include the product information, the selected service will be the cheapest option available. This functionality allows an easy implementation when cheapest option is the required product.

Extras

Extras returned in the search request can be added to the booking including it in the Booking request in the TPA_Extensions section. More than one extra of the same type can be added by incluing additional extra lines. Compulsory extras should not be included in the request as they are already included and calculated. In this example, 2 large dogs are requested:

```
<TPA_Extensions>
        <Fees>
                <Fee ExtraCode="PETLARGE/IN"/>
                <Fee ExtraCode="PETLARGE/IN"/>
                <Fee ExtraCode="PETLARGE/OT"/>
                <Fee ExtraCode="PETLARGE/OT"/>
        </Fees>
</TPA_Extensions>
```

Flight Info

Flight details should be added to OTA_GroundBookRQ in AiportInfo section, which contains both, arrival and departure flights. For arrival flight, last leg with departure airport and departure date time should be indicated. For departure flight, first leg of the travel with an arrival airport and arrival date time must be added.
The times are indicated in DateTime attribute. In case one of the flight times is blank, invalid or missing, an error message is returned and booking will not be committed.

Examples

Example of a direct transfer service for 2 adults from airport to Hotel and Hotel to airport:

```
<OTA_GroundBookRQ ResStatus = "Quote" xmlns = "http://www.opentravel.org/OTA/2003/05" Version
= "0">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID ID = "TEST" Type = "88" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <GroundReservations>
    <Service>
      <Locations>
        <Location RPH = "1">
          <Pickup DateTime = "2020-11-14T00:00:00">
            <AirportInfo>
              <Arrival CodeContext = "IATA" LocationCode = "PMI" DateTime = "2020-11-
14T19:20:00"/>
              <Departure CodeContext = "IATA" LocationCode = "STN" DateTime = "2020-11-
14T14:55:00"/>
            </AirportInfo>
            <Airline FlightNumber = "8156" Code = "FR"/>
          </Pickup>
          <DropOff>
            <Address>
              <LocationType Code = "11" UniqueId = "AESPMICGVO"/>
            </Address>
          </DropOff>
        </Location>
        <Location RPH = "2">
          <Pickup DateTime = "2020-11-21T00:00:00">
            <Address>
              <LocationType Code = "11" UniqueId = "AESPMICGVO"/>
            </Address>
          </Pickup>
          <DropOff>
            <AirportInfo>
              <Arrival CodeContext = "IATA" LocationCode = "STN" DateTime = "2020-11-
22T00:15:00"/>
              <Departure CodeContext = "IATA" LocationCode = "PMI" DateTime = "2020-11-
21T19:55:00"/>
            </AirportInfo>
```

```
                <Airline FlightNumber = "8157" Code = "FR"/>
              </DropOff>
            </Location>
          </Locations>
          <ServiceLevel Code = "SS000"/>
          <VehicleType Code = "26" Description = "Shared Speedy Shuttle"/>
          <RateQualifier PromotionCode = "IN/OT" RateQualifier = "TRESPMIPMI"/>
        </Service>
        <Passengers>
          <Primary RPH = "1" Age = "25">
            <PersonName>
              <NamePrefix>Ms</NamePrefix>
              <GivenName>Test</GivenName>
              <Surname>Axis</Surname>
            </PersonName>
            <Telephone PhoneNumber = "+4912252352"/>
            <Email>test@gmail.com</Email>
          </Primary>
          <Additional RPH = "2" Age = "25"/>
          <Additional RPH = "3" Age = "11"/>
        </Passengers>
      </GroundReservations>
      <TPA_Extensions>
        <Fees>
          <Fee ExtraCode = "Child Restraint Seat/IN"/>
          <Fee ExtraCode = "Child Restraint Seat/OT"/>
        </Fees>
      </TPA_Extensions>
    </OTA_GroundBookRQ>
```

5.4 OTA_GroundBookRS

The Quote response message will confirm the availability and final cost of the service. The Commit will do the final booking as well.

If the booking is not possible or if there was an error processing the request, an OTA_GroundBookRS with no <Success/> element is sent and the error message will detail the problem that occurred in <Errors/>. A List of the most common errors can be found in Appendix G.

Typical OTA_GroundBookRS structure:

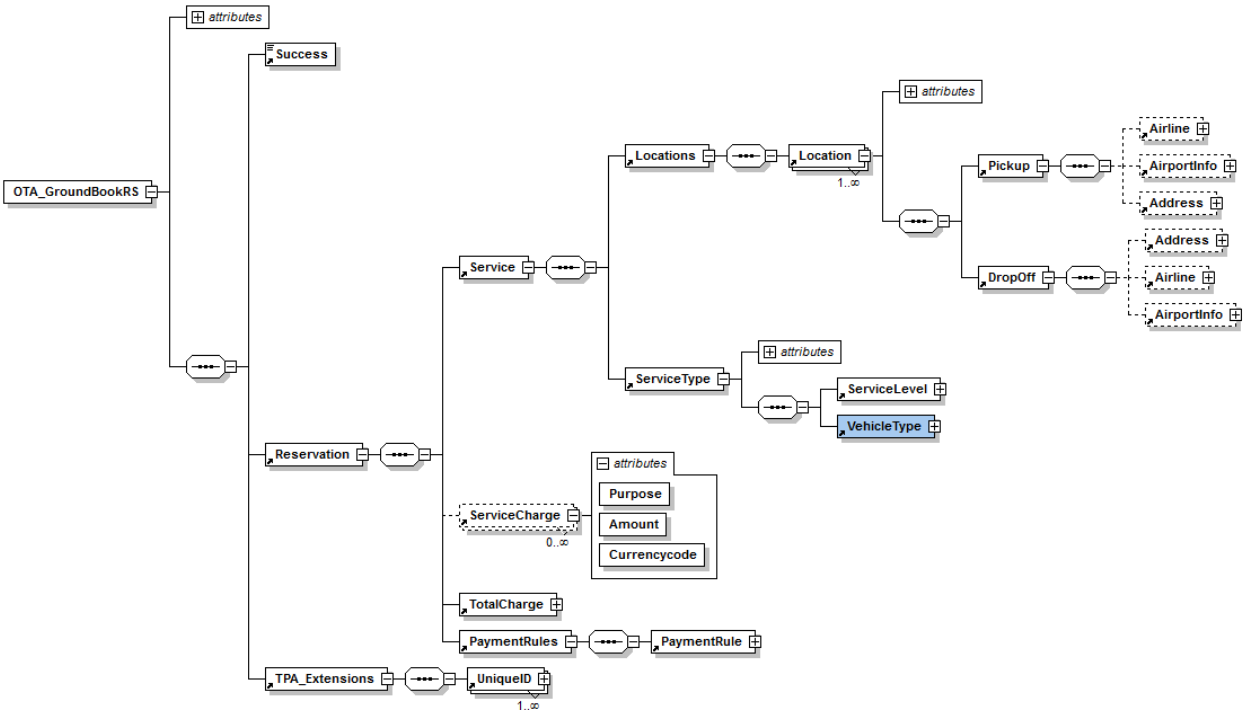

Service and pricing

Service and pricing confirmation will be included in Service and TotalCharge, the same way as OTA_GroundAvailRS. Details on the calculation is provided in ServiceCharges section. The prices shown in the <TotalCharge> section are final and will be the ones considered for accountancy.

Any service fee that may apply will be indicated in the fees section. Fee rates are applied for each element needed. I.E. a Bicycle supplement will be applied for each bcycle transported. Purpose code is an OTA VCP code (Vehicle Charge Purpose), typical values are:

3: Discount
28: Optional
35: Base Rate
36: Mandatory

```
<Service>
        <ServiceLevel Code="S0000">Shuttle</ServiceLevel>
        <VehicleType Code="3" Description="Shared"></VehicleType>
        <RateQualifier PromotionCode="IN/OT" RateQualifier="TREGHRGHRG"/>
      </Service>
      <ServiceCharge Amount="18.00" CurrencyCode="EUR">
        <ChargePurpose Code="35" Description="Base Rate"/>
        <Calculation Quantity="3" UnitName="SERVICE"/>
      </ServiceCharge>
      <ServiceCharge Amount="18.00" CurrencyCode="EUR">
        <ChargePurpose Code="35" Description="Base Rate"/>
        <Calculation Quantity="3" UnitName="SERVICE"/>
      </ServiceCharge>
      <TotalCharge RateTotalAmount="36.00" CurrencyCode="EUR"/>
```

Partner and Axisdata references

Client reference number and Axisdata internal reference numbers can be found in <TPA_Extensions> section. The client reference will use the master/child references.

```
<TPA_Extensions>
      <UniqueID ID="191206094817263" ID_Context="Client" Type="36"/>
      <UniqueID ID="Transfer_1" ID_Context="Client" Item_RPH="1" Type="37"/>
      <UniqueID ID="1" ID_Context="Internal" Item_RPH="1" Type="37"/>
      <UniqueID ID="Transfer_2" ID_Context="Client" Item_RPH="2" Type="37"/>
      <UniqueID ID="2" ID_Context="Internal" Item_RPH="2" Type="37"/>
</TPA_Extensions>
```

Both, client and internal references, can be used for cancellation process, but Client value should be used for any other communications (printed vouchers, accountancy, etc).

Meet and greet

Meet and greet informations are included now in OTA_GroundResRS, both Quote and Commit, as the Arrival Instructions. The language of the text is retrieved from PrimaryLangID of the

OTA_GroundResRQ. In case requested language is not provided, English will be the language returned by default.

Example of Meet and greet comments:


```
<Reservation>
		<Service>
			<ServiceLevel Code="S0000"/>
			<VehicleType Code="3" Description="Bus"/>
			<RateQualifier RateQualifier="TRPTFAOFAO"
PromotionCode="IN/OT"/>
		</Service>
		<ServiceCharge CurrencyCode="EUR" Amount="14.10">
			<ChargePurpose Description="Base Rate" Code="35"/>
			<Calculation UnitName="SERVICE" Quantity="3"/>
		</ServiceCharge>
		<ServiceCharge CurrencyCode="EUR" Amount="14.10">
			<ChargePurpose Description="Base Rate" Code="35"/>
			<Calculation UnitName="SERVICE" Quantity="3"/>
		</ServiceCharge>
		<TotalCharge CurrencyCode="EUR" RateTotalAmount="28.20"/>
		<Comments Language="EN">Arrival Instructions:
Once you have collected your luggage, please proceed to MTS Globe office which is located at
the arrivals hall in front of gate “D” and exit door nº6.
Please identify yourself by showing them a copy of your booking voucher.
Here you will find your representative who will indicate the location of your coach/car or in
case of private transfer they will introduce you to your driver and lead you to your vehicle.
Please do not leave the arrivals hall until you have located either our representative or found
your transfer driver.
In the event of a problem with your luggage, if possible, please send one person from your
party to the MTS Globe office or contact the emergency number to advice our representative /
driver of the delay.
Emergency number: (+34) 871 170 555
	</Reservation>
```


Cancellation rules

For each OTA_GroundResRQ (both of the type “quote” and the type “commit”) the cancellation policy is included in the OTA_GroundResRS. Full cancellations can be performed using both axisdata or partner reference, to perform a partial cancellation, specific child reference should be used.

Extras

Extras included in the booking will be returned in the response as a confirmation of its inclusion. Extra rates are already included in the TotalCharge value. If one extra type is requested multiple times (3 “bicycle/IN”), they will merged into a single line in the response with the total amount.

```
<Fees>
        <Fee Amount="15.00" CurrencyCode="EUR" Description="Large Pet/IN"
IncludeInRate="'true'"/>
        <Fee Amount="23.00" CurrencyCode="EUR" Description="Bicycle/IN"
IncludeInRate="'true'"/>
</Fees>
```

Examples

```
<OTA_GroundBookRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2012.1"
ResResponseType="Committed">
        <Success/>
        <Reservation>
                <Service>
                        <ServiceLevel Code="SS000"/>
                        <VehicleType Code="3"/>
                        <RateQualifier RateQualifier="TRESPMIPMI"
PromotionCode="IN/OT"/>
                </Service>
                <ServiceCharge CurrencyCode="EUR" Amount="63.80">
                        <ChargePurpose Description="Base Rate" Code="35"/>
                        <Calculation UnitName="SERVICE" Quantity="4"/>
                </ServiceCharge>
                <Fees>
                        <Fee Amount="15.00" CurrencyCode="EUR" Description="Large
Pet/IN" IncludeInRate="'true'"/>
                        <Fee Amount="23.00" CurrencyCode="EUR" Description="Bicycle/IN"
IncludeInRate="'true'"/>
                        <Fee Amount="11.00" CurrencyCode="EUR" Description="Bicycle/IN"
IncludeInRate="'true'"/>
                </Fees>
                <TotalCharge CurrencyCode="EUR" RateTotalAmount="112.80"/>
        </Reservation>
        <TPA_Extensions>+

                <UniqueID Type="36" ID_Context="Client" ID="1234567890"/>
                <UniqueID Type="36" ID_Context="Internal" ID="121212121212"/>
                <UniqueID Type="37" ID_Context="Client" ID="1234567890_1"/>
                <UniqueID Type="37" ID_Context="Internal" ID="1"/>
                <UniqueID Type="37" ID_Context="Client" ID="1234567890_2"/>
                <UniqueID Type="37" ID_Context="Internal" ID="2"/>
```

```
        </TPA_Extensions>
</OTA_GroundBookRS>
```

6 Excursion search and book messages

The use of the OTA_TourActivityxxx messages returns pricing in the response, based on Excursion and Ticketing agreements available to the client in our TravelKISS plaform.

Excursion flow is similar to previous ones (Transfer, Rent a car) keeping the same search-quote-book process but it includes an additional message to get the inventory descriptions in realtime. This step is optional and it is not required to have a fully functional excursion integration. The OTA messages used are:
Real-time inventory descriptions: OTA_TourActivitySearchRQ/RS
Real-time price search: OTA_TourActivityAvailRQ/RS
Real-time quote and book: OTA_TourActivityBookRQ/RS

OTA Tour Activity messaging pack is based on 2014.2 specification, so version for all OTA Vehicle messages is Version="2014.2". Message implementation is based on OTA with some extra functionality included.

6.1 OTA_TourActivitySearchRQ

OTA_TourActivitySearchRQ is the message used for searching available services with pricing.

Typical OTA_TourActivitySearchRQ structure:

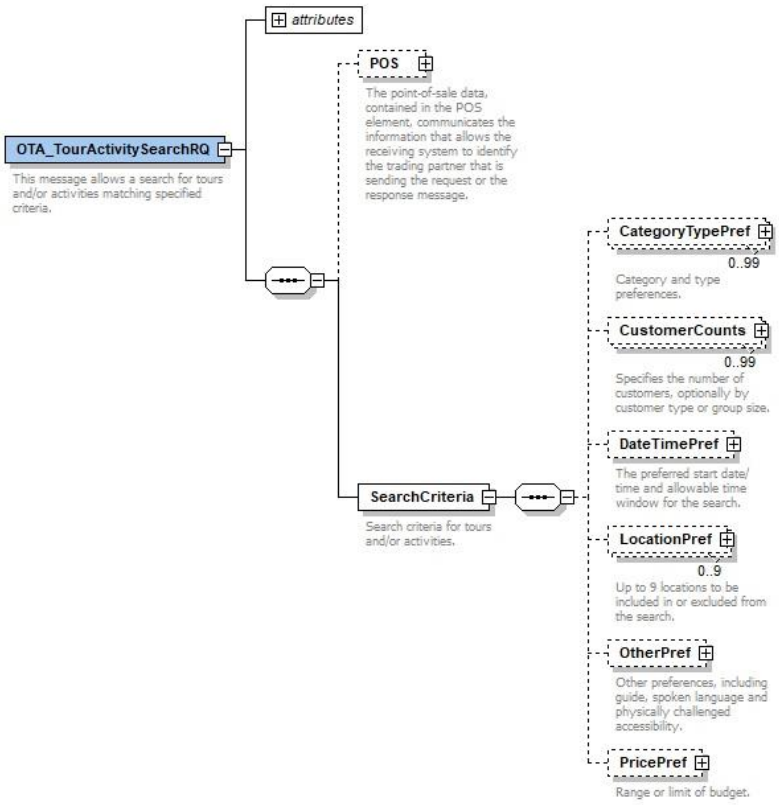

Location

Service location specifies the areas involved in an excursion service. Source location indicates the customer's position at the start of the service. Typical value would be the stay hotel or the touristic destination.The source location is needed for service and transfer availability, pickup location and pickup time calculation. Service location indicates the area of the requested services. Typical value would be the region or resort. The location Context attribute is an extension over the OTA standard.

```
<LocationPref Context="Source">
<LocationPref Context="Service">
```

Location structure allows different types of location types:

- Areas: Country, Destination, region, resort and Touristic destination.
- Hotel code or GIATA code (Usable by GIATA partners only)
- Geo Location
- TourActivity Code

```
<LocationPref Context="xxxx">
        <Region RegionCode="Country">Spain</Region>
        <Region RegionCode="Region">Mallorca</Region>
        <Region RegionCode="Resort">Arenal</Region>
        <Region RegionCode="HotelCode">AMTSxxxx</Region>
        <Region RegionCode="GIATA">25412</Region>
        <Region RegionCode="Product">LESPMIBKUI</Region>
        <Position Latitude="12541" Longitude="25412"/>
</LocationPref>
```

Only one of the location types should be used for each location, it is not necessary to be the same. I.E. Source location can be a hotel code and service location can be a region. In case the location is defined per area, Country should be always provided. I.E. Country + Region, Country + Resort, etc.

```
<LocationPref Context="Source">
        <Region RegionCode="HotelCode">AMTSxxxx</Region>
</LocationPref >
<LocationPref Context="Service">
        <Region RegionCode="Country">Spain</Region>
        <Region RegionCode="Region">Mallorca</Region>
</LocationPref >
```

Source locations allowed: Area (Country, Region, Resort), GIATA code, Hotel Code or Geo Location

Destination locations allowed: Area (Country, Region, Resort), TourActivity Code

Rate Delimiter

This concept defines a range or limit of budget. **MaxPrice** is the highest price for a price range search while **MinPrice** is the lowest. The pricing type might be per person and per group.

```
<PricePref MaxPrice = "100">
    <PricingType>PerPerson</PricingType>
 </PricePref>
```

Date and Time Preferences

DateTimePref contains the date range to be used in the excursion service search. This period normally covers the hotel stay. Period is limited to 28 days. Duration can be included to indicate the maximum duration of the requested services.

```
<DateTimePref Start="2022-08-01" End="2022-08-15" Duration="P6h"/>
```

Category Preferences

CategoryTypePref contains the preferred excursion categories to be returned in the search, this section is optional. Values can be found in the Appendix section.

```
<CategoryTypePref>
        <Category>Ticket</Category>
        <Type>Adventure</Type>
</CategoryTypePref>
```

Language preferences

Spoken language can be requested to fit the customer spoken language. Language code follows ISO 3166-1 alpha-2 codes.

```
<OtherPref>
        <SpokenLanguage Code="EN"/>
</OtherPref>
```

Availability Notification

For Excursions contracts, an availability is notified with Delta notifications when the client has been added to a new contract, or the existing contract has been amended also by activating or deactivating stop sales.
Excursion allotment is notified per product, not per contract.

Example

```
<OTA_TourActivitySearchRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2014.2"
PrimaryLangID = "EN">
  <POS>
    <Source>
      <RequestorID ID = "TEST" ID_Context = "AxisData" Type = "22"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <SearchCriteria>
    <DateTimePref Start = "2019-12-20" End = "2019-12-22"></DateTimePref>
    <LocationPref Context = "Service">
      <Region RegionCode = "Country">Portugal</Region>
      <Region RegionCode = "Resort">Funchal</Region>
    </LocationPref>
    <OtherPref>
      <SpokenLanguage Code = "EN"/>
    </OtherPref>
  </SearchCriteria>
</OTA_TourActivitySearchRQ>
```

6.2 OTA_TourActivitySearchRS

An OTA_TourActivitySearchRS message is received in response to the request. The presence of the <Success/> element indicates successful processing of the request; otherwise, a list of errors is returned. In case no services are available for the requested parametes, the result will have an empty list.

The response will contain all the services provided in the area requested, it's availability and pricing is not calculated.

Typical OTA_TourActivitySearchRS structure:

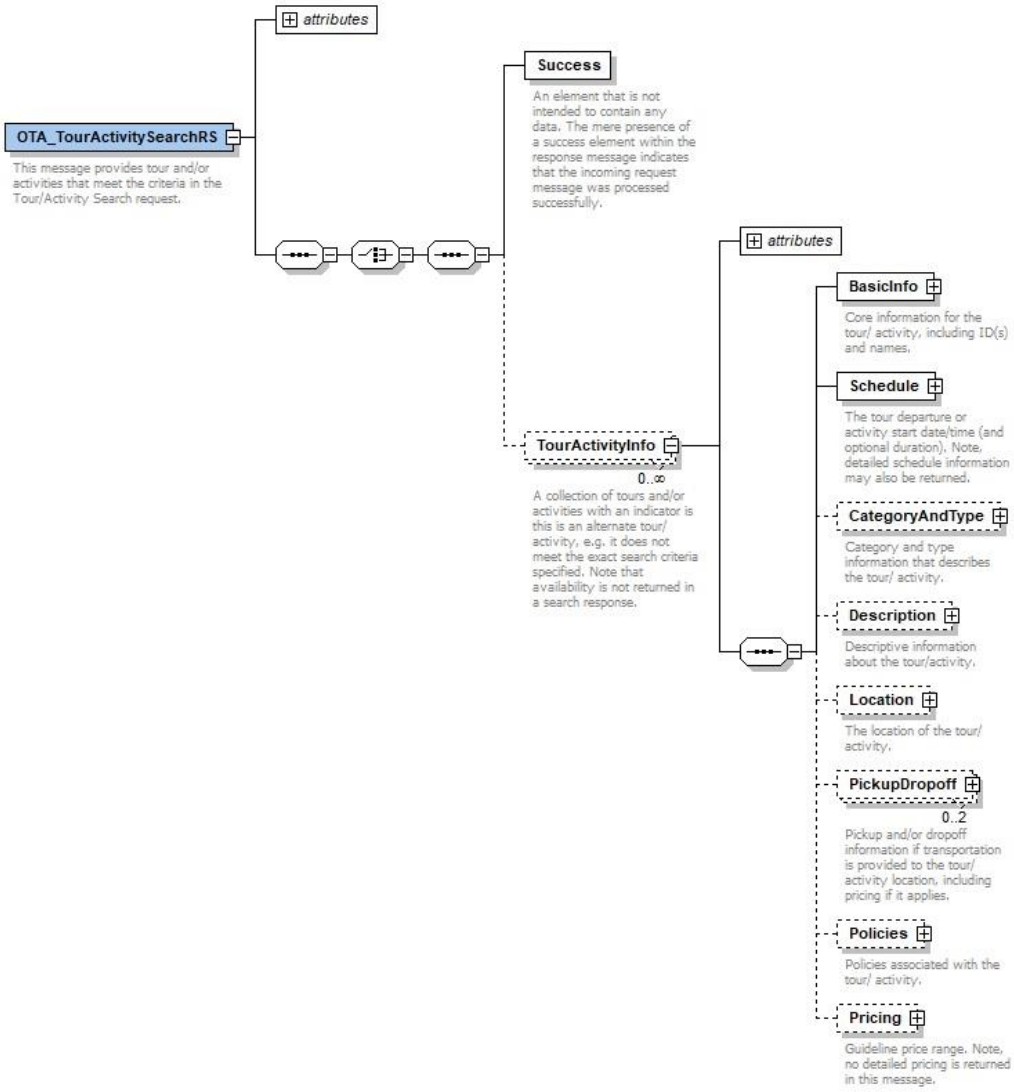

Service ID

Service ID defines the main excursion product. This code will be used during search-book flow.

```
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="STD"
SupplierServiceCode="XO"/>
…
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="STD"
SupplierServiceCode="XA"/>
…
<BasicInfo TourActivityID="LESACEA123" SupplierProductCode="STD"
SupplierServiceCode="XO"/>
…
<BasicInfo TourActivityID=" LESACEA123" SupplierProductCode="STD"
SupplierServiceCode="XA"/>
```

…

Schedule

It contains the date range period in which the service is available. Duration of the service (if available) is expressed as an XML duration type.

```
<Schedule>
  <Summary End = "2022-06-23" Start = "2022-06-01" Duration = "PT4H"/>
</Schedule>
```

Categories

This section describes the type of excursion and its category. Type codes can be found in Appendix I at the end of the documentation. Category code can be either “Excursion” or “Ticket”. An excursion service includes the transfer service from the source location to the service location, a ticket only includes the entrance and it does not include the transfer to the service location.

```
<CategoryAndType>
        <Type Code="Adventure"/>
        <Category Code="Excursion & Activities"/>
</CategoryAndType>
```

Description

Main description of the excursion can be found in the Long Description section. The description language will be English, to be extended in the future.

```
<Description>
        <LongDescription>Excursion Soller
…
</LongDescription>
</Description>
```

Facts

Activity facts can be found in the response as text item elements. Fact categories and codes can be found in the Appendix L.

```
<TextItem Category = "EX_TARGET" SourceID = "EX_TARGET_ALL">
  <Description>Anybody</Description>
</TextItem>
```

Location

This section will include the full service location. Location types and structure will be the same used in the OTA_TourActivityAvailRQ.

```
<Location>
  <Region RegionCode = "Country">Spain</Region>
  <Region RegionCode = "Region">Mallorca</Region>
  <Region RegionCode = "Resort">Calvia</Region>
</Location>
```

Cancellation rules

For each service available, the cancellation policy is included in the response. Structure is similar to the Hotel cancellation rules and section is included in the TPA_Extensions section.

```
<Policies>
        <CancelPolicy>
                <CancelPenalty>
                        <Deadline OffsetUnitMultiplier="2" OffsetTimeUnit="Day"
OffsetDropTime="BeforeArrival"/>
                        <AmountPercent BasisType="FullStay" Percent="50"/>
                </CancelPenalty>
                <CancelPenalty>
                        <Deadline OffsetUnitMultiplier="0" OffsetTimeUnit="Day"
OffsetDropTime="BeforeArrival"/>
                        <AmountPercent BasisType="FullStay" Percent="100"/>
                </CancelPenalty>
        </CancelPolicy>
</Policies>
```

Participant rules

The amount and type of participants that are eligible for the service are indicated in the Participant section under the policies node.

```
<Participant MaxParticipants="10" MinParticipants="2" MinADT="2" MaxADT="6" MinCHD="0"
MaxCHD="2" MaxINF="0" MaxCHDAge="6" />
```

Expected Rates

Rates returned in the detailed search result are sent back in the booking request for price consistency pourposes.

```
<Pricing>
<Summary Amount="130.00" CurrencyCode="EUR"/>
</Pricing>
```

Example

```
<OTA_TourActivitySearchRS xmlns = "http://www.opentravel.org/OTA/2003/05">
```

```
  <Success/>
  <TourActivityInfo>
    <BasicInfo SupplierProductCode = "FT000000" Name = "Yellow Bus Tour 2 in 1" TourActivityID =
"XPTFNC9TC6" SupplierServiceCode = "TIC"/>
    <Schedule>
      <Summary Start = "2019-12-20" End = "2019-12-20"/>
    </Schedule>
    <CategoryAndType>
      <Category Code = "Excursion &amp; Activities"/>
      <Type Code = "Trips and Tours"/>
    </CategoryAndType>
    <Description>
      <ShortDescription>Yellow Bus Tour 2 in 1</ShortDescription>
      <LongDescription>
        Funchal Tour
        Catch the Yellow Bus Hop on Off Bus Funchal and, at a height of 4 meters, discover the most
beautiful places in Funchal. You can get off and on at any stop throughout the circuit in this Funchal
Sightseeing Bus! Take advantage of the trip to get to know the unique views of Funchal (like the one at
Pico dos Barcelos), its main monuments, its typical Portuguese cobblestone streets and the colourful
flowers in its gardens. Be sure to visit the Madeira Wine Museum, where you can enjoy a glass of this
famous wine.

        Câmara de Lobos Tour
        Let yourself be enchanted by the blue sea in contrast with the green of the breathtaking
scenery. Enjoy the most special corners of Funchal, as well as the aromas and flavors at the Workers'
Market. Then visit the quaint village of Câmara de Lobos, with its enviable natural heritage and charm
that made it one of the favorite places of Winston Churchill.

        Cabo Girão Tour
        This circuit provides regular departures from Câmara de Lobos and allows you to get to know
one of the most amazing surprises that the Island of Madeira possesses: The Skywalk lookout point.
Since it is positioned at 580 meters above sea level it guarantees you a visual experience that you will
never forget!
      </LongDescription>
      <Multimedia>
        <MultimediaDescription>
          <TextItems>
            <TextItem Category = "EX_HIGHL" SourceID = "IS_DESC001">
              <Description>
                Choose 2 city tours to enjoy in 48hours!

                Did you know that Madeira is known as the "Pearl of the Atlantic" due to its Great
natural beauty? Set off and discover, with Madeira Tours, all unique sensorial experiences that this
island has to offer. From the capital, Funchal (with Funchal Sightseeing Tours), to the biggest lookout
point in Europe - Skywalk, you can find nooks full of history and memorable natural landscapes. Yellow
Bus provides you with two open-top bus circuits, two minibus circuits and two circuits that have a
special combination. Choose the most experienced for the best experience!
              </Description>
            </TextItem>
            <TextItem Category = "EX_TARGET" SourceID = "EX_TARGET_ALL">
              <Description>Anybody</Description>
            </TextItem>
            <TextItem Category = "EX_THEME" SourceID = "EX_THEME_SIGHTS">
              <Description>Sightseeing</Description>
            </TextItem>
            <TextItem Category = "EX_THEME" SourceID = "EX_THEME_CULTURE">
              <Description>Cultural</Description>
```

```
                </TextItem>
                <TextItem Category = "EX_DIFFIC" SourceID = "EX_DIF_1">
                  <Description>Easy</Description>
                </TextItem>
                <TextItem Category = "EXCURSION" SourceID = "EX_LANGSPOKEN">
                  <Description>English, German, French</Description>
                </TextItem>
                <TextItem Category = "EXCURSION" SourceID = "EX_MVOUCHER">
                  <Description>Mobile Voucher accepted</Description>
                </TextItem>
                <TextItem Category = "EXCURSION" SourceID = "EX_PVOUCHER">
                  <Description>Printed Voucher accepted</Description>
                </TextItem>
                <TextItem Category = "EX_INCL" SourceID = "EX_INCL_TRF">
                  <Description>Transport</Description>
                </TextItem>
                <TextItem Category = "EX_NOTINCL" SourceID = "EX_NOTINCL_FOOD">
                  <Description>Meals</Description>
                </TextItem>
              </TextItems>
            </MultimediaDescription>
          </Multimedia>
        </Description>
        <Location>
          <Region RegionCode = "Country">Portugal</Region>
          <Region RegionCode = "Region">Madeira</Region>
          <Region RegionCode = "Resort">Funchal</Region>
          <Position/>
        </Location>
        <PickupDropoff DateTime = "2019-12-20">
          <Schedule>
            <OperationTimes>
              <OperationTime Start = "2019-12-20" End = "2019-12-20"/>
            </OperationTimes>
          </Schedule>
        </PickupDropoff>
        <Policies>
          <Participant MinParticipants = "1" MaxParticipants = "99" MinAge = "0" MaxAge = "0"/>
        </Policies>
        <Pricing MinPrice = "17.00" CurrencyCode = "EUR">
          <PricingType>PerPerson</PricingType>
        </Pricing>
      </TourActivityInfo>
    <TourActivityInfo>
    …
    <TourActivityInfo>
    …
    </OTA_TourActivitySearchRS>
```

6.3 OTA_TourActivityAvailRQ

OTA_TourActivityAvailRQ is the message used for searching available services with pricing.

Typical OTA_TourActivityAvailRQ structure:

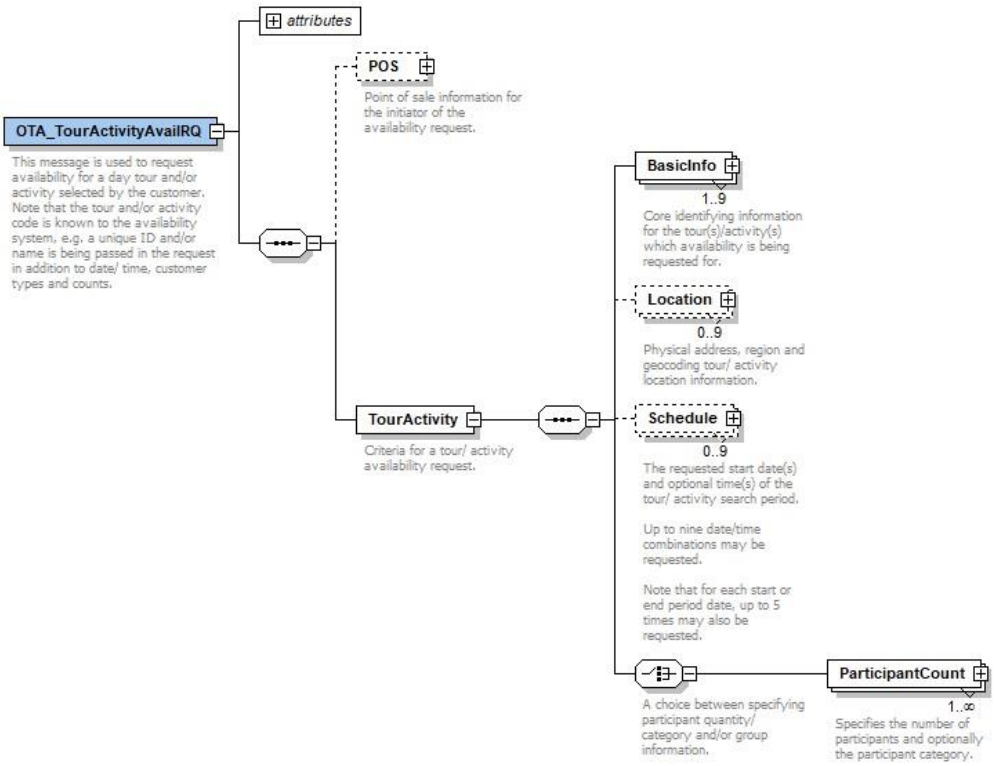

All services and cheapest service

To facilitate applications where the workflow is oriented to an initial search results display of one result per service, we do offer the possibility to get the cheapest price per service. A next step specifying the product code in the search request, allows the end user to specify the dates/options. This is an efficient approach in terms of data volume.

Instance MF001 returns all services + all schedules available

```
<RequestorID ID="TEST" ID_Context="AxisData" Type="22" Instance="MF001"/>
```

Instance MF002 returns all services with the cheapest price

```
<RequestorID ID="TEST" ID_Context="AxisData" Type="22" Instance="MF002"/>
```

The most efficient way to perform a service search is executing an initial search to retrieve all available services (MF002) with the cheapest value. Once a service has been selected, a second request to get all schedules and prices (MF001) for the specific service can be executed.

Location

See description in OTA_TourActivitySearchRQ

Schedule

Service Schedule contains the date range to be used in the excursion service search. This period normally covers the hotel stay. Period is limited to 28 days.

```
<Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-30"/>
```

Participants and ages

In the Participant details section, Pax quantity and age must be indicated. Age is important to determine the applicable rate and availability. The detail available at reservation time depends on the booking source: **age at the time of the service.** QualifierInfo Code follows OTA AQC codes (Age Qualifying code).

```
<ParticipantCount Quantity="2">
        <QualifierInfo>10</QualifierInfo>
</ParticipantCount>
<ParticipantCount Quantity="1" Age="6">
        <QualifierInfo>8</QualifierInfo>
</ParticipantCount>
```

Rate Delimiter

A maximum rate value must be specified in the request. The maximum value can be defined PerPerson o PerGroup. Currency code must be specified.

```
<MultimodalOffer>
        <RequestedOffer>
                <GuidelinePricing>
                        <Method>PerGroup</Method>
                        <MaximumPrice Amount="350.00"
CurrencyCode="EUR"/>
                </GuidelinePricing>
        </RequestedOffer>
</MultimodalOffer>
```

Maximum responses inclusion

The default number of responses included is 100. This value can be customized in the "ProcessingInformation" element.

```
<OTA_TourActivityAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05"
Version="2014.2">
    <POS>
        <Source>
```

```
                <RequestorID Type="22" ID="LSAE" ID_Context="AxisData"
Instance="MF002"/>
            </Source>
        </POS>
        <ProcessingInformation MaxResponses="9999"/>
        <TourActivity>
            <Location Context="Source">
                <Region RegionCode="Resort">The Palm</Region>
            </Location>
            <Location Context="Service">
                <Region RegionCode="Region">Dubai</Region>
            </Location>
            <Schedule EndPeriod="2022-11-09" StartPeriod="2022-11-03"/>
        </TourActivity>
</OTA_TourActivityAvailRQ>
```

Examples

All services available in PMI with starting price from (Initial search)

```
<OTA_TourActivityAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05"
Version="2014.2">
        <POS>
            <Source>
                <RequestorID ID="TEST" ID_Context="AxisData" Type="22"
Instance="MF002"/>
            </Source>
            <Source>
                <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
            </Source>
        </POS>
        <TourActivity>
            <BasicInfo/>
            <Location Context="Source">
                <Region RegionCode="HotelCode">AMTSESxxxx</Region>
            </Location>
            <Location Context="Service">
                <Region RegionCode="Region">Mallorca</Region>
            </Location>
            <Schedule EndPeriod="2022-05-23" StartPeriod="2022-05-16"/>
            <ParticipantCount Quantity="1">
                <QualifierInfo>10</QualifierInfo>
            </ParticipantCount>
            <MultimodalOffer>
                <RequestedOffer>
                    <GuidelinePricing>
                        <Method>PerPerson</Method>
                        <MaximumPrice Amount="999" CurrencyCode="EUR"
CurrencyDecimal="2"/>
                    </GuidelinePricing>
                </RequestedOffer>
```

```
                </MultimodalOffer>
        </TourActivity>
</OTA_TourActivityAvailRQ>
```

Specific Activity with all services (Detailed search)

```
<OTA_TourActivityAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:gen="http://travelkiss.axisdata.net/Generic" Version="2014.2">
        <POS>
                <Source>
                        <RequestorID ID="TEST" ID_Context="AxisData" Type="22"
Instance="MF001"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <TourActivity>
                <BasicInfo/>
                <Location Context="Source">
                        <Region RegionCode="HotelCode">AMTSESxxxx</Region>
                </Location>
                <Location Context="Service">
                        <Region RegionCode="Product">LESPMIBKUI</Region>
                </Location>
                <Schedule EndPeriod="2022-05-23" StartPeriod="2022-05-16"/>
                <ParticipantCount Quantity="4">
                        <QualifierInfo>10</QualifierInfo>
                </ParticipantCount>
                <MultimodalOffer>
                        <RequestedOffer>
                                <GuidelinePricing>
                                        <Method>PerPerson</Method>
                                        <MaximumPrice Amount="999" CurrencyCode="EUR"
CurrencyDecimal="2"/>
                                </GuidelinePricing>
                        </RequestedOffer>
                </MultimodalOffer>
        </TourActivity>
</OTA_TourActivityAvailRQ>
```

6.4 OTA_TourActivityAvailRS

An OTA_TourActivityAvailRS message is received in response to the request. The presence of the <Success/> element indicates successful processing of the request; otherwise, a list of errors is returned. In case no services are available for the requested parametes, the result will have an empty list.

The response will contain a single block with price from for each service ID (MF002) or a block for each available product and subservice per Service ID (MF001), see OTA_TourActivityAvailRQ.

Typical OTA_TourActivityAvailRS structure:

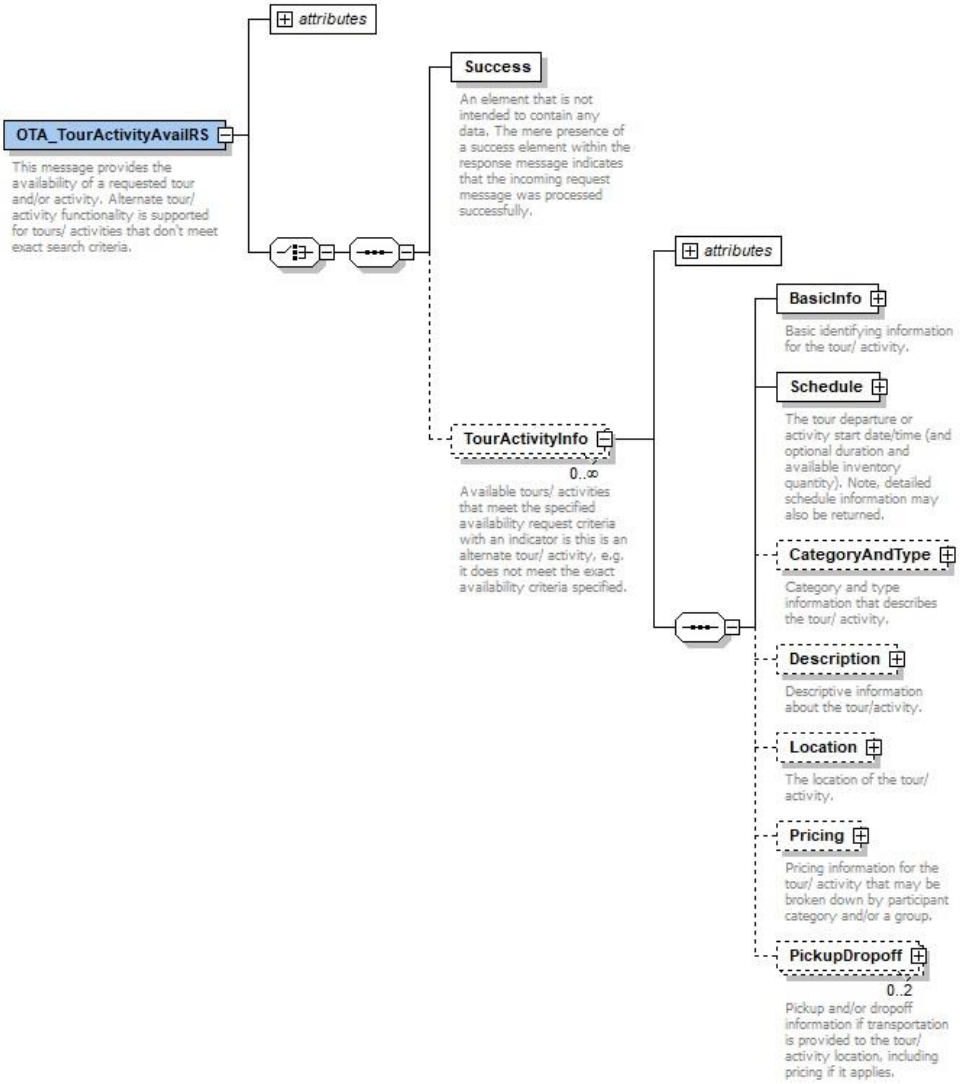

Service ID

Service ID defines the main excursion product. This code will be used during search-book flow.

Basic service ID is returned for an initial search (MF002). Detailed product and subservice are not provided. A single block per Touractivity will be returned.

```
<BasicInfo TourActivityID="LESACE474M"/>
```

Full service ID is returned in a detailed search (MF001). All available products and subservices will be included.

```
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="STD"
SupplierServiceCode="XO"/>
…
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="STD"
SupplierServiceCode="XA"/>
…
<BasicInfo TourActivityID="LESACEA123" SupplierProductCode="STD"
SupplierServiceCode="XO"/>
…
<BasicInfo TourActivityID=" LESACEA123" SupplierProductCode="STD"
SupplierServiceCode="XA"/>
…
```

Schedule

It contains the date range period when the service is available. Duration of the service (if available) is expressed as XML duration type.

```
<Schedule>
  <Summary End = "2022-06-23" Start = "2022-06-01" Duration = "PT4H"/>
</Schedule>
```

Categories

This section describes the type of excursion and its category. Type codes can be found in Appendix I at the end of the documentation. Category code can be either “Excurison” or “Ticket”. An excursion service includes the transfer service from the source location to the service location; a ticket only includes the entrance and does not include the transfer to the service location.

```
<CategoryAndType>
        <Type Code="Adventure"/>
        <Category Code="Excursion & Activities"/>
</CategoryAndType>
```

Description

Description of the excursion. The description language will be English, to be extended in the future.

```
<Description>
        <ShortDescription>Excursion Soller</ShortDescription>
</Description>
```

Location

This section includes the full service location. Location types and structure will be the same used in the TourActivitySearchRQ/RS.

Rates

A price from rate will be returned for the initial search (MF002). This price is the minimum price and it will be expressed as a per person value.

```
<Pricing>
        <Summary MinCharge="38.00" CurrencyCode="EUR">
                <PricingType>PerPerson</PricingType>
        </Summary>
</Pricing>
```

Detailed search result includes the price for each product and subservice available. The rate is expressed as a price per group.

```
<Pricing>
        <Summary Amount="200.00" CurrencyCode="EUR">
                <PricingType>PerGroup</PricingType>
        </Summary>
</Pricing>
```

Pickup and dropoff

The detailed response (MF001) will include all the operation times, duration of the service and pickup times. The attribute PickupInd="true" indicates if the location and date time corresponds to the pickup (true) or dropoff (false). Pickup location and time will not be included in a ticket service, as the transfer in not covered.

```
<PickupDropoff LocationName="AMTSESxxxx" PickupInd="true"
DateTime="09:00:00">
        <Schedule Duration="8h">
                <OperationTimes>
```

```
                                        <OperatonTime Start="2022-05-25" End="2022-05-
25"/>
                                        <OperatonTime Start="2022-05-26" End="2022-05-
26"/>
                                        <OperatonTime Start="2022-05-27" End="2022-05-
27"/>
                                        <OperatonTime Start="2022-05-28" End="2022-05-
28"/>
                                </OperationTimes>
                        </Schedule>
                </PickupDropoff>
```

Extras

If the service does offer an optional extra or includes a mandatory extra, it will be included in the search response. Optional extras can be included in the booking by adding them in the booking request (see OTA_TourActivityBookRQ). Compulsory extras are already included in the booking and calculated, there is no need to add them in the booking request.

Extras can be found under the Extras section and are identified via the attribute RequiredInd. A false value indicates that the extra is optional, and a true value sets the extra as mandatory.

SupplierCode attribute holds the code of the extra. This code is used in the booking request to add the extra to the booking.

```
    <Extra SupplierCode = "XME1" Description = "Additional equipment" quantity = "1" RequiredInd =
"false">
      <Pricing>
        <Summary Amount = "3.00" CurrencyCode = "EUR"/>
      </Pricing>
    </Extra>
```

Examples Cheapest service per ticket/excursion response (MF002)

```
<OTA_TourActivityAvailRS xmlns="http://www.opentravel.org/OTA/2003/05"
Version="2014.2">
        <Success/>
        <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" />
                <Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-30"
Duration="8h"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Ticket"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Rancho Texas entrance</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Country">Spain</Region>
                        <Region RegionCode="Region">Mallorca</Region>
                        <Region RegionCode="Resort">Arenal</Region>
                        <Position Latitude="12541" Longitude="25412"/>
                </Location>
                <Pricing>
                        <Summary MinCharge="38.00" CurrencyCode="EUR">
                                <PricingType>PerPerson</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="Rancho Texas">
                </PickupDropoff>
        </TourActivityInfo>
```

```
        <TourActivityInfo>
                <BasicInfo TourActivityID="EMTSES0002" />
                <Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-30"
Duration="8h"/>
                <CategoryAndType>
                        <Type Code="EcoAdventure"/>
                        <Category Code="Ticket"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Drach's caves</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Country">Spain</Region>
                        <Region RegionCode="Region">Mallorca</Region>
                        <Region RegionCode="Resort">Porto Cristo</Region>
                        <Position Latitude="12541" Longitude="25412"/>
                </Location>
                <Pricing>
                        <Summary MinCharge="42.00" CurrencyCode="EUR">
                                <PricingType>PerPerson</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="Drach's caves">
                </PickupDropoff>
        </TourActivityInfo>
        <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" />
                <Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-30"
Duration="8h"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Excursion"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Excursion Soller</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Region">Mallorca</Region>
                </Location>
                <Pricing>
                        <Summary MinCharge="60.00" CurrencyCode="EUR">
                                <PricingType>PerPerson</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="AMTSESxxxx" PickupInd="true">
                </PickupDropoff>
        </TourActivityInfo>
</OTA_TourActivityAvailRS>
```


Detailed response (MF001) for one ticket/excursion

```
<OTA_TourActivityAvailRS xmlns="http://www.opentravel.org/OTA/2003/05"
Version="2014.2">
        <Success/>
        <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" SupplierProductCode="ST"
SupplierServiceCode="AI"/>
                <Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-28"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Excursion"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Excursion Soller</ShortDescription>
                </Description>
                 <Extra SupplierCode = "XME1" Description = "Additional equipment" quantity
= "1" RequiredInd = "false">
                         <Pricing>
                                 <Summary Amount = "3.00" CurrencyCode = "EUR"/>
                        </Pricing>
                 </Extra>
                <Location>
                        <Region RegionCode="Region">Mallorca</Region>
                </Location>
                <Pricing>
                        <Summary Amount="200.00" CurrencyCode="EUR">
                                <PricingType>PerGroup</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="AMTSESxxxx" PickupInd="true"
DateTime="09:00:00">
                        <Schedule Duration="8h">
                                <OperationTimes>
                                        <OperatonTime Start="2022-05-25" End="2022-05-
25"/>
                                        <OperatonTime Start="2022-05-26" End="2022-05-
26"/>
                                        <OperatonTime Start="2022-05-27" End="2022-05-
27"/>
                                        <OperatonTime Start="2022-05-28" End="2022-05-
28"/>
                                </OperationTimes>
                        </Schedule>
                </PickupDropoff>
        </TourActivityInfo>
                <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" SupplierProductCode="ST"
SupplierServiceCode="HB"/>
                <Schedule StartPeriod="2022-05-29" EndPeriod="2022-05-30"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Excursion"/>
                </CategoryAndType>
```

```
                <Description>
                        <ShortDescription>Excursion Soller</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Region">Mallorca</Region>
                </Location>
                <Pricing>
                        <Summary Amount="230.00" CurrencyCode="EUR">
                                <PricingType>PerGroup</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="AMTSESxxxx" PickupInd="true"
DateTime="09:00:00">
                        <Schedule Duration="8h">
                                <OperationTimes>
                                        <OperatonTime Start="2022-05-29" End="2022-05-
29"/>
                                        <OperatonTime Start="2022-05-30" End="2022-05-
30"/>
                                </OperationTimes>
                        </Schedule>
                </PickupDropoff>
        </TourActivityInfo>
                <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" SupplierProductCode="ST"
SupplierServiceCode="AI"/>
                <Schedule StartPeriod="2022-05-25" EndPeriod="2022-05-28"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Ticket"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Rancho Texas entrance</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Country">Spain</Region>
                        <Region RegionCode="Region">Mallorca</Region>
                        <Region RegionCode="Resort">Arenal</Region>
                        <Position Latitude="12541" Longitude="25412"/>
                </Location>
                <Pricing>
                        <Summary Amount="100.00" CurrencyCode="EUR">
                                <PricingType>PerGroup</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="Rancho Texas">
                        <Schedule Duration="8h">
                                <OperationTimes>
                                        <OperatonTime Start="2022-05-25" End="2022-05-
25"/>
                                        <OperatonTime Start="2022-05-26" End="2022-05-
26"/>
```

```
                                        <OperatonTime Start="2022-05-27" End="2022-05-
27"/>
                                        <OperatonTime Start="2022-05-28" End="2022-05-
28"/>
                                </OperationTimes>
                        </Schedule>
                </PickupDropoff>
        </TourActivityInfo>
                <TourActivityInfo>
                <BasicInfo TourActivityID="LESACE474M" SupplierProductCode="ST"
SupplierServiceCode="AI"/>
                <Schedule StartPeriod="2022-05-29" EndPeriod="2022-05-30"/>
                <CategoryAndType>
                        <Type Code="Adventure"/>
                        <Category Code="Ticket"/>
                </CategoryAndType>
                <Description>
                        <ShortDescription>Rancho Texas entrance</ShortDescription>
                </Description>
                <Location>
                        <Region RegionCode="Country">Spain</Region>
                        <Region RegionCode="Region">Mallorca</Region>
                        <Region RegionCode="Resort">Arenal</Region>
                        <Position Latitude="12541" Longitude="25412"/>
                </Location>
                <Pricing>
                        <Summary Amount="130.00" CurrencyCode="EUR">
                                <PricingType>PerGroup</PricingType>
                        </Summary>
                </Pricing>
                <PickupDropoff LocationName="Rancho Texas">
                        <Schedule Duration="8h">
                                <OperationTimes>
                                        <OperatonTime Start="2022-05-29" End="2022-05-
29"/>
                                        <OperatonTime Start="2022-05-30" End="2022-05-
30"/>
                                </OperationTimes>
                        </Schedule>
                </PickupDropoff>
        </TourActivityInfo>
</OTA_TourActivityAvailRS>
```


6.5 OTA_TourActivityBookRQ

OTA_TourActivityBookRQ is the message used for quoting and booking.

Typical OTA_TourActivityBookRQ structure:

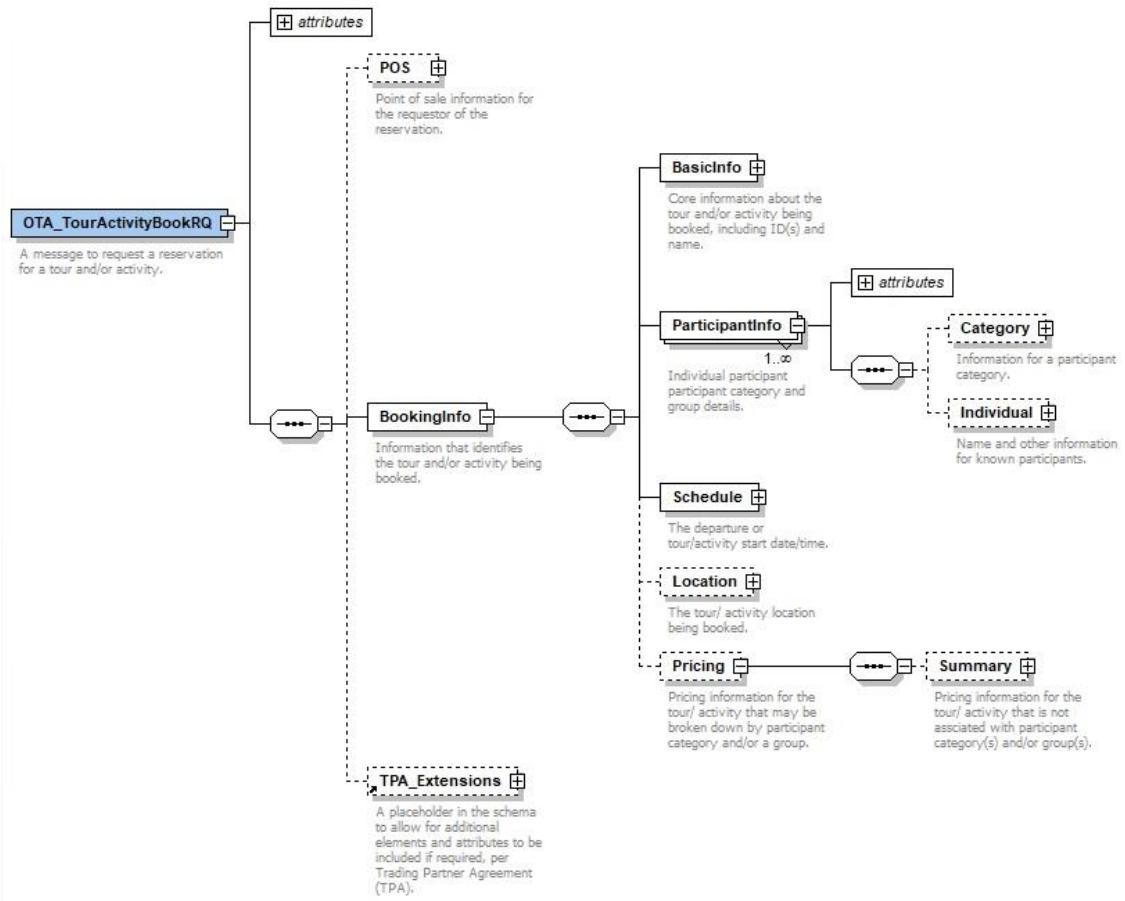

Quote and Commit

The OTA_TourActivityBookRQ can also be used to make an inquiry whether a particular reservation is possible, requesting the availability and total price for the booking. The quote is requested the same way as OTA_TourActivityBookRQ, using ResStatus attribute with “Quote” value. The behavior is similar to Hotel and Transfer messages, no actual booking is requested, just the confirmation of the price and availability.

The definite booking request is sent using ResStatus with value “Commit”. If accepted by the reservation system, this is a binding commitment with possible penalties in the case of cancellations or modifications. The booking request is the exact same message as the quote request and technically the exact same modules are used. Where in case of a booking the transaction is committed, in the “quote”, the transaction is not confirmed nor registered in our system.

Service ID

Full service ID returned in a detailed search (MF001) must be provided in the booking quote/commit.

```
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="STD"
SupplierServiceCode="XO"/>
```

Participants and ages

In the Participant details section, Pax quantity and age must be indicated. Each Pax must have an ID to be identified; ParticipantID is used for this purpose. Age is important to determine the applicable rate and availability. The detail available at reservation time depends on the booking source: **age at the time of <u>the service.</u>** QualifierInfo Code follows OTA AQC codes (Age Qualifying code).

```
<ParticipantInfo>
        <Category QualifierInfo="10"/>
        <Individual Age="26" ParticipantID="1">
                <GivenName>Jesse</GivenName>
                <NamePrefix>Mr</NamePrefix>
                <Surname>Jones</Surname>
        </Individual>
</ParticipantInfo>
<ParticipantInfo>
        <Category QualifierInfo="10"/>
        <Individual Age="26" ParticipantID="2">
                <GivenName>Jessica</GivenName>
                <NamePrefix>Mrs</NamePrefix>
                <Surname>Jones</Surname>
        </Individual>
</ParticipantInfo>
<ParticipantInfo>
        <Category QualifierInfo="8"/>
        <Individual Age="6" ParticipantID="3">
                <GivenName>Johnny</GivenName>
                <NamePrefix>Jr</NamePrefix>
                <Surname>Jones</Surname>
        </Individual>
</ParticipantInfo>
```

Schedule

Schedule must indicate the specific date of the service, so the period should be a single date.

```
<Schedule Start="2022-05-29" End="2022-05-29"/>
```

Pickuptime and the location of the selected service must be included as well:

```
<PickupDropoff DateTime="2022-07-30T00:50:00" PickupInd="true"
LocationName="APTFAOBOFM"/>
```

Expected Rates

Rates returned in the detailed search result are sent back in the booking request for price consistency purposes.

```
<Pricing>
        <Summary Amount="130.00" CurrencyCode="EUR"/>
</Pricing>
```

Partner reference

The partner reference is a mandatory element for obvious reasons regarding voucher numbers, and also, to enable:

- Implementation of the cancel/RS with partner references
- Avoid double bookings (if a partner tries to make two bookings with the same partner reference, the system will respond “booking already exists“.
- This reference must be printed on the voucher.

```
<TPA_Extensions>
        <UniqueID Type="36" ID="123456789" ID_Context="Client"/>
        <UniqueID Type="37" ID="123456789_1" ID_Context="Client"/>
</TPA_Extensions>
```

Please see section 3.5 “master child references” for details

Extras

Extras returned in the search request can be added to the booking, including them in the Booking request, in the Extra section. More than one extra of the same type can be added. Compulsory extras should not be included in the request as they are already included and calculated.

```
<Extra SupplierCode="EXFOOD" Description="Extra Food" quantity="1"/>
```

Examples

```
<OTA_TourActivityBookRQ Version="2014.2" Echotoken="1234132415" ResStatus="Commit"
xmlns="http://www.opentravel.org/OTA/2003/05">
	<POS>
		<Source>
			<RequestorID ID="TEST" ID_Context="AxisData" Type="22"
Instance="MF002"/>
		</Source>
		<Source>
			<RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
		</Source>
	</POS>
	<BookingInfo>
		<BasicInfo TourActivityID="XMXQA12BV82" SupplierProductCode="TC000000"
SupplierServiceCode="XO"/>
		<ParticipantInfo>
			<Category QualifierInfo="ADT"/>
			<Individual Age="36" ParticipantID="1">
				<GivenName>Ramon</GivenName>
				<NamePrefix>Mr</NamePrefix>
				<Surname>Monchito</Surname>
			</Individual>
		</ParticipantInfo>
		<ParticipantInfo>
			<Category QualifierInfo="ADT"/>
			<Individual Age="32" ParticipantID="2">
				<GivenName>Ramona</GivenName>
				<NamePrefix>Ms</NamePrefix>
				<Surname>Monchito</Surname>
			</Individual>
		</ParticipantInfo>
		<Schedule Start="2022-10-15" End="2022-10-15"/>
		<PickupDropoff DateTime="2022-10-15T08:50:00" PickupInd="true"
LocationName="AMXQA12BTCC"/>
	</BookingInfo>
	<TPA_Extensions>
		<UniqueID Type="36" ID="T43957A-3ESQV" ID_Context="Client"/>
	</TPA_Extensions>
	</OTA_TourActivityBookRQ>
```

6.6 OTA_TourActivityBookRS

The Quote response message will confirm the availability of the service and the final cost of the service. The Commit will do the final booking as well.

If the booking is not possible or if there was an error processing the request, an OTA_TourActivityBookRS with no <Success/> element is sent and the error message will detail the problem that occurred in <Errors/>. A List of the most common errors can be found in Appendix G.

Typical OTA_TourActivityBookRS structure:

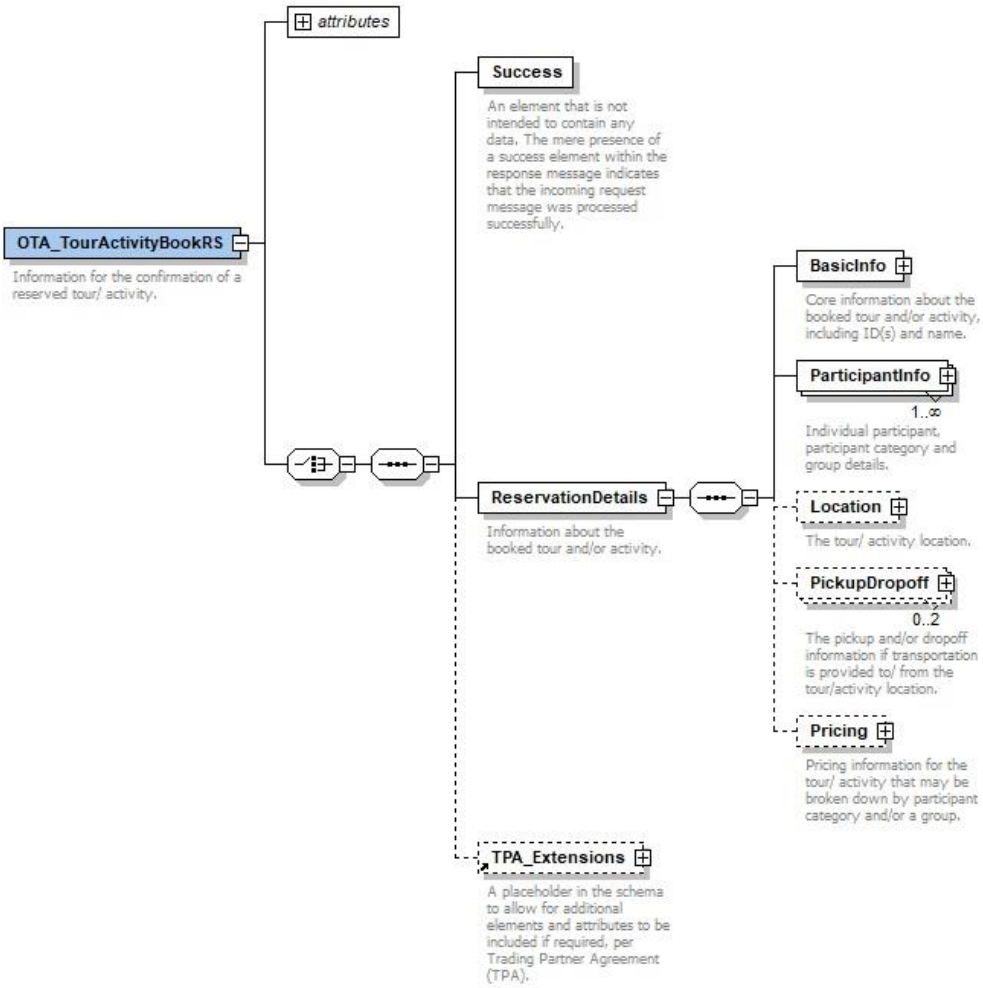

Service ID and Location

Service ID and location values are returned as confirmation info.

```
<BasicInfo TourActivityID="LESACE474M" SupplierProductCode="ST"
SupplierServiceCode="AI"/>
<Location Context="Service">
    <Region RegionCode="Region">Mallorca</Region>
</Location>
```

Participants

In the Participant details section, Pax quantity and age must be indicated. Age is important to determine the applicable rate and availability. The detail available at reservation time depends on the booking source: **age at the time of the service.** QualifierInfo Code follows OTA AQC codes (Age Qualifying code).

```
<ParticipantInfo>
    <Category QualifierInfo="ADT"/>
    <Individual Age="36" ParticipantID="1">
      <GivenName>Ramon</GivenName>
      <NamePrefix>Mr</NamePrefix>
      <Surname>Monchito</Surname>
    </Individual>
  </ParticipantInfo>
```

Rates

Pricing confirmation will be included in Service and TotalCharge the same way as OTA_TourActivityAvailRS, details on the calculation is provided in ServiceCharges section. Prices shown in the <Summary> section are final and will be the ones considered for accountancy.

```
<Pricing>
    <Summary Amount="130.00" CurrencyCode="EUR"/>
    <Group KnownGroupsize="3"/>
</Pricing>
```

Partner and Axisdata references

Client reference number and Axisdata internal reference numbers can be found in <TPA_Extensions> section. The client reference will use the master and child references.

```
<TPA_Extensions>
    <UniqueID Type="36" ID_Context="Client" ID="1234567890"/>
    <UniqueID Type="36" ID_Context="Internal" ID="121212121212"/>
    <UniqueID Type="37" ID_Context="Client" ID="1234567890_1" />
    <UniqueID Type="37" ID_Context="Internal" ID="1/>
</TPA_Extensions>
```

Both, client and internal references, can be used for cancellation process, but Client value should be used for any other communications (printed vouchers, accountancy, etc).
See also Master/child reference in chapter 3.4 under Real-time messages.

Cancel penalties

For each OTA_TourActivityBookRQ (both of the type “quote” and the type “commit”), the cancellation policy is included in the OTA_TourActivityBookRS. Structure is similar to the Hotel cancellation rules and section is included in the TPA_Extensions section.

```
<CancelPenalties>
        <CancelPenalty>
                <Deadline OffsetUnitMultiplier="24" OffsetTimeUnit="Hour"
OffsetDropTime="BeforeArrival"/>
                <AmountPercent Percent="50" BasisType="FullStay"/>
        </CancelPenalty>
        <CancelPenalty>
                <Deadline OffsetUnitMultiplier="72" OffsetTimeUnit="Hour"
OffsetDropTime="BeforeArrival"/>
                <AmountPercent Percent="5" BasisType="FullStay"/>
        </CancelPenalty>
</CancelPenalties>
```

Full cancellations can be performed using both Axisdata or partner reference. To perform a partial cancellation, specific child reference should be used.

Extras

Extras included in the booking will be returned in the response as a confirmation of its inclusion. Extra rates are already included in the TotalCharge value.

```
<Extra SupplierCode="EXFOOD" Description="Extra Food" quantity="1"/>
```

Examples


```
<OTA_TourActivityBookRS
  xmlns="http://www.opentravel.org/OTA/2003/05" Version="2014.2"
ResResponseType="Committed">
  <Success/>
  <ReservationDetails>
    <BasicInfo TourActivityID="XMXQA12BV82" SupplierProductCode="TC000000"
SupplierServiceCode="XO"/>
    <ParticipantInfo>
      <Category QualifierInfo="10"/>
      <Individual Nationality="ES" Age="26" ParticipantID="0" LeadCustomerInd="true"
BirthDate="1993-02-13">
        <Contact>
          <Email>Test1@Test.de</Email>
          <Telephone PhoneNumber="11 2350 5687"/>
        </Contact>
        <GivenName>Ramon</GivenName>
        <NamePrefix>Mr</NamePrefix>
        <Surname>Monchito</Surname>
      </Individual>
    </ParticipantInfo>
    <ParticipantInfo>
      <Category QualifierInfo="10"/>
      <Individual Nationality="EN" Age="38" ParticipantID="1" LeadCustomerInd="false"
BirthDate="1981-02-13">
        <Contact>
          <Email>Test2@Test.de</Email>
          <Telephone PhoneNumber="11 8807 0297"/>
        </Contact>
        <GivenName>Roman</GivenName>
        <NamePrefix>Mr</NamePrefix>
        <Surname>Monchito</Surname>
      </Individual>
    </ParticipantInfo>
    <Location Context="Service">
      <Region RegionCode="Region">Cancun</Region>
    </Location>
    <PickupDropoff DateTime="2022-10-15 10:50:00" PickupInd="true"
LocationName="AMXQA12BTCC">
      <Schedule Duration="8h">
        <OperationTimes>
          <OperatonTime Start="2022-10-15" End="2022-10-15"/>
        </OperationTimes>
      </Schedule>
    </PickupDropoff>
    <Pricing>
      <Summary Amount="60.00" CurrencyCode="EUR"/>
      <Group KnownGroupsize="2"/>
    </Pricing>
  </ReservationDetails>
  <TPA_Extensions>
```

```
    <CancelPenalties>
      <CancelPenalty Item_RPH="1">
        <Deadline OffsetUnitMultiplier="0" OffsetTimeUnit="Days"
OffsetDropTime="BeforeArrival"/>
        <AmountPercent BasisType="WholeStay" Percent="25"/>
      </CancelPenalty>
      <CancelPenalty Item_RPH="1">
        <Deadline OffsetUnitMultiplier="0" OffsetTimeUnit="Days"
OffsetDropTime="BeforeArrival"/>
        <AmountPercent BasisType="WholeStay" Percent="50"/>
      </CancelPenalty>
      <CancelPenalty Item_RPH="1">
        <Deadline OffsetUnitMultiplier="0" OffsetTimeUnit="Days"
OffsetDropTime="BeforeArrival"/>
        <AmountPercent BasisType="WholeStay" Percent="100"/>
      </CancelPenalty>
    </CancelPenalties>
    <UniqueID Type="36" ID_Context="Client" ID="T43957A-3ESQV"/>
    <UniqueID Type="36" ID_Context="Internal" ID="4969964"/>
  </TPA_Extensions>
</OTA_TourActivityBookRS>
```

7 Product search and book messages

The use of the OTA_Product messages returns pricing in the response, based on Excursion, Packaging and Other agreements available to the client in our TravelKISS plaform. This message is typically used for selling Optional Services that are not hotel related. Hotel related Extra's like an early check-in, late check-out, spa treatment,.. are in the Extra's sections of the OTA_HotelAvail and OTA_HotelRes messages.

When a client wants to buy a fast-track security at the airport, a VIP Lounge at the airport, a PCR test and a nearby clinic, with or without transfer. Or even at the hotel. Then we use the OTA_Product family of messages

Product flow is similar to TourActivity created upon the same search-avail-quote-book process. It also includes an inventory description in realtime. This Search step is negligent, and it is not required to have a fully functional product integration.

The OTA messages used are:

Real-time inventory descriptions with from price: OTA_ProductSearchRQ/RS
i.e. we have available in Dubai a Marhaba Service, VIP service, Fast track security, PCR test and Chauffeur on Demand. In this message the description will be provided and the price of the cheapest option for each.

Real-time price search including all options and extras: OTA_ProductAvailRQ/RS
This message can be used to just get the cheapest service across all optional services available, without the descriptions or to get prices for all possible options and extras for one or more services.
i.e. The Marhaba bronze, silver, gold or family service, with extra's like a sleeping pod and luggage/ticket handling. Or a chauffeur on Demand with a Mercedes, Rolls Royce, a performance vehicle, 4x4 or a 7 seater. With or without champagne, snacks or a Russian speaking hostess…

Real-time quote and book: OTA_ProductBookRQ/RS
Quote and Book the options offered in the ProductAvail message, using the codes provided for the required services and extras.

7.1 OTA_ProductSearchRQ

OTA_ProductSearchRQ is the message used for searching available services with description and frompricing.

OTA_ProductSearchRQ structure is following:

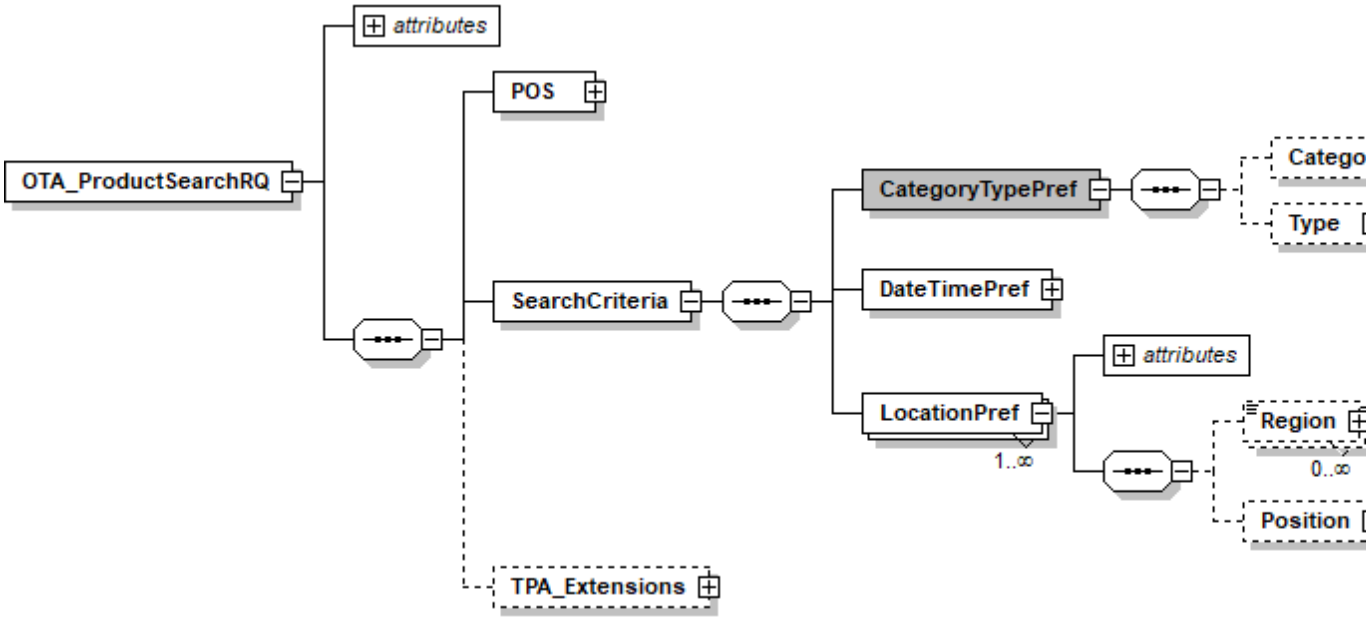

Location

Service location specifies the areas involved in a Product service. Source location indicates the customer's position at the start of the service. Typical value would be the stay hotel or the region or resort. The source location is needed for service and transfer availability, pickup location, and pickup time calculation. Service location indicates the area of the requested product services. Typical value would be the Region or Resort.

```
<LocationPref Context="Service">
<LocationPref Context="Source">
```

Location structure allows different types of location types:

```
<LocationPref Context = "Service">
  <Region RegionCode = "Country">Spain</Region>
  <Region RegionCode = "Region">Mallorca</Region>
  <Region RegionCode = "Product">XESPMIxxxx</Region>
```

```
    </LocationPref>
    <LocationPref Context = "Source">
      <Region RegionCode = "Country">Spain</Region>
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </LocationPref>
```

Only one of the location types should be used for each location, it is not necessary to be the same. I.E. Source location can be a hotel code and service location can be a region. In case the location is defined per area, Country must be always provided. I.E. Country + Region or Country + Resort.

```
    <LocationPref Context = "Service">
      <Region RegionCode = "Country">Spain</Region>
      <Region RegionCode = "Region">Mallorca</Region>
    </LocationPref>
    <LocationPref Context = "Source">
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </LocationPref>
```

Source locations allowed: Area (Country, CountryCode, Region, Resort), GIATA code, Hotel Code or Geo Location

Destination locations allowed: Area (Country, CountryCode, Region, Resort), Product Code

Example

```
<?xml version="1.0" encoding="UTF-8"?>
<OTA_ProductSearchRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2016.2"
PrimaryLangID = "EN">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
    </Source>
  </POS>
  <SearchCriteria>
    <DateTimePref Start = "2022-08-01" End = "2022-08-01"/>
    <LocationPref Context = "Service">
      <Region RegionCode = "Country">Spain</Region>
      <Region RegionCode = "Region">Mallorca</Region>
    </LocationPref>
    <LocationPref Context = "Source">
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </LocationPref>
  </SearchCriteria>
```

</OTA_ProductSearchRQ>

7.2 OTA_ProductSearchRS

An OTA_ProductSearchRS message is a response to the request. With the <Success/> element successful processing of the requestis confirmed. In opposite case, a list of errors is returned. If there is no availability for the requested parametes, the result contains an empty list.

The response will provide all the products provided in the area requested. On the Search step the availability and pricing is not calculated.

OTA_ProductSearchRS structure:

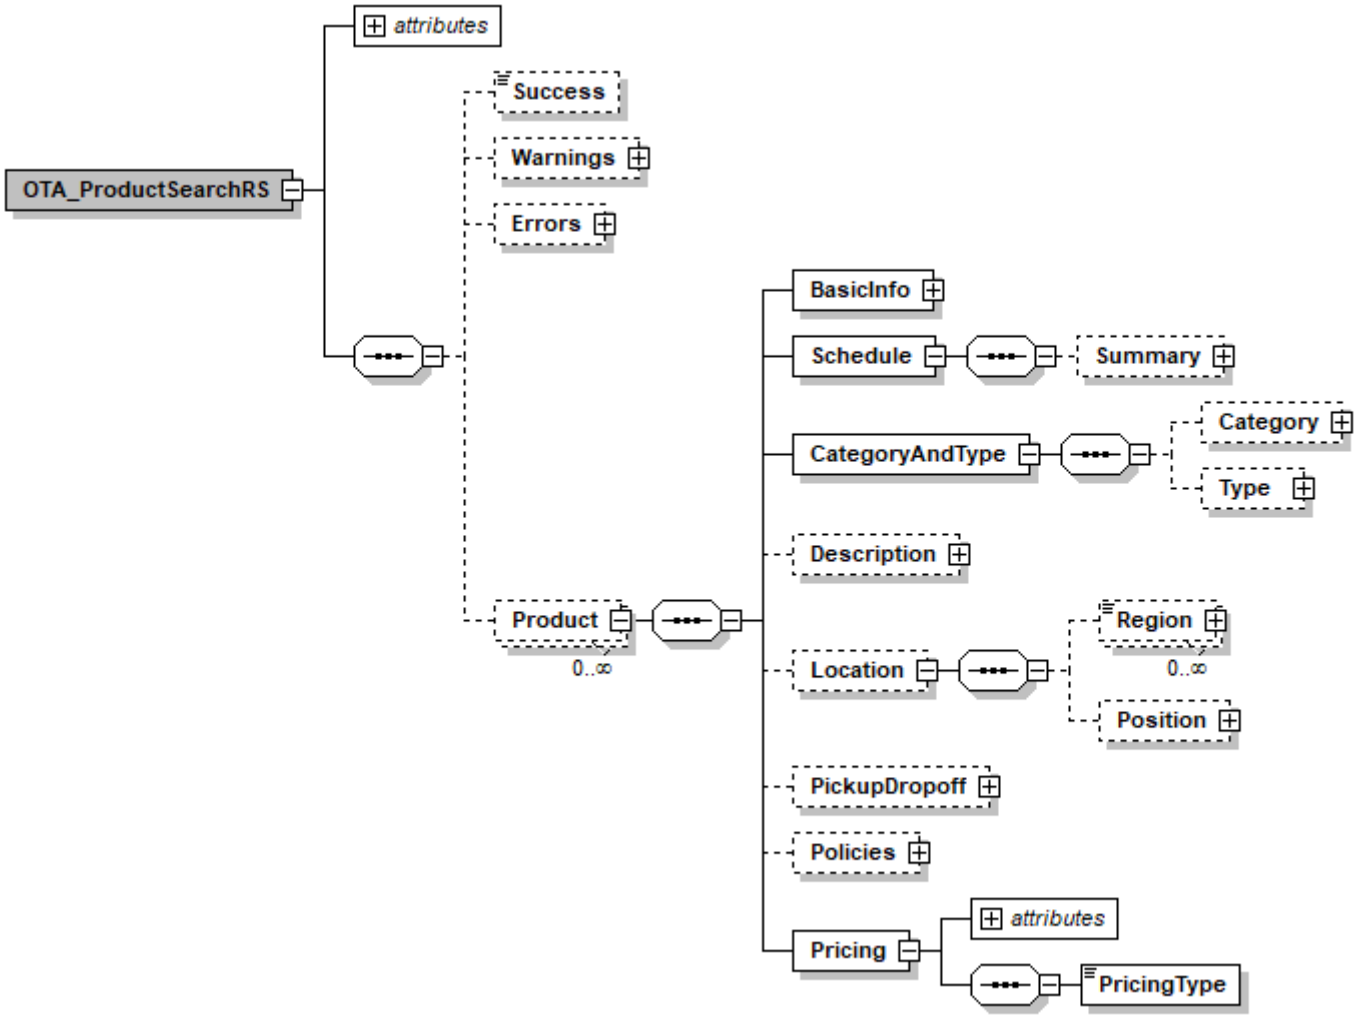

Basic Info

In Basic Info the ProductId, its name and the UnitCode and the name of each product are returned:

<BasicInfo UnitCode = "T1H00LL0" ProductID = "XESPMIXXXX" BaseCode = "TPU" Name = "Covid-19 PCR Test"/>

Schedule

It contains the date for which the product has been searched.

```
<Schedule>
  <Summary Start = "2022-08-01" End = "2022-08-01"/>
</Schedule>
```

Categories

This section describes the type of product and its category. Category code can be Excursion&Activity, Transfer, Guides and Others. The type code is the stock code and can be found in Appendix M at the end of the documentation.

```
<CategoryAndType>
  <Category="Excursion&Activity"/>
  <Type="Health Services"/>
</CategoryAndType>
```

Description

Short description informs in general what the product is.

```
<ShortDescription>High Sensitive RT-PCR Test [Lab-Location]</ShortDescription>
```

Main description of the product can be found in the Long Description section. The description language will be English, to be extended in the future.

```
<LongDescription>
  PCR test valid for return to your home country.
  We will take care of your appointment, manage any problems you may have and if you wish, we can organise your transfer.
  The test must be done within 72 hours before your return flight.
  24 hours after the test, you will receive the results by email or you can download them from the clinic's website, which you can access by uploading a personal code that you will receive by SMS.

  You have the option to book the following:
  - PCR test only
  - PCR test together with a transfer from your hotel (one way)
  - PCR test together with a transfer from and to your hotel.

  Clinic hours:
  Clínica Rotger: Monday to Friday from 08.00 hrs to 20.00 hrs / Saturdays and Sundays from 08.00 hrs to 13.00 hrs.
  Clinica Planas: Monday to Friday from 11.00 hrs to 18.00 hrs / Saturdays and Sundays from 11.00 hrs to 13.00 hrs
```

```
</LongDescription>
```


Multimedia

Product facts can be found in the response. They contain image and text item elements.


```
<Multimedia>
        <MultimediaDescription>
          <ImageItems>
            <ImageItem ID = "1">
              <ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory
= "original" Title = "Miscellaneous" RecordID = "1" UnitOfMeasureCode = "9" Width = "4752" Height =
"3326">
                <URL> XESPMIXXXX_948202.jpg</URL>
              </ImageFormat>
              <ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory
= "thumbnail" Title = "Miscellaneous" RecordID = "2" UnitOfMeasureCode = "9" Width = "286" Height =
"200">
                <URL> XESPMIXXXX_948202.jpg</URL>
              </ImageFormat>
              <ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory
= "display" Title = "Miscellaneous" RecordID = "3" UnitOfMeasureCode = "9" Width = "643" Height =
"450">
                <URL> XESPMIXXXX_948202.jpg</URL>
              </ImageFormat>
              <ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory
= "print" Title = "Miscellaneous" RecordID = "4" UnitOfMeasureCode = "9" Width = "1714" Height =
"1200">
                <URL> XESPMIXXXX_948202.jpg</URL>
              </ImageFormat>
              <ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory
= "print_lead" Title = "Miscellaneous" RecordID = "5" UnitOfMeasureCode = "9" Width = "3429" Height =
"2400">
                <URL> XESPMIXXXX_948202.jpg</URL>
              </ImageFormat>
            </ImageItem>
          </ImageItems>
          <TextItems>
            <TextItem Category = "EX_HYGIENE" SourceID = "EX_CLDISINF">
              <Description>Intensive cleaning and disinfection protocols for all vehicles</Description>
            </TextItem>
            <TextItem Category = "EX_DIFFIC" SourceID = "EX_DIF_1">
              <Description>Easy</Description>
            </TextItem>
            <TextItem Category = "EX_HYGIENE" SourceID = "EX_HYGTRAIN">
              <Description>Trained and equipped staff with hygiene and protection
measures</Description>
            </TextItem>
```

```
<TextItem Category = "EXCURSION" SourceID = "EX_ICONF">
  <Description>Instant Confirmation</Description>
</TextItem>
<TextItem Category = "EXCURSION" SourceID = "EX_LANGSPOKEN">
  <Description>English</Description>
</TextItem>
<TextItem Category = "EXCURSION" SourceID = "EX_MVOUCHER">
  <Description>Mobile Voucher accepted</Description>
</TextItem>
<TextItem Category = "EX_NEEDED" SourceID = "EX_NEEDED_OTHER">
  <Description>Original Passport/ID Required</Description>
</TextItem>
<TextItem Category = "EX_NOTINCL" SourceID = "EX_NOTINCL_HPD">
  <Description>Hotel pickup and drop-off (optional)</Description>
</TextItem>
<TextItem Category = "EX_HYGIENE" SourceID = "EX_PAPROTEQ">
  <Description>Self-Protection Equipment Available for Passengers (Masks/ Gloves/ Hand
sanitizer)</Description>
</TextItem>
<TextItem Category = "EXCURSION" SourceID = "EX_PVOUCHER">
  <Description>Printed Voucher accepted</Description>
</TextItem>
<TextItem Category = "EX_HYGIENE" SourceID = "EX_SOCDIST">
  <Description>Adapted capacities to ensure social distancing</Description>
</TextItem>
<TextItem Category = "EX_HYGIENE" SourceID = "EX_STPROTEQ">
  <Description>Staff equipped with Self-protecting gear</Description>
</TextItem>
<TextItem Category = "EX_TARGET" SourceID = "EX_TARGET_ALL">
  <Description>Anybody</Description>
</TextItem>
<TextItem Category = "EXCURSION" SourceID = "EX_WHEELCHAIR">
  <Description>Wheelchair Accessible</Description>
</TextItem>
<TextItem Category = "EX_HIGHL" SourceID = "IS_DESC001">
```


Location

In the location the full service location is returned. The same location types and structure later are used in the availability check step within OTA_ProductAvailRQ.


```
<Location>
  <Region RegionCode = "Country">Spain</Region>
  <Region RegionCode = "Region">Mallorca</Region>
  <Region RegionCode = "Resort">Palma City</Region>
  <Position Latitude = "39.57554" Longitude = "2.64719"/>
</Location>
```

PickUp time

In this section the date for which the product has been requested is repated.

Participant rules

The amount and type of participants that are eligible for the service are indicated in the Participant section.

```
<Policies>
   <Participant MinParticipants = "1" MaxParticipants = "99"/>
</Policies>
```

Rates

Pricing returnes the amount to be paid for the product. PricingTypa informs how the price for product will be applied, ex. per person.

```
<Pricing MinPrice = "181.00" CurrencyCode = "EUR">
   <PricingType>PerPerson</PricingType>
</Pricing>
```

Example

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<OTA_ProductSearchRS xmlns = "http://www.opentravel.org/OTA/2003/05">
  <Success>Success</Success>
  <Product>
    <BasicInfo UnitCode = "T1H00LL0" ProductID = "XESPMIXXXX" BaseCode = "TPU" Name = "Covid-19
PCR Test"/>
    <Schedule>
      <Summary Start = "2022-08-01" End = "2022-08-01"/>
    </Schedule>
    <CategoryAndType>
      <Category/>
      <Type/>
    </CategoryAndType>
    <Description>
      <ShortDescription>High Sensitive RT-PCR Test [Lab-Location]</ShortDescription>
      <LongDescription>
        PCR test valid for return to your home country.
        We will take care of your appointment, manage any problems you may have and if you wish,
we can organise your transfer.
        The test must be done within 72 hours before your return flight.
        24 hours after the test, you will receive the results by email or you can download them from
the clinic's website, which you can access by uploading a personal code that you will receive by SMS.

        You have the option to book the following:
        - PCR test only
```

- PCR test together with a transfer from your hotel (one way)
- PCR test together with a transfer from and to your hotel.

Clinic hours:
Clínica Rotger: Monday to Friday from 08.00 hrs to 20.00 hrs / Saturdays and Sundays from 08.00 hrs to 13.00 hrs.
Clinica Planas: Monday to Friday from 11.00 hrs to 18.00 hrs / Saturdays and Sundays from 11.00 hrs to 13.00 hrs
</LongDescription>
<Multimedia>
<MultimediaDescription>
<ImageItems>
<ImageItem ID = "1">
<ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory = "original" Title = "Miscellaneous" RecordID = "1" UnitOfMeasureCode = "9" Width = "4752" Height = "3326">
<URL> XESPMIXXXX_948202.jpg</URL>
</ImageFormat>
<ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory = "thumbnail" Title = "Miscellaneous" RecordID = "2" UnitOfMeasureCode = "9" Width = "286" Height = "200">
<URL> XESPMIXXXX_948202.jpg</URL>
</ImageFormat>
<ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory = "display" Title = "Miscellaneous" RecordID = "3" UnitOfMeasureCode = "9" Width = "643" Height = "450">
<URL> XESPMIXXXX_948202.jpg</URL>
</ImageFormat>
<ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory = "print" Title = "Miscellaneous" RecordID = "4" UnitOfMeasureCode = "9" Width = "1714" Height = "1200">
<URL> XESPMIXXXX_948202.jpg</URL>
</ImageFormat>
<ImageFormat Format = "6" FileName = "XESPMIXXXX_948202.jpg" DimensionCategory = "print_lead" Title = "Miscellaneous" RecordID = "5" UnitOfMeasureCode = "9" Width = "3429" Height = "2400">
<URL> XESPMIXXXX_948202.jpg</URL>
</ImageFormat>
</ImageItem>
</ImageItems>
<TextItems>
<TextItem Category = "EX_HYGIENE" SourceID = "EX_CLDISINF">
<Description>Intensive cleaning and disinfection protocols for all vehicles</Description>
</TextItem>
<TextItem Category = "EX_DIFFIC" SourceID = "EX_DIF_1">
<Description>Easy</Description>
</TextItem>
<TextItem Category = "EX_HYGIENE" SourceID = "EX_HYGTRAIN">

```
                <Description>Trained and equipped staff with hygiene and protection
measures</Description>
              </TextItem>
              <TextItem Category = "EXCURSION" SourceID = "EX_ICONF">
                <Description>Instant Confirmation</Description>
              </TextItem>
              <TextItem Category = "EXCURSION" SourceID = "EX_LANGSPOKEN">
                <Description>English</Description>
              </TextItem>
              <TextItem Category = "EXCURSION" SourceID = "EX_MVOUCHER">
                <Description>Mobile Voucher accepted</Description>
              </TextItem>
              <TextItem Category = "EX_NEEDED" SourceID = "EX_NEEDED_OTHER">
                <Description>Original Passport/ID Required</Description>
              </TextItem>
              <TextItem Category = "EX_NOTINCL" SourceID = "EX_NOTINCL_HPD">
                <Description>Hotel pickup and drop-off (optional)</Description>
              </TextItem>
              <TextItem Category = "EX_HYGIENE" SourceID = "EX_PAPROTEQ">
                <Description>Self-Protection Equipment Available for Passengers (Masks/ Gloves/ Hand
sanitizer)</Description>
              </TextItem>
              <TextItem Category = "EXCURSION" SourceID = "EX_PVOUCHER">
                <Description>Printed Voucher accepted</Description>
              </TextItem>
              <TextItem Category = "EX_HYGIENE" SourceID = "EX_SOCDIST">
                <Description>Adapted capacities to ensure social distancing</Description>
              </TextItem>
              <TextItem Category = "EX_HYGIENE" SourceID = "EX_STPROTEQ">
                <Description>Staff equipped with Self-protecting gear</Description>
              </TextItem>
              <TextItem Category = "EX_TARGET" SourceID = "EX_TARGET_ALL">
                <Description>Anybody</Description>
              </TextItem>
              <TextItem Category = "EXCURSION" SourceID = "EX_WHEELCHAIR">
                <Description>Wheelchair Accessible</Description>
              </TextItem>
              <TextItem Category = "EX_HIGHL" SourceID = "IS_DESC001">
                <Description>
                  PCR Test as valid travel document
                  Results in 24 hours
                  Possibility to book a transfer from your hotel
                </Description>
              </TextItem>
            </TextItems>
          </MultimediaDescription>
        </Multimedia>
      </Description>
      <Location>
```

```
        <Region RegionCode = "Country">Spain</Region>
        <Region RegionCode = "Region">Mallorca</Region>
        <Region RegionCode = "Resort">Palma City</Region>
        <Position Latitude = "39.57554" Longitude = "2.64719"/>
      </Location>
      <PickupDropoff DateTime = "2022-08-01"/>
      <Policies>
        <Participant MinParticipants = "1" MaxParticipants = "99"/>
      </Policies>
      <Pricing MinPrice = "181.00" CurrencyCode = "EUR">
        <PricingType>PerPerson</PricingType>
      </Pricing>
    </Product>
</OTA_ProductSearchRS>
```

7.3 OTA_ProductAvailRQ

OTA_ProductAvailRQ is used for searching available services with pricing.

OTA_ProductAvailRQ structure:

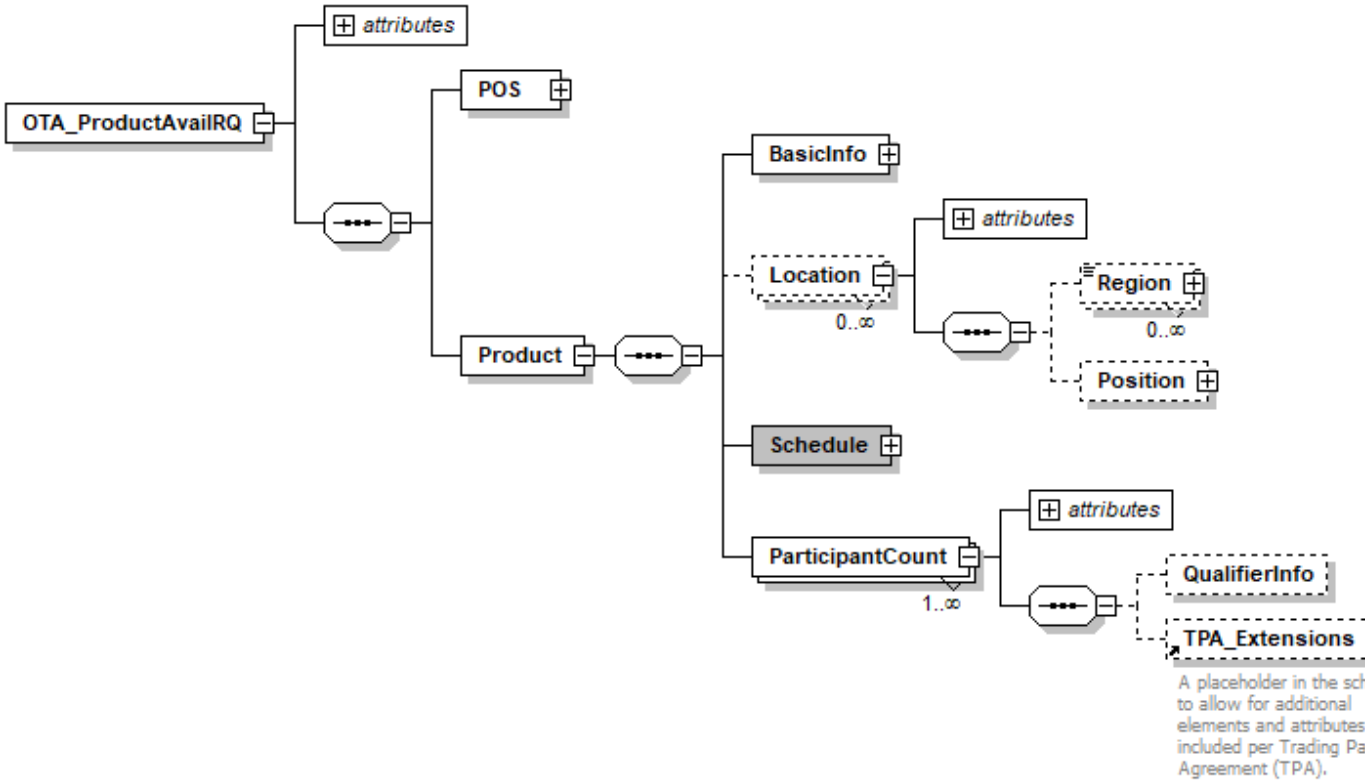

Within a response to the OTA_ProductAvail message exists the possibility of getting the cheapest price per service. A next step, allows specifying the product code in the request, the dates and the options chosen.

Instance MF001 returns all services + all schedules available:

<RequestorID ID="TEST" ID_Context="AxisData" Type="22" Instance="MF001"/>

Instance MF002 returns all services with the cheapest price

<RequestorID ID="TEST" ID_Context="AxisData" Type="22" Instance="MF002"/>

Location

In case if the OTA_ProductAvailRQ is an initial step of the the booking flow, location should be set as some area, for example region:

```
<Location Context = "Service">
  <Region RegionCode = "Region">Mallorca</Region>
</Location>
```

If the OTA_ProductAvailRQ is sent for a particular product already chosen after OTA_ProductSearch step, the Product can n be set:

```
<Location Context = "Service">
  <Region RegionCode = "Product">XESPMxxxx</Region>
</Location>
```

Schedule

Service Schedule contains the date to be used in the product service search.

```
<Schedule Start = "2022-08-01" End = "2022-08-01"/>
```

Participants and ages

In the Participant details section, Pax quantity and age must be indicated. From the participants' age the applicable rate and availability are dependent. It is crucial to set the pax age which he will beat the time of the service.

```
<ParticipantCount Quantity = "2" Age = "25">
```

Example of the message to get all products for a region

```
<OTA_ProductAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2016.2"
PrimaryLangID = "EN">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <Product>
    <BasicInfo/>
    <CategoryTypePref>
      <Category Code = "XA"/>
    </CategoryTypePref>
    <Location Context = "Service">
      <Region RegionCode = "Region">Mallorca</Region>
    </Location>
```

```
    <Location Context = "Source">
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </Location>
    <Schedule StartPeriod = "2022-08-01" EndPeriod = "2022-08-01"/>
    <ParticipantCount Quantity = "2" Age = "25">
      <QualifierInfo>Adult</QualifierInfo>
    </ParticipantCount>
  </Product>
</OTA_ProductAvailRQ>
```

Example of the message to get product when the Product is already chosen

```
<OTA_ProductAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2016.2"
PrimaryLangID = "EN">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <Product>
    <BasicInfo/>
    <CategoryTypePref>
      <Category Code = "XA"/>
    </CategoryTypePref>
    <!--Activity Product -->
    <Location Context = "Service">
      <Region RegionCode =  "Product">XESPMIxxxx</Region>
    </Location>
    <!--PickUpPoint -->
    <Location Context = "Source">
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </Location>
    <Schedule StartPeriod = "2022-08-01" EndPeriod = "2022-08-01"/>
    <ParticipantCount Quantity = "2" Age = "25">
      <QualifierInfo>Adult</QualifierInfo>
    </ParticipantCount>
  </Product>
</OTA_ProductAvailRQ>
```

7.4 OTA_ProductAvailRS

An OTA_ProductAvailRS message is received in response to the request. With <Success/> element successful processing of the request is indicated. Otherwise, a list of errors is returned. In case no services are available for the requested parametes, the result will have an empty list.

The response to the request made for all available products within the area, will contain a single block with price from for each service with ist category and type.

In case if the request was made for a particular product, only this service will be returned.

OTA_ProductAvailRS structure:

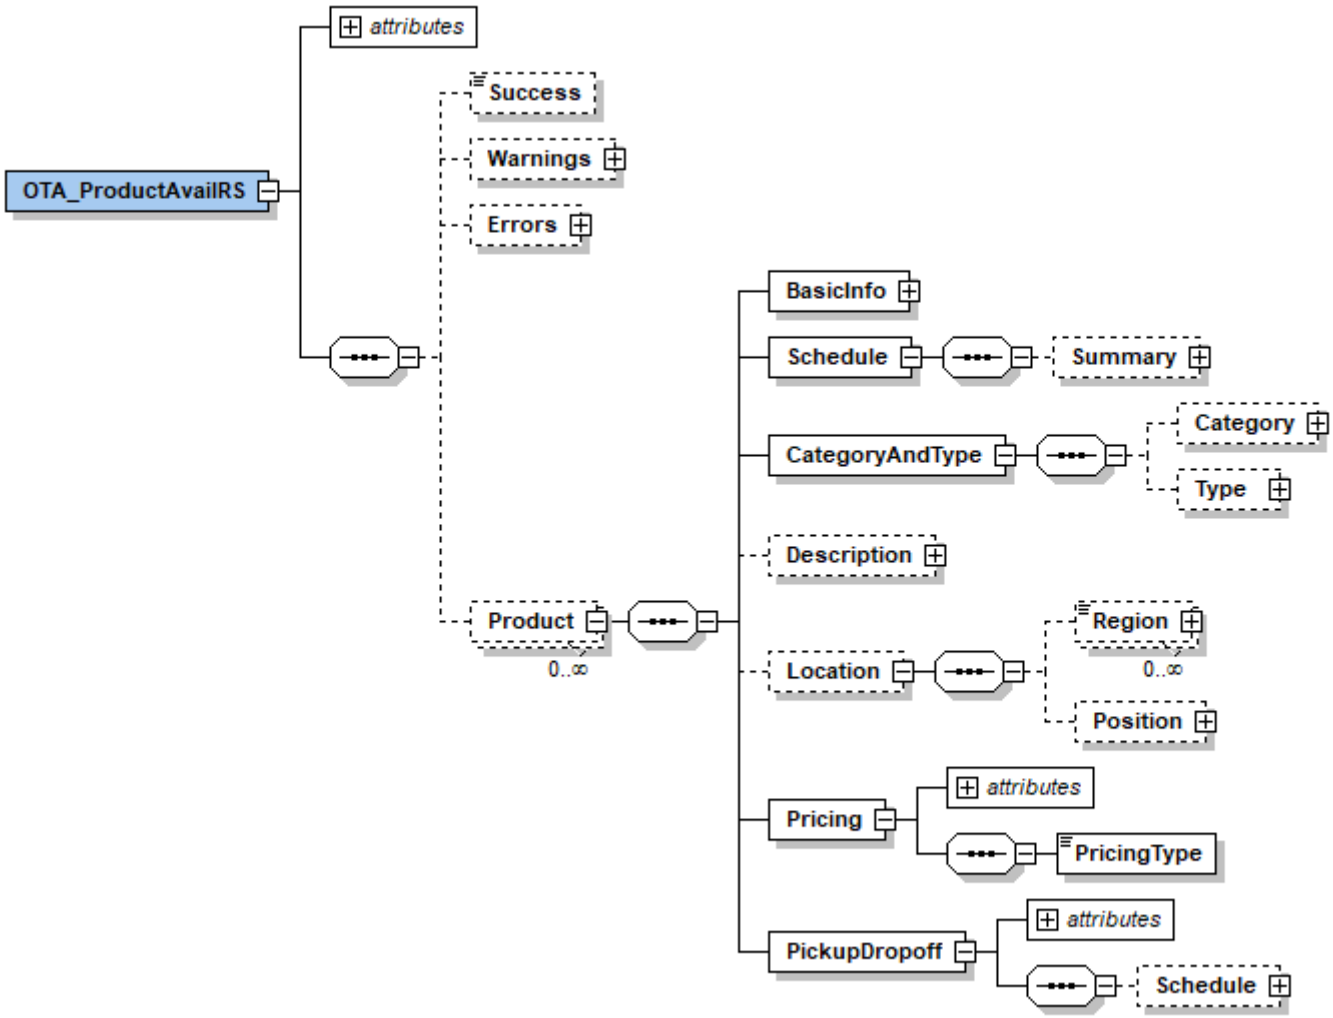

Basic Info

In BasicInfo displays a list of the products returned. The segment of product contains ProductID, available units and bases:

```
<BasicInfo UnitCode="T1H00LL0" ProductID="XESPMIXXXX" BaseCode="TPU"/>
```

Schedule

It contains the date for which the service has been requested in the OTA_ProductAvailRQ.

```
<Schedule>
  <Summary Start="2022-08-01T09:30:00" End="2022-08-01"/>tal
</Schedule>
```

Categories

This section describes the type of product and its category. Category code can be Excursion&Activity, Transfer, Guides and Others. The type code is the stock code and can be found in Appendix M at the end of the documentation.

```
<CategoryAndType>
  <Category Code = "XA"/>
  <Type Code = "HS"/>
</CategoryAndType>
```

Description

On the OTA_ProductAvail step the description is limited to the ShortDecription with the name of the product:

```
<Description>
  <ShortDescription>Covid-19 PCR Test</ShortDescription>
</Description>
```

Location

This section includes the full product location.

```
<Location>
  <Region RegionCode="Country">Spain</Region>
  <Region RegionCode="Region">Mallorca</Region>
  <Region RegionCode="Resort">Palma City</Region>
</Location>
```

Rates

Pricing segment shows the the cheapest price available for the product, the currency and the way how is going to be applied:

```
<Pricing MinPrice="279.00" CurrencyCode="EUR">
  <PricingType>PerPerson</PricingType>
</Pricing>
```

Pickup and dropoff

Contains the information regarding possible pickup and dropoff points if the transfer is offered within the product service. The attribute PickupInd="true" indicates if the location and date time corresponds to the pickup (true) or dropoff (false). Pickup location and time will not be included in a ticket service on this step.

```
<PickupDropoff Code="AMTSESxxxx" LocationName="Voramar Hotel" PickupInd="true"/>
```

Example of the response with previously indicated product:

```
<OTA_ProductAvailRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2016.2"
PrimaryLangID = "EN">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Instance = "MF001" Type = "22" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <Product>
    <BasicInfo/>
    <CategoryTypePref>
      <Category Code = "XA"/>
    </CategoryTypePref>
    <!--Activity Product -->
    <Location Context = "Service">
      <Region RegionCode = "Product">XESPMIxxxx</Region>
    </Location>
    <!--PickUpPoint -->
    <Location Context = "Source">
      <Region RegionCode = "Product">AMTSESxxxx</Region>
    </Location>
    <Schedule StartPeriod = "2022-08-01" EndPeriod = "2022-08-01"/>
    <ParticipantCount Quantity = "2" Age = "25">
      <QualifierInfo>Adult</QualifierInfo>
    </ParticipantCount>
  </Product>
</OTA_ProductAvailRQ>
```

7.5 OTA_ProductBookRQ

OTA_ProductBookRQ is the message used for quoting and booking one of the option of the ProductAvailRS.

OTA_ProductBookRQ structure:

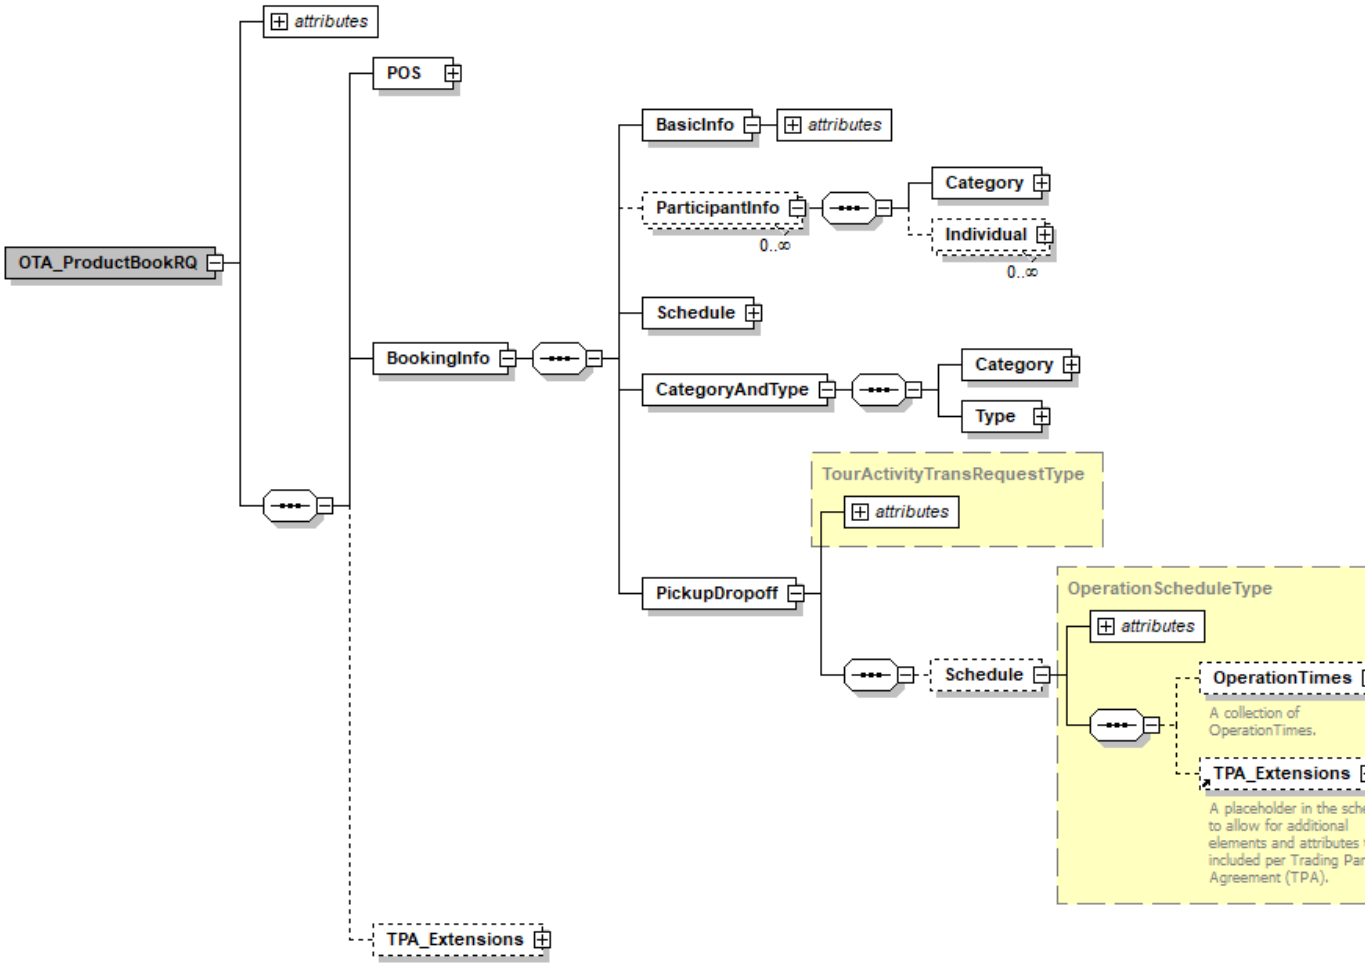

Quote and Commit

The OTA_ProductBookRQ can also be used to make a query whether a particular reservation is possible, requesting the availability and total price for the booking.

The quote is requested using ResStatus attribute with “Quote” value. The behavior is like Hotel, Transfer and Excursion messages, no real booking is requested, just the confirmation of the price and availability.

The final booking request is sent using ResStatus with value “Commit”. If accepted by the reservation system, this is a required commitment with possible penalties in the case of cancellations or modifications. The booking request is the exact same message as the quote request and technically the exact same modules are used. Where in case of a booking the

transaction is committed, in the “quote” the transaction is not confirmed nor registered in our system.

Service ID

Full service ID returned in a detailed search must be provided in the booking quote/commit.

```
<BasicInfo UnitCode = "T1H00LL0" ProductID = "XESPMIxxxx" BaseCode = "TPU"/>
```

Participants and ages

In the Participant details section, Pax quantity and age must be indicated. Each Pax must have an ID to be identified; ParticipantID is used for this purpose. Age at the time of the service determines the applicable rate and availability.

```
<ParticipantInfo>
  <Category QualifierInfo = "10"/>
  <Individual ParticipantID = "1" LeadCustomerInd = "true" Age = "25">
    <GivenName>name</GivenName>
    <Surname>surname</Surname>
  </Individual>
  <Category QualifierInfo = "10"/>
  <Individual ParticipantID = "2" LeadCustomerInd = "false" Age = "25">
    <GivenName>name1</GivenName>
    <Surname>surname1</Surname>
  </Individual>
</ParticipantInfo>
```

Schedule

Schedule must indicate the specific date of the service, so the period should be a single date.

```
<Schedule Start = "2022-08-01" End = "2022-08-01"/>
```

Pickuptime and the location of the selected service must be included as well:

```
<PickupDropoff DateTime = "2022-08-01T10:50:00" PickupInd = "false" LocationName =
"AMTSESxxxx"/>
```

Partner reference

The partner reference is a mandatory element for obvious reasons regarding voucher numbers, and, to enable:

- Implementation of the cancel/RS with partner references

- Avoid double bookings (if a partner tries to make two bookings with the same partner reference, the system will respond “booking already exists“.
- This reference must be printed on the voucher.

```
<TPA_Extensions>
  <UniqueID Type = "36" ID_Context = "Client" ID = "test12345"/>
</TPA_Extensions>
```

Please see section 3.5 “master child references” for details

Examples

```
<OTA_ProductBookRQ xmlns = "http://www.opentravel.org/OTA/2003/05" ResStatus = "Quote" Version
= "2016.2">
  <POS>
    <Source>
      <RequestorID ID = "TEST" Type = "22" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
  <BookingInfo>
    <BasicInfo UnitCode = "T1H00LL0" ProductID = "XESPMIXXXX" BaseCode = "TPU"/>
    <ParticipantInfo>
      <Category QualifierInfo = "10"/>
      <Individual ParticipantID = "1" LeadCustomerInd = "true" Age = "25">
        <GivenName>name</GivenName>
        <Surname>surname</Surname>
      </Individual>
      <Category QualifierInfo = "10"/>
      <Individual ParticipantID = "2" LeadCustomerInd = "false" Age = "25">
        <GivenName>name1</GivenName>
        <Surname>surname1</Surname>
      </Individual>
    </ParticipantInfo>
    <Schedule Start = "2022-08-01" End = "2022-08-01"/>
    <PickupDropoff DateTime = "2022-08-01T10:50:00" PickupInd = "false" LocationName =
"AMTSESxxxx"/>
  </BookingInfo>
  <TPA_Extensions>
    <UniqueID Type = "36" ID_Context = "Client" ID = "test1anna"/>
  </TPA_Extensions>
</OTA_ProductBookRQ>
```

7.6 OTA_ProductBookRS

The Quote response message will confirm the availability of the service and the final cost of the service. The Commit will do the final booking as well.

If the booking is not possible or if there was an error processing the request, an OTA_ProductBookRS with no <Success/> element is sent, and the error message will detail the problem that occurred in <Errors/>.

OTA_ProductBookRS structure:

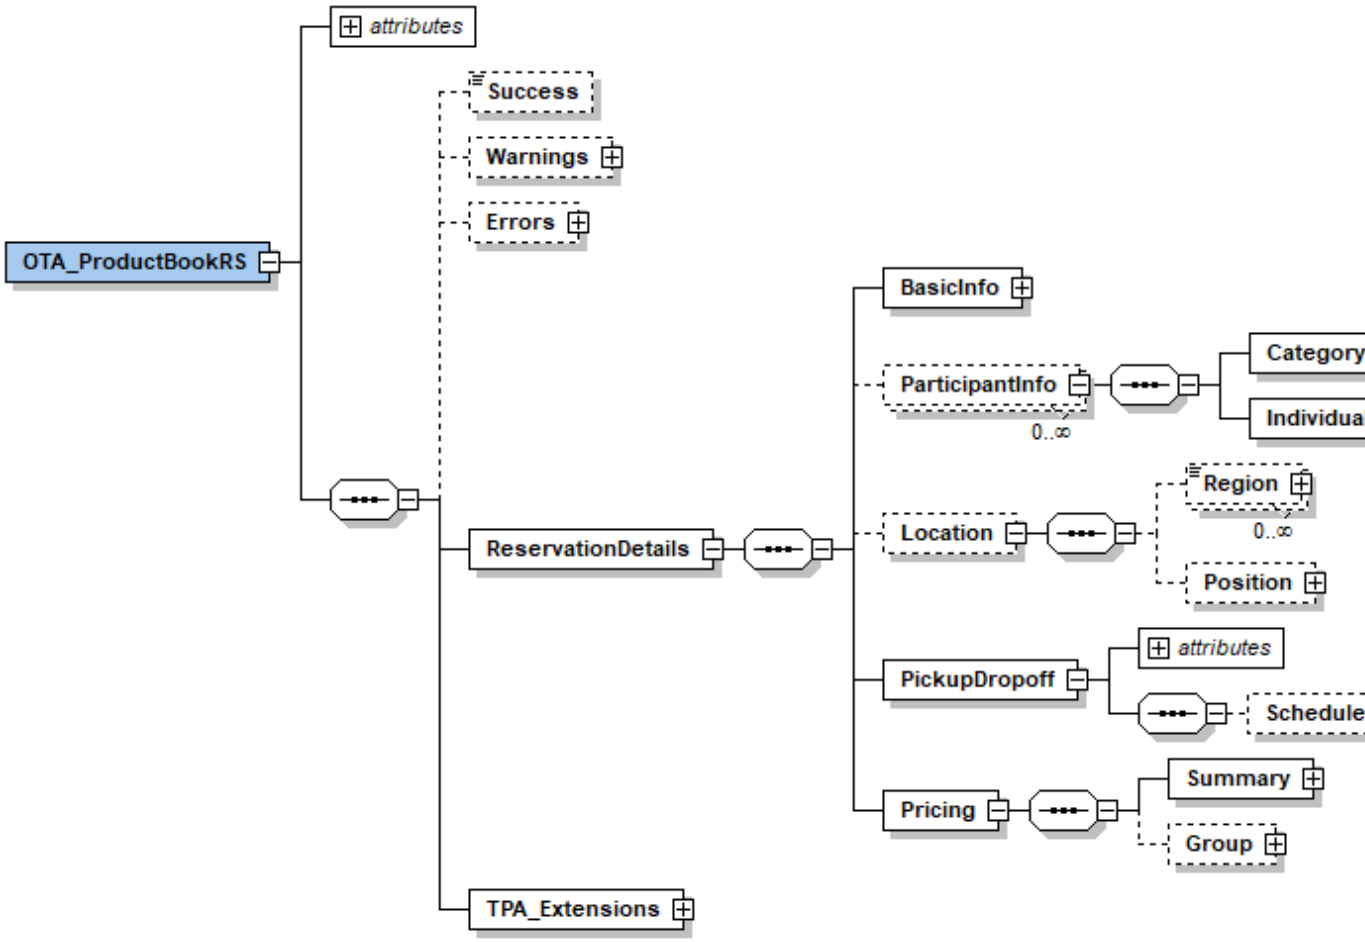

Service ID

Service ID is returned as confirmation info.

```
<BasicInfo UnitCode="T1H00LL0" ProductID="XESPMIXXXX" BaseCode="TPU"/>
```

Participants

In the Participant details section, Pax quantity and age must be indicated. Within the age the applicable rate and availability are determinated. It is crucial to set the pax age which he will beat the time of the service.

```
<ParticipantInfo>
  <Category QualifierInfo="10"/>
  <Individual ParticipantID="1" LeadCustomerInd="true" Age="25">
    <GivenName>name</GivenName>
    <Surname>surname</Surname>
  </Individual>
</ParticipantInfo>
```

Location and Pickup and Dropoff

It contains the date for which the service has been requested. The information regarding possible pickup and dropoff points if the transfer is offered within the product service is displayed here. The attribute PickupInd="true" indicates if the location and date time corresponds to the pickup (true) or dropoff (false).

```
<Schedule Start="2022-08-01" End="2022-08-01"/>
<Location Context="Service">
  <Region RegionCode="Region">Mallorca</Region>
</Location>
<PickupDropoff DateTime="2022-08-01 10:50:00" PickupInd="true" LocationName="AMTSESxxxx">
  <Schedule>
    <OperationTimes>
      <OperationTime Start="2022-08-01" End="2022-08-01"/>
    </OperationTimes>
  </Schedule>
```

Rates

Pricing confirmation will be included in Service and TotalCharge in the same way as in the availability message. Prices shown in the <Summary> section are final and will be the ones considered for accountancy.

```
<Pricing>
  <Summary Amount="181.00" CurrencyCode="EUR"/>
  <Group KnownGroupsize="1"/>
</Pricing>
```

Partner and Axisdata references

Client reference number and Axisdata internal reference numbers can be found in <TPA_Extensions> section. The client reference will use the master and child references.

```
<UniqueID Type="36" ID_Context="Client" ID="test1anna"/>
<UniqueID Item_RPH="1" ID="test1anna-1" Type="37" ID_Context="Client"/>
<UniqueID Item_RPH="1" ID="1" Type="37" ID_Context="Internal"/>
```

Both, client and internal references, can be used for cancellation process, but Client value should be used for any other communications (printed vouchers, accountancy, etc).

Example

```
<?xml version="1.0" encoding="UTF-8"?>
<OTA_ProductBookRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2016.2">
  <Success/>
  <ReservationDetails>
    <BasicInfo UnitCode="T1H00LL0" ProductID="XESPMIXXXX" BaseCode="TPU"/>
    <ParticipantInfo>
      <Category QualifierInfo="10"/>
      <Individual ParticipantID="1" LeadCustomerInd="true" Age="25">
        <GivenName>Renato</GivenName>
        <Surname>Pepinoni</Surname>
      </Individual>
    </ParticipantInfo>
    <Schedule Start="2022-08-01" End="2022-08-01"/>
    <Location Context="Service">
      <Region RegionCode="Region">Mallorca</Region>
    </Location>
    <PickupDropoff DateTime="2022-08-01 10:50:00" PickupInd="true"
LocationName="AMTSESXXXX">
      <Schedule>
        <OperationTimes>
          <OperationTime Start="2022-08-01" End="2022-08-01"/>
        </OperationTimes>
      </Schedule>
    </PickupDropoff>
    <Extra Quantity="1" Description="Inbound Transfer" SupplierCode="TRIN"/>
    <Pricing>
      <Summary Amount="181.00" CurrencyCode="EUR"/>
      <Group KnownGroupsize="1"/>
    </Pricing>
  </ReservationDetails>
  <TPA_Extensions>
    <CancelPenalties/>
    <UniqueID Type="36" ID_Context="Client" ID="test1anna"/>
```

```
    <UniqueID Item_RPH="1" ID="test1anna-1" Type="37" ID_Context="Client"/>
    <UniqueID Item_RPH="1" ID="1" Type="37" ID_Context="Internal"/>
  </TPA_Extensions>
</OTA_ProductBookRS>
```

8 Booking cancellations

To cancel a reservation, the requestor sends an OTA_CancelRQ with a CancelType of ***Commit*** to AxisData. The booking reference nº of the booking to be cancelled is specified in the ID attribute of the <UniqueID> tag. Either the client's booking reference nº or the AxisData internal booking reference nº can be used.

```
<OTA_CancelRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2016.2" EchoToken="5923005"
CancelType="Commit">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <UniqueID Type="36" ID="T62578A-7OVCC" ID_Context="Client"/>
</OTA_CancelRQ>
```

AxisData then responds with an OTA_CancelRS with a Status of ***Committed*** to confirm the cancellation. All relevant booking reference numbers (client and AxisData) are shown.

```
<OTA_CancelRS
  xmlns="http://www.opentravel.org/OTA/2003/05" Version="2016.2" EchoToken="5923005"
CancelType="Commit" Status="Committed">
  <POS>
    <Source>
      <RequestorID Type="22" ID_Context="OTS" ID="TEST"/>
    </Source>
  </POS>
  <Success/>
  <CancelInfoRS>
    <CancelRules>
      <CancelRule CancelByDate="2019-12-06T11:22:02" Amount="0.00" CurrencyCode="EUR"/>
    </CancelRules>
  </CancelInfoRS>
  <UniqueID ID="T62578A-7OVCC" ID_Context="Client" Type="36"/>
  <UniqueID ID="4652384" ID_Context="Internal" Type="36"/>
  <UniqueID ID="T62578A-7OVCC-1" ID_Context="Client" Type="37"/>
  <UniqueID ID="1" ID_Context="Internal" Type="37"/>
</OTA_CancelRS>
```

The element CancelRule CancelByDate="2019-12-06T11:22:02" specifies the exact date and time the booking was cancelled in our systems, for partners records.

If the cancellation contains a child reference, a partial cancellation of the child item will be executed.

```
<OTA_CancelRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2016.2" EchoToken="5923005"
CancelType="Commit">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <UniqueID Type="36" ID="T62578A-7OVCC" ID_Context="Client"/>
        <UniqueID Type="37" ID=" T62578A-7OVCC_1" ID_Context="Client"/>
</OTA_CancelRQ>
```

In this example only child item T62578A-7OVCC_1 will be cancelled. In case a partial cancellation removes the last valid item, the complete booking will be cancelled.

Cancellation Quote Request

Before sending a final CancelRQ, the requestor may want to inquire about cancel penalties with a CancelType of ***Quote***.

```
<OTA_CancelRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2016.2" EchoToken="5923005"
CancelType="Quote">
        <POS>
                <Source>
                        <RequestorID Instance="MF001" ID_Context="AxisData" ID="TEST"
Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <UniqueID Type="36" ID="T62578B-7OVB9" ID_Context="Client"/>
</OTA_CancelRQ>
```

AxisData responds by sending a CancelRS with a Status of ***Pending***, which includes penalty information for cancelling the reservation by dates:

```
<OTA_CancelRS
  xmlns="http://www.opentravel.org/OTA/2003/05" Version="2016.2" EchoToken="5923005"
CancelType="Quote" Status="Pending">
  <Success/>
  <CancelInfoRS>
    <CancelRules>
      <CancelRule CancelByDate="2019-12-06T11:26:30" Amount="0.00" CurrencyCode="EUR"/>
    </CancelRules>
  </CancelInfoRS>
  <UniqueID ID="T62578B-7OVB9" ID_Context="Client" Type="36"/>
  <UniqueID ID="4652380" ID_Context="Internal" Type="36"/>
  <UniqueID ID="T62578B-7OVB9-1" ID_Context="Client" Type="37"/>
```

```
  <UniqueID ID="1" ID_Context="Internal" Type="37"/>
</OTA_CancelRS>
```

9 Booking search and retrieve

Partners can query our system, obtaining the reservation information stored in our system by using the OTA_ ReadRQ, using the partner reference. The response is a detailed OTA_ResRetrieve, which holds hotel, transfer and excursion reservations in a similar way as their Booking requests (OTA_HotelResRQ, OTA_GroundBookRQ and OTA_TourActivityBookRQ).

If a transfer was included in the hotel booking (OTA_HotelResRQ), this information will be provided inside the Hotel section in the OTA_ResRetrieveRS.

This section decribes how booking information can be transmitted to the Client using a pull method and a choice can be made to use a two step approach: execute a search and retrieve booking details (both actions use same message, with different parameters). In any case, response will be the message OTA_ResRetrieveRS. Depending on the type of request, it will contain a list of booking references that fit in the specified criteria (search) or the booking details.

9.1 Search bookings

Search is enabled by setting to true the ReturnListIndicator="true" in the message header. Apart from that flag, SelectionCriteria must be provided. This criterion allows filtering by standard fields like:

- ChainName
- HotelCode
- HotelName
- Start
- End
- ResStatus.

and also by dates. There is an attribute (DateType) that indicates the type:

- ArrivalDate,
- CreateDate,
- DepartureDate or
- LastUpdateDate.

In this service, other region criterions are also defined. As OTA_ReadRQ definition does not provide a standard way of filtering by region codes, they will be defined as TPA Extensions, using OTA standard type *HotelSearchCriterionType* (specified in OTA_HotelCommonTypes.xsd), as an enumeration of RefPoints. This will allow defining filtering by Country, Airport, Region or Resort[1].

The most common approach is specified in the next paragraphs “Retrieve booking list” and “Retrieve booking details”: build a request for obtaining bookings for its hotels that have changed since last search (i.e. using DateType="LastUpdateDate") and then requesting the details for each reference. All other cases are for very specific use-cases.

[1] See Apendix 1

Another use-case is directly accessing one specific booking by the Distributor reference to check whether both systems are aligned (see “Retrieve booking details”).

Some examples of interaction between “Start”, “End” and DateType:

<SelectionCriteria Start="2020-06-21" End="2020-06-21" DateType="LastUpdateDate"/> This means all bookings created or modified on 21 June
<SelectionCriteria Start="2020-06-21" End="2020-06-28" DateType="LastUpdateDate"/> This means all bookings created or modifiedbetween 21 and 28 June

<SelectionCriteria Start="2020-06-21" DateType="LastUpdateDate"/> This means all bookings created or modified from 21 June and later
<SelectionCriteria Start = "2020-06-21T17:15" DateType = "LastUpdateDate"/> This means all bookings created or modified from 21 June at 17:15h CET and later
<SelectionCriteria End="2020-06-21" DateType="LastUpdateDate"/> This means all all bookings created or modified before 21 June with a max of 1000

<SelectionCriteria Start="2020-06-21" End="2020-06-21" DateType="CreateDate"/> This means all bookings created on 21 June
...
<SelectionCriteria Start="2020-06-21" End="2020-06-21" DateType="ArrivalDate"/> This means all bookings with Check-In date on 21 June
...
<SelectionCriteria Start="2020-06-21" End="2020-06-21" DateType="DepartureDate"/> This means all bookings with Check-Out date on 21 June
...

This is an example of an OTA_ReadRQ:

```
<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2008.1" ReturnListIndicator="true">
        <POS>
                <Source>
                        <RequestorID Type="22" ID="TEST" ID_Context="AxisData"/>
                </Source>
        </POS>
        <ReadRequests>
                <HotelReadRequest ChainName="Chain Name" HotelCode="HT_CODE" HotelName="Hotel
Name">
                        <SelectionCriteria Start="2020-06-21" End="2020-06-21"
DateType="LastUpdateDate"/>
                        <TPA_Extensions>
                                <Criterion>
                                        <RefPoint CodeContext="Country" Name="Spain"/>
                                        <RefPoint CodeContext="Airport" Name="AGP"/>
                                        <RefPoint CodeContext="Region" Name="Costa del Sol"/>
                                        <RefPoint CodeContext="Resort" Name="Malaga"/>
                                </Criterion>
                        </TPA_Extensions>
                </HotelReadRequest>
        </ReadRequests>
</OTA_ReadRQ>
```

SelectionCriteria also allows parameter ResStatus:

```
<OTA_ReadRQ xmlns = "http://www.opentravel.org/OTA/2003/05" Version = "2008.1" EchoToken = "1"
ReturnListIndicator="true">
  <POS>
    <Source>
      <RequestorID Type = "22" ID = "TEST" ID_Context = "AxisData"/>
    </Source>
    <Source>
      <RequestorID Type = "88" ID = "TEST" MessagePassword = "testpass"/>
    </Source>
  </POS>
        <ReadRequests>
                <HotelReadRequest>
                        <SelectionCriteria Start="2020-05-12" End="2020-05-30" DateType="LastUpdateDate"
ResStatus="Reserved"/>
                        <!-- Values allowed are "Reserved", "Cancelled" and "Requested"-->
                </HotelReadRequest>
        </ReadRequests>
</OTA_ReadRQ>
```

Response will be the list of bookings that fit the specified criteria. The list will contain the minimum set of properties that identifies a booking; these properties are the booking reference (internal reference and client reference) and the booking status:

```
<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2008.1">
                <Success/>
        <ReservationsList>
                <HotelReservation ResStatus="Reserved">
                        <UniqueID Type="36" ID="12345" ID_Context="Internal"/>
                        <UniqueID Type="36" ID="test-001" ID_Context="Client">
                                <CompanyName Code="TEST"/>
                        </UniqueID>
                </HotelReservation>
```

```
                <HotelReservation ResStatus="Reserved">
                        <UniqueID Type="36 ID="12346" ID_Context="Internal"/>
                        <UniqueID Type="36" ID="test-002" ID_Context="Client">
                                <CompanyName Code="TEST"/>
                        </UniqueID>
                </HotelReservation>
                <HotelReservation ResStatus="Cancelled">
                        <UniqueID Type="36" ID="12347" ID_Context="Internal"/>
                        <UniqueID Type="36" ID="test-003" ID_Context="Client">
                                <CompanyName Code="TEST"/>
                        </UniqueID>
                </HotelReservation>
                <HotelReservation ResStatus="Reserved">
                        <UniqueID Type="36" ID="12348" ID_Context="Internal"/>
                        <UniqueID Type="36" ID="test-004" ID_Context="Client">
                                <CompanyName Code="TEST"/>
                        </UniqueID>
                </HotelReservation>
        </ReservationsList>
</OTA_ResRetrieveRS>
```

The previous example shows that the service has returned 4 bookings, one of them is cancelled. All four bookings belong to same Client (TEST); client code is specified in the CompanyName element, as child of the UniqueID element.

9.2 Retrieve booking list

The most straight forward approach would be to periodically check and match bookings, omitting search criteria. The expected list must not exceed 1.000 bookings to avoid time-out problems. Max number of responses is limited to 1.000.

```
<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" Version="2008.1"
ReturnListIndicator="true">
        <POS>
                <Source>
                        <RequestorID ID_Context="AxisData" ID="TEST" Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <ReadRequests>
                <HotelReadRequest>
                        <SelectionCriteria Start="2012-06-21" DateType="LastUpdateDate"/>
                </HotelReadRequest>
        </ReadRequests>
</OTA_ReadRQ>
```

* In this scenario, we asume 21 June 2020 is today, so all bookings created or modified today are requested.

9.3 Retrieve booking details

After obtaining the list of booking references, continue to request the booking details using same message (OTA_ReadRQ) with the ReturnListIndicator="false" disabled and specifying the booking reference in the <UniqueID> element. It may also specify a search criterion; in this case, the service will return a limited number of booking details (in order to avoid creating a huge message that could collapse the system).
Attribute PrimaryLangID in the request is used to select the desired language in which any description in the response is written (room or board description). By default (or in case the specified language is not available), description will be returned in English:

```
<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
ReturnListIndicator="false" PrimaryLangID="EN">
        <POS>
                <Source>
                        <RequestorID ID_Context="AxisData" ID="TEST" Type="22"/>
                </Source>
                <Source>
                        <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                </Source>
        </POS>
        <UniqueID Type="36" ID="test-004" ID_Context="Client"/>
</OTA_ReadRQ>
```

Response will contain a ReservationsList with all the elements included in the booking (Hotel , transfer, excursions, etc) with the details.

Hotel elements are expressed as HotelReservationType, same as OTA_HotelResRS message.
Transfer elements are expressed as GroundReservationType, same as OTA_GroundBookRS message.
Future products will be included following this structure, and will be documented accordingly.

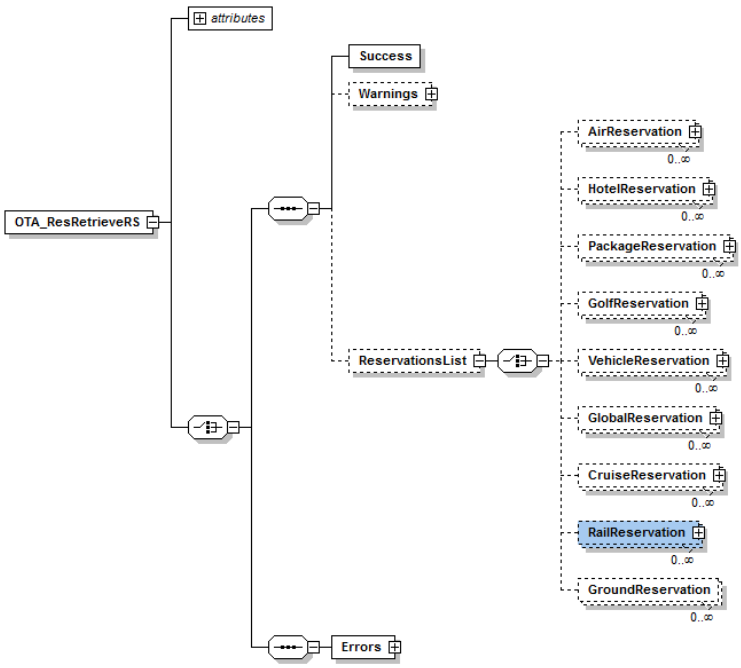

Note that uncalculated transfers will be returned as GroundReservationType Elements, and no longer as part of the Hotel element.


```
<OTA_ResRetrieveRS Version="2008.1" xmlns="http://www.opentravel.org/OTA/2003/05"
xmlns:ns2="http://www.opentravel.org/OTA/2003/05/tpa">
	<Success/>
	<ReservationsList>
		<HotelReservation CreateDateTime="2012-10-18T10:52:18" ResStatus="Reserved">
			<POS>
				<Source>
					<RequestorID Type="22" ID="TEST"
ID_Context="AxisData">
						<CompanyName Code="TEST"
CompanyShortName="TO ShortName"/>
					</RequestorID>
				</Source>
			</POS>
			<UniqueID Type="36" ID="12348" ID_Context="Internal"/>
			<UniqueID Type="36" ID="test-004" ID_Context="Client"/>
			<RoomStays>
				<RoomStay IndexNumber="1">
					<RoomTypes>
						<RoomType RoomTypeCode="RMSDDB0000">
							<RoomDescription>
								<Text
Language="EN">Room_Standard/Double</Text>
							</RoomDescription>
						</RoomType>
					</RoomTypes>
					<RoomRates>
						<RoomRate RoomTypeCode="RMSDDB0000">
							<Features>
								<Feature>
								<Description>

	<Text>BB</Text>
								<Text
Language="EN">Breakfast</Text>
								</Description>
								</Feature>
							</Features>
						</RoomRate>
					</RoomRates>
					<TimeSpan Start="2013-05-20" End="2013-05-27"/>
					<Total CurrencyCode="EUR" AmountAfterTax="511.68"/>
					<BasicPropertyInfo HotelName="Torviscas Playa"
HotelCode="AMTSES0FG0"/>
					<TPA_Extensions>
						<POS>
							<Source>
								<RequestorID Type="4"
ID="CATEST" ID_Context="AxisData">
								<CompanyName
Code="CATEST" CompanyShortName="ContractAgency ShortName"/>
```

```
                                                                    </RequestorID>
                                                                </Source>
                                                            </POS>
                                                        </TPA_Extensions>
                                                        <ResGuestRPHs>
                                                            <ResGuestRPH RPH="0"/>
                                                            <ResGuestRPH RPH="1"/>
                                                        </ResGuestRPHs>
                                                        <ServiceRPHs>
                                                            <ServiceRPH RPH="1"/>
                                                        </ServiceRPHs>
                                                    </RoomStay>
                                                </RoomStays>
                                                <Services>
                                                    <Service ServiceRPH="1" ServiceInventoryCode="BB"/>
                                                </Services>
                                                <ResGuests>
                                                    <ResGuest ResGuestRPH="0" AgeQualifyingCode="10">
                                                        <Profiles>
                                                            <ProfileInfo>
                                                                <Profile>
                                                                    <Customer BirthDate="1973-05-
19">
                                                                        <PersonName>

                                                <GivenName>test</GivenName>

                                                <Surname>test</Surname>
                                                                        </PersonName>
                                                                    </Customer>
                                                                </Profile>
                                                            </ProfileInfo>
                                                        </Profiles>
                                                        <GuestCounts>
                                                            <GuestCount Age="40"/>
                                                        </GuestCounts>
                                                    </ResGuest>
                                                    <ResGuest ResGuestRPH="1" AgeQualifyingCode="10">
                                                        <Profiles>
                                                            <ProfileInfo>
                                                                <Profile>
                                                                    <Customer BirthDate="1973-05-
19">
                                                                        <PersonName>

                                                <GivenName>test</GivenName>

                                                <Surname>test</Surname>
                                                                        </PersonName>
                                                                    </Customer>
                                                                </Profile>
                                                            </ProfileInfo>
                                                        </Profiles>
                                                        <GuestCounts>
                                                            <GuestCount Age="40"/>
                                                        </GuestCounts>
                                                    </ResGuest>
```

```
                    </ResGuests>
                    <ResGlobalInfo>
                        <CancelPenalties/>
                        <Total CurrencyCode="EUR" AmountAfterTax="511.68"/>
                    </ResGlobalInfo>
                    <TPA_Extensions>
                        <RateDetails>
                            <Totals>
                                <Total AmountAfterTax="511.68"
CurrencyCode="EUR" CurrencyType="Cost" Override="false" TotalType="Cost"/>
                            </Totals>
                        </RateDetails>
                        <ns1:BookingStatus ReservationStatusType="Reserved"
xsi:type="ns1:BookingStatus" xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
                    </TPA_Extensions>
                </HotelReservation>
            </ReservationsList>
</OTA_ResRetrieveRS>
```


9.4 Retrieve enrichment

Additional booking details can be retrieved using the attribute Instance in OTA_ReadRQ. These are the possible values and the additional information that will be returned in the response OTA_ResRetrieveRS; all of them are combinable (e.g. MF3, MF12, MF123...):

1 Item status, cancelled items will be included in the response with their status
2 Cancellation policies (for confirmed items) and cancellation cost (for cancelled items)
3 Per pax Rate breakdown, applicable to active bookings.

Price breakdown codes can be found in the Appendix section, at the end of the documentation.

I.E. Booking details RQ expecting rate breakdown (Instance="MF3")


```
<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
ReturnListIndicator="false" PrimaryLangID="EN">
    <POS>
        <Source>
            <RequestorID ID_Context="AxisData" ID="TEST" Type="22" Instance="MF3"/>
        </Source>
        <Source>
            <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
        </Source>
    </POS>
    <UniqueID Type="36" ID="test-004" ID_Context="Client"/>
</OTA_ReadRQ>
```


Booking details RS including rate breakdown


```
<OTA_ResRetrieveRS Version="2008.1" xmlns="http://www.opentravel.org/OTA/2003/05">
```

```
<Success />
<ReservationsList>
  <HotelReservation CreateDateTime="2022-11-22T17:07:06" ResStatus="Reserved">
    <POS>
      <Source>
        <RequestorID ID="TEST" ID_Context="OTS" Type="22">
          <CompanyName Code="TEST" CompanyShortName="TO ShortName" />
        </RequestorID>
      </Source>
    </POS>
    <UniqueID ID="1805084" ID_Context="Internal" Type="14" />
    <UniqueID ID="TEST_MF3" ID_Context="Client" Type="14" />
    <RoomStays>
      <RoomStay IndexNumber="1">
        <RoomTypes>
          <RoomType RoomTypeCode="RMSDDB0000-BB">
            <RoomDescription>
              <Text Language="EN">Double Standard Room</Text>
            </RoomDescription>
          </RoomType>
        </RoomTypes>
        <RoomRates>
          <RoomRate RoomTypeCode="RMSDDB0000">
            <Features>
              <Feature>
                <Description>
                  <Text>BB</Text>
                  <Text Language="EN">Breakfast</Text>
                </Description>
              </Feature>
            </Features>
          </RoomRate>
        </RoomRates>
        <TimeSpan End="2018-02-04" Start="2018-02-01" />
        <Total AmountAfterTax="2520.00" CurrencyCode="EUR" />
        <BasicPropertyInfo HotelCode="APTFAOAMLA" HotelName="Test Hotel" />
        <ResGuestRPHs>
          <ResGuestRPH RPH="1" />
          <ResGuestRPH RPH="2" />
          <ResGuestRPH RPH="3" />
        </ResGuestRPHs>
        <ServiceRPHs>
          <ServiceRPH RPH="1" />
        </ServiceRPHs>
        <Reference ID="TK1415731529998187893" Type="14" />
      </RoomStay>
    </RoomStays>
    <Services>
      <Service ServiceInventoryCode="BB" ServiceRPH="1" />
    </Services>
    <ResGuests>
      <ResGuest AgeQualifyingCode="10" ResGuestRPH="1">
        ...
      <ResGuest AgeQualifyingCode="10" ResGuestRPH="2">
        ...
      <ResGuest AgeQualifyingCode="8" ResGuestRPH="3">
        ...
    </ResGuests>
    <ResGlobalInfo>
      <Total AmountAfterTax="2520.00" CurrencyCode="EUR" />
      <HotelReservationIDs>
        <HotelReservationID ResGuestRPH="1" ResID_Source="TEST" ResID_SourceContext="Client"
ResID_Type="14" ResID_Value="TEST_MF3" />
```

```
            <HotelReservationID ResID_Source="OTS" ResID_SourceContext="Internal" ResID_Value="1805084" />
          </HotelReservationIDs>
          <CancelPenalties />
        </ResGlobalInfo>
        <TPA_Extensions>
          <RateDetails>
            <GuestDetails CurrencyCode="EUR" RateCode="Price" ResGuestRPH="1" TotalAmount="1200.00">
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="1" StayDay="1" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="1" StayDay="1" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="1" StayDay="2" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="1" StayDay="2" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="1" StayDay="3" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="1" StayDay="3" />
            </GuestDetails>
            <GuestDetails CurrencyCode="EUR" RateCode="Price" ResGuestRPH="2" TotalAmount="1200.00">
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="2" StayDay="1" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="2" StayDay="1" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="2" StayDay="2" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="2" StayDay="2" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-100.00"
ResGuestRPH="2" StayDay="3" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="2" StayDay="3" />
            </GuestDetails>
            <GuestDetails CurrencyCode="EUR" RateCode="Price" ResGuestRPH="3" TotalAmount="120.00">
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-10.00"
ResGuestRPH="3" StayDay="1" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="50.00"
ResGuestRPH="3" StayDay="1" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="-500.00"
ResGuestRPH="3" StayDay="1" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="3" StayDay="1" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="3" StayDay="2" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="50.00"
ResGuestRPH="3" StayDay="2" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="-500.00"
ResGuestRPH="3" StayDay="2" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-10.00"
ResGuestRPH="3" StayDay="2" />
              <RateComponents Code="AMT3" CurrencyCode="EUR" Edition="0.00" Rate="500.00"
ResGuestRPH="3" StayDay="3" />
              <RateComponents Code="EBO1" CurrencyCode="EUR" Edition="30.00" Rate="-10.00"
ResGuestRPH="3" StayDay="3" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="50.00"
ResGuestRPH="3" StayDay="3" />
              <RateComponents Code="APC1" CurrencyCode="EUR" Edition="27.00" Rate="-500.00"
ResGuestRPH="3" StayDay="3" />
            </GuestDetails>
            <Totals>
              <Total AmountAfterTax="2520.00" CurrencyCode="EUR" CurrencyType="Price" Override="false"
TotalType="Price" />
```

```
            </Totals>
          </RateDetails>
          <ns1:BookingStatus ReservationStatusType="Reserved" xsi:type="ns1:BookingStatusType"
xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" />
        </TPA_Extensions>
      </HotelReservation>
    </ReservationsList>
</OTA_ResRetrieveRS>
```


I.E. Booking details RQ of a cancelled booking getting the cancellation details (Instance="MF12")


```
<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1"
ReturnListIndicator="false" PrimaryLangID="EN">
          <POS>
                    <Source>
                              <RequestorID ID_Context="AxisData" ID="TEST" Type="22"
Instance="MF12"/>
                    </Source>
                    <Source>
                              <RequestorID Type="88" ID="TEST" MessagePassword="testpass"/>
                    </Source>
          </POS>
          <UniqueID Type="36" ID="test-005" ID_Context="Client"/>
</OTA_ReadRQ>
```


Booking details RS including cancelled item details


```
<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="2008.1">
          <Success/>
          <ReservationsList>
                    <HotelReservation ResStatus="Cancelled" CreateDateTime="2018-02-19T18:19:52"
LastUpdateDateTime="2018-02-19T18:21:16">
                              <POS>
                                        <Source>
                                                  <RequestorID Type="22" ID_Context="Axisdata" ID="TEST">
                                                            <CompanyName CompanyShortName="TEST"
Code="TEST"/>
                                                  </RequestorID>
                                        </Source>
                              </POS>
                              <UniqueID ID="123456" ID_Context="Internal" Type="14"/>
                              <UniqueID ID="test-005" ID_Context="Client" Type="14"/>
                              <RoomStays>
                                        <RoomStay IndexNumber="1" RoomStayStatus="Cancel">
                                                  <RoomTypes>
                                                            <RoomType RoomTypeCode="RMSDDBGV00">
                                                                      <RoomDescription>
                                                                                <Text Language="EN">Double
Standard Room (GardenView)</Text>
                                                                      </RoomDescription>
                                                            </RoomType>
                                                  </RoomTypes>
                                                  <RoomRates>
                                                            <RoomRate RoomTypeCode="RMSDDBGV00">
                                                                      <Features>
```

```
<Feature>
<Description>
<Text>AI</Text>
<Text
Language="EN">All Inclusive</Text>
</Description>
</Feature>
</Features>
</RoomRate>
</RoomRates>
<BasicPropertyInfo HotelCode="APTFAOAMLA" HotelName="Test
Hotel"/>
<TPA_Extensions>
<POS>
<Source>
<RequestorID Type="4"
ID_Context="OTS" ID="ICCHOTS">
<CompanyName
CompanyShortName="OTS Open Travel Services AG" Code="ICCHOTS"/>
</RequestorID>
</Source>
<Source>
<RequestorID Type="39"
ID_Context="OTS" ID="APTFAOAMLAS18OWN1"/>
</Source>
<Source>
<RequestorID Type="2"
ID_Context="OTS" ID="RHO"/>
</Source>
<Source>
<RequestorID Type="45"
ID_Context="OTS" ID="OWN1"/>
</Source>
</POS>
</TPA_Extensions>
<TimeSpan End="2018-07-23" Start="2018-07-14"/>
<ResGuestRPHs>
<ResGuestRPH RPH="0"/>
<ResGuestRPH RPH="1"/>
</ResGuestRPHs>
<ServiceRPHs>
<ServiceRPH RPH="1"/>
</ServiceRPHs>
<Total CurrencyCode="EUR" AmountAfterTax="0.00"/>
</RoomStay>
</RoomStays>
<Services>
<Service ServiceInventoryCode="AI" ServiceRPH="1"/>
</Services>
<ResGuests>
<ResGuest AgeQualifyingCode="10" ResGuestRPH="0">
...
<ResGuest AgeQualifyingCode="10" ResGuestRPH="1">
...
</ResGuest>
</ResGuests>
<ResGlobalInfo>
<Total CurrencyCode="EUR" AmountAfterTax="0.00"/>
<HotelReservationIDs>
<HotelReservationID ResID_Type="36"
ResID_SourceContext="Client" ResID_Value="test-005"/>
<HotelReservationID ResID_Value="123456" ResID_Type="36"
ResID_SourceContext="Internal"/>
```

```
                                        <HotelReservationID Item_RPH="1" ResID_Value="test-005-1"
ResID_Type="37" ResID_SourceContext="Client"/>
                                        <HotelReservationID Item_RPH="1" ResID_Value="1"
ResID_Type="37" ResID_SourceContext="Internal"/>
                                </HotelReservationIDs>
                                <CancelPenalties>
                                        <CancelPenalty Item_RPH="1">
                                                <AmountPercent CurrencyCode="EUR"
Amount="10.00"/>
                                                <PenaltyDescription Language="EN">
                                                        <Text>2018-02-19 18:21:16</Text>
                                                </PenaltyDescription>
                                        </CancelPenalty>
                                </CancelPenalties>
                                <BasicPropertyInfo HotelCodeContext="241485" AreaID="294"
HotelName="Test Hotel" HotelCode="APTFAOAMLA">
                                        <VendorMessages>
                                                <VendorMessage Title="IncidentsAndErrata"
InfoType="5">
                                                        <SubSection>
                                                                <Paragraph>
                                                                        <Text>Tax Payable Locally,
charge cycle: per Room per Night,  Currency: EUR,  Duration: from 2018-01-01,  type: city tax</Text>
                                                                </Paragraph>
                                                        </SubSection>
                                                </VendorMessage>
                                        </VendorMessages>
                                </BasicPropertyInfo>
                        </ResGlobalInfo>
                        <TPA_Extensions>
                                <RateDetails/>
                                <ns1:BookingStatus
xmlns:ns1="http://www.opentravel.org/OTA/2003/05/tpa" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:type="ns1:BookingStatusType" ReservationStatusType="Reserved"/>
                        </TPA_Extensions>
                </HotelReservation>
        </ReservationsList>
</OTA_ResRetrieveRS>
```


10 Checking connectivity

Partners can check the connectivity of the system using OTA_Ping request. This message does not have any other functionality than returning a response with the same text sent in the request.

Request:


```
<OTA_PingRQ Version="1.003" TimeStamp="2011-02-09T12:00:00+01:00" EchoToken="12345"
Target="Test" PrimaryLangID="EN" xmlns="http://www.opentravel.org/OTA/2003/05">
        <EchoData>Connectivity test</EchoData>
</OTA_PingRQ>
```


Response:


```
<OTA_PingRS EchoToken="12345" TimeStamp="2011-02-10T10:36:35+00:00" Target="Test"
Version="1.003" PrimaryLangID="EN" xmlns="http://www.opentravel.org/OTA/2003/05">
        <Success/>
```

```
        <EchoData>Connectivity test </EchoData>
</OTA_PingRS>
```

This message is intended for:

- Checking the connectivity from new systems/environments
- Verify connectivity from new network endpoints
- Check connectivity during any planned outage

11 Appendix A Hotel codes

The hotel codes are structured in 2 possible ways:

Classic, construction based on 3 elements. I.e. in AMTSES0FFG, A stands for “Accomodation”, MTSES for the Incoming Agent (MTS Spain in this example) and 0FFG is a counter.

New destinations, construction based on 4 elements. I.e. in AEGHRG10SY, A stands for “Accomodation”, EG for Country (Egypt in this example), HRG for destination (Hurgada in this example) and 10SY is a counter.

The handling office for each hotel is included in the OTA_HotelDescriptiveInfo.

12 Appendix B Hotel Rating codes

Apartments	Rural	Hotels	Other
1 Key	1 Palm	1 Star	No Rating
2 Key	2 Palm	1,5 Star	TBD
3 Key	3 Palm	2 Star	
4 Key	4 Palm	2,5 Star	
5 Key	5 Palm	3 Star	
		3,5 Star	
		4 Star	
		4,5 Star	
		5 Star	
		5,5 Star	
		6 Star	
		7 Star	

13 Appendix C Hotel Room codes

The RoomClassificationCode used in the OTA_HotelAvailRQ (Search) can be any of the "Type" values. Room codes are assembled from various room characteristics: ex. RMSDDBSV00

Subtypes like 0, A, B, etc. define themselves through the listed <Amenities>.in the OTA_HotelInvNotif and OTA_HotelDescriptiveInfo (UNIT). These codes indicate ***"features different from rooms with otherwise identical codes"***. So you may get a RMSDDB0000 and a RMSDDB00A0 and maybe a RMSDDB00B0, where

* RMSDDB0000 is the plain double room
* RMSDDB00A0 lists "BALCONY" under <Amenities>
* RMSDDB00B0 lists "KITCHENETTE" and "JACUZZI" under <Amenities>

A special case arises for room codes containing a Subtype A, B, etc. suffix but do not have any differences in associated amenities. Instead these rooms have **different board bases**, i.e. different meal plans included in their rates. But this is not necessarily indicated by a different Room code with a Subtype.

Room codes are assembled from various room characteristics: ex. RMSDDBSV00 using the code elements, with the number of positions marked between brackets:
Type(2)|Grade(2)|Base(2)|View(2)|Subtype(2)

This used to be
Type(2)|Grade(2)|Base(2)|View(2)|Subtype(1)|Promo(1)
By merging the fields Subtype and Promo we have gained 1.276 new codes

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
72	Room - Inc. 2 Rounds of Golf	0	NotDefined	0	NotDefined	0	NotDefined	0	NotDefined
73	Room - Inc. 3 Rounds of Golf	0W	Overwater	10	10 Bedroom	2	Sunset View	1	GolfPackage
74	Room - Inc. 4 Rounds of Golf	50	Premium Leisure Club Executive Arabian Deluxe	1X	1 Bedroom Duplex	3	Resort View	2	SpaPackage
75	Room - Inc. 5 Rounds of Golf	51	Premium Leisure Club Executive Ocean Deluxe	2A	2 Adjacent Rooms	4	Burj Khalifa View	3	ThallasoPackage
76	Room - Inc. 4 Rounds of Golf Including Buggy	52	Arabian Suite	2K	2 King Beds	5	Canal View	5	Action
77	Room - Inc. 5 Rounds of Golf Including Buggy	53	Ocean Gulf Summerhouse	2S	2 Single Beds	6	Burj Al Arab View	6	Activities Package
78	Room - Unlimited Golf	77	Penn Plaza Renovated	2T	2 Twin Beds	9	Palm View	7	CarPackage
AH	Arabian Summerhouse	A0	Arabian	2W	2 Queen Beds-resort fee waived	11	Walk View	8	ServicePackage
AP	Apartment	A1	Armani Deluxe	2X	2 Bedroom Duplex	17	Marina View	9	WaterparkPackage
BU	Bungalow	A2	Armani Classic	3A	3 adjacent rooms	18	Race Track View	0A	Attic
BV	BeachVilla	A3	Armani Premier	3R	3 Rooms	19	Marina or Pool View	0B	Best-Price
CA	Capsule	A4	Armani Executive	3S	3 Single Beds	20	Souk View	0C	Low Cost
CC	CruiseCabin	A5	Armani Ambassador	3T	3 Twin Beds	2P	Chill-Out Pool View	0D	Dreamer
CH	Chalet	A6	Armani Signature	3X	3 Bedroom Duplex	31	Desert View	0E	Economy
CT	Cottage	A7	Armani Dubai	BW	BunkBeds-resort fee waived	AC	AcrÃ³polis	0F	Staff
CV	Campervan	A8	Armani Residence	CR	2 ConnectingRooms	AN	Panoramic AcrÃ³polis	0G	SingleSaver
FA	Family Lake House	A9	Anthurium	D1	1 Double Bed	AP	Pool Access	0H	Honeymooners
FB	FamilyBungalow	AA	Arabian Superior	D2	2 Double Beds	AV	Volcano View	0I	Kids Free
FH	Farmhouse	AB	Adjacent Beach	DB	Double	BA	Beach Access	0J	Fast Pay
FJ	Family Junior Suite	AC	Arabian Club Superior	DM	Dormitory	BF	BeachFront	0L	LadiesOnly
FL	FamilyLodging	AD	Arabian Deluxe	DX	Duplex	BH	BosphorusView	0M	Reduced Mobility
FM	Family House	AE	Al Rimal Enclosed	FU	Full	BV	BayView	0N	Non-Refundable
FP	FamilyApartment	AF	Aloft	IN	SingleUse	CP	Castle-Palace View	0O	Offer
FR	FamilyRoom	AG	Arabian Gulf	K1	King	CR	CreekView	0P	Promotion
FS	FamilySuite	AH	Abu Dhabi	KB	King Bed	CS	Chill-Out Sea View	0Q	Adults Only
FT	Family Tent	AI	Al Ain	KG	King or Queen	CT	City View (Palm Residences)	0R	Senior 60+
FV	FamilyVilla	AJ	Ambassador	KS	King SingleUse	CV	CityView	0S	Senior 55+
FX	FamilyStudio	AL	Atlantic	KW	King-resort fee waived	CW	Country/Pool View	0T	Student
GH	Gulf Summerhouse	AM	Armani	LB	Bunkbed	CY	CourtyardView	0V	VipTreatment

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
GR	GardenRoom	AN	Anantara	LR	Large	DD	Disney View	0W	Sol
HF	HolidayFlat	AQ	Aqua	MB	MultipleBed	DS	Dubai Skyline	0X	Agent
HH	HolidayHouse	AR	Astor	OC	Octuple	DT	Downtown	0Y	Resort Fee Included
HO	House	AS	Annex Superior	Q1	Queen	DV	DunesView	0Z	SpecialPackage
JS	JuniorSuite	AT	Al Khaimah Tented	Q2	2 Queen Beds	ES	Creek Scene	10	Spa
JT	JuniorStudio	AU	Austral	QI	Quintuple	FR	Front Row	1N	Spa Non-Refundable
LO	Loft	AX	Annex	QS	Queen SingleUse	FV	FountainView	1P	Spa Promotion
LS	Loft Suite	B0	Beach	QU	Quad	G2	Garden or Pool View	20	Spa - Private Pool
LV	LagoonVilla	B1	Baros	QW	Queen-resort fee waived	G3	Garden or Sea View	2N	Spa - Private Pool Non-Refundable
MA	Maisonette	B2	Barachois	R2	2 Rooms	GH	GoldenHorn View	30	Rooftop
MH	MobileHome	BA	Basic	SC	Single w.Child	GO	GolfCourseView	3E	Rooftop Economy
MI	Mini-Suite	BB	Royal Beit Al Bahar	SG	Single	GP	Garden-Pool View	3N	Rooftop Non-Refundable
MS	Mansion	BC	Boulevard Club	SP	Septuple	GS	Garden-Sea View	3P	Rooftop Promotion
OA	Oasis	BD	Deluxe Delight Beach	ST	Sextuple	GV	GardenView	40	TypeB
OT	Room Tower	BE	Premium Beach	T1	1 Bedroom	HV	HarborView	4B	TypeB Best-Price
PH	Penthouse	BF	Deluxe Beach (Ground Floor)	T2	2 Bedroom	IL	Inland View	4E	TypeB Economy
PK	Package	BG	BVLGARI	T3	3 Bedroom	IN	Interior	4L	TypeB Low cost
PS	Penthouse Suite	BH	Bahia	T4	4 Bedroom	IW	Island View	4M	TypeB Reduced Mobility
PV	Pavilion	BN	Business	T5	5 Bedroom	JV	Jungle View	4N	TypeB Non-Refundable
RC	Room Club	BO	O Beach	T6	6 Bedroom	KS	Skyline Sea View	4O	TypeB Offer
RD	Room Deluxe	BP	Palm Beach Premier	T7	7 Bedroom	LA	LagoonView	4P	TypeB Promotion
RM	Room	BR	Residence Beach	T8	8 Bedroom	LC	LandscapeView	4Q	TypeB Adults Only
RS	Rock Suite	BS	Sangu Beach	T9	9 Bedroom	LF	LakeSide	4Z	TypeB SpecialPackage
RT	Retreat	BT	Al Bahar Tented Beach	TP	Triple	LL	Lateral LakeView	50	Speedboat
SC	Suite Club	BU	Bedouin	TW	Twin	LP	Laguna Pool Side	5H	Speedboat Honeymooners
SS	SeniorSuite	BV	Boulevard	W1	1 Double Bed-resort fee waived	LS	LateralSeaView	5P	Speedboat Promotion
ST	Studio	C1	Sea Scape	W2	2 Double Beds-resort fee waived	LV	LakeView	60	Shared Pool
SU	Suite	C2	Palm Scape			LW	Lagoon Water Pool View	6N	Shared Pool Non-Refundable
SV	SuiteVilla	C3	Sky View			LX	LagoonAccess	6P	Shared Pool Promotion
TH	Townhome	C4	Sky Terrace			M2	Mountain or Pool View	6Q	Shared Pool Adults Only

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
TN	Tent	C5	Sky Pool			MC	Mosque/Canal View	70	With Jacuzzi - Speedboat
TS	Studio Suite	C6	Sky Scape			MG	Mountain or Garden View	80	With Slide and Pool - Seaplane
TV	Loft Villa	C7	Horizon			MP	Main Pool View	81	With Slide and Pool â€“ Domestic Flight
UT	Suite Tower	C8	Panoramic			MS	Mountain or Sea View	90	Domestic Flight
VI	Villa	C9	Jabal Terrace			MU	Mountain View	99	Domestic Flight WaterparkPackage
XX	Extras	CB	Cabana			MV	MountainView	9H	Domestic Flight Honeymooners
		CC	Cool Corner			NV	NileView	9P	Domestic Flight Promotion
		CD	Arabian Court Deluxe			OF	Ocean Front	A0	Balcony or Terrace
		CE	Arabian Court Executive			OV	Ocean View	A1	Balcony or Terrace GolfPackage
		CF	Comfort			P1	Pool Sunsrise	A2	Balcony or Terrace SpaPackage
		CG	Grand Club			P2	Pool Sunset	A3	Balcony or Terrace ThallasoPackage
		CH	Anything Can Happen			PA	PanoramaView	A4	Balcony or Terrace HolidayPackage
		CI	Colonial			PC	Pool or City View	A5	Balcony or Terrace Action
		CL	Club			PD	PoolSide	A6	Balcony or Terrace Activities Package
		CN	Central Location			PF	Pool Front	A7	Balcony or Terrace CarPackage
		CO	Coral			PH	Partial Harborview	A8	Balcony or Terrace ServicePackage
		CP	Arabian Court Prince			PK	Park View	A9	Balcony or Terrace WaterparkPackage
		CR	Corner			PL	Partial Lake View	AA	Balcony or Terrace Attic
		CS	Classic			PM	Pyramid View	AB	Balcony or Terrace Best-Price
		CU	Crusoe			PO	Partial Ocean View	AC	Balcony or Terrace Low Cost
		CV	Covet			PR	PartialRiverView	AD	Balcony or Terrace Dreamer
		CW	Ocean Water			PS	Pool-Sea View	AE	Balcony or Terrace Economy
		CX	Club Luxury			PT	Patio View	AG	Balcony or Terrace SingleSaver
		CY	Crystal			PV	PoolView	AH	Balcony or Terrace Honeymooners
		D1	Deluxe Lake			PW	Partial Waterfall View	AI	Balcony or Terrace Kids Free
		DA	Deluxe Lagoon			RP	River or Pool View	AJ	Balcony or Terrace Fast Pay
		DB	Deluxe Beach			RV	RiverView	AK	Balcony or Terrace Late Check-Out
		DC	Deluxe Club			S1	Palm Sea View	AL	Balcony or Terrace LadiesOnly
		DD	Deluxe Signature			S2	Sea or Pool View	AM	Balcony or Terrace Reduced Mobility
		DE	Design			S3	Lateral Sea View or Pool View	AN	Balcony or Terrace Non-Refundable

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		DF	Deluxe Upper Floor			S4	Lateral Sea View and Pool Shared Terrace	AO	Balcony or Terrace Offer
		DH	Dolphin			S5	Lateral Sea View or Pool Shared Terrace	AP	Balcony or Terrace Promotion
		DI	Diamond			SB	SeaView Balcony	AQ	Balcony or Terrace Adults Only
		DL	Deluxe			SF	SeaFront	AR	Balcony or Terrace Senior 60+
		DN	Dhoni			SG	StageView	AS	Balcony or Terrace Senior 55+
		DO	Grand Overwater			SL	Skyline View	AV	Balcony or Terrace VipTreatment
		DP	Diplomatic			SM	Sea/Palm View	AW	Balcony or Terrace Type B
		DQ	Deluxe-Unique			SP	Sea-Pool Side	AZ	Balcony or Terrace SpecialPackage
		DR	Grand Reef			SS	SeaSide	B0	Balcony
		DS	Deluxe Superior			ST	StreetView	B1	Balcony GolfPackage
		DV	Deluxe V Level			SV	SeaView	B2	Balcony SpaPackage
		DW	Deluxe Water			TV	Tropical View	B3	Balcony ThallasoPackage
		E1	Emirates			VC	Country View	B5	Balcony Action
		EC	Executive Club			VG	Glacial View	B6	Balcony Activities Package
		ED	Executive Downtown			VH	Horizon View	B7	Balcony CarPackage
		EE	Reef			VP	Partial Sea View	B9	Balcony WaterparkPackage
		EF	Efficiency			VR	Ridge View	BA	Balcony Attic
		EH	Etihad			VS	Sunrise View	BB	Balcony Best-Price
		EI	Emiri			VT	SeaView Terrace	BC	Balcony Low Cost
		EL	Elegance			VV	ValleyView	BD	Balcony Dreamer
		EM	Emerald			VY	Vineyard View	BE	Balcony Economy
		EN	Palm Manor Executive			WF	Waterfront	BG	Balcony SingleSaver
		EP	Residence Prestige			WS	WaterView	BH	Balcony Honeymooners
		ER	Royal Estate			WV	Waterfall View	BM	Balcony Reduced Mobility
		ET	Earth			YS	City Scene	BN	Balcony Non-Refundable
		EW	Escape Water			YV	Party View	BO	Balcony Offer
		EX	Executive					BP	Balcony Promotion
		FB	Beachfront					BQ	Balcony Adults Only
		FC	Raffles Club					BS	Balcony Senior 55+
		FD	Fairmont Grand					BV	Balcony VipTreatment

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		FG	Fairmont Gold					BW	Balcony Sol
		FI	Fitness					BX	Balcony Agent
		FM	Fairmont					BZ	Balcony SpecialPackage
		FO	Fabulous Overwater					C0	TypeC
		FS	Life Style					C5	TypeC Action
		FT	Fantastic					CB	TypeC Best-Price
		FV	Fashion Victim					CC	TypeC Low Cost
		FW	Reefwater					CD	TypeC Dreamer
		FY	Fully Theme					CE	TypeC Economy
		G1	Gold Corner					CI	TypeC Kids Free
		G2	Gold Deluxe					CJ	TypeC Fast Pay
		GB	GardenBuilding					CM	TypeC Reduced Mobility
		GC	Regal Club					CN	TypeC Non-Refundable
		GD	GrandDeluxe					CO	TypeC Offer
		GE	Guest					CP	TypeC Promotion
		GH	Grand Beach					CS	TypeC Senior 55+
		GI	Grand Imperial					CV	TypeC VipTreatment
		GL	Gold					CZ	TypeC SpecialPackage
		GO	Gulf Ocean					D0	TypeD
		GP	Palm Manor Grand					DB	TypeD bestprice
		GR	Grand					DE	TypeD Economy
		GW	Grand Water					DI	TypeD Kids Free
		GX	Grand Luxury					DJ	TypeD Fast Pay
		HA	Charm					DL	TypeD Lowcost
		HD	Horizon Club Deluxe					DM	TypeD Reduced Mobility
		HE	Heritage					DN	TypeD Non-Refundable
		HM	Harmony					DO	TypeD offer
		HP	Horizon Club Premier					DP	TypeD Promotion
		HR	Royal Etihad					DS	TypeD Senior 55+
		HV	Haven					DV	TypeD VipTreatment

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		HW	Horizon Water					DZ	TypeD SpecialPackage
		HY	Heavenly					E0	TypeE
		II	Infinity					EE	TypeE Economy
		IN	Inspire					EN	TypeE Non-Refundable
		IO	Inocean					EP	TypeE Promotion
		IP	Imperial					EZ	TypeE SpecialPackage
		IR	Island Residence					F0	FrenchBalcony
		IS	Island					F2	FrenchBalcony SpaPackage
		JB	Jabal					F4	FrenchBalcony HolidayPackage
		JC	Junior Club					FC	FrenchBalcony Low Cost
		JT	Jet					FE	FrenchBalcony Economy
		JY	Joy					FM	FrenchBalcony Reduced Mobility
		KD	Khaleej Deluxe					FN	FrenchBalcony Non-Refundable
		KH	Khaleej					FO	FrenchBalcony Offer
		KO	Kohinoor					FP	FrenchBalcony Promotion
		KP	Park					FZ	FrenchBalcony SpecialPackage
		KX	Park Executive					G0	Private-Garden
		L0	Lagoon					G5	Private-Garden Action
		LA	Platinum					GA	Private-Garden Attic
		LB	Lagoon Beach					GE	Private-Garden Economy
		LC	Club Scenic					GG	Private-Garden SingleSaver
		LD	Palace Deluxe					GN	Private-Garden Non-Refundable
		LE	Luxe					GO	Private-Garden Offer
		LF	Lower Floor					GP	Private-Garden Promotion
		LI	Life					GQ	Private-Garden Adults Only
		LM	Landmark					GZ	Private-Garden SpecialPackage
		LO	Overwater Lagoon					H0	With Jacuzzi
		LP	Lagoon Prestige					H5	With Jacuzzi Action
		LR	Club Rotana					HA	With Hammam
		LS	Standard Lagoon					HE	With Jacuzzi Economy

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		LU	Luux					HH	With Jacuzzi Honeymooners
		LV	Level					HN	With Jacuzzi Non-Refundable
		LW	Laamu Water					HO	With Jacuzzi Offer
		LX	Luxury					HP	With Jacuzzi Promotion
		MA	Maharaja					HV	With Jacuzzi VipTreatment
		MB	MainBuilding					HZ	With Jacuzzi SpecialPackage
		MJ	Majestic					I0	Private Pool - Domestic Flight
		ML	Premium V Level					IH	Private Pool - Domestic Flight Honeymooners
		MM	Semi-Basement					J0	Private Jacuzzi Terrace
		MN	Manta					J2	Private Jacuzzi Terrace SpaPackage
		MO	Premium Ocean					JE	Private Jacuzzi Terrace Economy
		MP	Palm Manor Premier					JH	Private Jacuzzi Terrace Honeymooners
		MQ	Premium Unique					JM	Private Jacuzzi Terrace Reduced Mobility
		MR	Mandarin					JN	Private Jacuzzi Terrace Non-Refundable
		MT	Master					JO	Private Jacuzzi Terrace Offer
		MV	Marvelous					JP	Private Jacuzzi Terrace Promotion
		MW	Semi Water					JS	Private Jacuzzi Terrace Senior 55+
		MZ	Mezzanine					JU	Slilts
		NA	Al Naseem Tented Beach					JV	Private Jacuzzi Terrace VipTreatment
		NB	Nirvana Beach					JZ	Private Jacuzzi Terrace SpecialPackage
		NE	Anelia					K0	Private Pool - Seaplane
		NL	All Night Long					KH	Private Pool - Seaplane Honeymooners
		NS	New Style					L0	2 Bathrooms
		NT	Nature					LE	2 Bathrooms Economy
		O0	Ocean					LN	2 Bathrooms Non-Refundable
		O1	Ocean Club Superior					LO	2 Bathrooms Offer
		O2	Ocean Premier					LP	2 Bathrooms Promotion
		OB	Ocean Beach					M0	3 bathrooms
		OC	Ocean Club					MN	3 bathrooms Non-Refundable
		OD	Ocean Deluxe					N0	NonSmoking

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		OF	Fabulous					NE	Non-Smoking Economy
		OL	Ocean Lagoon					NM	Non-Smoking Reduced Mobility
		OM	Ocean Romantic					NN	NonSmoking Non-Refundable
		ON	Coccoon					O0	Private Pool - Speedboat
		OO	Overwater Ocean					ON	Private Pool - Speedboat Non-Refundable
		OP	Opera					P0	Private-PoolTerrace
		OR	Ocean Reef					P2	Private-PoolTerrace SpaPackage
		OS	Ocean Residence					PB	Private-PoolTerrace Best-Price
		OT	Ocean Terrace					PE	Private-PoolTerrace Economy
		OW	Overwater					PH	Private-PoolTerrace Honeymooners
		P0	Premier Overwater					PN	Private-PoolTerrace Non-Refundable
		P1	Premier					PO	Private-PoolTerrace Offer
		P2	Palace					PP	Private-PoolTerrace Promotion
		P3	Pearl Club					PV	Private-PoolTerrace VipTreatment
		P4	Plus					PZ	Private-PoolTerrace SpecialPackage
		PA	Pearl					Q0	Shared-PoolTerrace
		PB	ParkBuilding					Q3	Shared-PoolTerrace ThallasoPackage
		PD	Palace Superior Deluxe					QN	Shared-PoolTerrace Non-Refundable
		PE	SuperiorSerenity					QO	Shared-PoolTerrace Offer
		PG	Palace Gold Club					QP	Shared-PoolTerrace Promotion
		PH	Plush					QV	Shared-PoolTerrace VipTreatment
		PI	Premium Indulgence Water					R0	Private Pool
		PK	Pocket					R5	Private Pool Action
		PL	Priority Location					RB	Private Pool Best-Price
		PM	Premium					RD	Private Pool Dreamer
		PN	Prince					RE	Private Pool Economy
		PO	Popular					RH	Private Pool Honeymooners
		PP	Palapa					RM	Private Pool Reduced Mobility
		PQ	Superior-Unique					RN	Private Pool Non-Refundable
		PR	Prestige					RO	Private Pool Offer

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		PS	Presidential					RP	Private Pool Promotion
		PT	Premium Water					S0	SharedTerrace
		PU	Superior Upper Floor					SH	SharedTerrace Honeymooners
		PV	Privilege					SP	SharedTerrace Promotion
		PW	Prestige Water					SR	Smoking Room
		PX	Palace Executive					SS	SharedTerrace Senior 55+
		PY	Palace Royal					T0	Terrace
		R0	Resort					T1	Terrace GolfPackage
		R1	Resort Deluxe					T4	Terrace HolidayPackage
		R2	Resort Superior					T8	Terrace ServicePackage
		R3	Resort Standard (ROH)					TA	Terrace Attic
		R4	Resort (ROH)					TB	Terrace Best-Price
		R5	Resort Superior (ROH)					TC	Terrace Low Cost
		R6	Rabdan					TE	Terrace Economy
		RA	Adapted Room					TH	Terrace Honeymooners
		RB	ResortBuilding					TM	Terrace Reduced Mobility
		RC	RoyalClub					TN	Terrace Non-Refundable
		RE	Reethi					TO	Terrace Offer
		RF	Reethi Faru					TP	Terrace Promotion
		RH	RunOfHouse					TQ	Terrace Adults Only
		RI	Al Rimal					TT	Terrace Student
		RL	Residence Lagoon					TV	Terrace VipTreatment
		RN	Regency					TW	Terrace Sol
		RO	Romantic					TZ	Terrace SpecialPackage
		RP	RoyalSuperior					U0	SwimUp-PoolTerrace
		RR	Rock Royalty					UE	SwimUp-PoolTerrace Economy
		RS	Residence					UH	SwimUp-PoolTerrace Honeymooners
		RT	Royal Club Tower					UN	SwimUp-PoolTerrace Non-Refundable
		RU	Regency Executive					UO	SwimUp-PoolTerrace Offer
		RW	Residence Overwater					UP	SwimUp-PoolTerrace Promotion

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		RX	RoyalSuperiorClub					UQ	SwimUp-PoolTerrace Adults Only
		RY	Royal					UV	SwimUp-PoolTerrace VipTreatment
		S0	Spectacular					UZ	SwimUp-PoolTerrace SpecialPackage
		S1	Standard Beach					V0	With Jacuzzi - Seaplane
		S2	Semi-Detached					VE	With Jacuzzi - Seaplane Economy
		S3	Sultan					VP	With Jacuzzi - Seaplane Promotion
		S4	Silver					W0	Without Balcony-Terrace
		S5	Sunset					WB	Without Balcony-Terrace Best-Price
		S6	Secret					WC	Without Balcony-Terrace Low Cost
		S7	Split Level					WD	Without Balcony-Terrace Dreamer
		SA	Al Sahari Secluded					WE	Without Balcony-Terrace Economy
		SB	Superior Beach					WG	Without Balcony-Terrace SingleSaver
		SC	SuperiorClub					WH	Without Balcony-Terrace Honeymooners
		SD	Standard					WK	With Kitchenette
		SE	Serenity					WM	Without Balcony-Terrace Reduced Mobility
		SF	Soneva Fushi					WN	Without Balcony-Terrace Non-Refundable
		SG	Signature					WO	Without Balcony-Terrace Offer
		SH	Superior Charm Beach					WP	Without Balcony-Terrace Promotion
		SK	Sky					WS	Without Balcony-Terrace Senior 55+
		SL	Select					WV	with Premium Veranda and Sharing Pool
		SM	Superior MainBuilding					WZ	Without Balcony-Terrace SpecialPackage
		SN	Sun					X0	Seaplane
		SO	Superior Overwater					XH	Seaplane Honeymooners
		SP	Superior					XP	Seaplane Promotion
		SQ	Sun Aqua					Y0	Plunge Pool
		SR	St. Regis					YN	Plunge Pool Non-Refundable
		SS	Spa Sanctuary					YP	Plunge Pool Promo
		ST	Saadiyat					YV	Plunge Pool VipTreatment
		SU	Standard Upper Floor					Z0	With Jacuzzi - Domestic Flight
		SV	Superior Vista						

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		SW	Sangu Water						
		SX	Super Deluxe						
		SY	Speciality						
		TB	Standalone Beach						
		TC	TowerClub						
		TD	Traders Deluxe						
		TH	Theme						
		TM	Traders Premier						
		TO	Tower						
		TP	Traders Superior						
		TR	Tree						
		TS	Superior Tower						
		TT	Treeptop						
		TV	Tryp VYP						
		TY	Tryp						
		UF	Upper Floor						
		UL	Superior V Level						
		UP	Supreme						
		UQ	Unique						
		UT	Ultra						
		VN	Venetian						
		VR	Red Level						
		W0	Water						
		W1	World (ROH)						
		W2	World Standard (ROH)						
		WA	Waldorf Astoria						
		WB	Wonderful Beach						
		WD	Wind						
		WE	E-Wow						
		WF	Wonderful						

TYPE		GRADE		BASE		VIEW		SUBTYPE	
code	name	code	name	code	name	code	name	code	name
		WL	Wellness						
		WO	Wow Ocean Escape						
		WP	Presidential Water						
		WS	Superior Water						
		WW	Wow						
		XC	Exclusive						
		XL	Relax						
		XO	Deluxe Overwater						
		XP	Premier Deluxe						
		XR	Residence Executive						
		XS	Deluxe Scenic						
		XW	Extreme Wow Ocean Haven						
		YG	Yas Grand						

14 Appendix D Hotel Board code

Board	Description
AI	All Inclusive
AI+	All Inclusive + additional services
AI-	All Inclusive Light
AIU	Ultra All Inclusive
BB	Bed & Breakfast
DO	Dinner Only
FB	Full Board
FB+	Full Board + additional services
HB	Half Board
HB+	Half Board + additional services
LO	Lunch Only
RO	Room Only
DB	Dinner Buffet
SC	Self Catering
AP	Acording to Programme*

*This board is used in accomodation packages only.

15 Appendix E Vehicle codes

TYPE			GRADE			SUBTYPE			BASE		
Code	Name	OTA	Code	Name	OTA	Code	Name	OTA	Code	Name	OTA
S	Shared	90	0	standard	5	0	Undefined		00	Undefined	
P	Private	91	L	Luxury	4	B	Bus	25	MG	meet & greet	
			P	Premium	90	M	Minibus	91	XL	extra-luggage	
			D	Direct	91	V	Van	2	04	4 Seater	104
			S	Speedy	92	T	Taxi	90	06	6 Seater	106
			X	Executive	93	C	Car	1	20	20 Seater	120
			W	Wheelchair Adapted	94	L	Limousine	7	XX	XX Seater	1xx
			V	VIP		S	SUV		LL	Luggage	
			A	Vintage	95	W	WaterTaxi				
			R	Rapid		Z	Strech Limo				
			B	Large		1	Shuttle				
			E	Economy		4	4x4				
			G	On the go		9	Special Vehicle				
			M	Small		2	Luxury Boat				
						3	Speedboat				
						5	Seaplane				
						6	Domestic flight				

Conversion table from the old codes into the new ones:

Old Code	New code	Description
CT	S0000	Common shuttle
DT	SD000	Direct shuttle
PT	P0000	Private
TX	P0T00	Taxi
LM	P0L00	Limousine
ST	SS000	Speedy Shuttle
WT	P0W00	Water Taxi
WA	PW000	Wheelchair Adapted
PS	PP000	Premium Service
PMG	P00MG	Private Meet and Greet

16 Appendix F Car codes

CATEGORY		TYPE		TRANSMISSION/DRIVE		FUEL/AIR COND.	
Code	**Description**	**Code**	**Description**	**Code**	**Description**	**Code**	**Description**
M	Mini	B	2-3 Door	M	Manual Unspecified Drive	R	Unspecified Fuel/Power With Air
N	Mini Elite	C	2/4 Door	N	Manual 4WD	N	Unspecified Fuel/Power Without Air
E	Economy	D	4-5 Door	C	Manual AWD	D	Diesel Air
H	Economy Elite	W	Wagon/Estate	A	Auto Unspecified Drive	Q	Diesel No Air
C	Compact	V	Passenger Van	B	Auto 4WD	H	Hybrid Air
D	Compact Elite	L	Limousine	D	Auto AWD	I	Hybrid No Air
I	Intermediate	S	Sport			E	Electric Air
J	Intermediate Elite	T	Convertible			C	Electric No Air
S	Standard	F	SUV			L	LPG/Compressed Gas Air
R	Standard Elite	J	Open Air All Terrain			S	LPG/Compressed Gas No Air
F	Fullsize	X	Special			A	Hydrogen Air
G	Fullsize Elite	P	Pick up Regular Cab			B	Hydrogen No Air
P	Premium	Q	Pick up Extended Cab			M	Multi Fuel/Power Air
U	Premium Elite	Z	Special Offer Car			F	Multi fuel/power No Air
L	Luxury	E	Coupe			V	Petrol Air
W	Luxury Elite	M	Monospace			Z	Petrol No Air
O	Oversize	R	Recreational Vehicle			U	Ethanol Air
X	Special	H	Motor Home			X	Ethanol No Air
		Y	2 Wheel Vehicle				
		N	Roadster				
		G	Crossover				
		K	Commercial Van/Truck				

Code	Definition	Category	Type	Transmission/Drive	Fuel/Air conditioning
ACAR	Any Standard Vehicle	Any	Any except K, Y,R & H	Any	Any
ALLB	2-3 Door	Any	B,C,E or N	Any	Any
ALLC	2 or 4 Door	Any	Any Except R, H, Y, K P or Q	Any	Any
ALLD	4-5 Door	Any	D, F, G, L, V or W	Any	Any
AELT	Any Elite	N, H, D, J, R, G, U, W	Any	Any	Any
ACPR	Couple/Roadster	Any	E or N	Any	Any
ASPC	Non-Standard Fleet	Any	Any	Any	Any
APUP	Any Pickup	Any	Q or P	Any	Any
AWGN	Any Estate/Wagon	Any	V, F, W or G	Any	Any
AREC	Recreational Vehicle	Any	R or H	Any	Any
ASUV	Any SUV	Any	F	Any	Any
AVAN	Passenger Van	Any	V	Any	Any
ASIX	Any 6+ Pax Van	I, J, S, R, F, G, P, U, L, W, X, O	V	Any	Any
ASEV	Any 7+ Pax van	S, R, F, G, P, U, L, W, X, O	V	Any	Any
AEIG	Any 8-Pax+ Van	P, U, L, W, X, O	V	Any	Any
ANIN	Any 9-Pax+ Van	L, W, X, O	V	Any	Any
AFWD	Any 4WD/ AWD	Any	Any	N, C, B or D	Any
ATRV	All Terrain	Any	J	Any	Any
ACGO	Commercial Truck	Any	K	Any	Any
ALMO	Limousine	Any	L	Any	Any
ASPT	Sport	Any	S	Any	Any
ACNV	Convertible	Any	T	Any	Any
AOFR	Special Offer Car	Any	Z	Any	Any
AMNO	Monospace	Any	M	Any	Any
AMTO	Motor Home	Any	H	Any	Any
AMCY	2-Wheel Vehicle	Any	Y	Any	Any
ACRS	Crossover	Any	G	Any	Any
AMAN	All Manual Transmission	Any	Any	M, N, C	Any
AUTO	All Automatic Transmission	Any	Any	A, B, D	Any
APET	All Petrol Powered Vehicles	Any	Any	Any	N, V, R, Z
ADSL	All Diesel Powered Vehicles	Any	Any	Any	D, Q
AGRN	Any Lower Emission Vehicles (Hybrid, Electric, LPG, Hydrogen, Ethanol, Multi Fuel)	Any	Any	Any	H, I, E, C, L, S, A, B, M, F, U, X

AHYB	All Hybrid Vehicles	Any	Any	Any	H, I
AELC	All Electric Powered Vehicles	Any	Any	Any	E, C
AHYD	All Hydrogen Powered Vehicles	Any	Any	Any	A, B
AMFP	All Multi Fuel Powered Vehicles	Any	Any	Any	M, F
ACPG	All LPG/Compressed Gas – Powered Vehicles	Any	Any	Any	L, S
AETH	All Ethanol – Powered Vehicles	Any	Any	Any	U, X

17 Appendix G Excursion Category codes

Code	Name	Description
AT	Air Tours	Planes, Helicopters, Ballooning...
BN	Bars,Wine, & Nightlife	Entrances, Wine Tastings, Rentals...
BT	Boat Tours	Cruising, Yachting, Boat Trips, Fishing Trips...
CP	Custom & Private	Custom & Private activities
EX	Excursions	Packaged day trip with programme
GF	Golf	Courses, Green Fees...
MM	Museums & Monuments	Museums & Monuments
OA	Outdoor Activities	Bike or Horse Rides, Walking Tours, Segway Rentals, Climbing, Paintball...
RS	Restaurants	Breakfast, Beverages, Meals...
SE	Shows & Events	Dinner Shows, Sport Events, Concerts...
SF	Safaris	Jeep, Buggy, Quad, etc..
SS	Ski & Snow	Skiing, Snowboarding and other Winter Activities
TP	Theme Parks	Theme Parks
TT	Sightseeing & Tours	Sightseeing Tours, Coach Tour, Shopping Tour...
WS	Wellness & Spa	Wellness Spots, Spas, Hammam, Beauty Salons, Personal Trainer…
WW	Water & Wind	Diving, Surfing, Jet Skiing, Snorkeling, Kayaking, Rafting, Flyboard...

18 Appendix H Excursion Type codes

Code	Name	Description
LA	Leisure & Activities	Leisure & Activities
XA	Excursions & Activities	Excursions & Activities

19 Appendix I Excursion Service codes

Code	Description
AI	All Inclusive
AP	According To Programme
BB	Breakfast
DA	Dinner + Alcoholic drinks
DS	Dinner + Sofdrinks
FB	Fullboard
FD	Fullday
FH	Full Hour
HB	Halfboard
HD	Halfday
HH	Half Hour
IN	Inbound
LA	Lunch + Alcoholic drinks
LS	Lunch + Softdrinks
OT	Outbound
OW	One Way
RT	Return
SO	Snacks
TDO	incl. dropOff only
TFP	incl. transfer by provider
THG	Hotel Guest
TIC	ticket only
TIC	no transport
TNH	Non Hotel Guest
TPU	incl. pickUp only
TRF	incl. pickUp & dropOff
TRF	pick-up & drop-off transport incl.
TRF	incl. pick-up & drop-off
TRP	incl. transfer by provider
TRV	incl. private transfer
WD	with Dinner
WD	Dinner Included
WL	with Lunch
WL	Lunch Included
WT	Wine Tasting Included
XO	Excursion Only

20 Excursion SupplierProductCode

There are currently 3.624 codes. Multilingual description is provided in the messages. Please requeste codelist if required.

Below are listed only the most used ones for your referrence:

Service	Description
TIC	Ticket Only
TRF	Includes hotel pickup-dropoff - generic
TRP	Includes transfer by provider
TPU	incl. pickUp only
TDO	incl. dropOff only
TRV	incl. private transfer
TFP	incl. transfer by provider

21 Appendix J Price Breakdown codes

Main calculation concepts	
AA	Accomodation adult
AC	Accomodation child
AP	Additional pax supplement
EX	Extras
HB,AI,etc	Board (see board codes)
Offer codes	
SPO	Special Offers
DPO	Special date offer
FSO	Free Stay Offers
LMO	Last minute offer
EBO	early booking offer
FBU	Free board upgrade
LSO	long stay offer
EBR	early booking offer (rolling)
AOO	Adult Offers
MSO	Minimum Stay Offers
COO	Child Offers
ASR	Senior Reduction
KGF	Kids Go Free

22 Appendix K RatePlan Codes

RatePlan codes are construced from the below elements
Rate Type(1), Rate Group(1), Rate Refund(1), Rate Sub Type(2)

Rate Type		Rate Group		Rate Refund		Rate Sub Type	
Code	**Description**	**Code**	**Description**	**Code**	**Description**	**Code**	**Description**
0	Rates	0	undefined	0	Undefined	00	Undefined
R	Retail rates	H	Hotel only	N	Non refundable	A0	Advanced Purchase
S	Static rates	P	Packaging	S	Semi-flexible	A2	Advanced Purchase 2
F	FIT Rates	O	Opaque	F	Flexible	A3	Advanced Purchase 3
B	BAR rates	R	Rack			P0	Promotional Rate
						P2	Promotional Rate 2
						P3	Promotional Rate 3
						P4	Promotional Rate 4
						P5	Promotional Rate 5

						P6	Promotional Rate 6
						P7	Promotional Rate 7
						P8	Promotional Rate 8
						P9	Promotional Rate 9
						01	[1]
						02	[2]
						03	[3]
						04	[4]
						05	[5]
						06	[6]
						07	[7]
						08	[8]
						09	[9]

Where in **Rate Type** column the elements mean:
0 → If the character is 0 would say that the value has been not defined – the rate stays unchanged like in the basic contract edition.
B → Bar - best available rates (changing due to rate updates)
S → Static – unchanged contract rate till the time of a promotion or an offer introduction
F → FIT - free individual traveller rates
R → Retail – advised end-price
Rate Group:
H → Hotel only - rates valid when booking contains only hotel
P → Packaging - rates valid when booking contains hotel + another product
O → Opaque - hotel rates must not be visible for end consumer
R → Rack - walk-in hotel rates for end consumer
Rate Refund:
N→Non refundable - immediately after booking; Nonrefundable rooms can be also still communicated within the RoomCode as a last character like it used to was (RMSD00000N)
S→ Semi-flexible – cancellation without fees up to 12 hours after booking
F→ Flexible – cancellation without fees up to 24 hours after booking
And in **Rate Sub Type**:
A→ Advanced Purchase - booking has to be paid before confirming
P→ Promotion rate

23 Appendix L Hotel segmentation

Segment	Description
Extra Care	Hotel has taken all possible measures in terms of hygiene and virus control
Environmentally Committed Hotel	Hotel has taken all possible measures to protect the environment
Gay friendly	….

24 Appendix M Activity codes

Category	Category name	SourceID	Description
EX_DIFFIC	Difficulty	EX_DIF_1	Easy
EX_DIFFIC	Difficulty	EX_DIF_2	Moderate
EX_DIFFIC	Difficulty	EX_DIF_3	Hard
EX_INCL	What`s included	EX_INCL_ALLADM	All admissions to sights
EX_INCL	What`s included	EX_INCL_DRINK	Drinks
EX_INCL	What`s included	EX_INCL_FOOD	Meals
EX_INCL	What`s included	EX_INCL_HPD	Hotel pickup and drop-off
EX_INCL	What`s included	EX_INCL_O	Other:
EX_INCL	What`s included	EX_INCL_SNACKS	Snacks
EX_INCL	What`s included	EX_INCL_TG	Guide
EX_INCL	What`s included	EX_INCL_TIPS	Gratuities
EX_INCL	What`s included	EX_INCL_TRF	Transport
EX_INCL	What`s included	EX_INCL_WATER	Bottle of water
EX_NEEDED	What`s needed	EX_NEEDED_DCODE	Dress Code required
EX_NEEDED	What`s needed	EX_NEEDED_DLICENCE	Driving License required
EX_NEEDED	What`s needed	EX_NEEDED_OTHER	Other:
EX_NEEDED	What`s needed	EX_NEEDED_PADI	PADI certificate required
EX_NEEDED	What`s needed	EX_NEEDED_PASSID	Passport/ID required
EX_NEEDED	What`s needed	EX_NEEDED_SHOES	Comfortable Shoes
EX_NEEDED	What`s needed	EX_NEEDED_SUB	Sun protection
EX_NEEDED	What`s needed	EX_NEEDED_SWIM	Swimsuit
EX_NOTINCL	What`s not included	EX_NOTINCL_ADM	Admissions to optional sites
EX_NOTINCL	What`s not included	EX_NOTINCL_DRINK	Drinks
EX_NOTINCL	What`s not included	EX_NOTINCL_FOOD	Meals
EX_NOTINCL	What`s not included	EX_NOTINCL_HPD	Hotel pickup and drop-off (optional)
EX_NOTINCL	What`s not included	EX_NOTINCL_O	Other:
EX_NOTINCL	What`s not included	EX_NOTINCL_TG	Guide
EX_NOTINCL	What`s not included	EX_NOTINCL_TIPS	Gratuities (optional)
EX_NOTINCL	What`s not included	EX_NOTINCL_TRF	Transport
EX_TARGET	Audience	EX_TARGET_ADTO	Adults Only
EX_TARGET	Audience	EX_TARGET_ALL	Anybody
EX_TARGET	Audience	EX_TARGET_COUPLES	Couples

EX_TARGET	Audience	EX_TARGET_FAMILY	Families
EX_TARGET	Audience	EX_TARGET_FRIENDS	Friend Groups
EX_THEME	Theme	EX_THEME_CULTURE	Cultural
EX_THEME	Theme	EX_THEME_ENTERT	Entertainment
EX_THEME	Theme	EX_THEME_NATURE	Nature Lovers
EX_THEME	Theme	EX_THEME_PARTYING	Partying
EX_THEME	Theme	EX_THEME_RELAXING	Relaxing
EX_THEME	Theme	EX_THEME_SHOP	Good for Shopping
EX_THEME	Theme	EX_THEME_SIGHTS	Sightseeing
EX_THEME	Theme	EX_THEME_SPORT	Adventurous
EX_THEME	Theme	EX_THEME_WATER	Water Activities
EXCURSION	Key Details	EX_CIRTIME	Reporting/Check-In time prior to service
EXCURSION	Key Details	EX_ICONF	Instant Confirmation
EXCURSION	Key Details	EX_LANGSPOKEN	Languages spoken
EXCURSION	Key Details	EX_MVOUCHER	Mobile Voucher accepted
EXCURSION	Key Details	EX_OTHERD	Other:
EXCURSION	Key Details	EX_PVOUCHER	Printed Voucher accepted
EXCURSION	Key Details	EX_WHEELCHAIR	Wheelchair Accessible

25 Appendix N Custom Type code definition

Custom Types are used as part of the DRV GlobalType structure (see www.globaltypecenter.de) or as standa alone identifications without reference to DRV-GT's

4 How are CustomTypes coded?

As with GlobalTypes® there are specific encoding rules:

- Coding length must not exceed 11 characters in length.
- Special characters are not used (such as "!"; "Ä", "&", "%", "+", etc.).
- The coding always starts **either** with the three-digit tour operator code (eg "UKH") **or** with the CustomType prefix "CTxx" (which is identical to the GlobalType prefix "GTxx" with a "C" in place of the "G"), in both cases followed by a delimiter "-". You should never start with "GT <digit> <digit>", "ST <digit> <digit>" or "AT <digit> <digit>".
- The remaining seven characters can be defined by the tour operator in an alphanumeric form.

Note: The uniqueness of the CustomTypes can only be guaranteed if you start the coding with the three digit tour operator code.

The maximum length of a CT is 11 chars; conclusively, we have 6 positions left to define. I.e: CTxx-abcdef

Category	CustomType	Description
SOA	CT03-SOASTC	SealOfApproval - Safe Tourism Certified. Spain
	CT03-SOASST	SealOfApproval - Certificate Of Safe Tourism. Turkey
	CT03-SOASTM	SealOfApproval - Safe Travels CPPSIT. Mexico
	CT03-SOACSP	SealOfApproval - Clean and Safe. Portugal
	CT03-SOACCM	SealOfApproval - Certified Compliant COVID-19. Malta
	CT03-SOAAUE	SealOfApproval - Assured DUBAI
	CT03-SOAAPC	SealOfApproval - Advanced Precaution Certified. NORTH CYPRUS
	CT03-SOARST	SealOfApproval - Ready and Safe. Tunisia
General NHSP	CT03-WHO	Compliance of the WHO recomendations and local laws
	CT03-SASCSE	Safe access with sanitary controls to suppliers and employees
	CT03-SRP	Staff Replacement Policy
	CT03-ICDPAA	Intense cleaning and disinfection protocols for all areas
	CT03-SCO	Self Catering Options available
	CT03-DIST2M	General distance of 2 meters
Restaurant	CT03-DK	Disposable Kitchenware
	CT03-TBLD2M	Table distance of 2 meters
	CT03-ICBO	Individual / Closed Bottles only
Pool	CT03-AACRA	Additional adapted Chill-out/ Relaxation areas
	CT03-SBDD2M	SunBed distance of 2 meters
Guest	CT03-SPGAG	Self-protecting gear Available for guests (Masks/ Gloves/ Hand sanitizer)
	CT03-ACTFG	Available Covid-19 tests for guests
	CT03-GIP	Guest Infection Policy
	CT03-TCMFG	Temperature control measures for guests
Housekeeping	CT05-CSR	Clean and sanitized room
	CT05-EDCP	Intensification of disinfection / Cleaning protocols
	CT05-24CICO	24h time between check-out and check-in
	CT05-IO	Individual amenities
	CT05-IWT	Individual wraped Towels
	CT05-CTSC	Clean Towels (service cycle)
	CT05-RDSC	Room disinfection (Service cycle)

Kids Club	CT03-AAKC	Adapted Activities at Kids Club
	CT03-RGGA	Reduced Groups and Guided activities
Spa & Wellness	CT03-ASWT	Adapted Spa / Wellness Treatments
	CT03-ASWRA	Adapted Spa and Wellness Relax Areas
Gym	CT03-SPGG	Self-protecting gear Available in the gym
	CT03-UCRLG	Usage of Changing Rooms/ Lockers in the gym

26 Appendix M Stock Types

Stock Type CodeCode	Stock Type
TR	Transfer -Airport to Resort
CR	Car Rental
AC	Accommodation
CT	Circuits & Tours
FD	Hotel Packages
GI	Groups & Incentives
MP	Other Packages
GA	Guest Assistance
GS	Guides & Other Staff
XA	Excursions & Activities
OA	Outdoor Activities
SF	Safaris
PU	Meeting Points
SA	Sights and Attractions
SZ	Service Zones
GF	Golf
WS	Wellness & Spa
RS	Restaurants
TP	Theme Parks
MM	Museums & Monuments
SE	Shows & Events
BN	Bars,Wine, & Nightlife
ES	Educational Services
TT	Sightseeing & Tours
MI	MICE Services
LP	Licenses & Permissions
IS	Insurances

FT	Fees & Taxes
SS	Ski & Snow
PX	Package of Excursions
CS	Catering Services
CP	Custom & Private
IA	Indoor Activities
TG	Tour Guides
DR	Drivers
MS	Miscellenous
AR	Accommodation + Car
AG	Accommodation + Golf
TRS	Transfer -Seaport to Resort
TUR	Tour Transport
TIT	Inter-Transfer
TAA	Transfer -Airport to Airport
TAS	Transfer -Airport to Seaport
TSS	Transfer -Seaport to Seaport
LA	Leisure & Activities
OP	Other Services
VS	Visa Services
AT	Air Tours
BT	Boat Tours
EX	Excursions
LG	Local Guides
BG	Bus Guide
GIM	MICE
GIS	SERIES
GIO	OTHER GROUPS
GIA	A LA CARTE
WW	Water & Wind
AS	Airport Services
PC	Passes & Cards
HS	Health Services

27 Versions

Date	Version	Name	Revision
23 Mar.. 2007	1.7	Klaus Blass	Previous versions
1 Feb. 2008	2.0	Sam Jaarsma	
04 Dec. 2008	3.0	Klaus Blass	
1-7-2010	4.0	Sam Jaarsma	
1-8-2010	4.01	All	Revision by all teams and commercial
1-10-2010	4.02	Sam Jaarsma	Addition of some initial examples and testcases
18-3-2011	4.03	Sam Jaarsma	• More examples and testcase, incorporation of customer feedback • Better explain 1st child is oldest child • Inclusion of packages • Inclusion of switch to OTA_HotelAvailRQ to return location list in the RS • Inclusion of <sellable product> “roomcode-baseboard” in all examples • Inclusion of stop-sale for board.
	4.04	Sam Jaarsma	• Inclusion of comments field in OTA_HotelResRQ/RS • Inclusion of a pull message for notifications (to be released before 31-5-2011) • Inclusion of Cancelation Policies • CancelByDate better explained • Revision of testcases
	4.05	Sam Jaarsma Alberto Palmer	• Inclusion of multiple room searches in OTA_HotelAvailRQ • Update of room code dimensions • Amended switches for OTA_HotelDescriptiveInfo • Amended enrichment of OTA_HotelAvailRQ • Added switches for specifying Languages • Improved compression doc • Better explained search behaviour for children and infants • Added multi resort search

Date	Version	Name	Revision
	4.06	Sam Jaarsma Alberto Palmer	• Updated OTA_Read response information • Message compression set as mandatory. Old connector deprecated • Age logic changed from booking date to arrival date • Added EchoToken control • Added example short stay supplement with SupplementRule • Added service to obtain all possible elements and values for OTA_HotelDescriptiveInfoRS (development and maintenance) • New Image section structure in OTA_HotelDescriptiveInfoRS • Added early booking discount pre-payment duedate and value in OTA_HotelRes • Enabled multi room booking across multiple hotels and dates in OTA_HotelRes • Added transfer realtime messaging, OTA_Groundxxx • Update Integration test diagram and testcases • Update room code appendix
20/03/2013	4.07	Alberto Palmer Sam Jaarsma	• Rearragned Transfer and Hotel sections • Transfer documentation improved and consolidated • Updated delivery dates for upcoming functionality • Improved Hotel modifications section
29/08/2013	4.08	Alberto Palmer Sam Jaarsma	• Improved OTA_HotelDescriptiveInfo templates • OTA_HotelDescriptiveInfo search by GeoCodes • Added Issues and errata section in OTA_HotelDescriptiveInfo message and Real-time messages. • New delta functionality in OTA_HotelDescriptiveInfo • Added Offer Tags in Search and book messages • Corrected some minor typos in documentation • Improved OTA_ResRetriveRS to accommodate transfer product

Date	Version	Name	Revision
29/11/2013	4.09	Alberto Palmer Sam Jaarsma	• Multiple Client ID's in OTA_HotelDescriptiveInfo request • Added Rent a Car realtime messaging, OTA_Vehxxx • Reworked packaging section, car packaging • New TEST hotels for car packages • New hotel codes • Erratas in search • Touristic destination + StateProvince • Selling company in notifications • Reference hierarchy • Search validations • Added Errata codes
11/09/2015	5.0	Alberto Palmer Sam Jaarsma	• Added excursion messaging • Updated diagrams • Updated document according to actual branding • Updated transport codes with new additions • Vehicle codes removed from ground messaging • Flight info in OTA_GroundBook redesigned • Vehicle codes updated with new values
14/12/2015	5.1	Alberto Palmer Sam Jaarsma	• Added Improvements in OTA_Ground services: default service, seaport and inter hotel support • Added breakdown in OTA_HotelRes • Removed prepayment flag request in OTA_HotelResRQ • Vendor messages (NRN + issues + complimentary extras + offer tags) • Allotment value included in hotel search response • Non refundable rooms • Notification model removed from this document, covered in "OTA notification model" • Travel destination concept • Geo location in OTA_HoteldescriptiveInfo • Refpoint minutes in OTA_HoteldescriptiveInfo • OTA_GroundAvail hotel and area list
	6.0	Alberto Palmer Sam Jaarsma	• Added AP board code in appendix • Resort code reintroduced • Added explanation of the rates per brand in

Date	Version	Name	Revision
			transfer section • Added Infosource 8, extended room descriptions • Summary template finished • Added diagram in cancellation policies • Added Master/child RPHs cannot be repeated in different messages • Inseries concept introduced in section 3.2 • Stock Template restored • OTA_HotelDescriptiveInfoRS main facts section removed, templates covers all the cases • Added language coverage
11/10/2017	6.1	Alberto Palmer Sam Jaarsma	• Added IT and FR room descriptions • Error appendix extended and moved to Axisdata Integration Documentation V1.2 • Added first 60 minutes in cancellation • Updated the max combinations to 1500 elements • Added ota ping • Added OTA_HotelDescriptiveContentNotif • Added OTA_HotelDescriptiveInfo push • Add image improvements • Price breakdown • New transfer product codes • Customer details section created, child ages section removed • Added telephone and email in customer details section • Added better explanation of the cancellation calculation (offset) in Cancelling section • Minor corrections • Max 20 chars in partner reference, moved to general section • Rewritten the max number of stay in search (55) • InSeries section rewritten • New room codes added • Extras Transfer • Extras Excursion • Touractivity check/rewrite • Touractivity – add pickup in book rq • DRV codes in NBC • Removed DPI concept in images

Date	Version	Name	Revision
			• Removed OTA_HotelResModify support • TourActivity Search • TourActivity CXL policies • Uncalculated transfer – service request-rewritten
	6.2	Alberto Palmer Sam Jaarsma	• Price-breakdown rewritten • Max 5 rooms in booking • MF implementation in OTA_Read • OTA_TourActivity rewritten • OTA_TourActivityBook payment id • Added Excursion category codes • Added Excursion pickup hotels • Added non refundable room DRV identification
01.08.2019	7.0	Alberto Palmer Sam Jaarsma Anna Siczek Analía Carrieri	• Removed ResortCode • Added Sort order in images • Added offer codes (SCR) • Added max responses to TourActivity • Update image categories • Transfer search by GeoCodes • OnRequest and service combinability support via MF • Meet and greet support in transfer • Uncalculated transfer - service and price • Booking retrieve enrichment (Multi Function - MFx) • Updated codes in appendix • Availability notification • Excursion Support in OTA_Read • Added Rateplan codes in Appendix • Removed Paging • Removed multiroom with pre calculated combinations • Pickup date and time in OTA_Ground messages • Language parameter in real time requests • Rent a Car removed fom the documentation • Added Activity facts in Appendix
	7.1	Alberto Palmer Sam Jaarsma Anna Siczek	• Provision of full example set of messages for all message types in Postman collection

Date	Version	Name	Revision
		Analía Carrieri	• Updated rate plan codes • Updated OTA_Read retrieve list section • Reviewed OTA_Ground examples • Rateplan options • Hotel Segmentation inclusion and hygiene facts following Covid-19 pandemia • Inclusion of MaxResponses in search request • Optional FCP and FCB inclusion in search results • Deprecated InfoSources 6 and 7 in search enrichment • Added CustomTypes appendix • Added Extras in Vendor Messages • Discontinued “absolute” and “rules” based cancellation policies, the formats are merged, and all attributes of bot set-ups are available in the same structure • Optional Extras
	8.0	Alberto Palmer Sam Jaarsma Anna Siczek Analía Carrieri	• Discontinued OTA_HotelDescriptiveContentNotif • Added language list to OTA_HotelDescriptiveInfoRQ • OTA_Product messages • Further explained use of child age and birthdate • Discontinuing Destination and TravelDestination in Q4/2021
28.02.2023	8.1	Alberto Palmer Sam Jaarsma Anna Siczek	• Limited free-text hotel search to include minimal 3 chars • Q1/2023 We have removed in OTA_HotelDescriptiveInfo the duplicated RoomDescription in GuestRoomInfo|DescriptiveText. We will keep the GuestRoomInfo |MultimediaDescriptions|MultimediaDescription |TextItems|TextItem|Description • Stock template description improved • Flexible search inclusion • Added inclusion of last modified date/time in images meta data in the section of image download • Warning if not all rooms of a multi-room search can be offered.

Date	Version	Name	Revision
			• OTA_HotelResModify reintroduced with minor and major changes, offering optional extras and room+mealplan upgrades • System time-zone is CET • Multi-Contracting inclusion in extended rateplan code logic • Improving Room codes: Merging Subtype and Promo room code elements.
18.04.2023	8.2	Juliana Silveira Anna Siczek Sergio Sánchez	• Added Handling Office in the OTA_HotelResRS in section 4.16 • Appendix 20: Added most used Subservice Excursion codes