

Employee_Management_System_REST_API

1.Created a file DB.json

DB.json

```
{
  "employees": [
    {
      "id": 1,
      "empId": 101,
      "empName": "John",
      "department": "IT",
      "designation": "Software Engineer",
      "salary": 50000,
      "email": "john@abc.com"
    },
    {
      "id": 2,
      "empId": 102,
      "empName": "Akhila",
      "department": "HR",
      "designation": "HR Executive",
      "salary": 45000,
      "email": "akhila@abc.com"
    }
  ]
}
```

2.Open Terminal

- Start JSON Server
- Command:json-server --watch db.json --port 3000

For more details, please visit <https://support.apple.com/kb/n1200000>.

(base) Akhilas-MacBook-Air-2:~ akhila\$ cd ~/Desktop/EmployeeMaangementAPI

(base) Akhilas-MacBook-Air-2:EmployeeMaangementAPI akhila\$ ls

DB.json

(base) Akhilas-MacBook-Air-2:EmployeeMaangementAPI akhila\$ json-server --watch db.json --port 3000

\{^_^}/ hi!

Loading db.json

Done


Resources

<http://localhost:3000/employees>

Home

<http://localhost:3000>


3. Verify in Browser

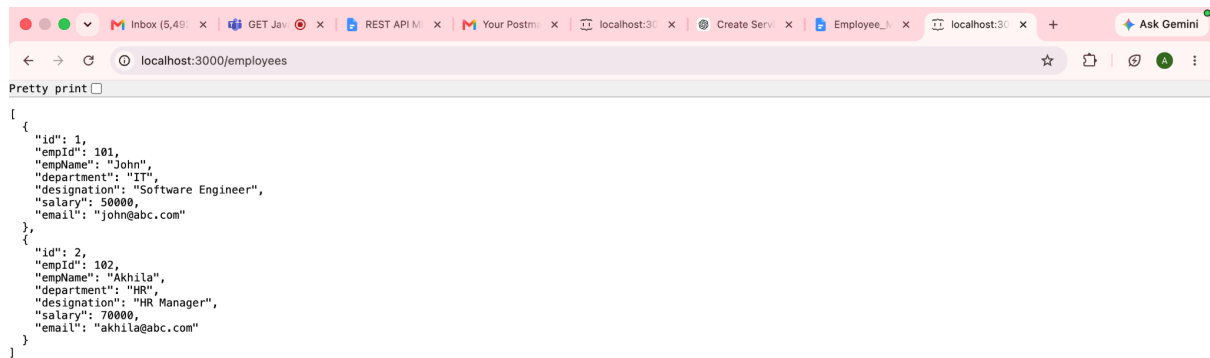

4. Open Postman

a. GET All Employees

- GET <http://localhost:3000/employees>

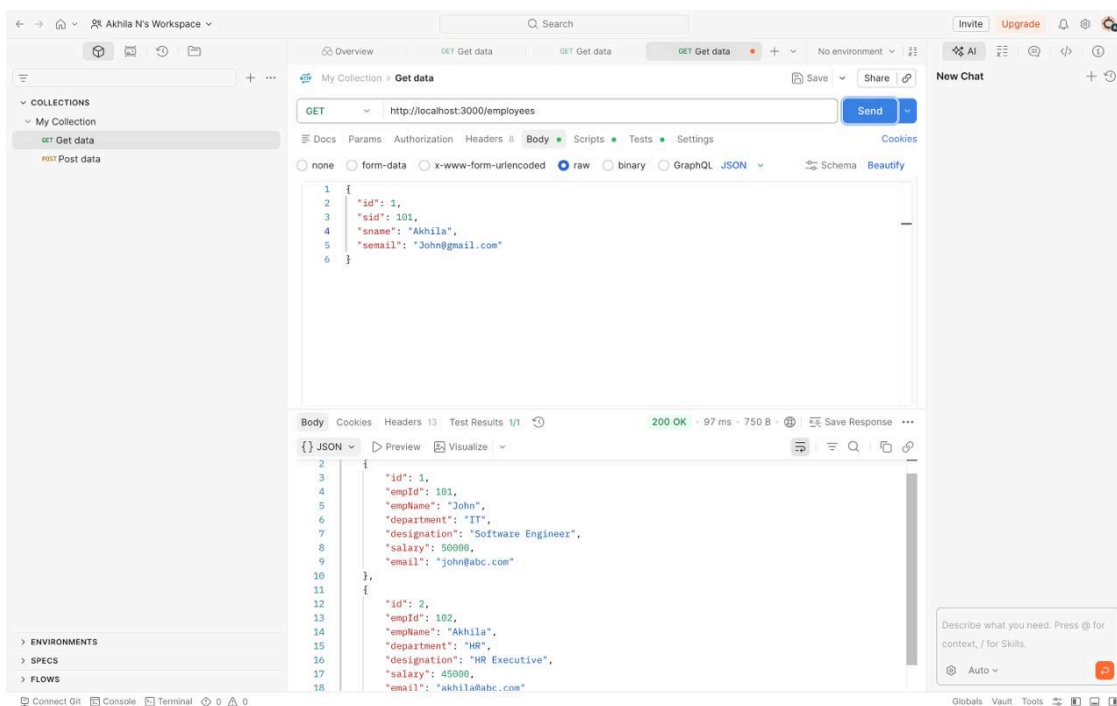

b.GET Employee by ID

- GET <http://localhost:3000/employees/1>

The screenshot shows the Postman interface with a GET request to `http://localhost:3000/employees/1`. The request is in the "raw" format. The response is a 200 OK status with a JSON body containing the following data:

```
{
  "id": 1,
  "empId": 101,
  "empName": "John",
  "department": "IT",
  "designation": "Software Engineer",
  "salary": 50000,
  "email": "john@abc.com"
}
```

The interface also shows the "Body" tab with the JSON response and a "New Chat" button on the right.

c.POST Add Employee

- POST <http://localhost:3000/employees>


The screenshot shows the Postman interface with a POST request to `http://localhost:3000/employees`. The request is in the "raw" format. The response is a 201 Created status with a JSON body containing the following data:

```
{
  "id": 3,
  "empId": 103,
  "empName": "Ramu",
  "department": "Finance",
  "designation": "Accountant",
  "salary": 55000,
  "email": "ramu@abc.com"
}
```

The interface also shows the "Body" tab with the JSON response and a "New Chat" button on the right.


d.PUT Update Employee

- PUT <http://localhost:3000/employees/2>

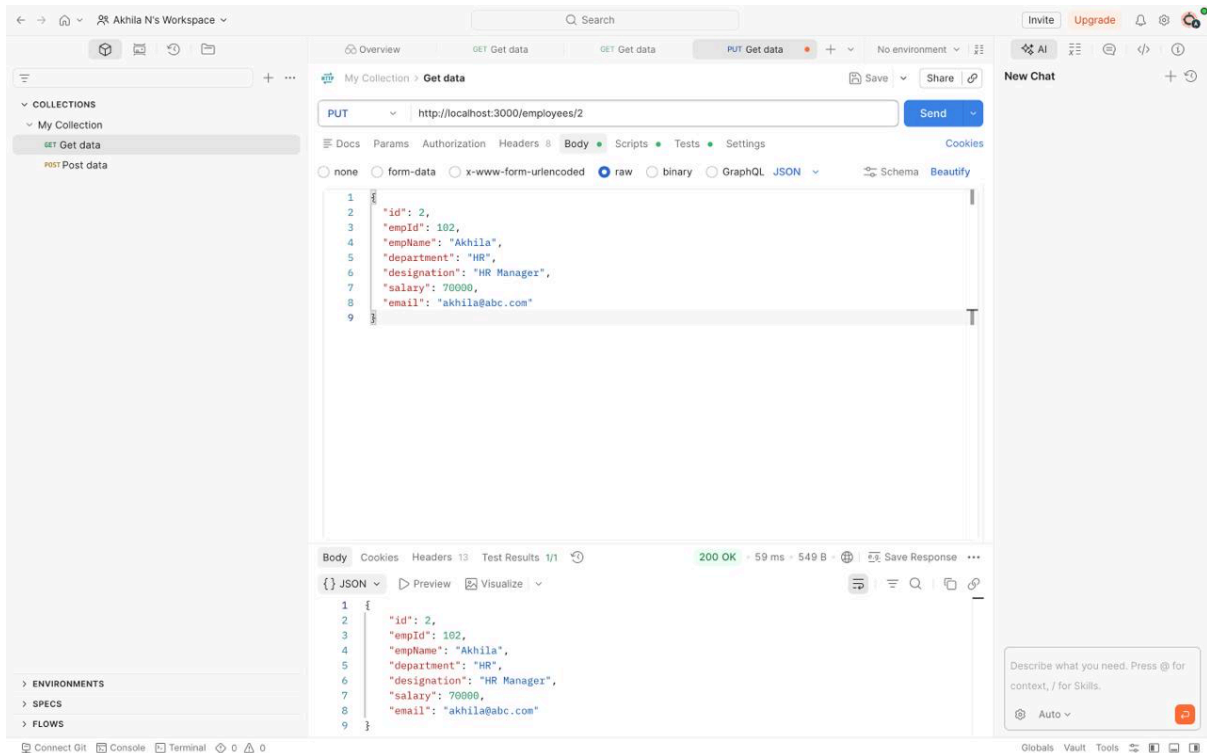

e.DELETE Employee

- DELETE <http://localhost:3000/employees/3>

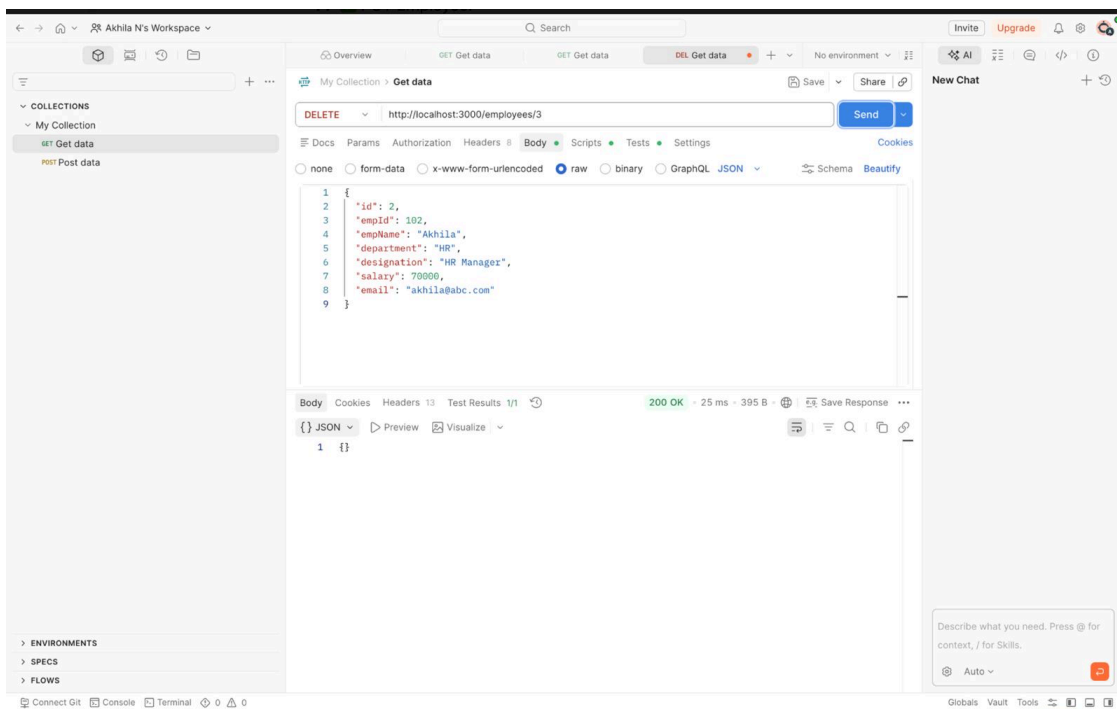

5.Final JSON Server configuration

```
Last login: Sat Jul 11 12:11:29 on ttys001

The default interactive shell is now zsh.
To update your account to use zsh, please run 'chsh -s /bin/zsh'.
For more details, please visit https://support.apple.com/kb/HT208050.
[(base) Akhilas-MacBook-Air-2:~ akhila$ cd ~/Desktop/EmployeeMaangementAPI
[(base) Akhilas-MacBook-Air-2:EmployeeMaangementAPI akhila$ ls
db.json
[(base) Akhilas-MacBook-Air-2:EmployeeMaangementAPI akhila$ json-server --watch db.json --port 3000

\\(^_^)/ hi!

Loading db.json
Done

Resources
http://localhost:3000/employees

Home
http://localhost:3000

Type s + enter at any time to create a snapshot of the database
Watching...

GET /employees 200 29.485 ms - 353
GET /employees/1 200 20.241 ms - 154
POST /employees 201 22.039 ms - 154
GET /employees 200 10.238 ms - 527
PUT /employees/2 200 17.712 ms - 153
GET /employees 200 10.187 ms - 525
GET /employees/3 200 14.668 ms - 154
DELETE /employees/3 200 20.974 ms - 2
GET /employees 200 8.442 ms - 351
█
```