```
(
  (
    type: "two-page-image",
    page1: 0,
    page2: 1,
    odd-image: odd-image,
    even-image: even-image,
    layout: none,
  ),
)
```

# Bookpositing Documentation

A tool to make the putting in page advanced for books.

v0.0.1 2026-11-06 MIT

Book composition tools base on meander.

Neo Teyrall

https://github.com/Neo-Teyrall/bookpositing

In this package you will find tools to put in page your document with a certain number of images that stretch on the two pages, of the put in page corresponding to these images, of the notes of margin, but also of the images of text that adapt automatically to the put in page.

## Table of Contents

**bookpositing . . . . . 3**
I.1 premier pas . . . . . 4
I.2 Liste des image . . . . . 5
I.2.1 Liberté de remplissage . . . . . 7
I.3 image de text . . . . . 8
I.3.1 comment . . . . . 8
I.3.2 composing . . . . . 9
I.3.3 content . . . . . 9
I.3.4 default-image . . . . . 10
I.4 comment . . . . . 10
I.5 marge secondaire . . . . . 10
I.6 layout secondaire . . . . . 10
I.7 layout header . . . . . 11
I.8 layout cut . . . . . 11
I.8.1 paramertrer la marge secondaire . . . . . 11
I.9 bleed . . . . . 11
I.9.1 parametré le bleed . . . . . 11
I.9.2 . . . . . 11
**Index . . . . . 12**

# Part I

# bookpositing


Bookpositing is a tool of page in page of books conceived to be able to put in page the books with images that stretch on several pages. It is based on the tool Meander.

# I.1 premier pas

```
#import "/src/bookpositing.typ"

#set par(justify: true)
#bookpositing.data.set_second-marge(outside: 1cm)

#bookpositing.composing(2,debug : false, {
    bookpositing.content(lorem(750))
    bookpositing.page-image.left-3-4(
        page:0,
        height:30%,
        marge:"second",
        image(
            "/img.png",
            fit: "stretch",
            height:100%,
            width:100%)
    )
})
```

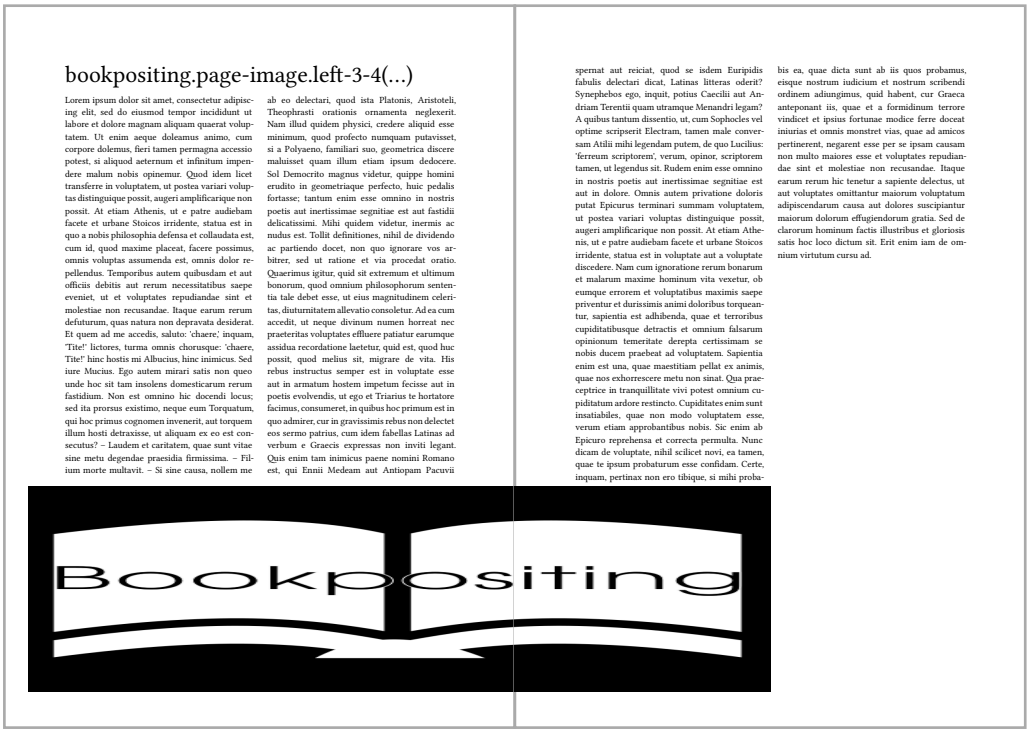


## I.2 Liste des image


A large number of images of double page and their layout associated are configured in the library. They allow to cover a large set of situation.

```
#import "/src/bookpositing.typ"

#set par(justify: true)
#bookpositing.data.set_second-marge(outside: 1cm)

#bookpositing.composing(14, debug: false, {
  bookpositing.content(lorem(6100))
  bookpositing.page-image.full-1-2(
    page: 0,
    bookpositing.default-image,
  )
  bookpositing.page-image.full-2-2(
    page: 2,
    bookpositing.default-image,
  )
  bookpositing.page-image.left-3-4(
    page: 4,
    bookpositing.default-image,
  )
  bookpositing.page-image.left-2-3(
    page: 6,
    bookpositing.default-image,
  )
  bookpositing.page-image.left-1-3(
    page: 8,
    bookpositing.default-image,
  )
  bookpositing.page-image.i1-4(
    page: 10,
    bookpositing.default-image,
  )
    bookpositing.page-image.centred(
    page: 12,
    bookpositing.default-image,
  )
})
```

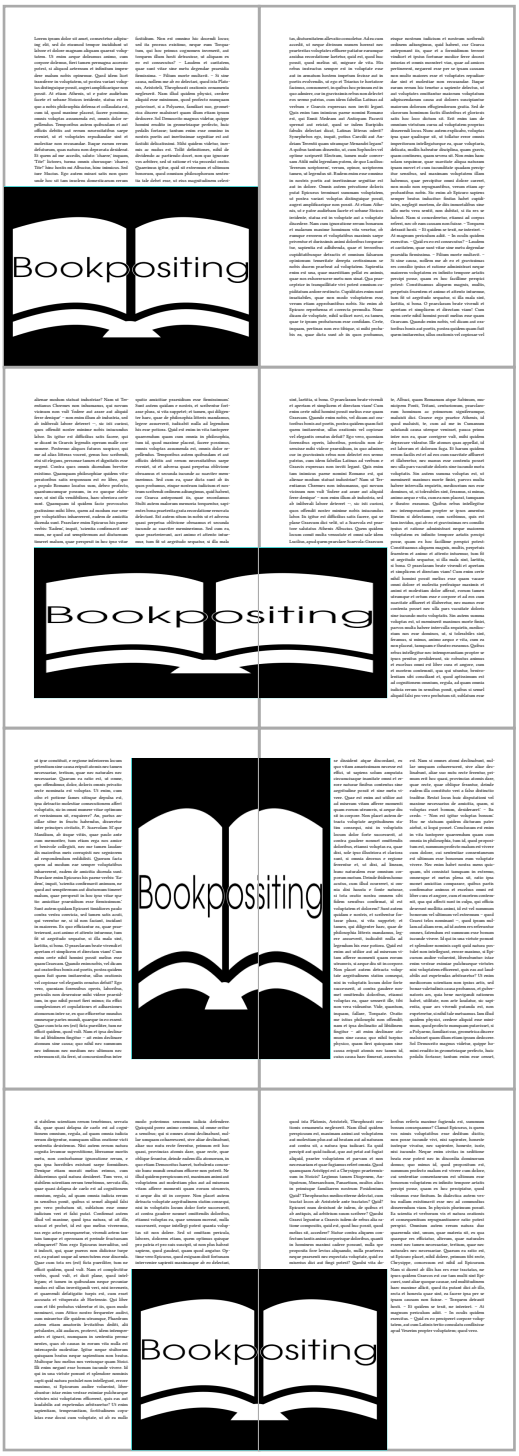

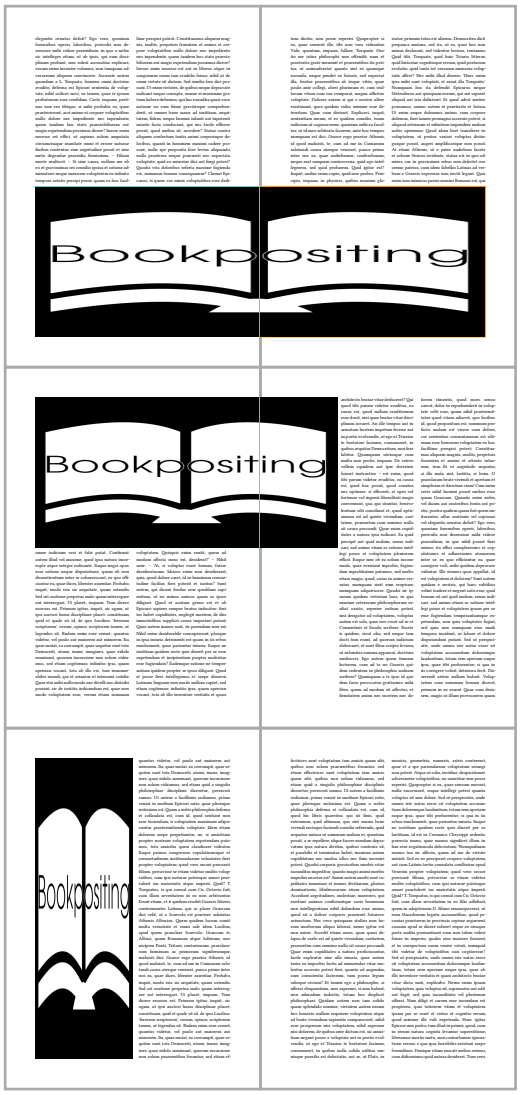
## I.2.1 Liberté de remplissage

The tool reserves a space in which you can place what you want, which can be text, just like an image. Feel free to use it at your convenience.

# I.3 image de text


- comment()
- composing()
- content()


**Variables**


- default-image


## I.3.1 comment

balise de commentaire. Un commentaire qui se place dans la marge et organise la composition en fonction de ce dernier.

### Parameters

```
comment(
  page,
  even,
  placement,
  content
)
```

#### page

the page where display the marge comment, relative to the composing region.

Default: `0`

#### even

the page is a even or odd page

Default: `true`

#### placement

the placement of marge comment

Default: `top + right`

#### content

The content to display

## I.3.2 composing

Cette fonction permet de recueillir les différentes balises de composition qui lui sont données en argument pour les organiser et composer les éléments entre eux. n-pages : Le nombre de pages à composer. force-break: Forcer la composition à commencer sur une page paire ou un paire. seq: La séquence de balise. debug : activer le débugage de meander.

### Parameters

```
composing(
  n-pages,
  force-break,
  seq,
  debug
)
```

#### n-pages

The number of page to compose.

#### force-break

force to breake page to start the composing at even or odd page

Default: `"even"`

#### seq

sequence of commande to compose the document

#### debug

activate the debug display of the meander documentation

Default: `false`

## I.3.3 content

This function contain the document content and fill it in the columne

### Parameters

```
content(
  content,
  container-break
)
```

**content**

The content

**container-break**

break the content column if true

Default: `true`

### I.3.4 default-image

a default image use to test the layout and images

The tool also allows to place images within the text, they respect the yahoots of the main images, so as to guard a coherence. There are two types of images of text, the small images that correspond to the width of a column, and the images wide that fill two columns.

## I.4 comment

The tool allows to place the notes of margin. These latter can be placed in a manner corresponding to a disposition imposed by an image or well will modify the placement of the columns to make correspond to the disposition.

## I.5 marge secondaire

The margin secondary is a second margin that can be defined and used to make sure that the images fit at a background image.

## I.6 layout secondaire

The layouts secondary are layouts which respect the constraints of the main layout while modifying its disposition. It allows to add to the text the regions in which the text stretches on two columns, very practical, to make an entity to a part or well cut a page in two parte.

## I.7 layout header

## I.8 layout cut

### I.8.1 paramertrer la marge secondaire

## I.9 bleed

### I.9.1 parametré le bleed

### I.9.2

# Part II
# Index