


```
/tcp filtered smtp  
/tcp open http  
1/tcp filtered smtp  
1/tcp open hr  
0/tcp filter  
1/tcp fl  
2/tcp  
7/opr  
1/f  
2/  
2/tc  
a/tcp open  
2/tcp open ec  
2/tcp echo echo  
2/tcp open snmp  
e/tcp open echo
```




Cyber Security

VECTOR ILLUSTRATION

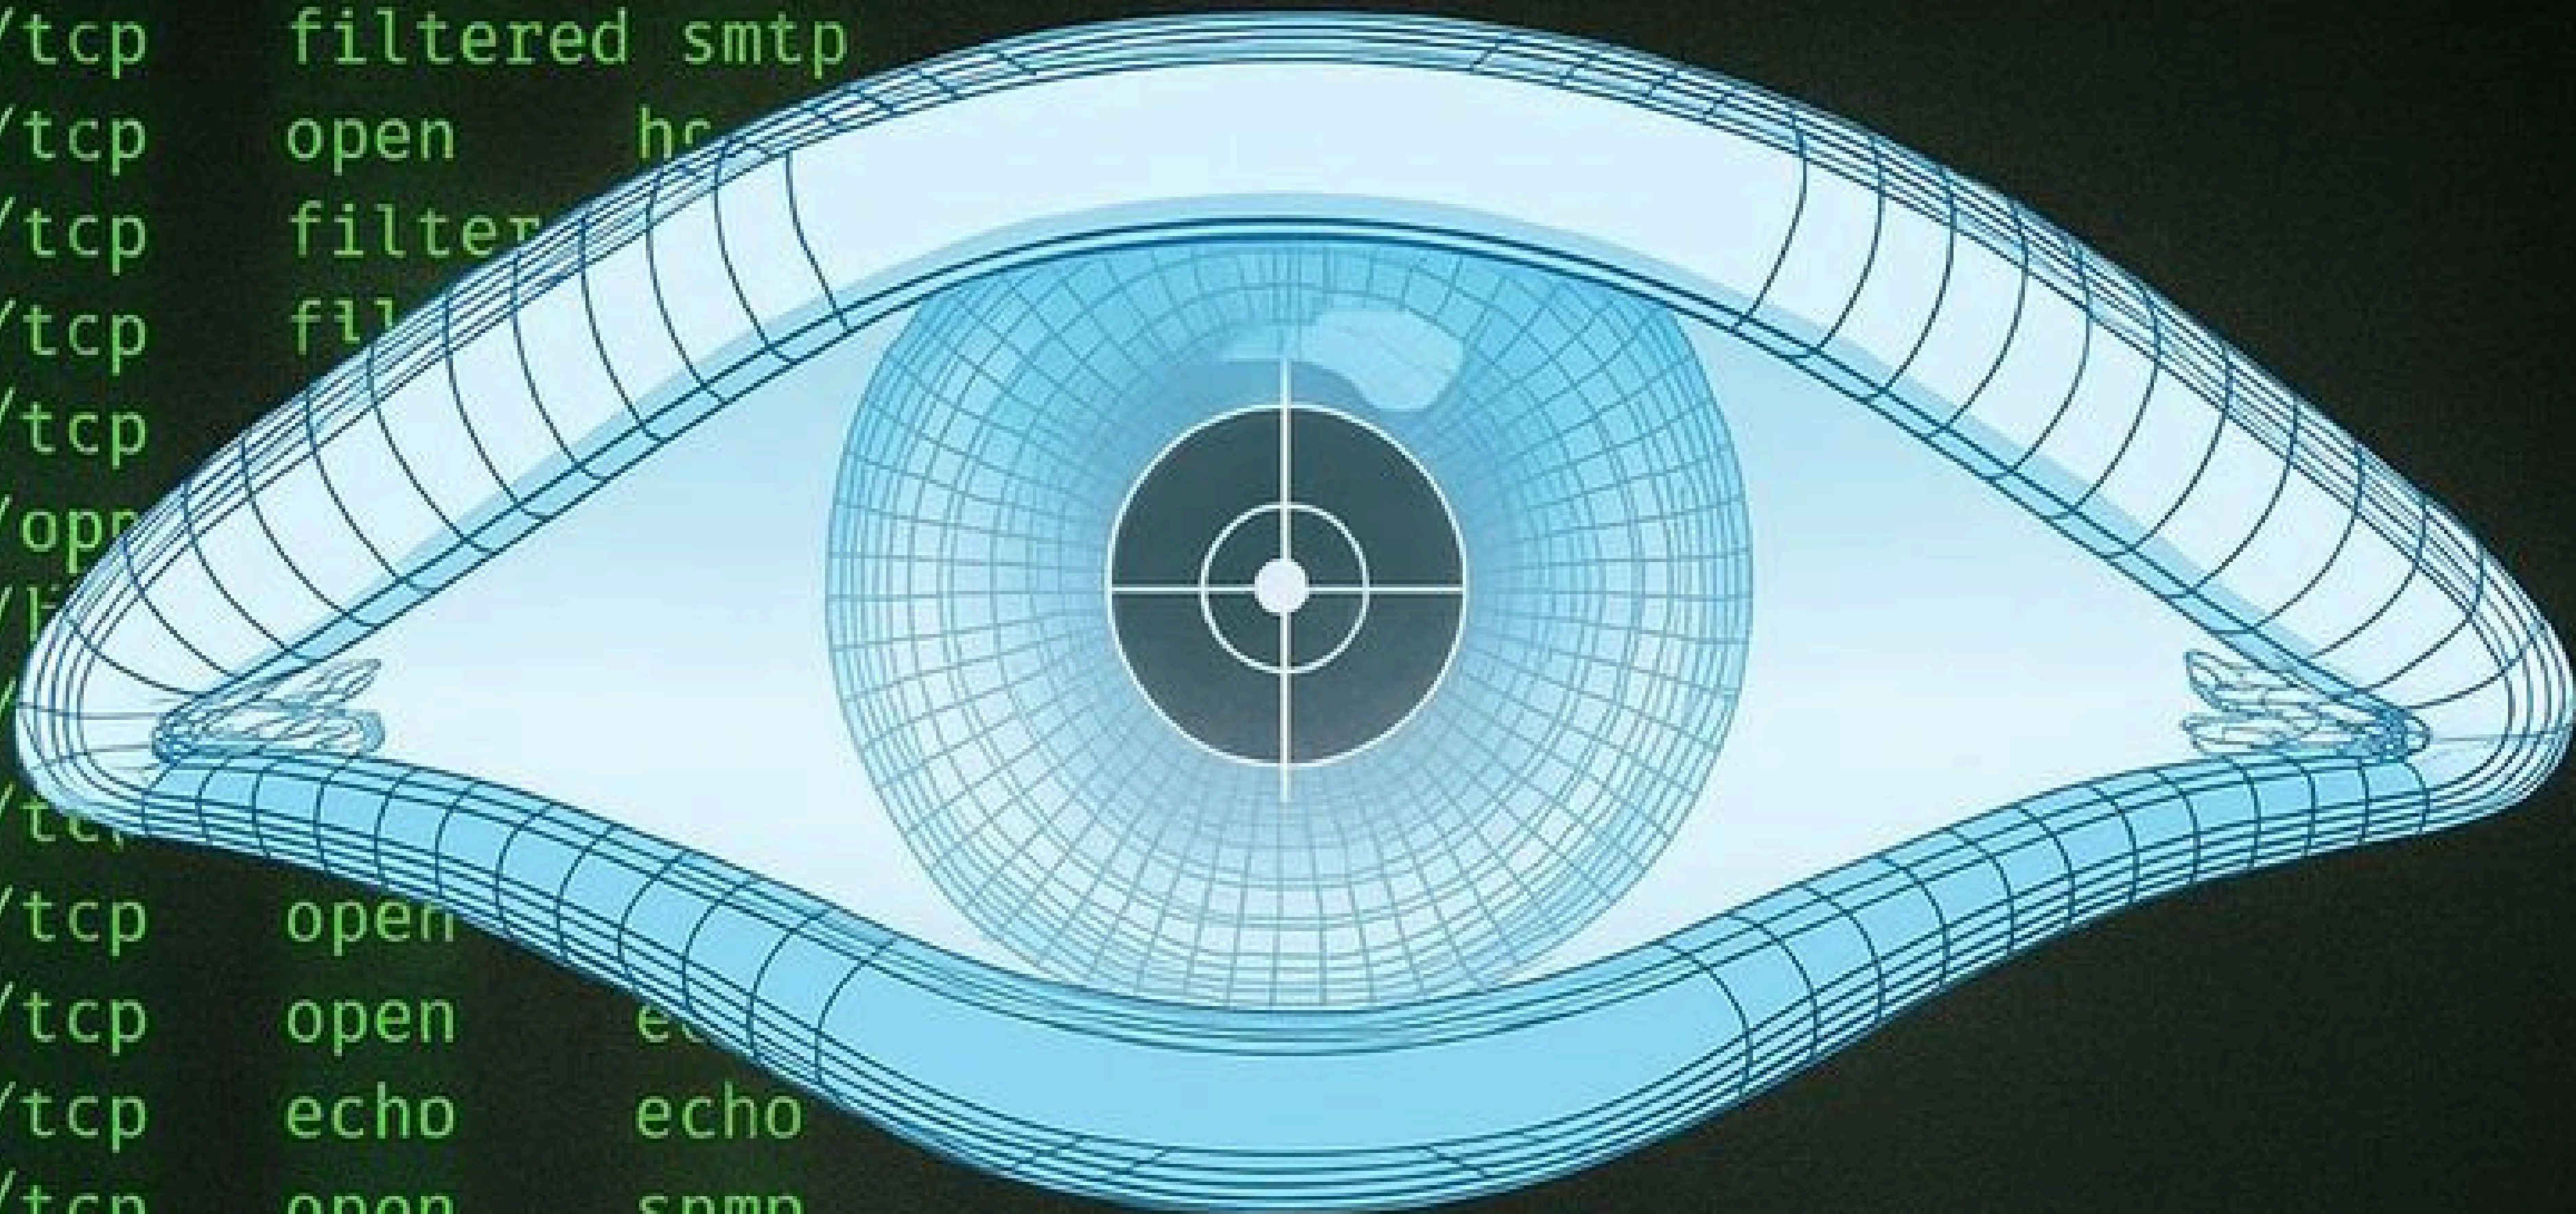



Dev`eloper`

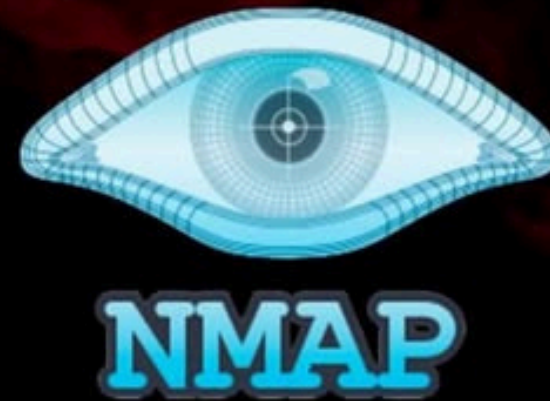

<code>nmap -sn</code>	Ping scan only
<code>nmap -sS</code>	Stealth SYN scan
<code>nmap -sT</code>	TCP connect scan
<code>nmap -sU</code>	UDP port scan
<code>nmap -p-</code>	Scan all ports
<code>nmap -p 80,443</code>	Scan specific ports
<code>nmap -sV</code>	Service and version detection
<code>nmap -A</code>	Aggressive OS & services
<code>nmap -O</code>	Operating system detection
<code>nmap --top-ports 100</code>	Top 100 ports
<code>nmap -sC</code>	Default NSE scripts
<code>nmap --script vuln</code>	Vulnerability scan scripts
<code>nmap --script=default,safe</code>	Safe default scripts
<code>nmap -Pn</code>	Skip host discovery
<code>nmap -T4</code>	Faster timing template
<code>nmap -T0</code>	Slow/stealth timing
<code>nmap -sX</code>	Xmas scan
<code>nmap -oN scan.txt</code>	Save normal output
<code>nmap -oX scan.xml</code>	Save XML output
<code>nmap -oA scan</code>	All output formats
<code>nmap -iL targets.txt</code>	Read targets from file

