
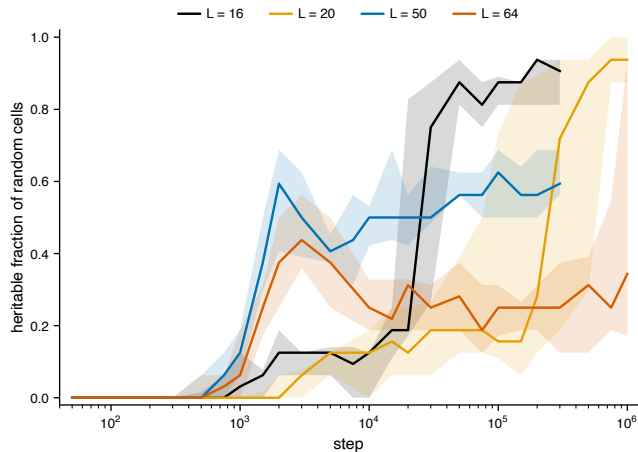
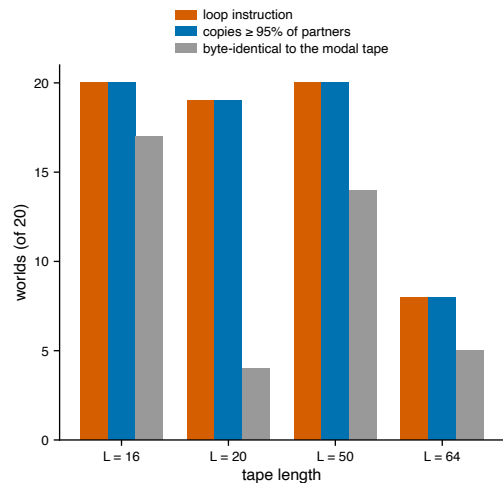


c**e****d**


open · the first replicator



executes partner code


copies 0.68 of partners; damaged in 0.33 of encounters (medians, 20 worlds)

RET NZ · 16 bytes




its written bytes double as its return addresses

JR NZ · 50 bytes




a relative jump of 16 bytes back, through the address wrap

DJNZ · 20 bytes



a counted jump of 27 bytes back, through the address wrap

LDIR · 20 bytes



the block copy repeats in place

closed: copies 1.00 of partners · 0.00 self-damage

closure is a cycle in control flow, not a wall around the bytes