S1/S2: open ≥8/16 partner-fetch encounters; confined 0/16; no first cases in 1–7/16

a **First-replicator route**

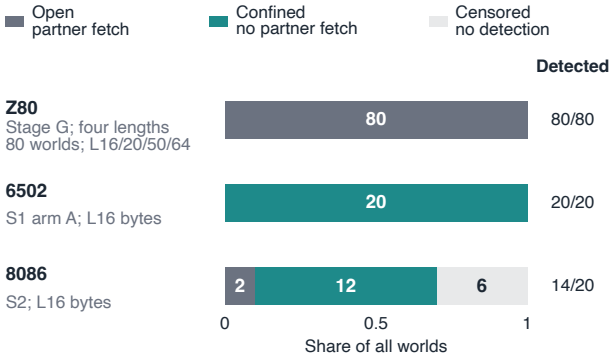

b **Arrival: first detected heritable copier**

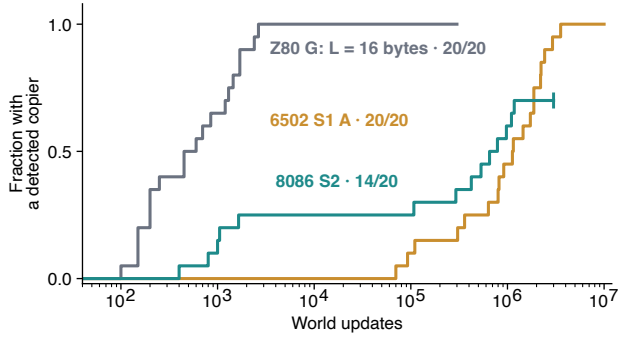

Observation ends: Z80 300,000; 6502 10,000,000;
8086 3,000,000 updates (6/20 undetected; censor tick).

c **Literal-channel expectation and observed beginnings**

Machine	Literal width (bytes / push)	Exact-pusher candidate present (opcode motif)	First route among detected worlds
Z80	2	Yes · 01 c5	Open · 80/80
6502	1	No	Confined · 20/20
8086	2	Yes · B9 51	**12/14 confined; 2/14 open**

Exact pusher: candidate writes its literal instruction bytes into an all-zero partner; routes: evolved worlds

d **8086 convergence: the 5F A4 x y first-copier family (10/14; all ten confined)**

World seed	5F A4 = POP DI; MOVSB								x, y: variable bytes								First detection (world updates)	Frozen full-address class (16/16 encounters)
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
8086001	5F	A4	63	3D	5F	A4	63	3D	5F	A4	63	3D	5F	A4	63	3D	652,500	One-pass class
8086005	5F	A4	73	5D	5F	A4	73	5D	5F	A4	73	5D	5F	A4	73	5D	975,000	One-pass class
8086006	5F	A4	6D	7D	5F	A4	6D	7D	5F	A4	6D	7D	5F	A4	6D	7D	1,650	One-pass class
8086009	5F	A4	61	3D	5F	A4	61	3D	5F	A4	61	3D	5F	A4	61	3D	292,500	One-pass class
8086012	5F	A4	E2	7D	5F	A4	E2	7D	5F	A4	E2	7D	5F	A4	E2	7D	1,100,000	One-pass class
8086013	5F	A4	7D	FD	5F	A4	7D	FD	5F	A4	7D	FD	5F	A4	7D	FD	1,175,000	Loop class
8086014	5F	A4	E9	3C	5F	A4	E9	3C	5F	A4	E9	3C	5F	A4	E9	3C	532,500	One-pass class
8086017	5F	A4	61	BD	5F	A4	61	BD	5F	A4	61	BD	5F	A4	61	BD	422,500	One-pass class
8086018	5F	A4	69	DD	5F	A4	69	DD	5F	A4	69	DD	5F	A4	69	DD	787,500	One-pass class
8086020	5F	A4	63	FD	5F	A4	63	FD	5F	A4	63	FD	5F	A4	63	FD	107,500	Loop class

Frozen class uses full instruction-start addresses: One-pass = no repeated start; Loop = repeated start.
Labels agree in all 16/16 encounters per tape. Post hoc: all ten repeatedly copy mapped ring positions at displacement d = 4 bytes.
G = historical random-code cohort; S1 A = 6502 primary arm; S2 = coherent-fetch 8086 arm.