

a **Historical core C0 / benign: L32, mutation on**

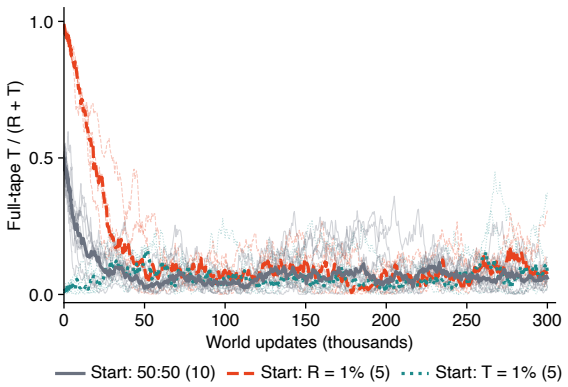


Parentheses count worlds. Thin: worlds; thick: medians
R partial-copy / T full-tape
Benign chemistry: zero executes; lethal chemistry: zero halts

b **Corrected core / benign: L32, mutation on**

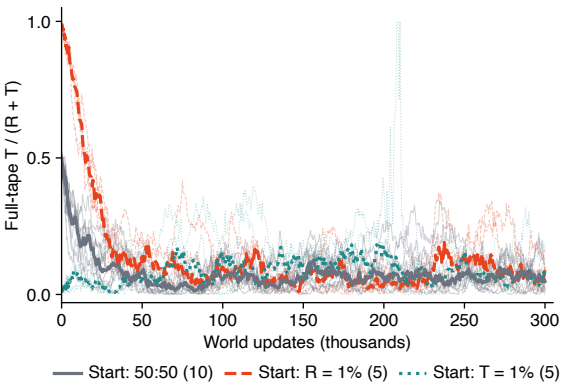


Parentheses count worlds. Thin: worlds; thick: medians
R partial-copy / T full-tape
Benign chemistry: zero executes; lethal chemistry: zero halts

c **Historical core C0 / lethal: L32, mutation on**

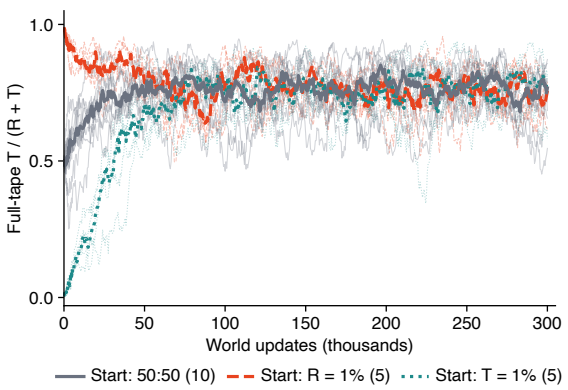

Parentheses count worlds. Thin: worlds; thick: medians
R partial-copy / T full-tape
Benign chemistry: zero executes; lethal chemistry: zero halts

d **Corrected core / lethal: L32, mutation on**

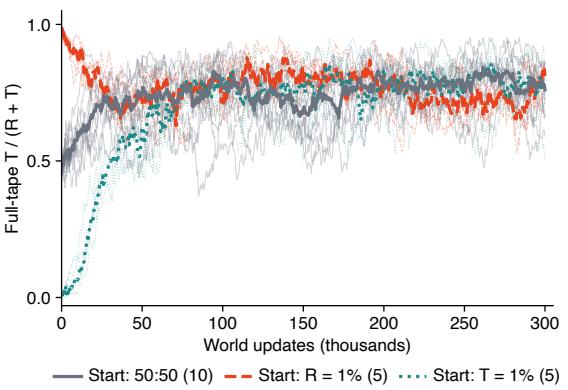

Parentheses count worlds. Thin: worlds; thick: medians
R partial-copy / T full-tape
Benign chemistry: zero executes; lethal chemistry: zero halts

e **Complete endpoints: 110 worlds/core; C1 Corrected, C0 Historical**

					T share		Core share		Tail types	
L bytes	Zero rule	Mutation	Start	Worlds Corr/H	C1	C0	C1	C0	C1	C0
L = 16 bytes										
16	benign	off	50:50	10/10	0.62	0.70	1.00	1.00	1	3
16	benign	on	R at 1%	5/5	0.50	0.33	0.04	0.03	70	56
16	benign	on	T at 1%	5/5	0.58	0.88	0.01	0.04	46	155
16	benign	on	50:50	10/10	0.70	0.52	0.05	0.05	156	134
16	lethal	off	50:50	10/10	0.63	0.32	1.00	1.00	2	2
16	lethal	on	R at 1%	5/5	0.81	0.87	0.72	0.73	3305	3476
16	lethal	on	T at 1%	5/5	0.81	0.81	0.74	0.00	3307	0
16	lethal	on	50:50	10/10	0.86	0.86	0.72	0.72	3234	3336
L = 32 bytes										
32	benign	off	50:50	10/10	0.28	0.25	1.00	1.00	1	2
32	benign	on	R at 1%	5/5	0.09	0.07	0.88	0.80	448	391
32	benign	on	T at 1%	5/5	0.08*	0.08	0.76	0.87	162	396
32	benign	on	50:50	10/10	0.05	0.06	0.85	0.84	229	308
32	lethal	on	R at 1%	5/5	0.81	0.76	0.91	0.88	4477	3879
32	lethal	on	T at 1%	5/5	0.77	0.78	0.88	0.93	4000	4272
32	lethal	on	50:50	10/10	0.76	0.77	0.90	0.92	4046	4135

World medians; Corr = corrected core (C1); H = historical core C0. Benign zero executes; lethal zero halts.
Mutation off: 100,000; on: 300,000 updates. T share = T/(R+T); core share = 5e ed b0-bearing cells /20,000.
Tail types = distinct byte 4–(L–1) sequences/world. *L32 benign T-at-1%: T median n = 4/5 defined ratios;
core/tail medians n = 5/5, including zeros.

f **EXPLORATORY continuation and host controls; registered stability verdict**

Source soup	Execution zero rule	Worlds	Mean T fraction, start	Mean T fraction, end
benign	benign	10	0.071	0.070
benign	lethal	10	0.071	0.110
lethal	benign	10	0.734	0.685
lethal	lethal	10	0.733	0.740

Continuation: historical core C0 Z80 L32; end = 2,000 updates; T fraction = T/(R+T).

Host damage control: historical core C0 Z80 L32, lethal chemistry

Fraction leaving all host bytes unchanged: unmodified 0.0137; detox 0.0128.
25,600 encounters/condition (400 hosts ×64 executors).

Detox replaces payload 0x00/0x76 with non-toxic bytes; host B faces executors from its own soup.

Registered E1 not met: L16: 4/10, L32: 4/10; requires ≥7/10 worlds with final T/(R+T) in [0.3,0.7].

E1: corrected Z80 core (C1), benign chemistry, mutation off, 50:50 starts; L16/L32.
Variable endpoints do not establish neutral drift.