
a **Matched competitions: relative share and absolute persistence**

50:50 (10 worlds) · 1% R in T (5 worlds) · 1% T in R (5 worlds) · Archive: light/open · C1: dark/filled


Z80; L = 32 bytes; 20,000 cells; mutation on. C1 corrects instruction flags/refresh; archive uses older semantics.
Regenerator R preserves a short pattern; transmitter T preserves payload. Hex 5e ed b0 is the copy core. Curves: world medians.

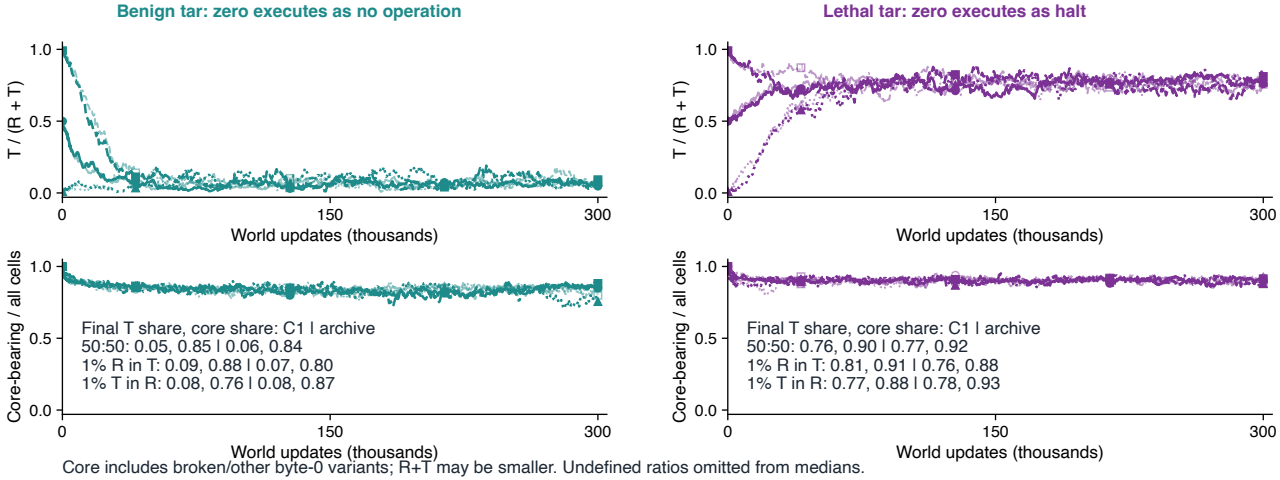

Core includes broken/other byte-0 variants; R+T may be smaller. Undefined ratios omitted from medians.

b **Final world distributions at 300,000 world updates**

Open: archive / filled: C1 implementation

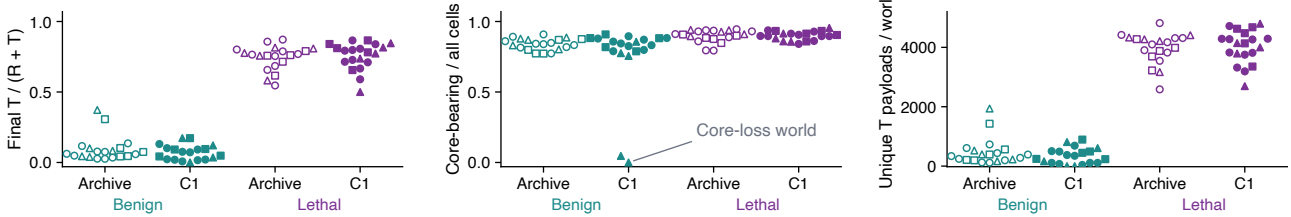

20 worlds/group; ratio has 19 in C1 benign (one zero R+T). Payload = distinct byte strings at positions 4-31.

c **Random-code dial: L = 16; 10 worlds per implementation per p**

Each entry: C1 | archive

p: halt per zero instruction	0	0.01	0.03	0.1	0.3	1
Open-first (out of 10)	10 | 10	10 | 10	10 | 10	9 | 10	4 | 2	0 | 0
T-majority (out of 10)	0 | 1	1 | 1	1 | 1	3 | 1	3 | 6	8 | 6
KM median to first confined copier (k updates)	32.5 | 18	42.5 | 42.5	60 | 60	80 | 75	212.5 | 57.5	115 | 52.5

Open-first copier executes partner; T-majority is > half of heritable cells at 300k updates. Counts may overlap.
KM event = first confined copier (no partner fetch in 16 tests); median includes nondetections, censored at 300k.
Heritable = offspring reproduces, distinct from motif counts above. Each zero instruction halts with probability p.