


OPTION C — Neo Small (public, cost-optimised)


Prepared for Example Customer () — · UK South · neo-small.bicep · {E}-{ORG}-NEOLOGIK-UKS-RG · v1.0 · July 2026

EXTERNAL / INTERNET

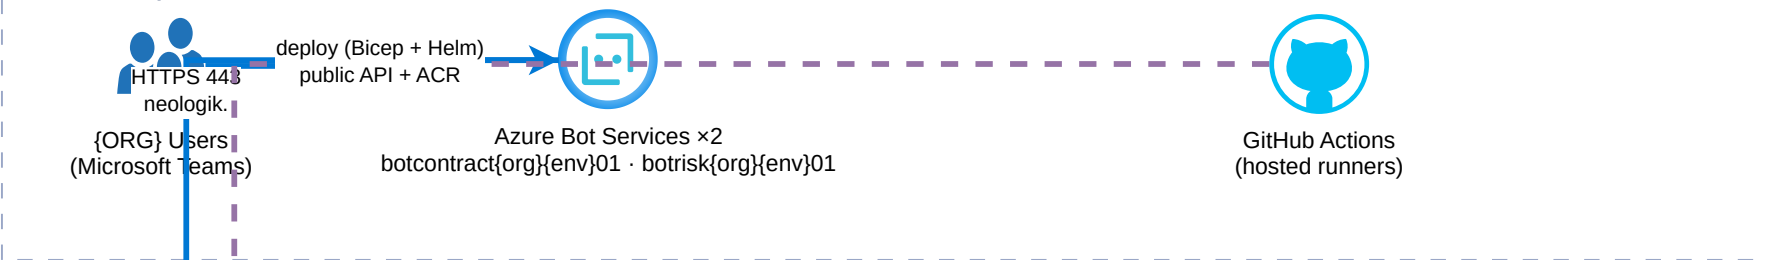


Cost-optimised profile: PUBLIC network access (no Private Endpoints, no Bastion, no App Gateway) · public AKS · NGINX via Web App Routing add-on · ACR Standard · logs 30d · AKS start/stop automation (~65% compute saving)

AZURE SUBSCRIPTION ({ORG}) — {E}-{ORG}-NEOLOGIK-UKS-RG · UK South · PaaS: public endpoints (firewall + Entra ID / PRAC / keys in Key Vault)

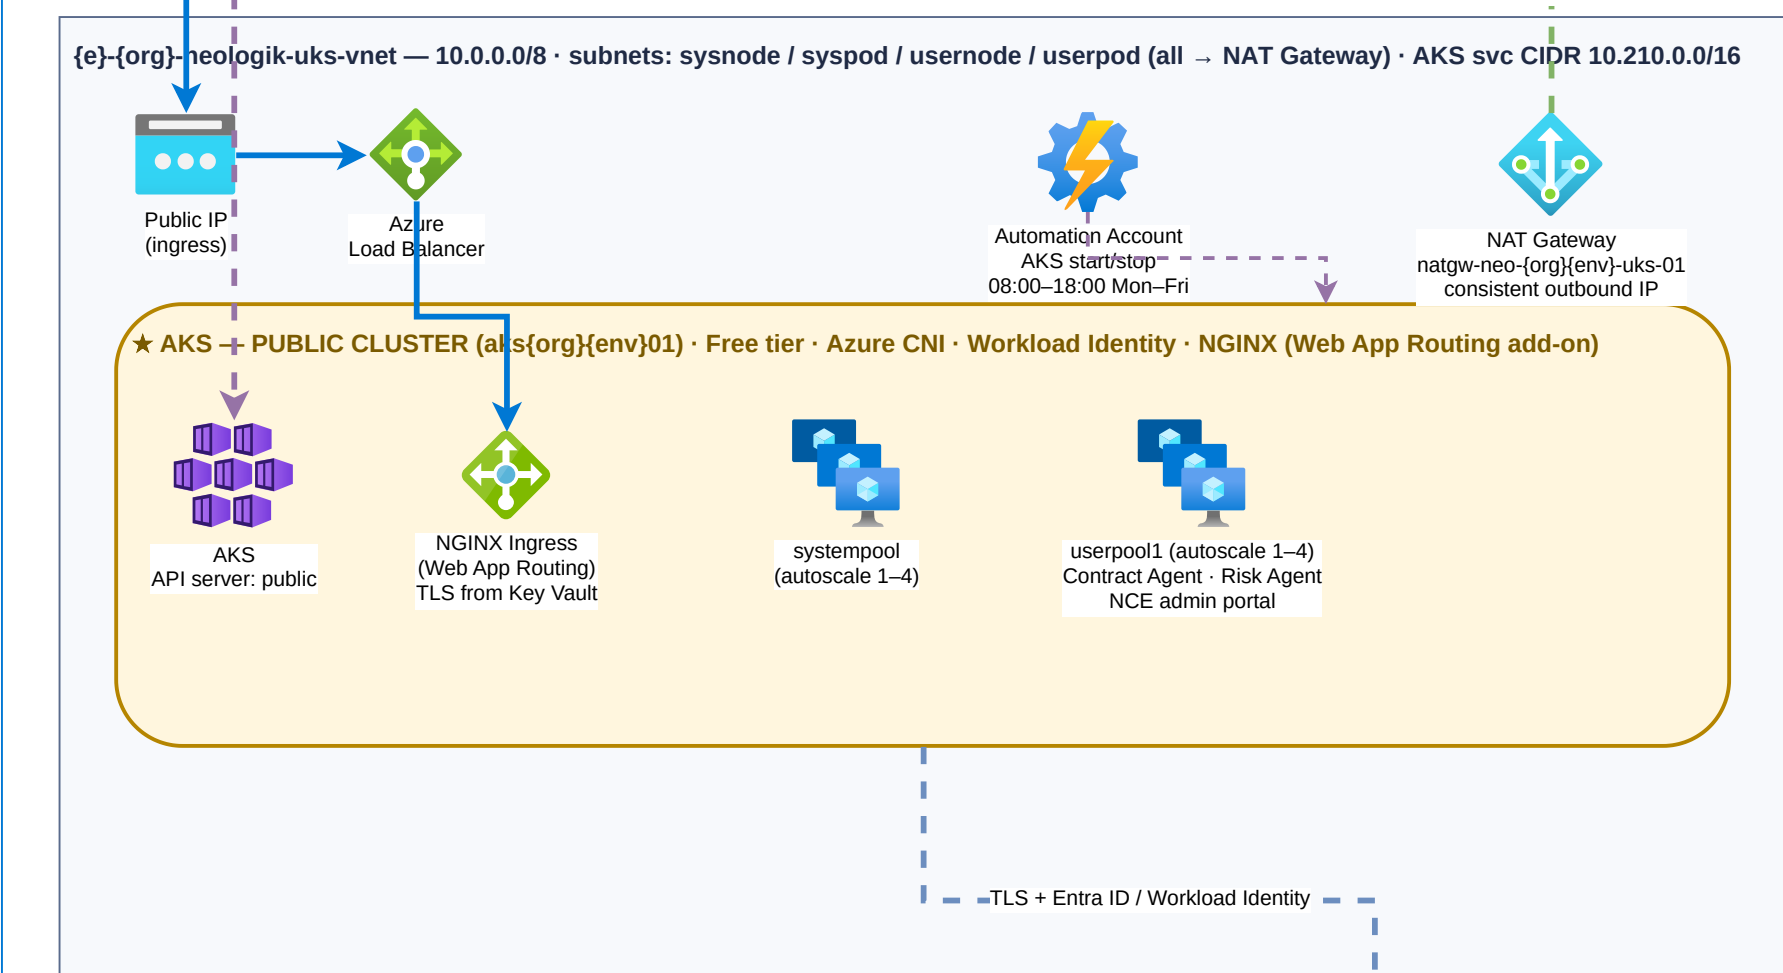

MONITORING

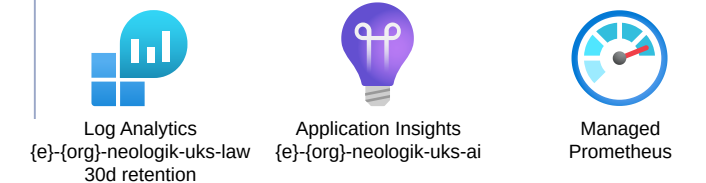


{ORG} BOT AGENTS (workload identities)

Contract Agent — clause analysis, compliance
/api/v4/contract/messages · idaksworkloadidcontract{org}{env}01


Risk Agent — risk assessment, mitigation
/api/v4/risk/messages · idaksworkloadidrisk{org}{env}01

RBAC: KV Secrets User · Blob Contributor (stfiles) · OpenAI User · Search Index Contributor · Cosmos SQL role

LEGEND

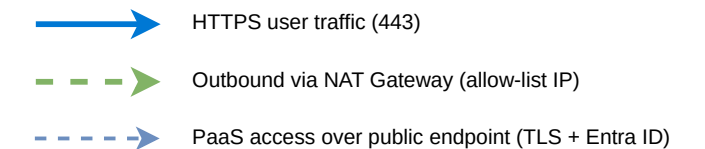

PaaS SERVICES — public endpoints · accessed via Entra ID / Workload Identity / Key Vault secrets

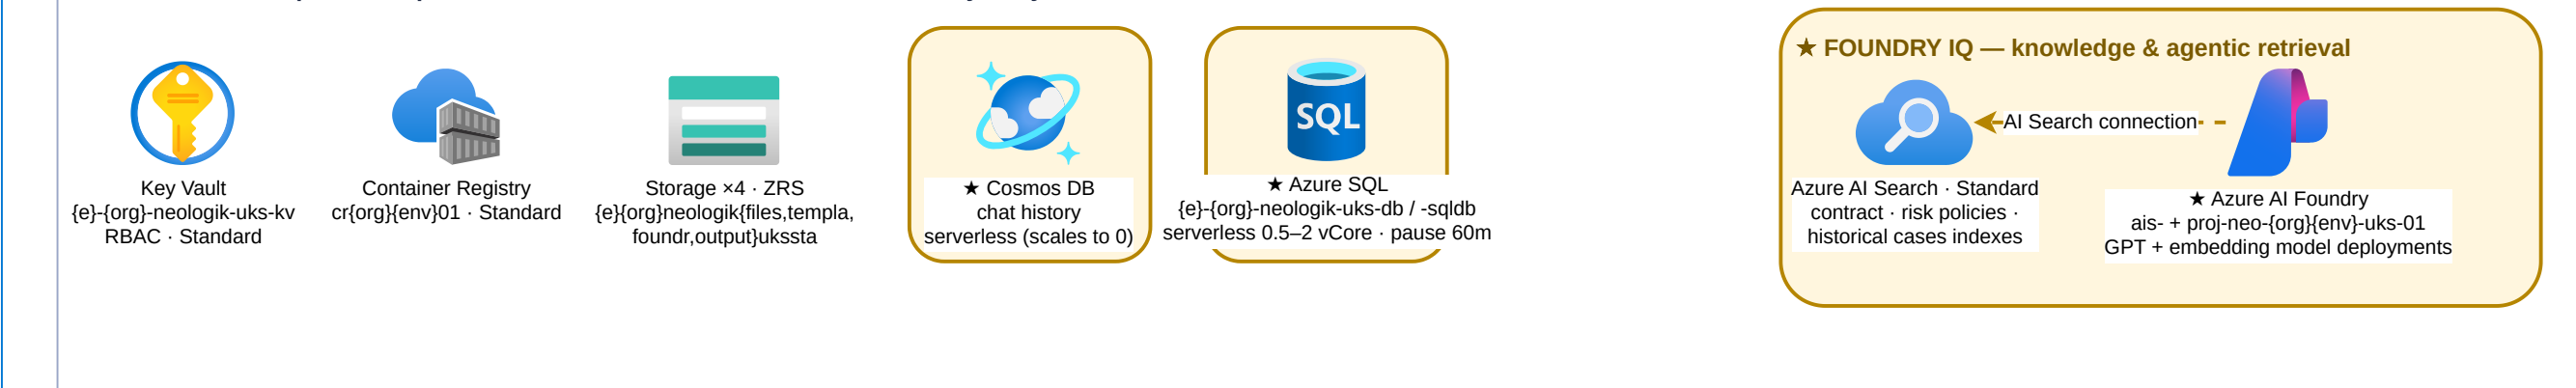

MANAGED IDENTITIES & DEPLOYMENT STORAGE

Onboarding-created (in resource group, before deployment):

- neologik-script-runner-service-connection-{org}{env} — Contributor (subscription) · Key Vault Secrets Officer + Azure Bot Service Contributor (RG)
- neologik-sql-managed-identity-{org}{env} — Directory Readers (Entra ID)

Infrastructure (neo-small.bicep): idakscaler{org}{env}01 (Network Contributor) · idakskubelet{org}{env}01 (AcrPull) · idtestrunner{org}{env}01 · Web App Routing + Key Vault Secrets Provider (system-assigned)

Workload identities (AKS OIDC-federated): idaksworkloadid{nce-ui, nce-api, ingest-api, file}{org}{env}01 — plus the Contract & Risk bot identities detailed above



Deploy Storage

Deployment storage account (onboarding script, not Bicep)
stneodeploy{org}{env}uks01 · Standard_LRS · StorageV2
Entra-ID auth only (shared-key & blob public access disabled)
Containers: certificate (client TLS PFX) · json (config) · logs
Created before the VNet exists; supplies the TLS cert consumed at ingress deployment.