

# LuckyDoll, an analysis package for the AIDA detector

Vi Ho Phong

A preliminary manual  
October 28, 2016

## Contents

<b>1</b>	<b>Changelog</b>	<b>2</b>
1.1	October 28, 2016 . . . . .	2
1.2	October 26, 2016 . . . . .	2
<b>2</b>	<b>Introduction</b>	<b>3</b>
2.1	What This is About? . . . . .	3
2.2	LuckyDoll main classes and what are they good for . . . . .	3
2.3	LuckyDoll main programs . . . . .	4
<b>3</b>	<b>LuckyDoll basic: How to run it?</b>	<b>4</b>
3.1	Installation . . . . .	4
3.2	Convert AIDA full data . . . . .	5
3.3	Convert AIDA partial data . . . . .	5
<b>4</b>	<b>Advance topics: Understanding LuckyDoll</b>	<b>5</b>
4.1	How to read the timestamp in AIDA . . . . .	5
4.2	How the clustering algorithm works . . . . .	6
4.3	How to handle the transient time after the implantation event . .	6

# **1 Changelog**

## **1.1 October 28, 2016**

A faster clustering function has been added. About 25% improvement in the overall performance.

## **1.2 October 26, 2016**

A almost final version released

## 2 Introduction

### 2.1 What This is About?

LuckyDoll is a data analysis package which is used for analyzing the data from AIDA detector.

The AIDA detector is a new generation implantation detector which is specifically designed for decay experiment at fast RI beam facilities. More information about AIDA can be found at [2]

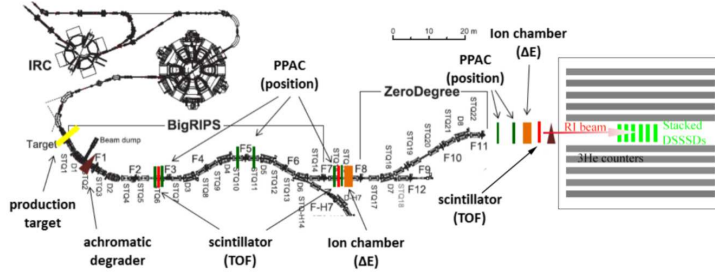


Figure 1: A schematic view of the BRIKEN setup

The development of the LuckyDoll package is governed by a number of principles:

- Capatable to analyze a large amount of data from both implantation and decay events within a reasonable computing time so that it can be used for semi-online analysis during the experiment
- Comprehensive data structure
- Easy to understand, easy to use
- Produce output data with a mimized the number of the background and unwanted events.

### 2.2 LuckyDoll main classes and what are they good for

LuckyDoll package is divded into several classes, each is programed to perform a particluar task

**AIDAUnpacker** class handles the decoding of the MIDAS data and convert it into the "hits".

**BuildAIDAEvent** class is used to reconstruct the decay and implantation events from the energy deposition in the strips of the silicon detector. The reconstruction is based on timing and spatial correlation. The implementation of the class is as follow:

- Open files, initialize the Event Builder object
- ```

TFile* ofile = new TFile(OutFile,"recreate");
ofile->cd();

```

```

    ///! Book tree and histograms
    TTree* treeion=new TTree("ion","tree_ion");
    TTree* treebeta=new TTree("beta","tree_beta");
    TTree* treepulser=new TTree("pulser","tree_pulser");

    BuildAIDAEvents* evts=new BuildAIDAEvents;
    evts->SetVerbose(Verbose);
    evts->SetFillData(true);
    evts->BookTree(treeion,treebeta,trepulser);
    evts->SetMappingFile(MappingFile); //must be set first
    evts->SetThresholdFile(ThresholdFile); //must be set first
    evts->SetCalibFile(CalibrationFile);
    evts->SetAIDATransientTime(TransientTime);
    evts->SetEventWindowION(WindowIon);
    evts->SetEventWindowBETA(WindowBeta);
    evts->Init(R10_0);

```

- Event loop (similar with analoop)

```

while(evts->GetNextEvent()){
    if(evts->IsBETA()) evts->GetAIDABeta()->GetCluster(0)->GetHitPos
    else evts->GetAIDAIon()->GetCluster(0)->GetHitPositionX();
    evts->GetAIDAIon()->GetCluster(0)->GetEnergy();
    evts->GetAIDAIon()->GetCluster(0)->GetTimestamp();
}

```

- Write tree and close files

```

treeion->Write();
treebeta->Write();
treepulser->Write();
ofile->Close();
}

```

## 2.3 LuckyDoll main programs

The Lucky main programs are built on top of the main classes to perform some paticular analysis jobs.

# 3 LuckyDoll basic: How to run it?

## 3.1 Installation

....

### Prerequisites

- gcc
- cmake version  $\geq 6$

- CERN **root** version  $\geq 5.34$

### Installation Steps

```
git clone https://github.com/vihopong/LuckyDoll.git
cd LuckyDoll
cd ../
mkdir build_LuckyDoll
cd build_LuckyDoll
cmake ../LuckyDoll
make
```

## 3.2 Convert AIDA full data

```
$ ./aidafull
AIDA event builder
use ./aidafull with following flags:
[-a <char* >: AIDA input list of files]
[-o <char* >: output file]
[-wi <long long>: Ion event building window]
[-wb <long long>: Beta event building window]
[-wd <long long>: Fast Discriminator Scan window]
[-v <int >: verbose level]
[-map <char* >: mapping file (default: FEE_table.txt)]
[-cal <char* >: calibration file]
[-thr <char* >: threshold file]
[-f <int >: fill data or not: 1 fill data 0 no fill (default: 1)]
[-tt <long long>: aida transient time (20000?)]
[-ecut <char* >: specify energy cut file]
```

## 3.3 Convert AIDA partial data

```
$ ./aida
AIDA event builder
use ./aida with following flags:
[-a <char* >: AIDA input list of files]
[-o <char* >: output file]
[-wi <long long>: Ion event building window (default: 2500*10ns)]
[-wb <long long>: Beta event building window (default: 2500*10ns)]
[-wd <long long>: Fast Discriminator Scan window (default: 0 i.e no s)]
[-v <int >: verbose level]
[-map <char* >: mapping file]
[-cal <char* >: calibration file]
[-thr <char* >: threshold file]
[-f <int >: fill data or not: 1 fill data 0 no fill (default: 1)]
[-tt <long long>: aida transient time (default: 20000*10ns)]
[-ecut <char* >: specify energy cut file]
```

## **4 Advance topics: Understanding LuckyDoll**

### **4.1 How to read the timestamp in AIDA**

It's complicated...

### **4.2 How the clustering algorithm works**

It's complicated...

### **4.3 How to handle the transient time after the implantation event**

It's complicated...

## References

- [1] A. Tarifeño-Saldivia et al.: arXiv:1606.05544.
- [2] <http://www2.ph.ed.ac.uk/~td/AIDA/Information/information.html>